

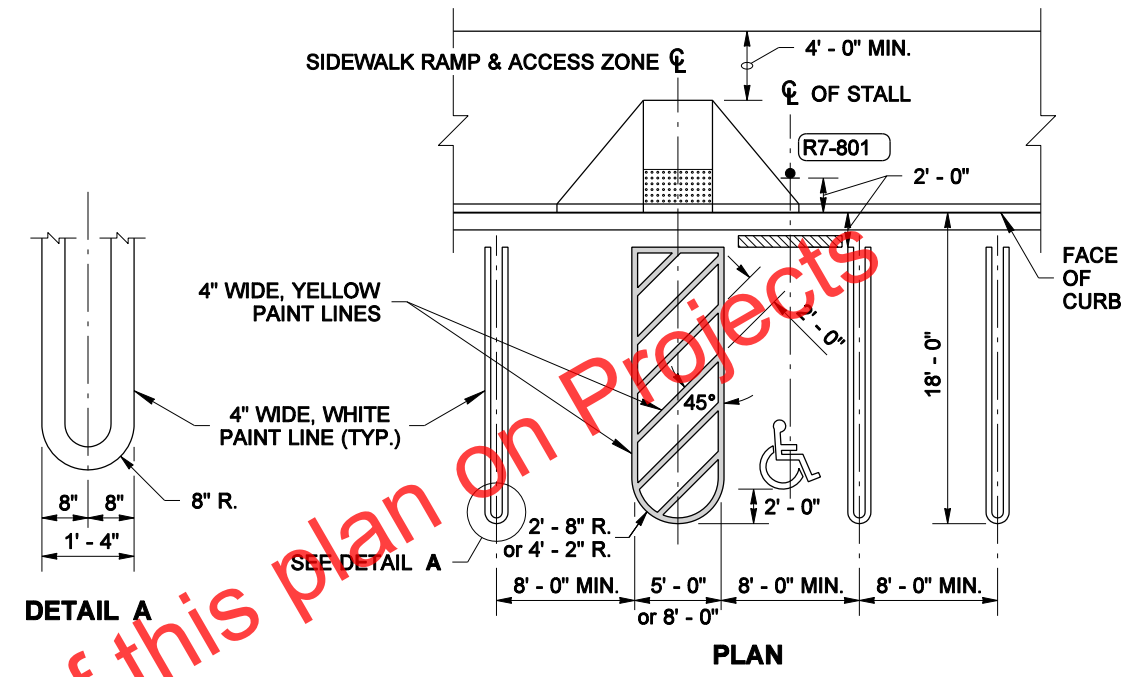


DRAWN BY: FERN LIDDELL


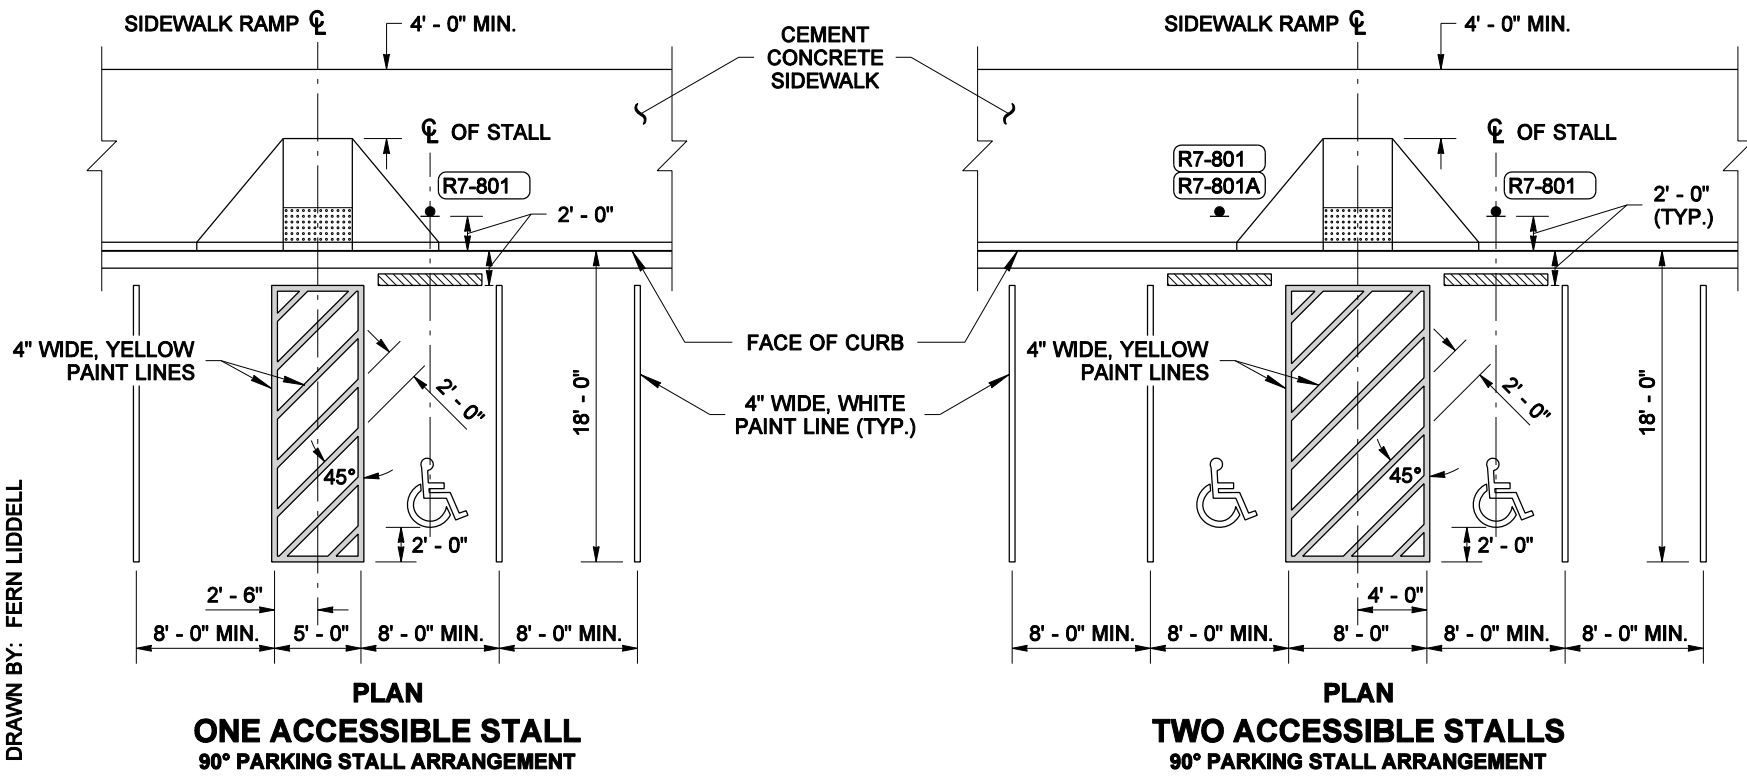


NOTES

1. Three, four and five accessible stall arrangements may be either 60° (angled) or 90° (perpendicular) parking arrangements. See Contract.
2. An Access Parking Space Symbol is required for each accessible parking stall. A blue background and white border are required when the symbol is installed on a cement concrete surface.
3. All accessible stalls shall have wheel stops. Place wheel stops in other stalls when specified in the contract. Wheel stops shall be approximately 6" high and a minimum of 6' long.
4. Refer to the Standard Plans for sidewalk ramp, detectable warning pattern, and curb details.

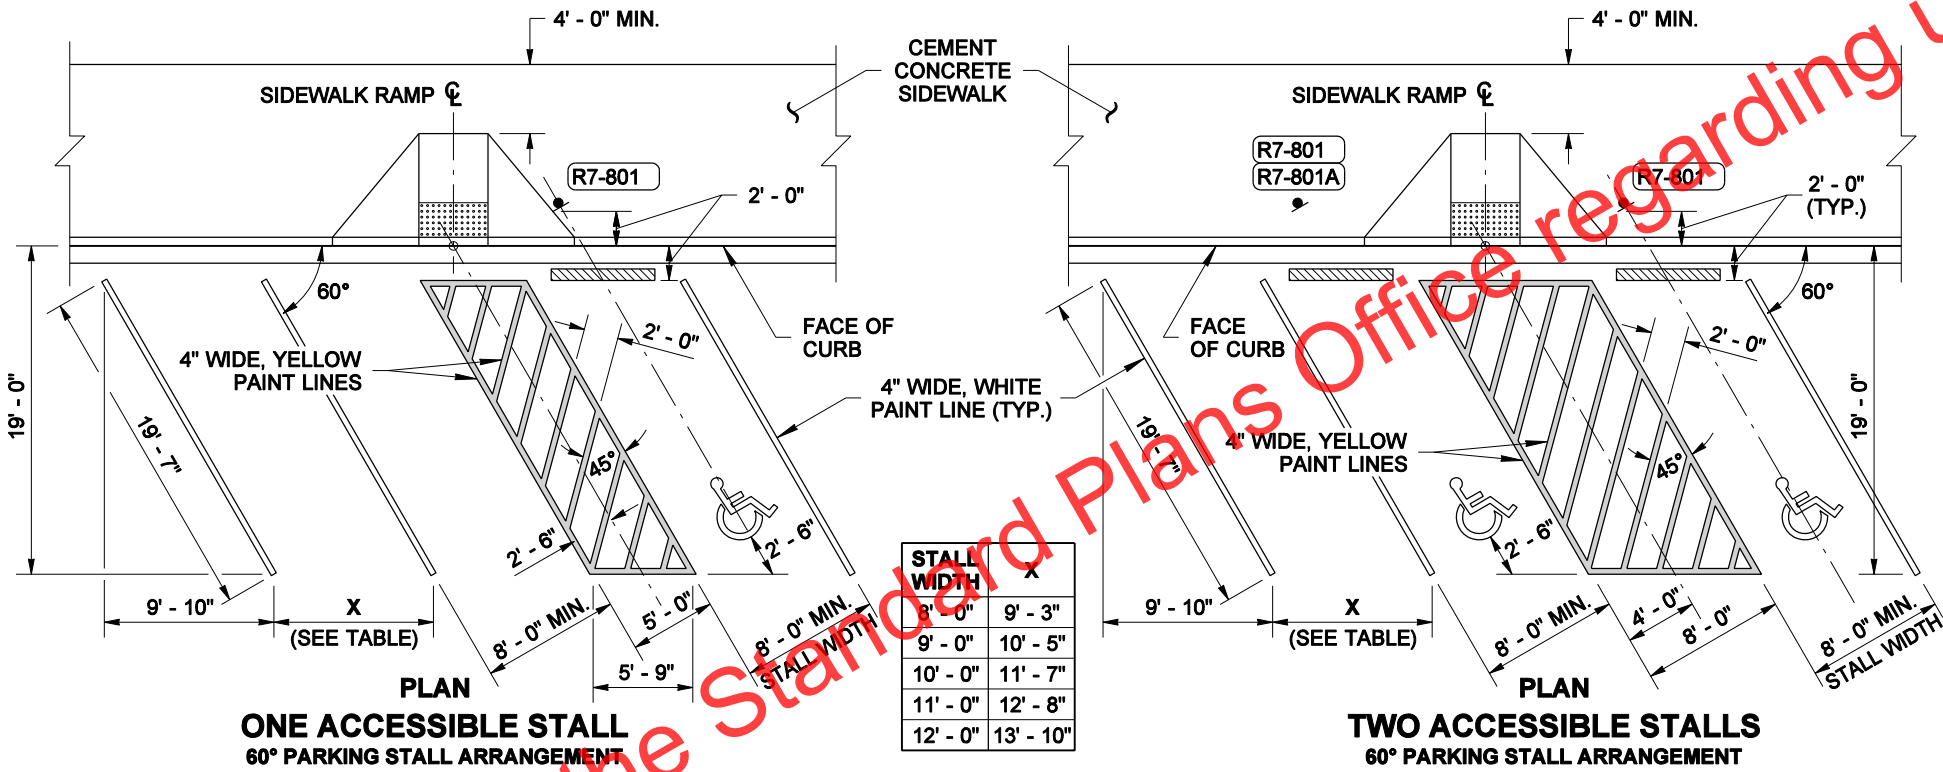

- LEGEND**
- R7-801 Reserved Parking Sign and post with R7-801A Plaque, if indicated (See Sign Fabrication Manual)
 - Access Parking Space Symbol
 - Manufactured wheel stop
 - Detectable Warning Pattern

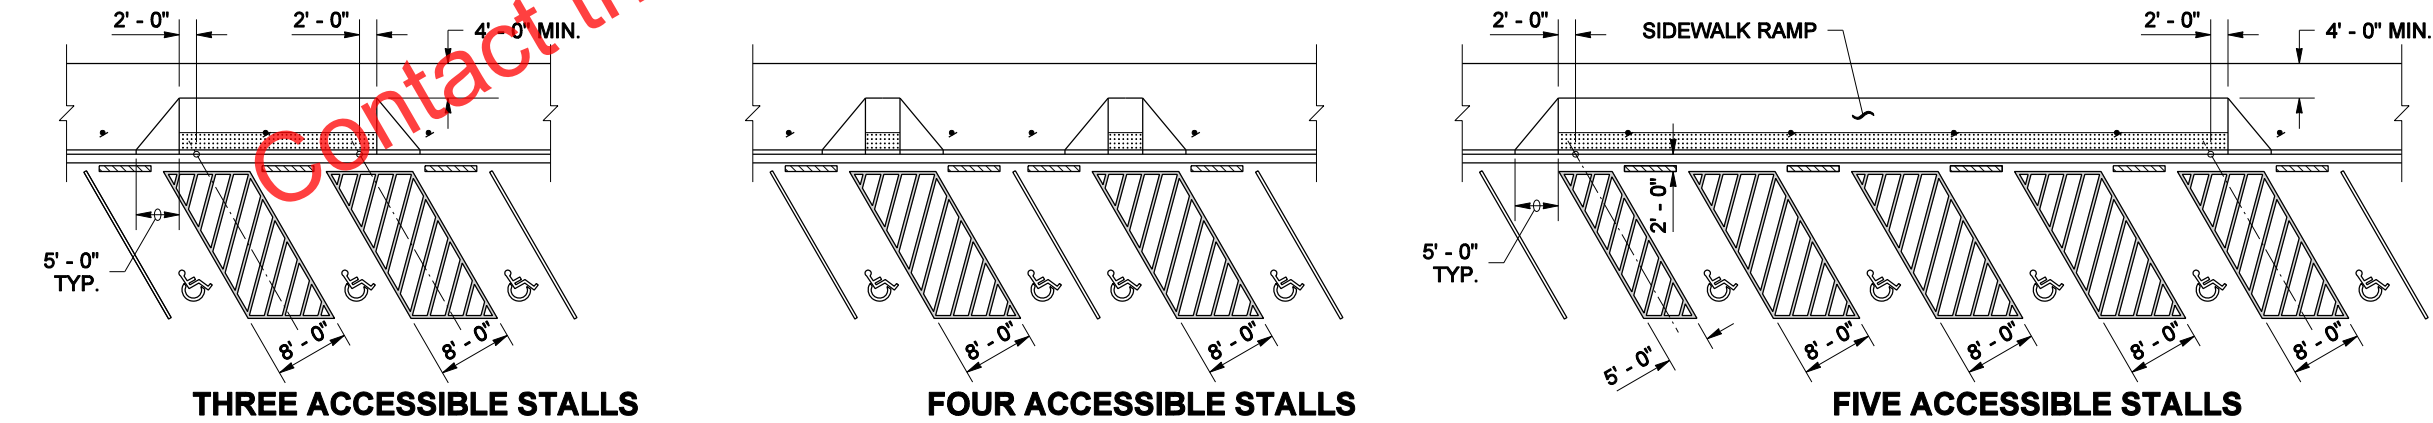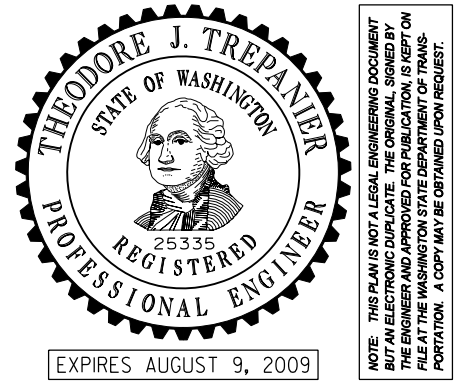

PARKING SPACE LAYOUTS

STANDARD PLAN M-17.10-02

SHEET 1 OF 1 SHEET

APPROVED FOR PUBLICATION

Pasco Bakotich III 07-03-08
STATE DESIGN ENGINEER DATE

Washington State Department of Transportation