

SR 3 Silverdale Milepost 38.53 to 53.18

Milepost 38.53 - 45.23

Length: 6.7 miles
Median width: 38-68 feet
Speed limit: 60 mph
Barrier type: High-tension
Year installed: 2007

Milepost: 45.51 - 45.98

Length: .47 miles
Median width: 24-36 feet
Speed limit: 60 mph
Barrier type: High-tension
Year installed: 2007


Milepost: 46.38 - 53.18

Length: 6.8 miles
Median width: 38-48 feet
Speed limit: 60 mph
Barrier type: High-tension
Year installed: 2007



Average annual daily traffic volume

Vehicles per day by year

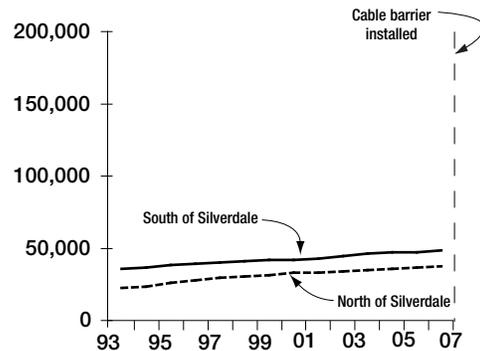

Source: WSDOT Traffic Data Office

ADT average growth rate on segment north of Silverdale is 4 percent per year.

ADT average growth rate on segment south of Silverdale is 2 percent per year.



SR 3 Silverdale (38.53 - 45.23)	No injury	Possible injury	Evident injury	Serious injury	Fatality
All median collisions before (60 months)	12	10	1	8	0
All median collisions after (7 months)	9	2	1	0	0
Cross median collisions before (60 months)	2	1	0	4	0
Cross median collisions after (7 months)	0	0	0	0	0

SR 3 Silverdale (45.51 - 45.98)	No injury	Possible injury	Evident injury	Serious injury	Fatality
All median collisions before (60 months)	0	0	1	0	0
All median collisions after	No data				
Cross median collisions before (60 months)	0	0	0	0	0
Cross median collisions after	No data				

SR 3 Silverdale (46.38 - 53.18)	No injury	Possible injury	Evident injury	Serious injury	Fatality
All median collisions before (60 months)	11	6	2	0	0
All median collisions after (7 months)	9	0	1	0	0
Cross median collisions before (60 months)	2	1	0	0	0
Cross median collisions after (7 months)	0	0	0	0	0

No cross-median incidents have occurred since we installed this cable median barrier.

The cable median barrier through this area generally will be located 10 feet from the edge of the eastbound lanes.