
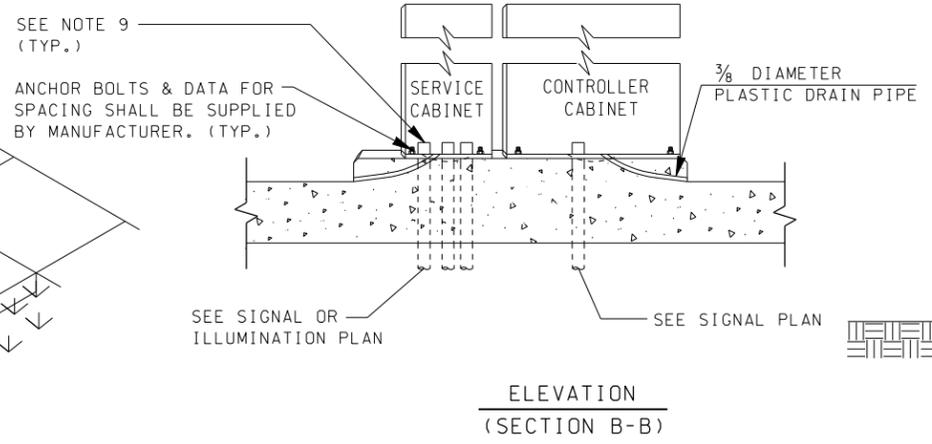
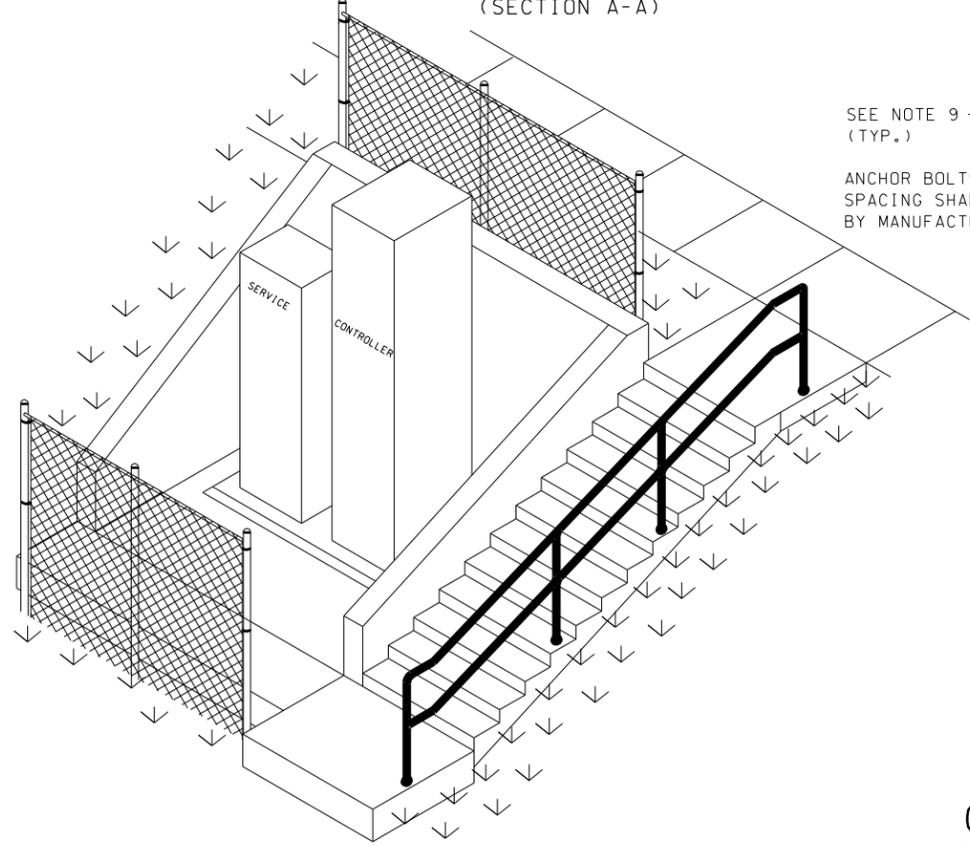



- ### GENERAL NOTES
1. 1/2" CHAMFER ALL EXPOSED CORNERS.
  2. ADJUST WALL HEIGHT TO MATCH SLOPE OF FINAL GRADE.
  3. ADJUST REINFORCING FOR WALL HEIGHT.
  4. FOR FENCE DETAILS SEE STANDARD PLAN L-2.
  5. FOR CONCRETE STAIRWAY AND RAILING DETAILS SEE STANDARD PLAN H-10.
  6. THE CABINETS SHALL BE ATTACHED TO THE FOUNDATION WITH STAINLESS STEEL CINCH BOLTS PER MANUFACTURER'S RECOMMENDATIONS. BOLT SHALL EXTEND A MINIMUM OF 1 1/2" ABOVE THE CONCRETE PAD.
  7. SEAL THE CABINETS TO THE FOUNDATION WITH A 14 SILICONE BEAD.
  8. FOR GROUNDING DETAILS SEE STANDARD PLAN J-9A.
  9. INSTALL CONDUIT AS INDICATED IN PLANS. CONDUIT SHALL EXTEND 2" ABOVE THE FOUNDATION.
  10. CONCRETE SHALL BE CLASS 3000 FOR WALLS AND BASE.
  11. CONCRETE SHALL BE CLASS 4000 FOR STAIRS AND LANDINGS.

1 DRIVE GROUND RODS BEFORE PLACING CONCRETE. MOVE ROD(S) AND DRAIN TILE(S) WITH COVER(S) AS REQUIRED TO ACHIEVE FULL GROUND PENETRATION. MAINTAIN A 6" MINIMUM CLEARANCE BETWEEN GROUND RODS AS DETAILED ON STD. PLAN J-9a "TYPICAL GROUNDING DETAILS".

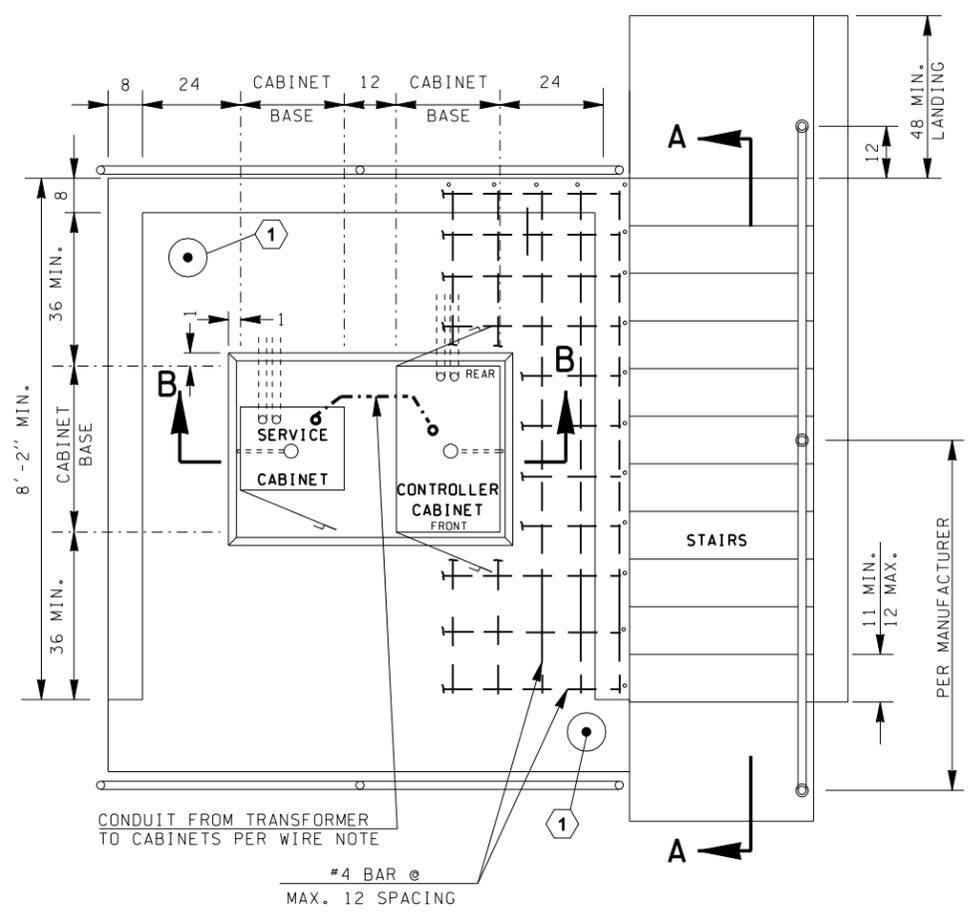

ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE NOTED.

### CONTROLLER AND SERVICE CABINET FOUNDATION DETAIL

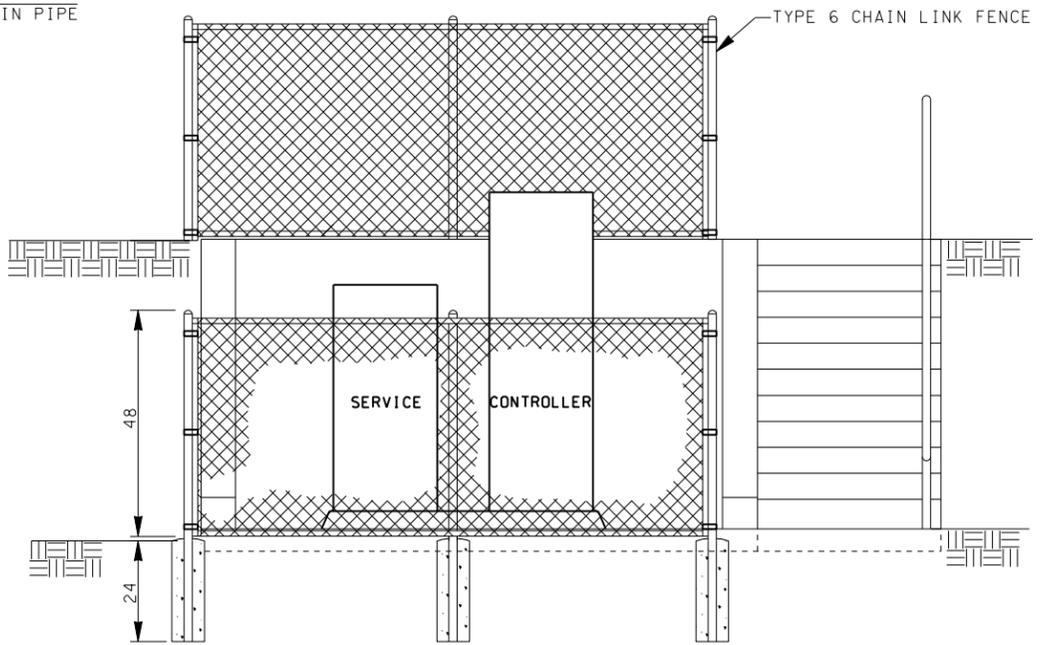

FILE NAME	S:\414126\Electrical\MASTER_FILES\DETAILS Homepage\FenceCabinet.dgn			REGION NO.	STATE	FED. AID PROJ. NO.	PLOT1
TIME	02:25:02 PM			10	WASH	8.30E	
DATE	04/07/2005			JOB NUMBER			SHEET
DESIGNED BY				CONTRACT NO.	LOCATION NO.	OF	
ENTERED BY	GROUNDING ROD NOTE ADDED	4-15-03	JH			SHEETS	
CHECKED BY	GROUNDING RODS ADDED, DIM. CHANGE	9-25-02	JH				
PROJ. ENGR.	NEW DETAIL	3-23-00	JH				
REGIONAL ADM.	REVISION	DATE	BY				



**CONTROLLER & SERVICE CABINET WITH FENCE**

**ENGLISH**