
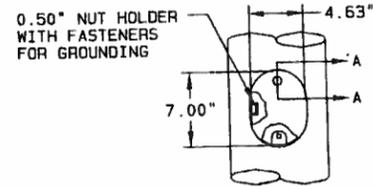


(4) - "A" DIA. X "B" LONG ANCHOR BOLTS. EACH BOLT TO HAVE MINIMUM THREAD LENGTH OF "C" AT TOP AND "D" AT BOTTOM. BOLT GALVANIZED FULL LENGTH. EACH BOLT FURNISHED WITH (6) HEAVY HEX NUTS AND (6) FLAT WASHERS. (2) ANCHOR BOLT TEMPLATES ARE REQ'D PER POLE. SEE ANCHOR BOLT TEMPLATE PLATE DETAIL 6.


ANCHOR BOLT SCHEDULE

POLE TYPE	DIAMETER "A" (IN)	LENGTH "B" (IN)	THREAD LENGTH "C" (IN)	THREAD LENGTH "D" (IN)
PPB	0.50	12.00	ALL THREAD	
PS / TYPE 1	0.75	30.00	12.00	3.00


DETAIL 5 ANCHOR BOLT

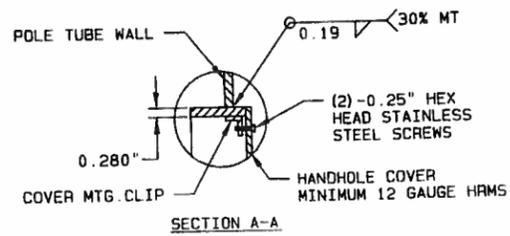

DETAIL 7 HANDHOLE

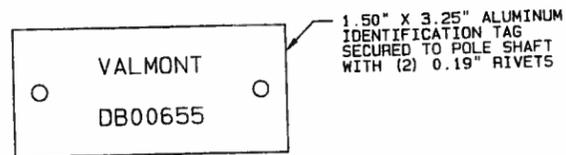


DETAIL 8 I.D. TAG

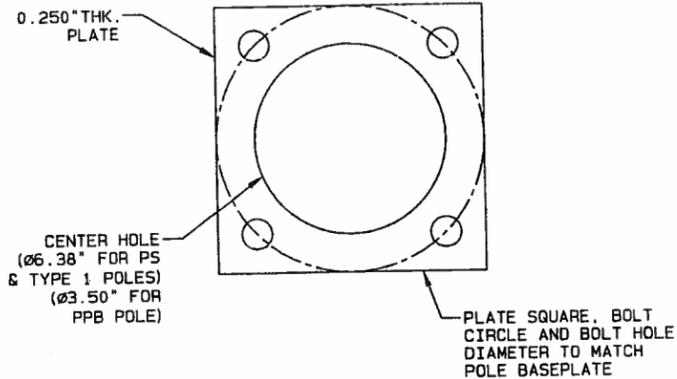

(2) TEMPLATE PLATES REQ'D PER POLE

DETAIL 6 ANCHOR BOLT TEMPLATE

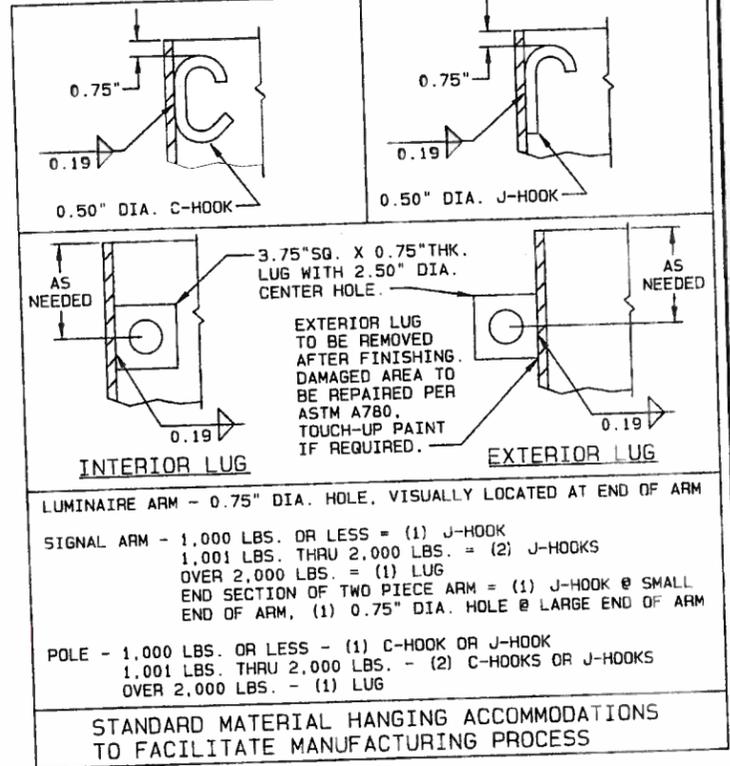

LUMINAIRE ARM - 0.75" DIA. HOLE, VISUALLY LOCATED AT END OF ARM  
 SIGNAL ARM - 1,000 LBS. OR LESS = (1) J-HOOK  
 1,001 LBS. THRU 2,000 LBS. = (2) J-HOOKS  
 OVER 2,000 LBS. = (1) LUG  
 END SECTION OF TWO PIECE ARM = (1) J-HOOK @ SMALL END OF ARM, (1) 0.75" DIA. HOLE @ LARGE END OF ARM  
 POLE - 1,000 LBS. OR LESS - (1) C-HOOK OR J-HOOK  
 1,001 LBS. THRU 2,000 LBS. - (2) C-HOOKS OR J-HOOKS  
 OVER 2,000 LBS. - (1) LUG

STANDARD MATERIAL HANGING ACCOMMODATIONS TO FACILITATE MANUFACTURING PROCESS

**APPROVED**  
 Manufacturer's Pole Plan  
 Approved For Listing As A  
 Pre-Approved Drawing  
 WSDOT Bridge & Structures Office  
 By GB Date 8-11-2011

