

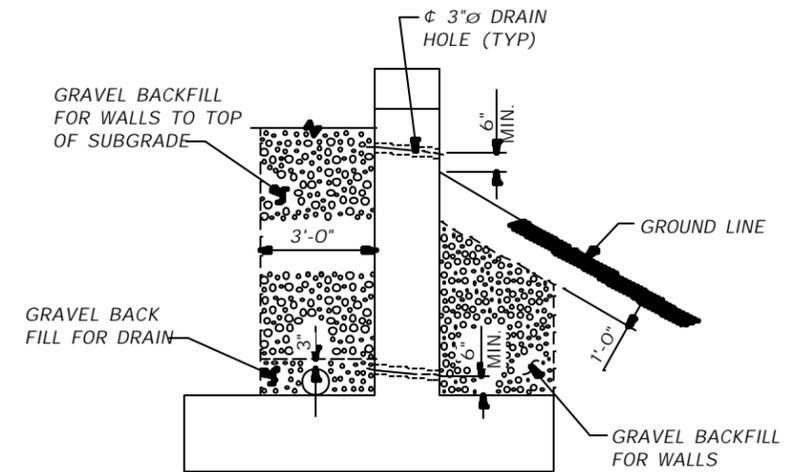


FABRIC PAC DETAIL

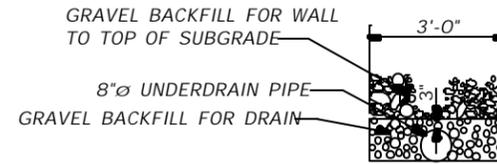


DRAINAGE DETAIL

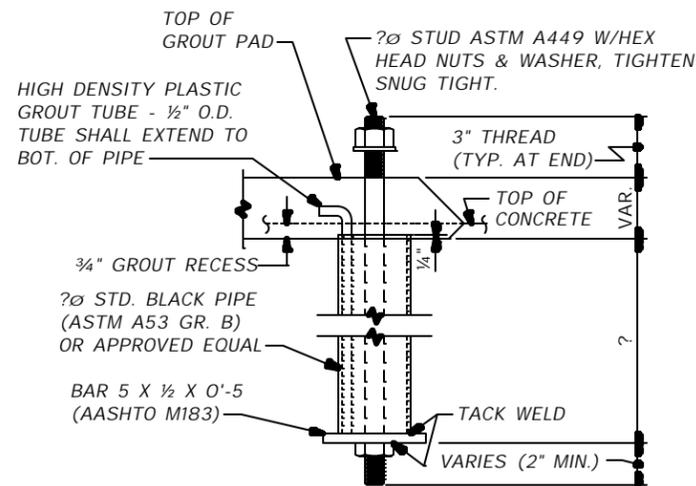

ANCHOR BOLT DETAIL


PAINT ANCHOR BOLTS WITH ONE SHOP COAT IN ACCORDANCE WITH "APPLICATION OF PAINT" SPECIAL PROVISIONS TO 6" BELOW CONCRETE SURFACE.

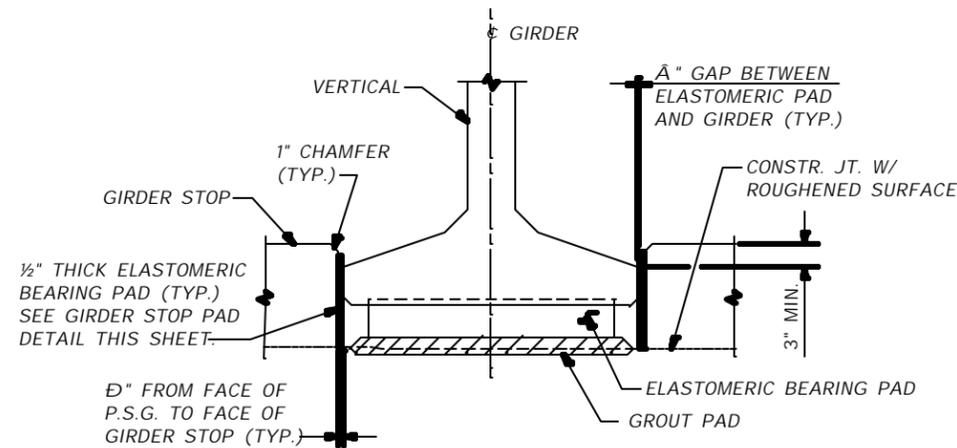

GIRDER STOP DETAIL

NOTE:

- GIRDER STOPS SHALL BE CONSTRUCTED AFTER PLACEMENT OF PRESTRESSED GIRDERS.
- ELASTOMERIC PADS BETWEEN GIRDER AND GIRDER STOPS SHALL BE PLACED AFTER CONSTRUCTING THE GIRDER STOPS. THE PADS SHALL BE CEMENTED TO GIRDER STOPS WITH APPROVED RUBBER CEMENT.

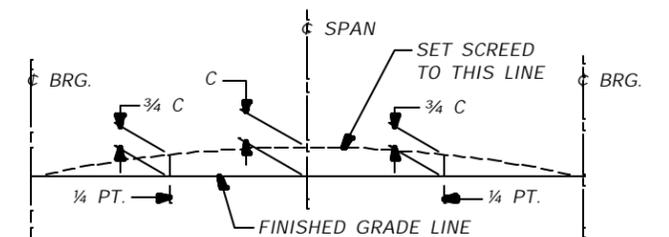


PRESTRESSED GIRDER SCREED SETTING DIMENSIONS

FOR DIMENSION "C" SEE GIRDER SCHEDULE

1
Job
L5

Bridge Design Engr.	Jugesh Kapur	M:\BRIDGELIB\Master6\Standards\Standard Drawings\Misc. Details 2.man			
Supervisor	Sup	REGION NO.	STATE	FED. AID PROJ. NO.	SHEET NO.
Designed By	Designer	Date	10	WASH.	TOTAL SHEETS
Checked By	Checker	Date	JOB NUMBER		
Detailed By	Detailer	Date			
Bridge Projects Engr.					
Prelim. Plan By					
Architect/Specialist	DATE	REVISION	BY	APPD	

BRIDGE AND STRUCTURES OFFICE

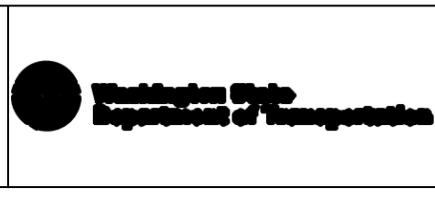

Project Title 1	BRIDGE SHEET NO.
Project Title 2	1
Project Title 3	SHEET
Structure Name	OF
Sheet Title	SHEETS