


DETAIL **G**

NOTES:

- GIRDER STOPS SHALL BE CONSTRUCTED AFTER GIRDER PLACEMENT.
- ELASTOMERIC STOP PADS SHALL BE CEMENTED TO GIRDER STOP WITH APPROVED ADHESIVE.

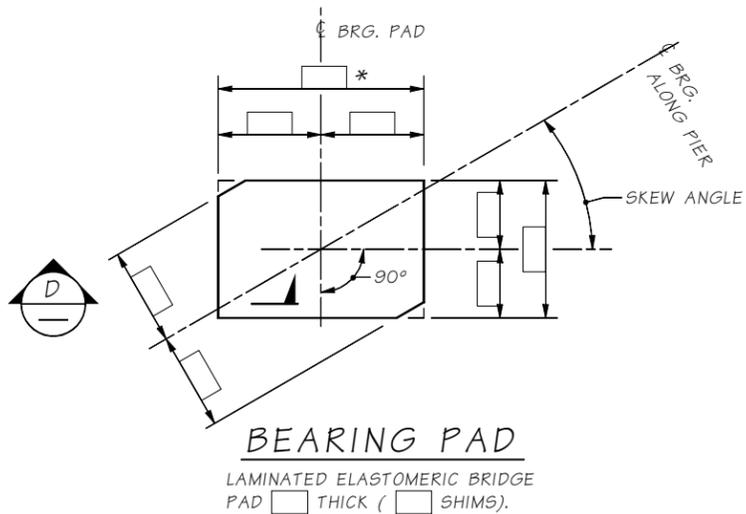


BEARING PAD

LAMINATED ELASTOMERIC BRIDGE PAD THICK (SHIMS).

Skew angle shown at 30°.

* The edge of the bearing pad shall be set at 1" from the edge of the bottom flange.

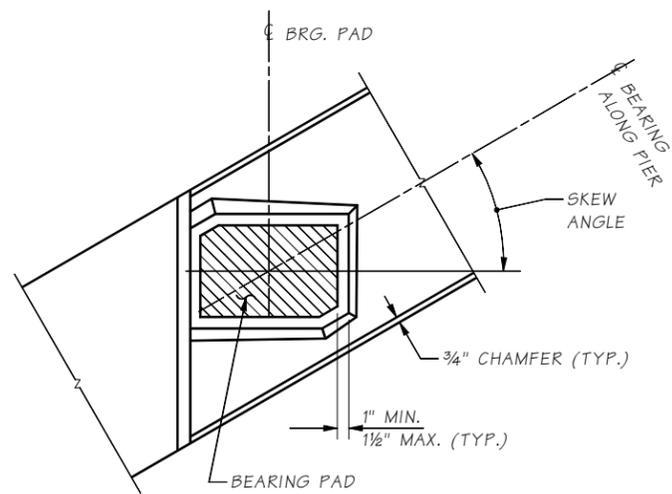

GROUT PAD DETAIL

Skew angle shown at 30°.

SR JOB NO. 5.6-A17-7 SHEET

Bridge Design Engr.	M:\STANDARDS\Girders\Trapezoidal Tube\SIP TRAPEZOIDAL TUB MISC DETAILS.MAN				REGION NO.	STATE	FED. AID PROJ. NO.	SHEET NO.	TOTAL SHEETS
Supervisor					10	WASH.			
Designed By					JOB NUMBER				
Checked By									
Detailed By									
Bridge Projects Engr.									
Prelim. Plan By									
Architect/Specialist	DATE	REVISION	BY	APPD					

BRIDGE AND STRUCTURES OFFICE



STANDARD PRESTRESSED CONCRETE GIRDERS

TRAPEZOIDAL TUB S-I-P DECK PANEL GIRDER MISCELLANEOUS BEARING DETAILS

BRIDGE SHEET NO.
SHEET
OF
SHEETS