



SECTION

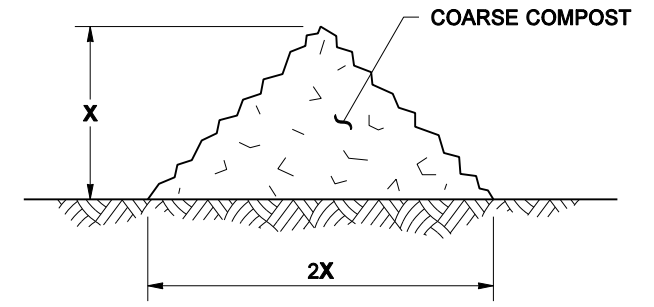

X = 1' - 0" FOR SLOPES 4H:1V OR FLATTER
 X = 1' - 6" FOR SLOPES STEEPER THAN 4H:1V

TYPICAL SECTION
 COMPOST BERM DETAIL

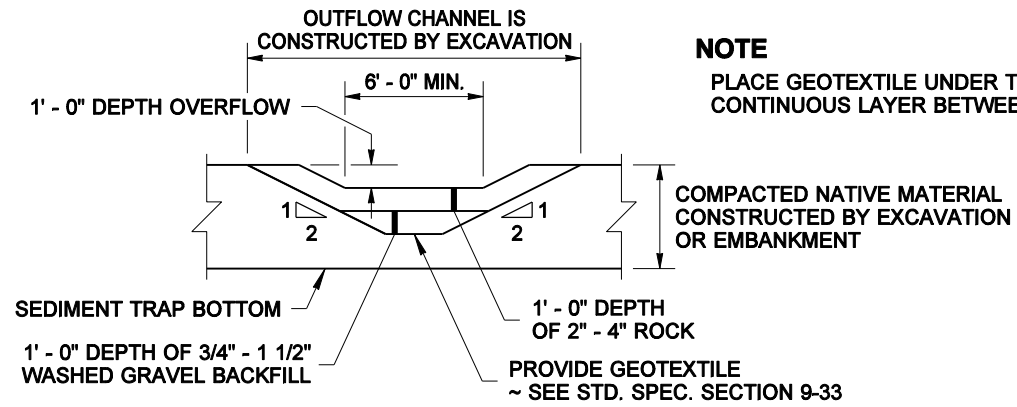


NOTE
 PLACE GEOTEXTILE UNDER THE SPILLWAY AND SIDE SLOPES. PROVIDE A CONTINUOUS LAYER BETWEEN THE GRAVEL/ROCK AND THE NATIVE EARTHEN MATERIAL.

COMPACTED NATIVE MATERIAL
 CONSTRUCTED BY EXCAVATION
 OR EMBANKMENT

PROVIDE GEOTEXTILE
 ~ SEE STD. SPEC. SECTION 9-33


SECTION A

TEMPORARY SEDIMENT TRAP

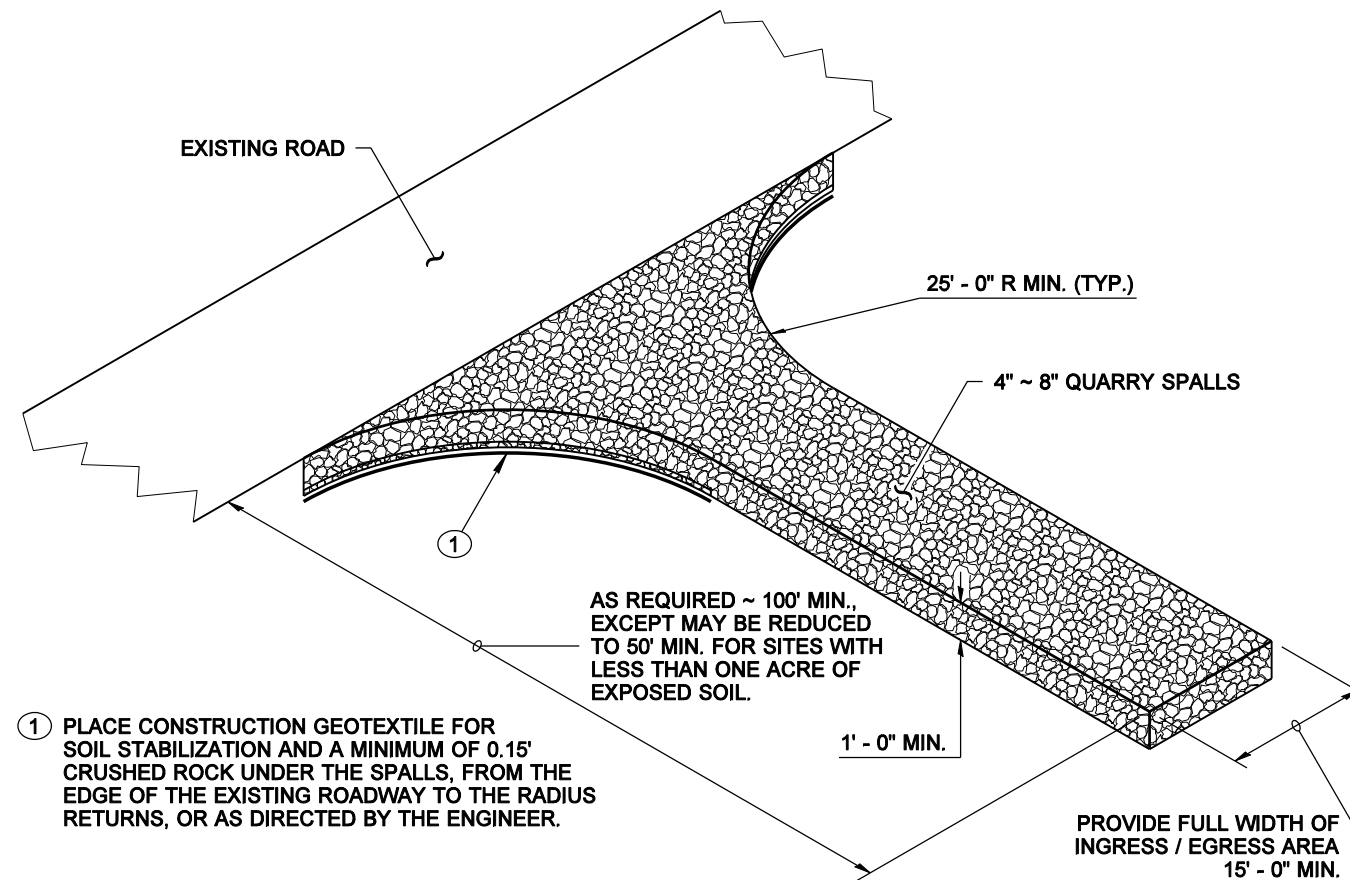

① PLACE CONSTRUCTION GEOTEXTILE FOR SOIL STABILIZATION AND A MINIMUM OF 0.15' CRUSHED ROCK UNDER THE SPALLS, FROM THE EDGE OF THE EXISTING ROADWAY TO THE RADIUS RETURNS, OR AS DIRECTED BY THE ENGINEER.

ISOMETRIC VIEW
 STABILIZED CONSTRUCTION ENTRANCE



STATE OF WASHINGTON
 REGISTERED
 LANDSCAPE ARCHITECT

MARK W. MAURER
 CERTIFICATE NO. 000598

NOTE: THIS PLAN IS NOT A LEGAL ENGINEERING DOCUMENT BUT AN ELECTRONIC DUPLICATE. THE ORIGINAL, SIGNED BY THE ENGINEER AND APPROVED FOR PUBLICATION, IS KEPT ON FILE AT THE WASHINGTON STATE DEPARTMENT OF TRANSPORTATION. A COPY MAY BE OBTAINED UPON REQUEST.

**MISCELLANEOUS
 EROSION CONTROL DETAILS
 STANDARD PLAN I-80.10-01**

SHEET 1 OF 1 SHEET

APPROVED FOR PUBLICATION

Pasco Bakotich III 08-11-09

STATE DESIGN ENGINEER DATE

