



DRAWN BY: LISA CYFORD

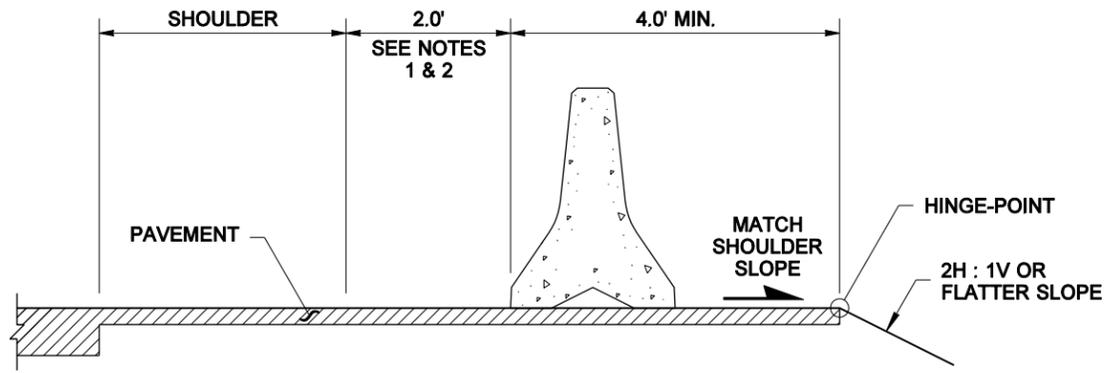


PRECAST CONC. BARRIER TYPE 2

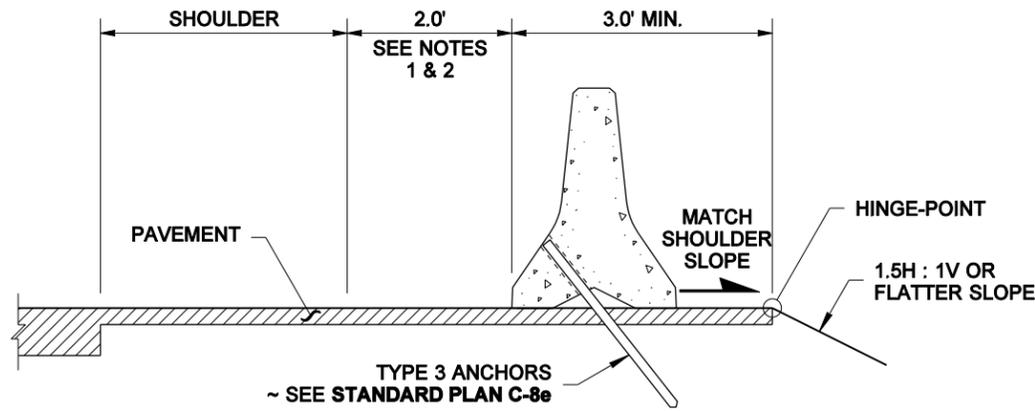


ANCHORED PRECAST CONC. BARRIER TYPE 2

NOTES


1. An additional width for shy distance is required when the existing roadway is to be widened.
2. The additional width for shy distance may be less than 2.0' when it, combined with the existing shoulder width, totals 8.0' or more.
3. For W-Beam Type 31 shoulder application, see **Standard Plan C-28.40**.

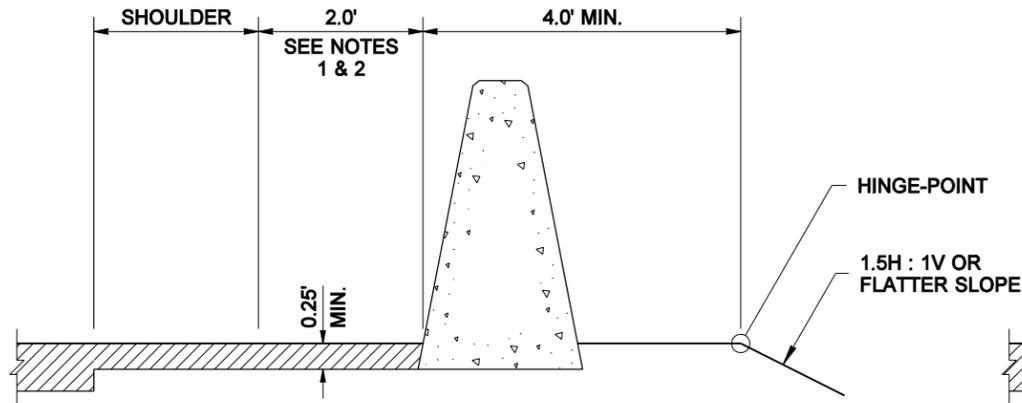


SINGLE SLOPE CONC. BARRIER CAST-IN-PLACE

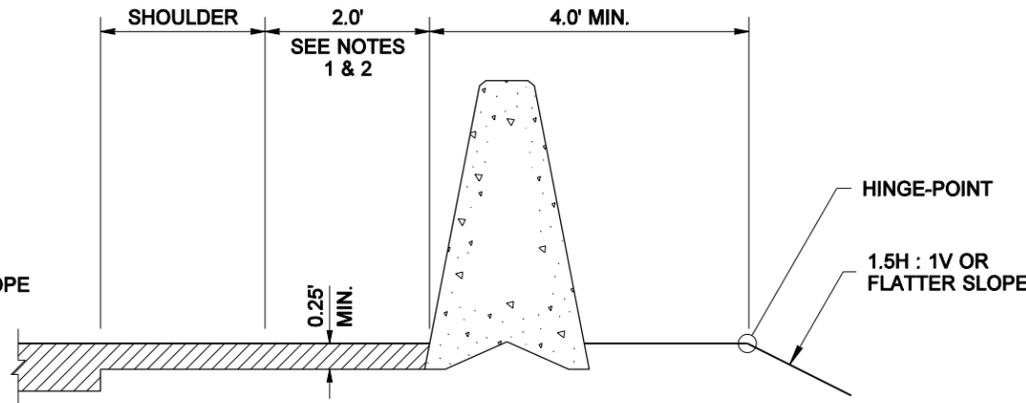


SINGLE SLOPE CONC. BARRIER PRECAST

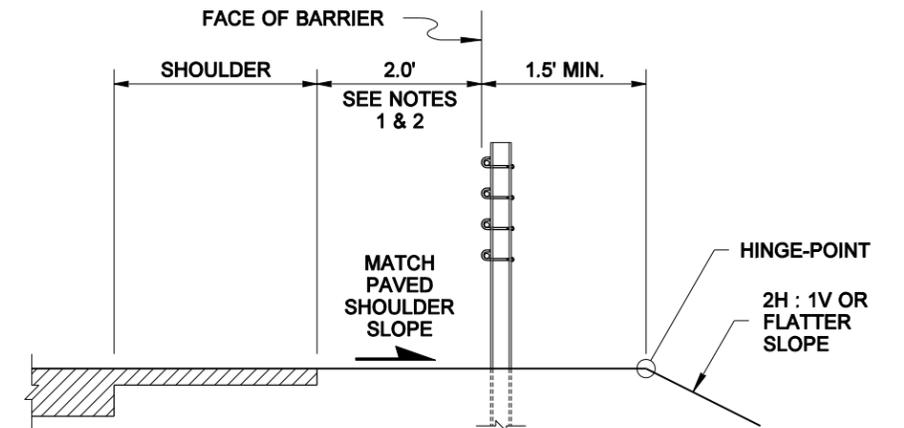

CABLE BARRIER

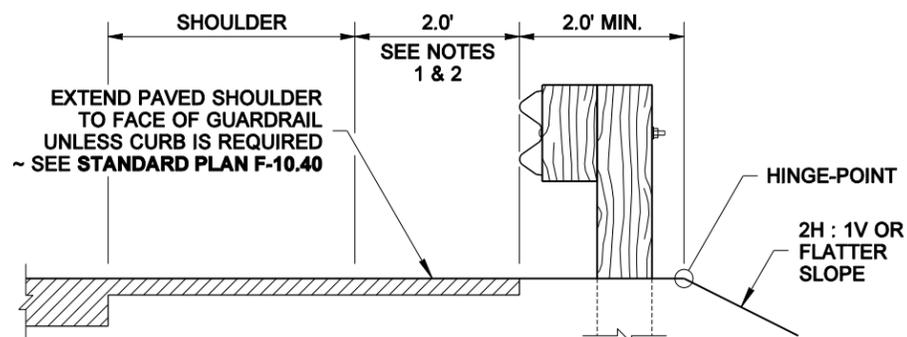

BEAM GUARDRAIL TYPE 1
(SEE NOTE 3)

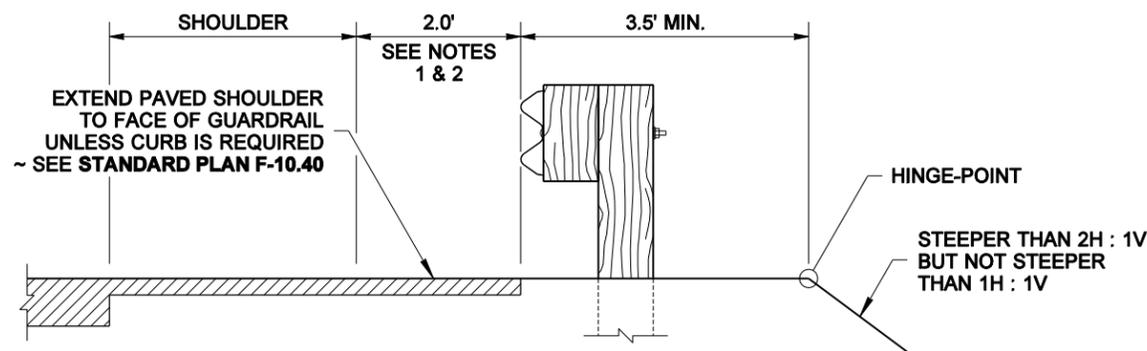

BEAM GUARDRAIL TYPE 1 ON STEEP SLOPES
(SEE NOTE 3)



NOTE: THIS PLAN IS NOT A LEGAL ENGINEERING DOCUMENT UNLESS IT IS APPROVED FOR PUBLICATION BY THE ENGINEER AND APPROVED FOR OR CONTROLLED BY THE ENGINEER AND APPROVED FOR OR CONTROLLED BY THE FILE AT THE WASHINGTON STATE DEPARTMENT OF TRANSPORTATION. A COPY MAY BE OBTAINED UPON REQUEST.

TRAFFIC BARRIER SHOULDER WIDENING ~ FOR SHOULDERS LESS THAN 8.0' WIDE
STANDARD PLAN C-16b

SHEET 1 OF 1 SHEET

APPROVED FOR PUBLICATION

Pasco Bakotich III 06-03-10

STATE DESIGN ENGINEER

DATE

