




I-5 - SR 432 Talley Way Interchange

Staging the project for construction

Stage 1 and 2:

Stage 1 of the project will include traffic from the new wall and structure areas to detours 1 and 2. This allows construction to start on ground improvements necessary for construction of walls and structures. **Stage 2** of the project will include ground improvements, walls and additional soil placed at structure locations for construction. Walls and additional soil will be allowed to settle for 90 days. During the structure work, signalized intersections at Talley Way and connecting ramps will be completed.

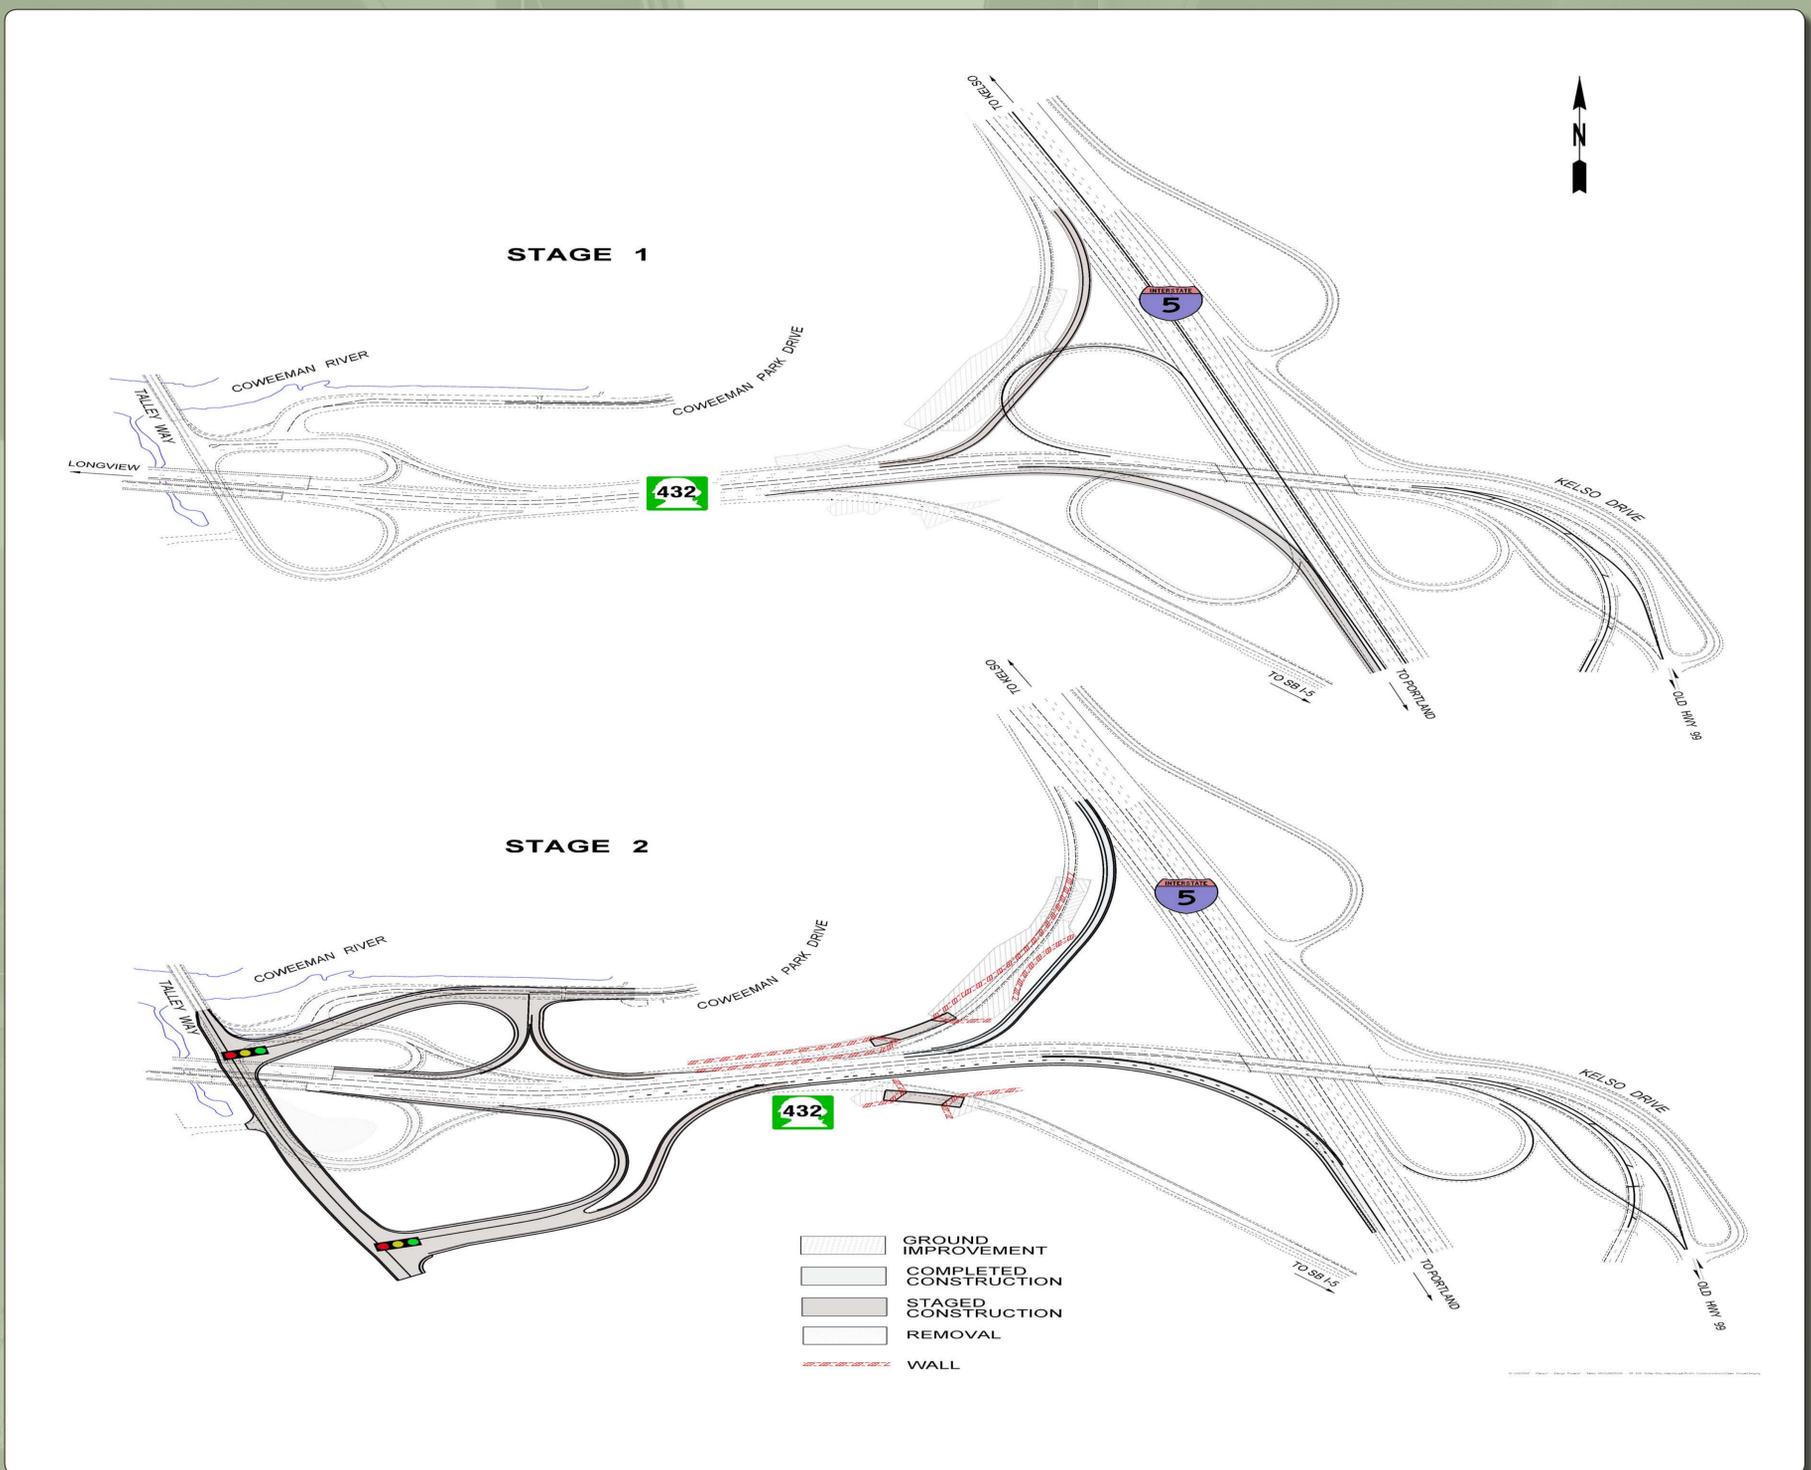

To learn more

WSDOT Kelso Area Engineering Office
2400 Talley Way Kelso, WA 98626
(800) 545-1393 / swKelso@wsdot.wa.gov
www.wsdot.wa.gov/Projects/I5/SR432Interchange/

