


Work Zone Traffic Control Guidelines

January 2006
M 54-44

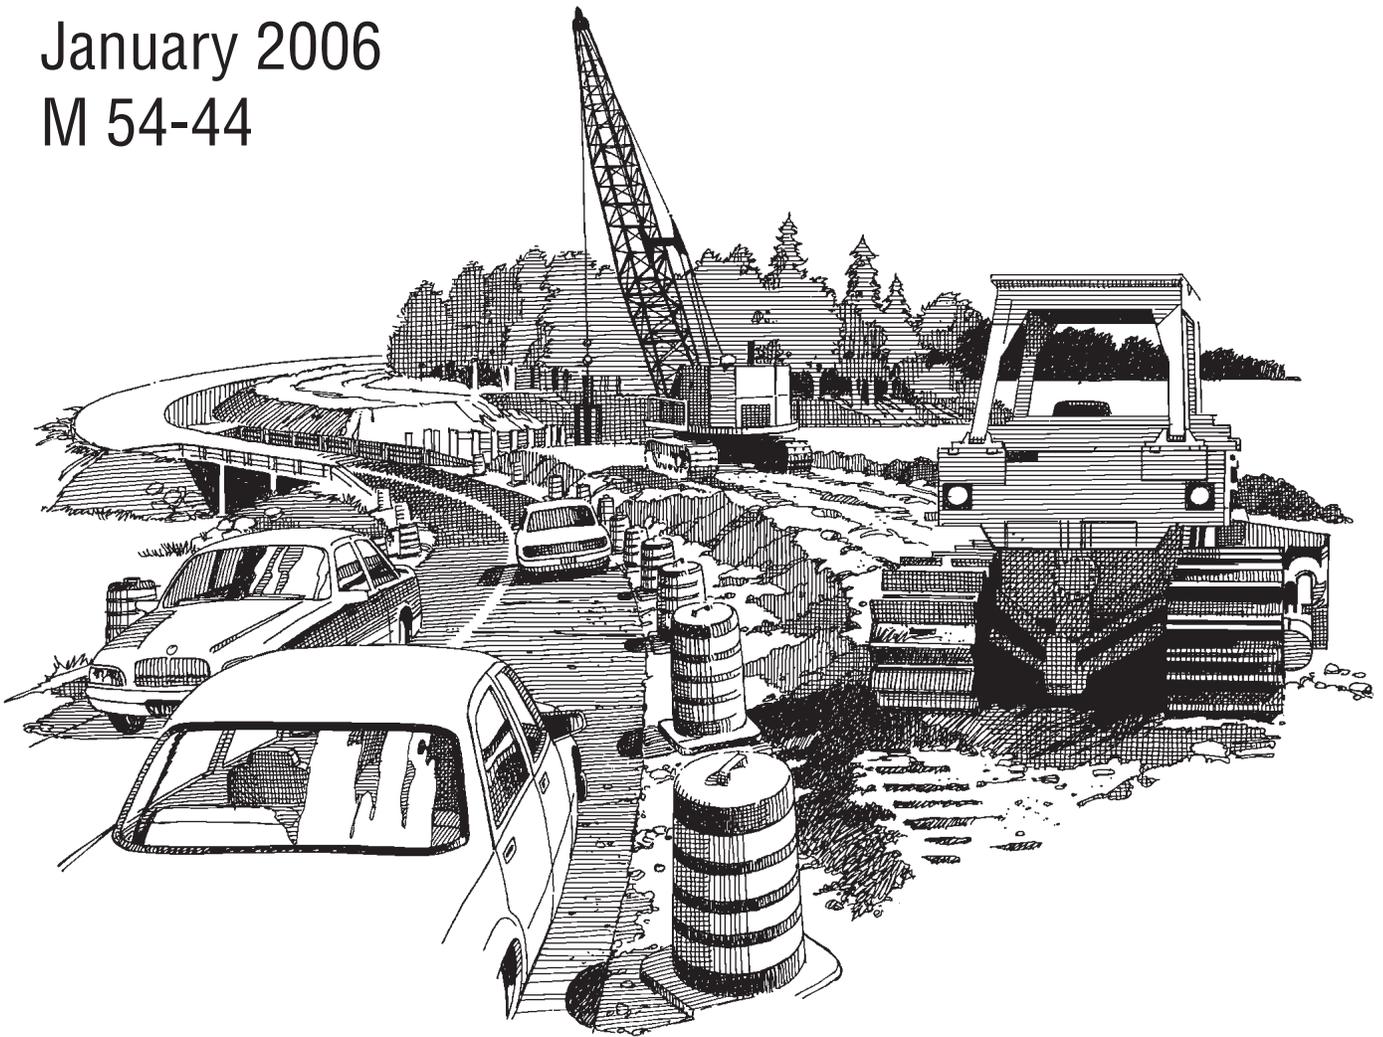

Washington State
Department of Transportation

M54-44 ~ Work Zone Traffic Control Guidelines Book

2006 update summary:

General:

- Complete revision of book to ensure it complies with 2003 edition of MUTCD and WSDOT modifications.
- Minor text changes throughout book to better clarify sections and address comments.
- Added new guidance on Automated Flagger Assistance Devices (AFAD)
- HQ Safety office revised Personal Protective Wear and High Visibility Apparel chapter.

Plan sheet revisions:

- The primary changes you will notice is that the sign spacing chart values for Rural Highway distance was reduced from 1000' to 800' (WSDOT Modification) and that the longitudinal buffer space distances (MUTCD revision to comply with AASHTO) in the buffer data charts have all increased.
- The lane transition sign W4-2 series was revised in the MUTCD and adopted by WSDOT. This sign has a mandatory compliance date of December 23, 2013. Until this date the old style series will still be allowed to be used but it is encouraged that as new signs are ordered that the new series be the standard.

Appendix:

- Removed outdated guidance shown in bulletins and updated the “Channelizing Device Application Matrix”.



Persons with disabilities may request this information be prepared and supplied in alternate forms by calling the WSDOT ADA Accommodation Hotline collect (206) 389-2839. Persons with hearing impairments may access WA State Telecommunications Relay Service at TT 1-800-833-6388, Tele-Braille 1-800-833-6385, or Voice 1-800-833-6384, and ask to be connected to (360) 705-7097

Additional copies of the Work Zone Traffic Control Guidelines may be purchased from:

Engineering Publications

Washington State Department of Transportation

PO Box 47408

Olympia, WA 98504-7408

E-mail: enrpubs@wsdot.wa.gov

Phone: (360) 705-7430

Fax: (360) 705-6861

Work Zone Traffic Control Guidelines M54-44 is on the Engineering Publications CD Library of Technical Publications and can also be downloaded, free of charge, from this location on the WSDOT home page:

<http://www.wsdot.wa.gov/FASC/EngineeringPublications/>

Additional work zone safety information is available at the WSDOT HQ Traffic Operations homepage:

<http://www.wsdot.wa.gov/biz/trafficoperations/workzone/default.htm>

Forward

While this booklet provides interpretive guidance, it does not change the intent of Part VI of the Manual on Uniform Traffic Control Devices (MUTCD). The traffic control devices and distances shown in this booklet reflect desired minimums for state routes.

Effective traffic control is essential, not only for the safety of the traveling public, but also for WSDOT employees whose jobs often require them to be in close proximity to high-speed traffic. The traffic control guidelines in this booklet are intended to reduce field personnel's exposure to the hazards of traffic and offer road users consistent and positive guidance through work zone areas. Safety of crews and the driving public must be an integral part of WSDOT field operations.

We emphasize that these are guidelines and not absolute standards. Some portions of the guidance such as the bold and underlined parts along with charts shown on the plan sheets refer to WSDOT policy and should be considered requirements. If these requirements cannot be physically implemented then MUTCD standards shall apply as the minimum. The traffic control plans in this booklet are to be used along with sound judgment. Proper planning, a good safety conscious attitude and full participation from the persons involved in the work zone are all prerequisites to good traffic control. Aspects of the roadway environment such as weather, time of day, traffic volumes, traffic speed, roadway geometry, roadside conditions, and your inventory of traffic control devices should all be considered when implementing the guidelines of this booklet. If you have any questions or needs not addressed here, please consult your Regional Traffic Office staff.

Be assured that along with the Work Zone Safety Task Force, we are committed to securing increased funding for better and safer work zones through the legislative process to meet your workforce and equipment needs.

Don Nelson

Gummada Murthy

Environmental and Engineering
Director

Maintenance and Operations
Director

Comment Request Form

From: _____ Date: _____
_____ Phone: _____

To: State Traffic Engineer
310 Maple Park Avenue SE
PO Box 47344
Olympia, WA 98504-7344

Subject: *Work Zone Traffic Control Guidelines* Comment

Addition Correction
 Deletion Other

Comment (Marked copies attached):

Preserve this original for future use - Submit copies only

Contents

	Page Number
Introduction	1
Instructions	1
Considerations	1
Personal Attributes	2
Equipment	3
Flagging	11
Pedestrians, Bicycles and Other Roadway Users	12
Additional work zone considerations	14
Checklist for Establishing a Temporary Traffic Control Zone	16
Taper and Buffer Space Details	17
Taper/Channelizing Device Table	18
Stationary Work Zones	19
TCP 1 Alternating One-Way Traffic - Flagger Controlled	20
TCP 2 Pilot Car Operation	21
TCP 3 Single Lane Closure for Multi-Lane Roadways	22
TCP 4 Double Lane Closure for Multi-Lane Roadways	23
TCP 5 Shoulder Closure – Low Speed (40 MPH or Less)	24
TCP 6 Shoulder Closure – High Speed (45 MPH or higher)	25
TCP 7 Temporary Off-Ramp for Multi-Lane Roadways	26
TCP 8 Temporary On-Ramp for Multi-Lane Roadways	27
TCP 9 Temporary On-Ramp (Right Lane Closed)	28
TCP 10 Right Lane Closure with Shift – (5 Lane Roadway)	29
TCP 11 Left Lane and Center Turn Lane Closure – (5 Lane Roadway)	30
TCP 12 Lane Shift/Three Lane Roadway	31
TCP 13 Typical Short-Term Ramp Closure	32

Short Duration Work Zones	33
Short Duration Work Zone Condition	35
Short Duration Traffic Control Plans	37
Very Short Duration Work Zones	39
Short Duration Work Zone Considerations Chart	40
Short Duration Work Zones Do's and Don'ts	42
TCP 14 Typical Short Duration Lane Closure – 2 Lane Operation	43
TCP 15 Typical Short Duration Lane Closure – Multi-Lane Operation	44
TCP 16 Typical Short Duration Shoulder Work	45
TCP 17 Typical Short Duration – Intersection Location	46
TCP 18 Typical Very-Short Duration Work Operation	47
TCP 19 Typical Very-Short Duration Work Operation	48
TCP 20 Typical Very Short Duration – Intersection Location	49
Rolling Slowdown	50
TCP 21 Typical Rolling Slowdown	51
Mobile Work Zones	52
TCP 22 Mobile Freeway Operation – Left Shoulder Closed	53
TCP 23 Mobile Freeway Operation – Left Lane Closure	54
TCP 24 Mobile Freeway Operation – Middle Lane Work Area	55
TCP 25 Mobile Operation Lane Closure – Two-Lane Roadway	56
TCP 26 Mobile Operation Shoulder Closure – Two-Lane Roadway	57
TCP 27 Mobile Shoulder Operation with Lane Encroachment	58
Intersection Operations	59
TCP 28 Intersection Lane Closure – Three Lane Roadway	60
TCP 29 Intersection Lane Closure – Five Lane Roadway	61
TCP 30 Typical Intersection Pedestrian Traffic Control	62
Emergency Operations	63
TCP 31 Flood or Slide Emergency Plan	64

Special Details and TCP's	65
TCD 1 Shoulder Work Area Protection – Non-Working Hours	66
TCD 2 Typical Motorcycle Warning Sign Sequence	67
TCD 3 Typical Lane Closure with Shift	68
TCD 4 Typical Speed Zone Detail – Chip Seal Projects	69
TCD 5 Temporary Pavement Marking Details	70
Appendix	71

Appendix 1-1 Work Zone Signs
 Approved Type X Sign Sheeting Examples

Appendix 2-2 Channelization Device Application Matrix

Introduction

The primary function of work zone traffic control is to allow vehicles, cyclists and pedestrians to move safely and easily through or around work areas. Effective temporary traffic control enhances traffic safety and efficiency. Drivers and pedestrians need to be guided in a clear and positive manner while approaching and traversing temporary traffic control zones.

The traffic control plans contained in this booklet are furnished as a guide to be used along with good judgment. Minor modifications may be made, as necessary, to accommodate site conditions; however, a plan's original intent must be maintained. An alternate plan should be considered if substantial revisions are needed. Consult the Region Traffic Office Staff for additional guidance.

Traffic control plans and procedures consistent with these guidelines should be developed to address the specific needs of work operations that are not included in this guide.

This set of traffic control plans is not intended to satisfy all conditions for all work zones and can generally be adapted to a broad range of conditions. The Manual on Uniform Traffic Control Devices (MUTCD) is adopted by WSDOT as the legal standard. Principles set forth in Part VI of the MUTCD titled "Temporary Traffic Control" are represented in this booklet to provide traffic control guidance for common work operations.

This guidebook does not specifically address individual types of work operations. Standards do not allow exceptions based on work type. Many types of work operations such as surveying, maintenance, utility, developer, etc. can be applied to the guidance and plans contained within.

The typical applications (TA's) shown in MUTCD Part 6 may/should be considered and used as needed to develop or implement TCP's within the intent of this guidance.

Instructions

Considerations

1. Provide substantial protection and minimize worker exposure to traffic by applying barriers and devices in practical ways. Long-term projects may warrant the use of concrete barrier while short-term projects can be better served by a truck-mounted attenuator (TMA). Always consider the use of positive protection.
2. Prior to the beginning of work operations, evaluate all aspects of the work area, including sight distance, traffic speed, volume, road approaches and the type of work activity, before deciding on a traffic control plan.
3. After the traffic control plan is implemented, the supervisor (i.e. the person(s) supervising the actual work task(s) for which the TCP was implemented – e.g. Maintenance Lead Tech, Construction Project TCS(s) – both WSDOT and contractor, survey party chief) should drive through the work area, at the anticipated speed of the motorists, to determine the effectiveness

of the plan. Additional reviews throughout the day are recommended to insure that traffic control devices remain in place.

4. Traffic control devices shall be moved ahead whenever work advances to more than 2 miles from the advance warning signs.
5. Contact region traffic management center (TMC) prior to starting work when appropriate, based on region polices. Also consider coordination with region public information officer (PIO) for public notification when adverse traffic impacts are anticipated.
6. Plan ahead for manpower, equipment, and materials, (such as signs, channelizing devices, pavement marking materials, etc.) needed for traffic control.
7. The distances shown on the traffic control plans are desirable minimum requirements. Device spacing, buffer space, and sign spacing might require adjustments to provide for site conditions. Reductions in taper length distances are not allowed. Reductions in roll-ahead distances are allowed, see page 4, item number 5 for additional information.
8. The Washington State Patrol is available to assist WSDOT by enforcing excessive speed and impaired driver laws in critical work zone traffic control situations. These may include nighttime lane closures on high volume/high speed freeways or road closures. Contact the Region Traffic Office Staff for specific information regarding procedures to utilize the WSP.
9. Traffic control devices are used to visually guide drivers through work zones. Signing, channelizing devices, arrow panels and warning beacons all display a message to the driver. Work zone credibility is established through the proper use of these devices to send correct messages to drivers. Poor work zone credibility has a direct, negative, impact on work zone safety by causing driver confusion, frustration and disrespect which results in a high potential for accidents.
10. During paving operations, temporary pavement markings shall be maintained throughout the project. Temporary pavement markings shall be installed on the roadway that was paved that day. Temporary pavement markings shall be in accordance with page 70, TCD5 (Temporary Pavement Marking Details) and Std. Spec. 8-23.
11. Traffic delays due to work zone restrictions must be addressed. Excessive delays contribute to work zone incidents of road rage or crashes. Traffic capacity issues must be addressed with the region traffic office prior to starting work. Traffic should not be allowed to back up past the advance warning signs. Sign locations may need to be adjusted to fit actual site conditions or additional signs added to the sequence.

Personal Attributes

1. **Awareness:**
Routinely working near traffic for extended periods of time can cause workers to become complacent to the danger around them. Therefore, it is necessary to continually remind ourselves and those around us of the dangers to which everyone is exposed.

2. **Alertness:**
There is no place on a “*traffic exposed*” work crew for a daydreamer or distracter. Each individual, for their own protection and that of the crew, must stay constantly alert and watchful.
3. **Attitude:**
A positive, safety-conscious, attitude on the part of each crewmember will contribute greatly to the overall safety of crew operations.
4. **Responsibility:**
Each person is responsible for ensuring their own safety and to see all standards are followed. This includes ensuring temporary signs, warning devices, and flag persons are placed appropriately to protect both the motorists and workers. **Motorist and worker safety are of primary importance.**

Equipment

1. **Traffic Control Device Crash Test Requirements:**
After October 1, 2000, all new purchases of Category II traffic control devices (portable sign stands with signs, type 1, 2, & 3 barricades, vertical panels, intrusion alarms, and other work zone devices under 100 lbs.) shall be compliant with the federal NCHRP 350 crash test requirements. WSDOT will phase out existing devices as they complete their normal service life. All Category II devices will be "350" compliant by December 31, 2007.
2. **Condition and Care of Equipment:**
All personal equipment and traffic control devices shall be kept clean to provide protection for the crew through better visibility to the motorist. The condition of signs and traffic control devices shall be “acceptable or marginal” as defined in the book “*Quality Guidelines for Work Zone Traffic Control Devices*”, and will be accepted based on a visual inspection. A sign or traffic control device determined to be “not acceptable” shall be removed from the project. Copies of the Quality Guidelines book may be obtained from the American Traffic Safety Services Association (ATSSA.)
3. **Signs:**
Signs that are no longer retro-reflective (visible and legible at night) or are in poor condition are to be replaced. Standard 48" x 48" temporary warning signs are diamond shape with black letters or symbols on an orange background. See appendix 2-2, for information on work zone signs and example sheet of Type X sheeting samples.

Some work areas might require the use of special or regulatory signs, contact region traffic office for assistance with special signs. Use of double-faced (back-to-back) signs or signs made of plywood substrate are not allowed. Sign supports must be in good condition and be capable of withstanding normal wind stresses along the highway.

4. **Vehicles:**

- **Work Zone Vehicle** - All construction vehicles, except hauling vehicles, used within the work zone must be equipped with an approved flashing warning beacon. Consideration must be given to the location of workers in relation to the work vehicles. Worker safety can be jeopardized if the motorists' attention is focused on the work vehicle and beacon when the workers are at an unexpected location.
- **Protective Vehicle** - Usually a stationary vehicle (in stationary work zones) strategically placed in advance of the work area, between the buffer space and the roll-ahead space, to protect workers from oncoming traffic. The use of a Truck Mounted Attenuator (TMA) on this vehicle is recommended. Allow for roll-ahead distance resulting from an impact. Refer to the data block on the TCPs for specific information. The Protective vehicle can be a work vehicle if no other vehicles are available.
- **Shadow Vehicle** - Very similar to the protective vehicle but usually a moving vehicle (mobile work zones). All of the above guidelines for the protective vehicle applies to the shadow vehicle except for the roll-ahead distances only apply to a stationary operation. An arrow panel or truck mounted Portable Changeable Message Sign (PCMS) may also be used on the shadow vehicle.

5. **Truck Mounted Attenuators (TMA):**

A truck mounted attenuator (TMA) is a portable impact attenuator attached to the rear of a large truck. Ballast is added to the truck to minimize the roll-ahead distance when impacted by a vehicle. The TMA is used as a shield to prevent errant vehicles from entering the work zone. If a TMA is not available, the use of a protective or shadow vehicle is still highly recommended.

Considerations for the use of TMA's:

- **Speed of Traffic** - Higher operating speeds leave less reaction time and impacts generally result in more severe injuries and damage. Therefore, the higher the operating speed the more probability that a TMA is necessary.
- **Type of activity** - Mobile, intermittent or stationary.
- **Duration of project** – Typically daily maintenance operations are suitable for TMA's but for longer term operations positive protection from devices such as temporary concrete barrier should be considered.
- **Roadway environment** - Access controlled vs. non-access controlled, urban vs. rural, and roadway geometrics. Access controlled facilities frequently give drivers a false sense of security since interruptions are not expected. Therefore, activities on freeways may be more susceptible to incidents than are activities on non-access controlled facilities, where drivers are generally more alert.

- **Traffic volumes** - More traffic means more worker exposure.
- **Exposure to special hazards** - Operations involving personnel on foot or located in exposed positions (for example, on the approved platform of a pickup truck placing cones or in a lift-bucket performing overhead operations) are particularly susceptible to severe injuries or death. TMA's should be strongly considered for use in these operations.
- **Location of work area** - Locations of primary concern are those within the traveled lanes or within frequently used, all-weather, shoulders. Activities taking place within the traveled lanes are more likely to become involved in an incident than are shoulder activities.
- **Roll Ahead Distance** - The 30 foot roll ahead distance shown in the BUFFER DATA block on the TCPs is based upon a minimum 15,000 lb. vehicle weight impacting the TMA and is the recommended minimum distance to be used. A protective vehicle is recommended regardless if a TMA is available. If no TMA is used, the protective vehicle shall be strategically located in the field to shield workers and no specific roll ahead distance has been provided.
- **TMA's must be certified as NCHRP 350 compliant.**

6. **Portable Changeable Message Signs (PCMS):**

- Recommended for high speed, high volume roadways, or work operations that require a highly visible message.
- Shall ***not*** be used to replace required signs. Can be used to replace static message signs for short duration or moving operations, as per approved traffic control plan.
- Place in advance of other temporary traffic control zone signing.
- Shall meet the minimum visibility and legibility standards established in the MUTCD.
- Should be able to read the message twice at the posted speed.
- Each individual display should convey a single thought.
- A complete message cycle should consist of ***no more than two*** displays in sequence. Refer to MUTCD for a list of acceptable message abbreviations.
- Bottom of sign panel shall be a minimum of 7' above roadway.
- PCMS shall automatically adjust its light source relative to surrounding conditions.
- Messages shall not scroll horizontally or vertically across the sign face.
- Consider use of a truck mounted PCMS for protective vehicles.
- Consider use of permanently located changeable message signs when applicable.
- PCMS should be placed on the shoulder of the roadway, or if practical, further from the traveled lane. They should be delineated with traffic control devices or shielded with a barrier or crash cushion. When signs are not being used, they should be removed.
- Except when the PCMS trailer is actually being moved, it shall be detached from the towing vehicle. Towing trailer devices with the display active as a mobile operation is not allowed.

7. **Arrow Panel:**

- **Required for all lane closures on multi-lane roads, except during emergencies.**
- Arrow panels shall meet the minimum size, legibility, legibility distance, number of elements, and other specifications as shown in the MUTCD.
- An arrow panel shall not be used on a multi-lane roadway to laterally shift traffic.
- An arrow panel shall not be used on a two lane, two-way roadway.
- An arrow panel shall only be used in the caution mode when used for shoulder closures.
- Only the **four-corner flash mode** shall be used to indicate caution.
- Use **only one** arrow panel per lane being closed (unless used in mobile operations).
- Arrow panel should be used in combination with other appropriate traffic control devices. When arrow panels are not being used, they should be removed.
- Arrow panel shall be capable of a minimum 50 percent dimming.
- For stationary lane closure, the arrow panel should be located on the shoulder at the beginning of the taper. Where the shoulder is narrow, the arrow panel should be located in the closed lane.
- The arrow panel shall be located behind channelizing devices (unless used in mobile operations).
- An arrow display mounted on a shadow (early warning) vehicle is allowed on mobile lane closure operations.
- Type “C” arrow panels are required for high-speed, long term stationary lane closures. Type “B” arrow panels are allowed for maintenance and mobile lane closure operations. (See MUTCD Part 6F)
- Except when the arrow trailer is actually being moved, it shall be detached from the towing vehicle. Towing trailer devices with the display active as a mobile operation is not allowed.

8. **Channelizing Devices:**

Traffic safety cones are the most common devices used to separate and guide traffic past a work area. Cones must be 18" tall, except for high speed, high volume, or nighttime operations, where they must be 28" tall, and retro-reflectorized. Traffic safety drums must be 36" tall, and are recommended for use in the tapers on high-speed roadways due to their greater visibility and imposing size. Maximum spacing requirements are shown on the TCP's. The Table on page 18 is provided to help select the proper taper lengths and number of devices needed. Tighter spacing may be desirable, under some conditions, to enhance motorists' guidance. Refer to Appendix 2-2, Channelizing Device Application Matrix, for additional guidance.

9. **Temporary Concrete Barrier:**

Temporary concrete barrier is designed to prevent intrusion of errant vehicles into work areas. Barrier is recommended for long-term stationary work areas with high exposure to traffic. Refer to the WSDOT design manual and contact the Region Traffic Office Staff for site specific placement information.

Consider the following for use of concrete barriers:

- Areas where there is a high potential for injury to workers or "no escape" areas such as internal lane work, work zones in tunnels, bridges, lane expansion work, etc.
- Long term, stationary jobs (work occupying a location for more than 3 days).
- Areas of high exposure to workers and motorists such as high speed and high volume of traffic.
- The approach ends of temporary concrete barriers shall be fitted with impact attenuators to reduce the potential for occupant injury during a vehicle collision with the barrier. Examples of impact attenuators are shown in Design Manual Chapter 720.

10. **Water Filled Barrier:**

Water filled barriers are longitudinal barrier systems that use light weight modules pinned together and filled with water to form a barrier. They are ***not intended*** as a replacement for concrete barrier but are an improvement over traffic cones and drums to channelize traffic through a work zone. In emergency maintenance situations, they may be considered for short-term use as a substitute for concrete barrier.

Contact the Region Traffic Office, or HQ Design Office, for advice on use of this device and assistance in determining the deflection space requirement behind the barrier.

11. **Barricades:**

Generally used to protect spot hazards but can also be used to close roadways and sidewalks with appropriate signing. Barricades can also be used to provide additional protection to work areas.

12. **Warning Lights:**

These lights are either flashing or steady burn (Types A, B, or C or strobe) mounted on channelizing devices, barriers and signs. Secure warning lights to the channelizing device or sign so they will not come loose and become a dangerous flying object if impacted by a vehicle. See the MUTCD, Part VI for additional information.

- Type A – low-intensity flashing warning light used to warn road users during nighttime hours they are approaching a potentially hazardous area.
- Type B – high-intensity warning light used to warn road users during both daylight and nighttime hours.
- Type C – steady-burn warning light designed to operate 24 hours per day to delineate the edge of the roadway.

13. **Flares:**

All work vehicles should carry a supply of flares. Use flares only to alert drivers to emergencies and not as routine traffic control device. Emergencies are defined as unexpected events where life threatening conditions, injuries or property damage may occur unless immediate action is taken. Use caution at accident sites where flammable materials, such as fuel spills, are suspected.

Consider the following for use of flares:

- Primarily used in high hazard conditions only (i.e. accidents, spills, equipment breakdowns, dangerous snow and ice conditions, etc.)
- Use electronic flares or orange/red-glow sticks instead of incendiary flares where flammable materials are suspected.

14. **Temporary and Portable Signal Systems:**

Temporary traffic control signals are typically used in work zones to control traffic such as temporary one-way operations along a one-lane, two-way highway where one lane is closed and alternating traffic movements are necessary. Examples of work operations are temporary one-way operations on bridges and intersections. Contact the region traffic office and signal superintendent for specific guidance and advice on the use of these systems. A traffic control plan is required for use of these systems.

- Temporary signal system - typically a permanent signal system modified in a temporary configuration such as temporary pole locations during intersection construction, span wire systems, adjustment of signal heads to accommodate a construction stage.
- Portable traffic signal system – a trailer mounted traffic signal used in work zones to control traffic. These versatile, portable units allow for alternative power sources such as solar power, generator and deep cycle marine batteries in addition to AC power.

15. **Automated Flagger Assistance Device (AFAD):**

The AFAD is an automated flagging machine that is operated remotely by a flagger located off the roadway and away from traffic. The device is a safety enhancement for projects that use alternating traffic control by physically placing the human flagger off the roadway while maintaining control of the traffic movements approaching the work zone. Contact the region traffic office and signal superintendent for specific guidance and advice on the use of these systems. A traffic control plan is required for use of these systems.

16. **Highway Advisory Radio (HAR):**

Roadside radio system that provides traffic and traveler related information (typically affecting roadway being traveled) via AM radio. The system may be a permanently located transmitter or a portable trailer mounted system that can be moved from location to location as necessary. Contact the region traffic office and signal superintendent for specific guidance and advice on the use of these systems.

17. Specific Warning Sign Requirements

Examples:

- Abrupt Lane Edge
- Motorcycles Use Extreme Caution
- Bump
- Traffic Revision Ahead
- Road Narrows
- Grooved Pavement
- Rough Road
- Loose Gravel
- No Shoulder
- Water Over Roadway

Not all warning signs are shown on the traffic control plans but are required to address specific work zone hazards when conditions warrant, particularly if the hazard is not obvious or cannot be seen by approaching motorists.

15. Personal Protective Wear:

- Hard hats are required when working on or around the following:
 - Asphalt Plant, Crushers, Blasting Area, and Asphalt grinding operations.
 - Construction of bridges, structures, retaining walls, etc.
 - Overhead work such as working in a trench, rock-fall areas, sign installation, installing poles, work under bridges, electrical conductors, etc.
 - Working near operating equipment with arms, booms, buckets, etc.
 - Work around cranes, pile driving, drilling.
 - During work as a flagger.
 - Brush cutter work, danger tree work, and other logging operations.
 - On any construction site whenever there is a potential exposure to danger from falling objects to persons working or occupying the area.
 - Any designated hardhat area.

The wearing of soft caps is permitted in accordance with the WSDOT Personal Protective Equipment Chapter of the Safety Procedures and Guidelines Manual (Chapter 5). Supervisors have the authority to require employees to wear hard hats for other activities where there is a danger from impact and/or penetration of falling and flying objects. Employees must have a hard hat on site and readily available for use when work conditions require their use.

15. High Visibility Apparel:

- While working on foot in a highway right of way (fence line to fence line) or in other areas where job duties are performed in proximity to moving vehicles/equipment, WSDOT workers shall:

For Flagging Operations:

- During daylight hours, at a minimum, flaggers must wear an ANSI/ISEA approved class II high-visibility garment; while flagging, a hard hat is required at all times.
- During hours of darkness, at a minimum, flaggers shall wear a ANSI approved Class II garment with white coveralls or high-visibility Class E orange pants; during hours of darkness flaggers should be wearing an ANSI/ISEA approved class III high-visibility ensemble (e.g., a class II vest worn in tandem with class E pants constitutes a class III ensemble, a vest worn alone and with white coveralls does not constitute a class III ensemble).
- During hours of darkness, at a minimum, flaggers must wear a high-visibility hardhat with at least 12 square inches of retro-reflective material applied to the hardhat to provide 360 degrees of visibility.
- During inclement environmental conditions with limited visibility (e.g., snow, fog, heavy rain) an ANSI Class III high-visibility ensemble is required. An example of a class III ensemble would include an ANSI Class II high-visibility vest worn in tandem with ANSI Class E orange retro-reflective pants or an ANSI class III raingear ensemble.
- High-visibility garments shall always be the outermost garments.

For NON-Flagging Operations:

- During hours of darkness, at a minimum, wear ANSI/ISEA approved class II garments (e.g., vests, jackets, pullovers, T-shirts) and white coveralls or ANSI Class E pants.
- During daylight hours, at a minimum, wear ANSI/ISEA approved class II garments (e.g., vests, jackets, pullovers, T-shirts), except that during daylight hours, an orange T-shirt with two 2-inch wide yellow stripes front and back may be worn.

Exceptions to these high visibility requirements: (1) when personnel are out of view of, or not exposed to, traffic, (2) when personnel are inside a vehicle, or (3) where it is obvious that such apparel is not needed for employee safety from traffic.

The standard WSDOT garments are either:

- ANSI/ISEA standard Class II Fluorescent Orange-Red textured Woven polyester vest with Fluorescent lime yellow or ANSI approved equal strips from state contract,
- ANSI/ISEA standard Class II lightweight Fluorescent Orange-Red Mesh vest with Fluorescent lime yellow or ANSI approved equal strips from state contract, or
- ANSI/ISEA standard Class II Surveyors with Fluorescent lime yellow or ANSI approved equal strips from state contract,
- ANSI/ISEA standard Class E high-visibility pants from state contract,
- ANSI/ISEA class III ensemble raingear from state contract.

A standard WSDOT approved T-shirt may be purchased by WSDOT employees and worn in lieu of the WSDOT Safety Vest by employees during daylight hours and when not working as a flagger. T-shirts shall not have any words or “ads” affixed to them. The WSDOT T-shirt standard requires a crew neck, base color orange, minimum 2 each 2” horizontal yellow bars

on front and back with at least 2” apart vertically. The Appointing Authority and/or Region Safety Manager shall have final approval authority over both the T-shirt itself and its use.

In the link below is access to Washington State purchasing contracts for high visibility apparel (contract #00403) and high visibility raingear (contract #12200). Please use the contract numbers to find the contract documentation.

<http://www.ga.wa.gov/pca/pcacust.htm>

Flagging

- Flagging should be employed only when all other methods of traffic control are inadequate to direct, or control, traffic.
- Locate the flagger off the traveled portion of the roadway. More than one flagger may be necessary to achieve traffic control in both directions. A means of communication between flaggers must be considered in these situations. Communication by hand held radio is the recommended procedure.
- Only persons who have successfully completed an approved flagging course and who possess current flagging certification recognized in Washington State can be used as flaggers.
- Freeway characteristics do not lend themselves to effective flagging. High speed multiple lanes and normal driver expectancy do not provide an opportunity for the flagger to actually warn or direct traffic, therefore flagging on freeways and freeway ramps is not normally recommended. However, using a “spotter” may be helpful to protect the work crew.
- In a mobile flagging operation when the flagger is moving with the operation, all signs associated with the flagger shall be moved ahead whenever work advances to more than 2 miles from the advance warning signs; also, **the flagger ahead (symbol or text message) sign must be within 1,500 feet of the flagger.**
- During hours of darkness flagger stations shall be illuminated without causing glare to the traveling public.
- When flagging in the vicinity of signalized intersections special consideration must be made to address the specific needs to traffic movements. The signal must be either turned off or set to red “flash” mode. At no time shall traffic be flagged with an active signal.
- **The placement of a flagger at the center of an intersection to control traffic is not allowed,** the only person allowed to legally control traffic from the center of an intersection is a uniformed police officer.

Flagger’s Rules of Conduct

1. Be clearly visible to approaching traffic at all times.
2. Do not stand in front of parked/stopped cars.
3. Always be aware of oncoming traffic.
4. Do not step into, or turn your back on the traffic.

5. Stand on the shoulder of the road observing traffic and the work zone. You may have to stand on the opposite side of the road to effectively direct traffic around the work.
6. Choose the best flagging position that will provide the greatest color contrast between you and the background.
7. If at all possible, do not stand in the shade.
8. Never flag from inside a vehicle.
9. Do not lean, sit or lie on a vehicle.
10. Stand alone. Do not permit a group of workers to congregate around you.
11. Familiarize yourself with the nature of the work being performed. Be able to answer motorists' questions. Be aware of the work in progress.
12. Establish a warning signal with the work crew in case of an emergency.
13. Plan an escape route in case of an emergency.
14. Stay alert! Be ready to respond to an emergency.
15. Record the license number and description of any vehicle whose driver disobeys your instructions and threatens the safety of the work area. Report information to authorities.
16. Be courteous and professional.
17. Keep your mind on your job; do not do any other work when flagging.
18. Do not involve yourself in unnecessary conversation with workers, pedestrians, or motorists.
19. Do not leave your position until you are appropriately relieved.
20. Cover, turn or remove the "FLAGGER AHEAD" sign when a flagger is no longer on duty.
21. Always carry your flagger certification card while on the job.

Pedestrians, Bicycles and Other Roadway Users

Give consideration to pedestrian and bicycle traffic where appropriate. Provide alternative routes where designated walkways or bicycle routes are temporarily interrupted due to work operations. Alternative routes need to be free of obstructions and hazards (e.g., holes, debris, mud, construction and stored equipment, etc.). Clearly delineate all hazards near or adjacent to the path (e.g., ditches, trenches, excavations, etc.). Refer to MUTCD Part VI, Chapter 6D for additional requirements.

Pedestrians:

Most public highways and streets cannot deny access to pedestrians if no other route is available to them. All pre-existing ADA compliant pedestrian facilities within the work zone must continue to comply with ADA requirements for barrier-free access during work operations. Consider the following when addressing pedestrian issues within and around work zones:

- Pedestrians should not be led into conflicts with work site vehicles, equipment, and operations.
- Pedestrians should not be led into conflicts with vehicles moving through or around the work site.
- Pedestrians should be provided with a safe, convenient path that replicates as nearly as practical the most desirable characteristics of the existing sidewalks or a footpath.
- Pedestrians generally will not go out of their way. Make alternate pathways reasonable.

- Do not place signs and other traffic control devices within the pathway that may pose a hazard.
- **Placement of sidewalk closure signs shall be provided in advance of the closure point for pedestrians to make adjustments to their route. It must be recognized that pedestrians are reluctant to retrace their steps to a prior intersection for a crossing.**

Bicycles:

- Bicycles have a legal right of access to most highway facilities and provisions for their safe conduct through work zones are necessary.
- Provide for and sign an appropriate alternate route when activities close a designated (signed) bicycle path or shoulder bikeway. Where horizontal separation for bicycles and pedestrians existed prior to work, give consideration to separating during work.
- When laying out alternative bicycle paths, make sure no overhead obstructions present a direct hazard to normal bicycle operation.
- Riding surfaces are important for safe bicycle operation. Loose gravel, uneven surfaces, milled pavement, and various asphaltic tack coats endanger the bicyclist. Consider the condition of the surface the bicyclist will be required to use.

Motorcycles:

The driving or roadway surface is also important for motorcycle rider safety. The same surfaces that are a problem for bicyclist are also difficult for motorcyclists. Stability at high speed is a far greater concern for motorcycles than cars on grooved pavement, milled asphalt and tapers from existing pavement down to milled surfaces. Adequate signing to warn for these conditions to alert the motorcycle rider are required. See TCD2, page 67, for a typical signing layout example.

Schools:

Work zone operations in the vicinity of schools require consideration to ensure that conflicts are kept to a minimum. Issues that should be considered are:

- Student path to and from the school
- Bus movements for loading and unloading students
- Coordination with crossing guards
- School hours to minimize impacts

Oversize Loads

Oversized vehicles may exceed the legal width, height, or weight limits for vehicles, but are still allowed to travel on certain state highways. WSDOT Motor Carrier Services office issues permits that allow the oversized vehicles to use these routes and in some areas the region maintenance office also issues permits. If the proposed work zone will not accommodate over legal vehicles, then additional warning signs are necessary and notification of the motor carrier services and the region's maintenance offices that issue these permits so they are aware of the restrictions. On some projects, it may be necessary to designate a detour route for oversized vehicles. A specific and specialized TCP should be considered to address oversize load conflicts and this information must be shared with the Motor Carrier Services office for

their use in processing permits. Contact the region traffic office for assistance in determining and developing detour route plans.

Additional Work Zone Considerations

Work Zone Speed Limits

The speed limits on state highways are set by the State Traffic Engineer and cannot be changed without approval. Only use reduced legal speed limits when the safe operating speed of the roadway determines the need to do so. Safety issues such as access points, sight distance, poor roadway condition and reduced geometric features are some examples of issues that may apply. Speed reduction guidelines are outlined in RCW 47.48.020, the WSDOT Construction Manual (M41-01), and WSDOT Directive D55-20, "Reduced Speed in Maintenance and Construction Work Zones."

Do not reduce speed limits based on the hope that traffic will slow down when there is no driver perceived need to do so. Proposals to reduce the speed limit for work zones must be submitted to the region traffic office for consideration and Regional Administrator approval.

Worker Protection

Working on or along the highway can present a potentially hazardous work environment. Consider the risk to workers when developing the traffic control plans. An assessment of worker safety should be made prior to beginning work operations.

Survey Work Zones

The guidance and tcp's contained in this guidebook do not reflect a specific type of work operation, which is consistent with the principles of Part VI of the MUTCD. It is intended that survey crews will follow the guidance shown in this guidebook to accommodate their work needs. Survey crews are not allowed any additional flexibility than other work crews to conduct work operations in a safe manner as intended within the established rules and guidance. However, tcp's more specific to survey operations may be considered. If specific plans are necessary or additional guidance is needed, contact the region traffic office for assistance.

Coordination

Accurate and timely reporting of work zone information to the public is a valuable element in the overall traffic control strategy. The use of public information resources, such as newspapers, radio and television can greatly improve the public's perception and acceptance of the necessary delays and other inconveniences caused by the project's construction. Issues to consider are:

- Emergency services coordination so they are aware of the project and can make adjustments to routes if necessary when responding to emergencies.
- Transit organizations, they may require adjustments to bus stop locations within project limits.
- Schools and local business, special considerations may be necessary for them to maintain access to their sites.

- Special events, be aware of special events that may conflict with the operation and make adjustments to work hours if necessary. Coordinate with event to minimize impacts. The region's public information officer can provide assistance in the coordination effort.

Road Closures

Closing a highway, street, or ramp, while not always practical, is a desirable option from a safety viewpoint. For the traveling public, closing the road for a short time might be less of an inconvenience than driving through a work zone for an extended period of time.

When it is necessary to close a road, street or ramp, submit a request to the region traffic office in advance of the need. Per RCW 47.48.010 and WSDOT Directive M55-20, the Regional Administrator may close a road, street, or ramp.

If a road closure is feasible, take the following actions:


- Obtain local agency approval; consult with region local programs office.
- Determine maximum number of days allowed for the closure.
- Determine if additional traffic control measures are needed at intersections on the detour route.
- Contact emergency services, schools, and transit organizations, etc.
- Coordinate with the region public information officer for assistance with public notification.

Short-term closures may be allowed without advance public notification for emergencies or off-peak closure (night closure). Check with the region traffic office prior to implementing a closure.

CHECKLIST FOR ESTABLISHING A TEMPORARY TRAFFIC CONTROL ZONE*

COMPLETED	ITEM
<input type="checkbox"/>	Determine the duration of work, (Stationary, Short-Duration, Mobile)*
<input type="checkbox"/>	Select hours of work to avoid peak periods (refer to region work hour chart when applicable)*
<input type="checkbox"/>	Select the appropriate layout(s), using duration, type of roadway, volume, and speed, from guidelines.
<input type="checkbox"/>	Determine any modifications to typical layout(s). <ul style="list-style-type: none">• Check decision sight distance• Include intersections and driveways• Allow for buffer space free of obstructions
<input type="checkbox"/>	Check the condition of devices (Refer to Quality Guidelines Booklet).
<input type="checkbox"/>	Install devices beginning with the first device the driver will see. Device spacing and layout as per chart shown on TCP's.
<input type="checkbox"/>	Conduct a drive through to check for problems.
<input type="checkbox"/>	Document temporary traffic control zone, problems and major modifications to the layouts.
<input type="checkbox"/>	Maintain devices while in place.
<input type="checkbox"/>	Remove the devices as soon as work is completed, beginning with the last device placed.

*Utilize the Region Traffic Office Staff to address concerns and questions.

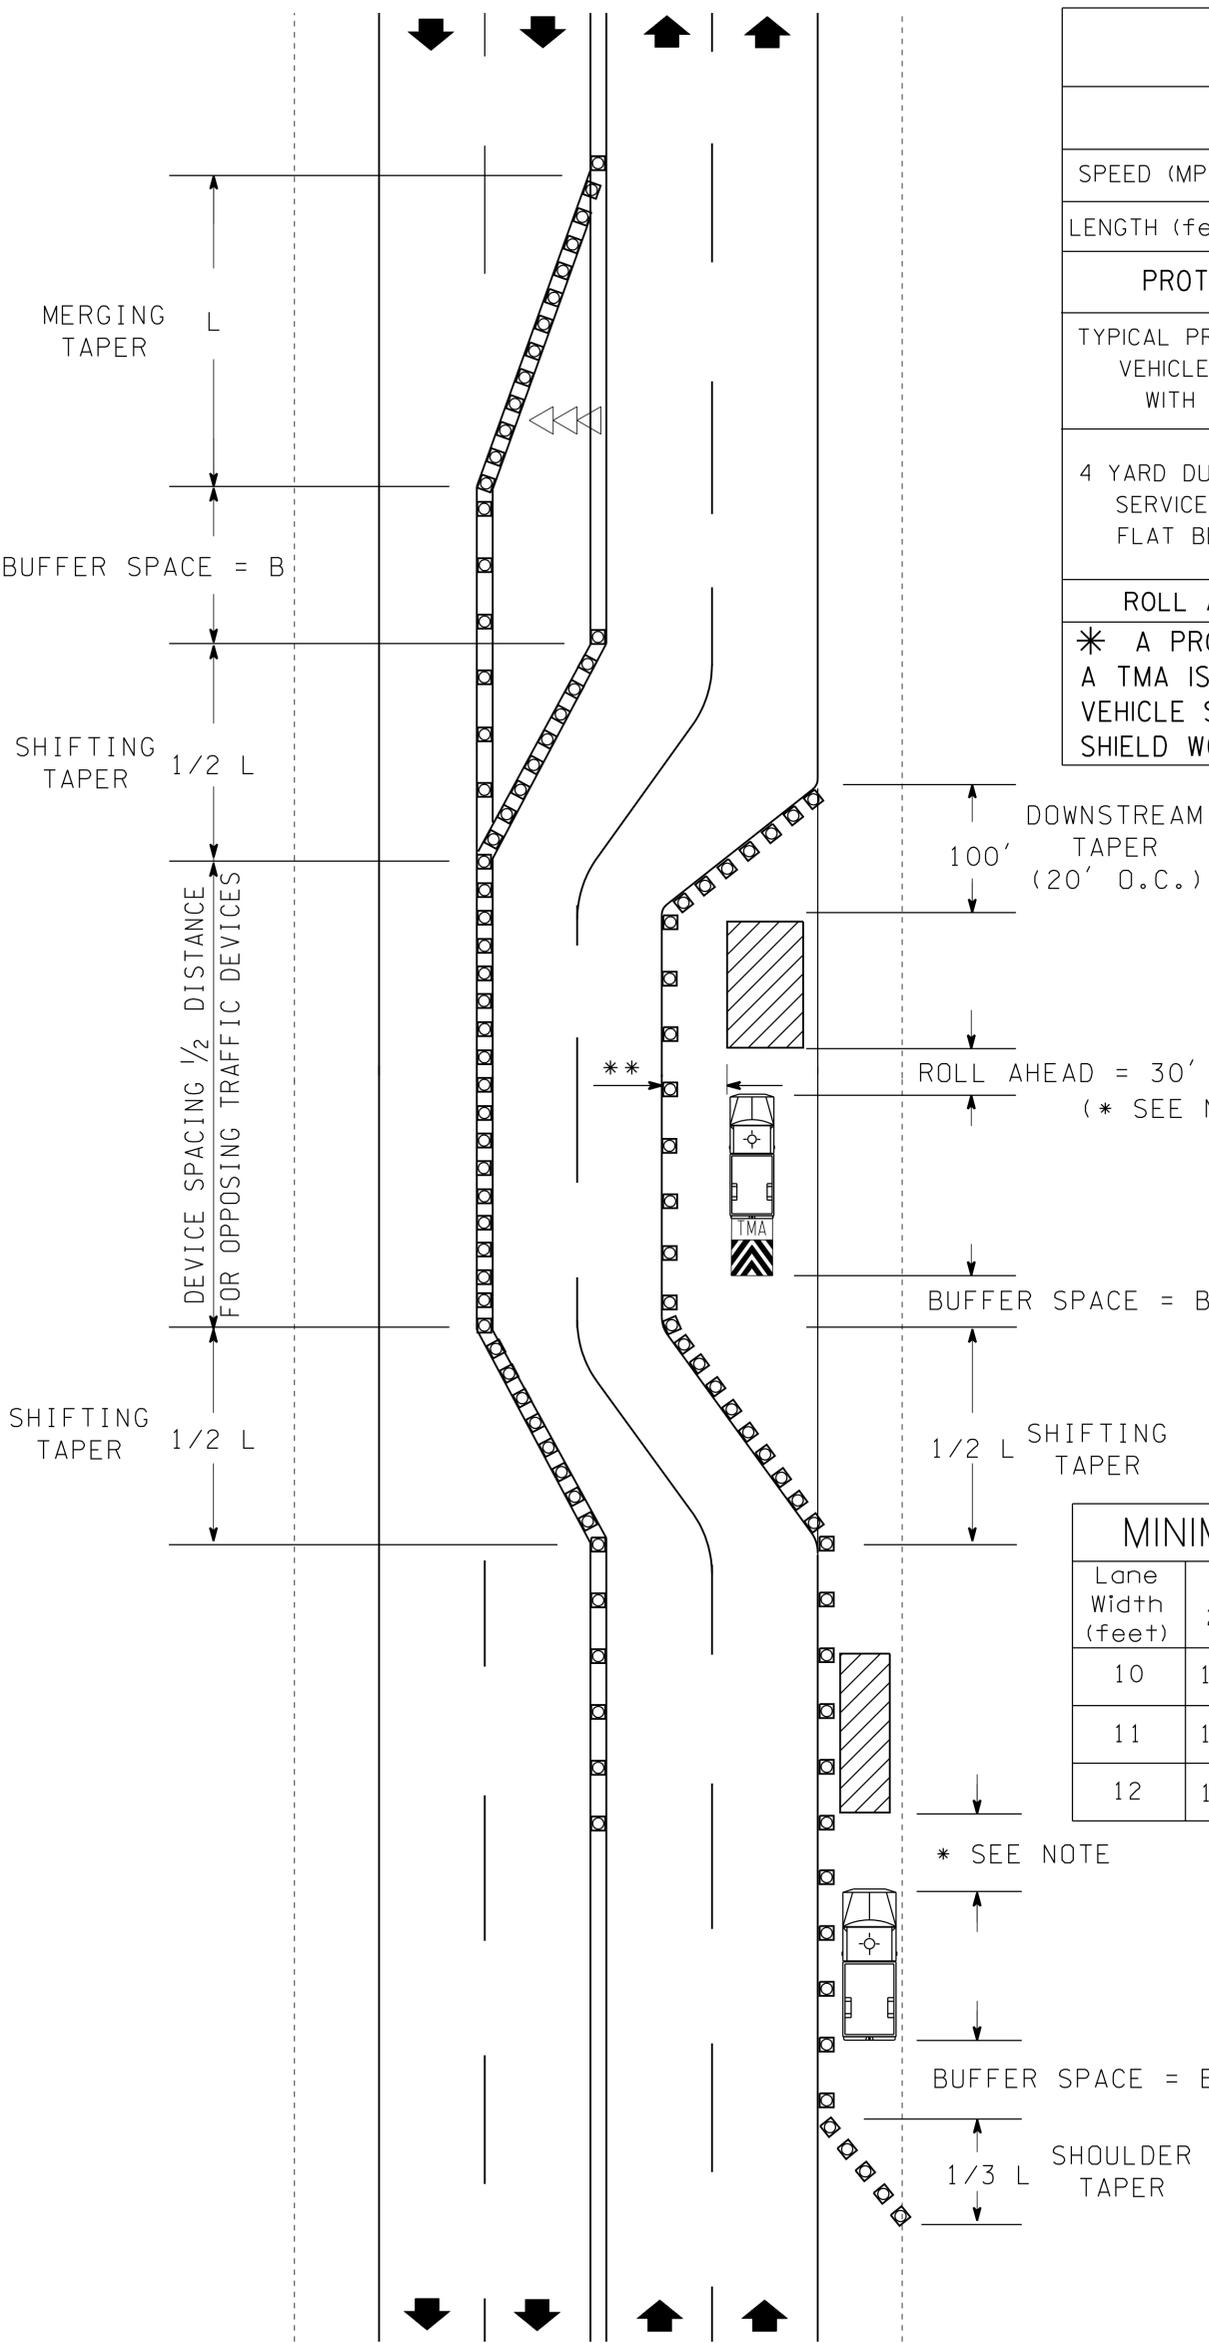

BUFFER DATA										
LONGITUDINAL BUFFER SPACE = B										
SPEED (MPH)	25	30	35	40	45	50	55	60	65	70
LENGTH (feet)	155	200	250	305	360	425	495	570	645	730
PROTECTIVE VEHICLE WITH TMA ROLL AHEAD DISTANCE										
TYPICAL PROTECTIVE VEHICLE TYPE WITH TMA	TYPICAL PROTECTIVE VEHICLE (WITH TMA) LOADED WEIGHT (LBS)							STATIONARY OPERATION (feet)		
4 YARD DUMP TRUCK, SERVICE TRUCK, FLAT BED, ETC.	MINIMUM WEIGHT 15,000 LBS. (MAXIMUM WEIGHT SHALL BE IN ACCORDANCE WITH MANUFACTURER RECOMMENDATION)							30 MIN.		
ROLL AHEAD STOPPING DISTANCE ASSUMES DRY PAVEMENT										
* A PROTECTIVE VEHICLE IS RECOMMENDED REGARDLESS IF A TMA IS AVAILABLE. IF NO TMA IS USED, THE PROTECTIVE VEHICLE SHALL BE STRATEGICALLY LOCATED IN THE FIELD TO SHIELD WORKERS AND NO ROLL AHEAD DISTANCE IS SPECIFIED.										

** LATERAL BUFFER SPACE
A LATERAL BUFFER SPACE OF 2 FEET IS RECOMMENDED FOR HIGH SPEED WORK ZONES.

CHANNELIZING DEVICE SPACING (FEET)		
MPH	TAPER	TANGENT
50/70	40	80
35/45	30	60
25/30	20	40

MINIMUM TAPER LENGTH (L) IN FEET										
Lane Width (feet)	Posted Speed (mph)									
	25	30	35	40	45	50	55	60	65	70
10	105	150	205	265	450	500	550	-	-	-
11	115	165	225	295	495	550	605	660	-	-
12	125	180	245	320	540	600	660	720	780	840

LEGEND

- ARROW PANEL
- CHANNELIZING DEVICES
- PROTECTIVE VEHICLE WITH OR WITHOUT TMA - RECOMMENDED
- PROTECTIVE VEHICLE WITH TMA - RECOMMENDED

TAPER AND BUFFER SPACE DETAILS

TAPER / CHANNELIZING DEVICE TABLE

MERGING, SHIFTING & SHOULDER TAPER LENGTHS
AND NUMBER OF CHANNELIZATION DEVICES USED

(All minimums)

Lane Width	10 Feet				11 Feet				12 Feet				Shoulder Tapers (Assumes 10' Shoulders)		
	L		1/2 L		L		1/2 L		L		1/2 L		*1/3L		
MPH	Merging	Devices	Shifting	Devices	Merging	Devices	Shifting	Devices	Merging	Devices	Shifting	Devices	MPH	(ft) Length	Devices
20	70	6	35	3	75	6	40	3	80	6	40	3	20	25	3
25	105	6	55	4	115	7	60	4	125	7	65	4	25	35	3
30	150	8	75	5	165	9	85	5	180	10	90	5	30	50	3
35	205	8	105	5	225	9	115	5	245	9	125	5	35	70	4
40	270	10	135	6	295	11	150	6	320	12	160	6	40	90	4
45	450	16	225	9	495	18	250	9	540	19	270	10	45	150	6
50	500	14	250	8	550	15	275	8	600	16	300	9	50	170	6
55	550	15	275	8	605	16	305	9	660	18	330	9	55	185	6
60	600	16	300	9	660	18	330	9	720	19	360	10	60	200	6
65	650	17	325	9	715	19	370	10	780	21	390	11	65	220	7
70	700	19	350	10	770	20	385	11	840	22	420	12	70	235	7

**L for shoulder taper equals
Shoulder Width x Speed.
Figures shown are for a
10' shoulder.*

* The number of channelizing devices listed is the minimum required. Use of more devices should be considered if additional delineation is desired.

** Termination taper, when used should have a minimum length of 100' per lane with devices placed approximately 20' O.C.

STATIONARY WORK ZONES

Traffic Control Plans (TCP's) 1 to 13

Stationary work zones are used for work activities that exceed one hour but could last for several days. Signs and channelizing devices are required for stationary work zones. Devices, such as sequential arrow panels, barricades and protective vehicles, may also be used depending on the situation. For longer term projects, temporary concrete barrier, temporary pavement markings and post mounted signs might be typical devices. Examples of stationary work zone operations include: light standard repair, paving, sign installation and bridge repair. Stationary work zone traffic control is usually associated with a substantial work operation that may have many workers, equipment, truck hauling and flagging. Traffic operation, all work activities, workers and flaggers must be incorporated into the work zone and provided for during planning and selecting the Traffic Control Plans (TCP's).

The following TCP's show typical stationary traffic control setups.


END ROAD WORK
G20-2A
48" x 24"
B/O

G20-2A
48" x 24"
B/O
or
down stream taper to
show end of work area

SIGN SPACING = X (feet) (1)		
Rural Highways	60/65 MPH	800'+-
Rural Roads	45/55 MPH	500'+-
Rural Roads & Urban Arterials	35/40 MPH	350'+-
Rural Roads, Urban Arterials Residential & Business Districts	25/30 MPH	200'+- (2)
Urban Streets	25 MPH or LESS	100'+- (2)

ALL SIGNS ARE 48" x 48" BLACK ON ORANGE UNLESS OTHERWISE DESIGNATED.
(1) All spacing may be adjusted to accommodate interchange ramps, at-grade intersections, and driveways.
(2) This spacing may be reduced in urban areas to fit roadway conditions.

BUFFER DATA										
LONGITUDINAL BUFFER SPACE = B										
SPEED (MPH)	25	30	35	40	45	50	55	60	65	70
LENGTH (feet)	155	200	250	305	360	425	495	570	645	-
PROTECTIVE VEHICLE WITH TMA ROLL AHEAD DISTANCE										
TYPICAL PROTECTIVE VEHICLE TYPE WITH TMA	TYPICAL PROTECTIVE VEHICLE (WITH TMA) LOADED WEIGHT (LBS)						STATIONARY OPERATION (feet)			
4 YARD DUMP TRUCK, SERVICE TRUCK, FLAT BED, ETC.	MINIMUM WEIGHT 15,000 LBS. (MAXIMUM WEIGHT SHALL BE IN ACCORDANCE WITH MANUFACTURER RECOMMENDATION)						30 MIN.			
ROLL AHEAD STOPPING DISTANCE ASSUMES DRY PAVEMENT										
* A PROTECTIVE VEHICLE IS RECOMMENDED REGARDLESS IF A TMA IS AVAILABLE. IF NO TMA IS USED, THE PROTECTIVE VEHICLE SHALL BE STRATEGICALLY LOCATED IN THE FIELD TO SHIELD WORKERS AND NO ROLL AHEAD DISTANCE IS SPECIFIED.										

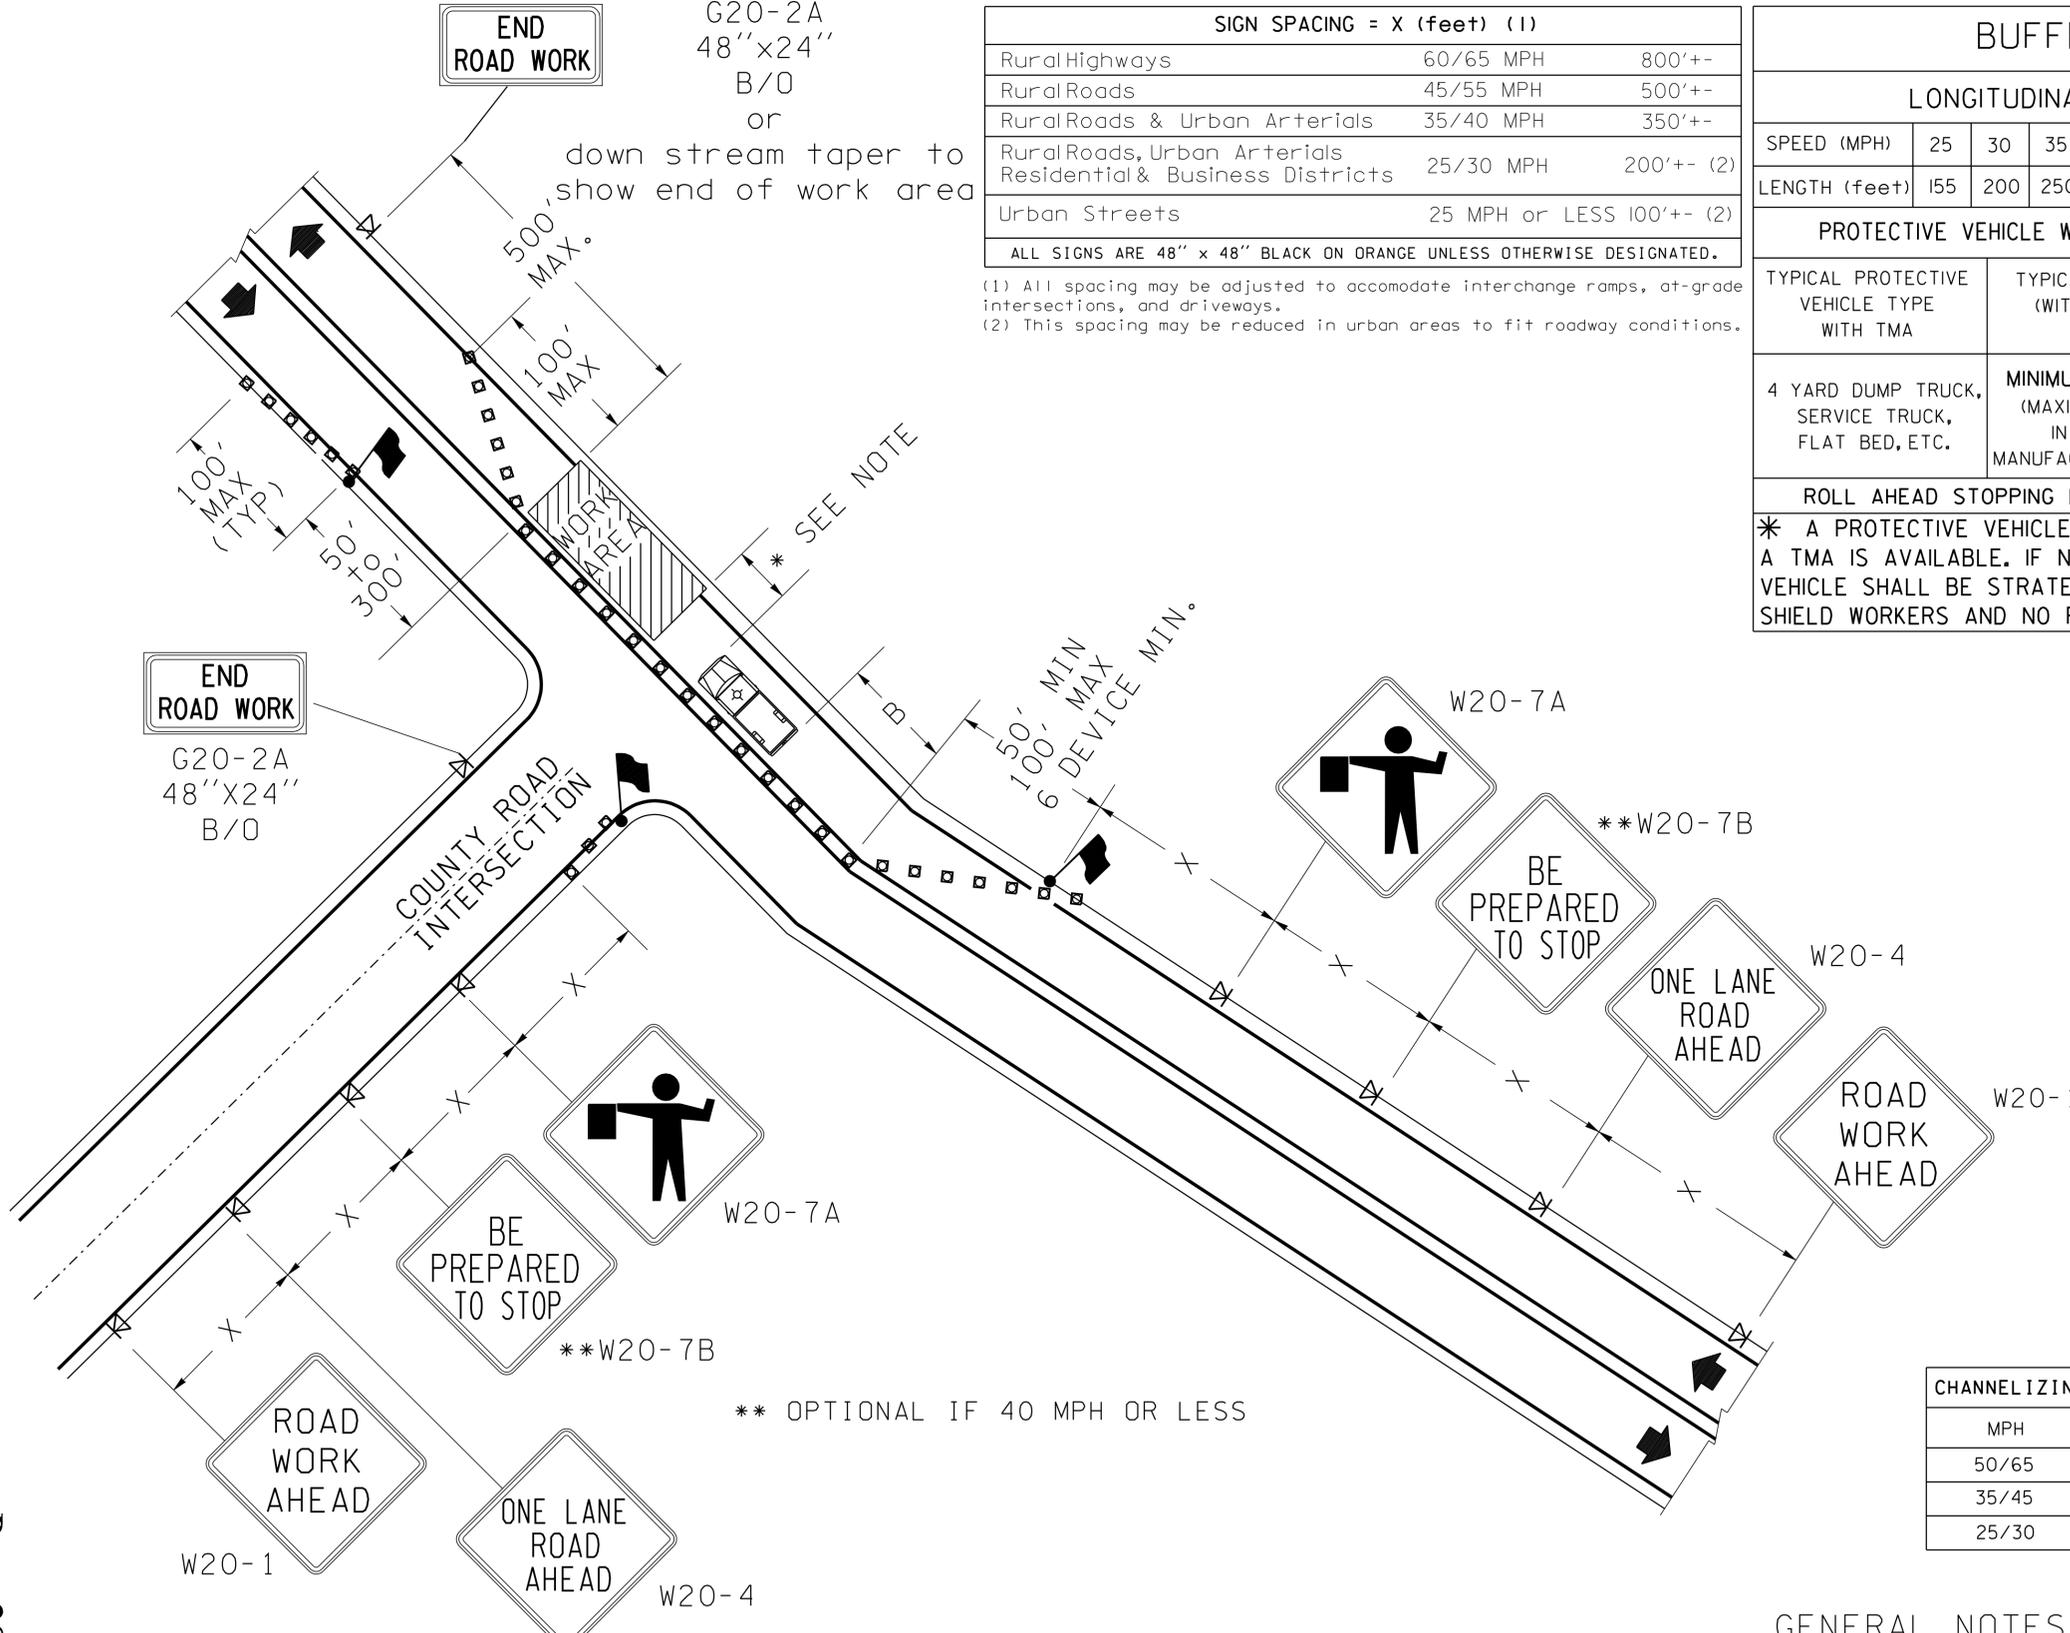

CHANNELIZING DEVICE SPACING (FEET)		
MPH	TAPER	TANGENT
50/65	40	80
35/45	30	60
25/30	20	40


LEGEND

- FLAGGING STATION
- SIGN LOCATION
- CHANNELIZING DEVICES
- PROTECTIVE VEHICLE - RECOMMENDED


**ALTERNATING ONE-WAY TRAFFIC
FLAGGER CONTROLLED
TCP 1**

GENERAL NOTES

1. NIGHTWORK REQUIRES ADDITIONAL ROADWAY LIGHTING AT FLAGGING STATIONS, REFER TO WSDOT STD. SPECIFICATIONS FOR ADDITIONAL DETAILS.
2. RECOMMEND EXTENDING CHANNELIZING DEVICE TAPER ACROSS SHOULDER.
3. PROTECTIVE VEHICLE RECOMMENDED - MAY BE A WORK VEHICLE.
4. SIGN SEQUENCE IS THE SAME FOR BOTH DIRECTIONS OF TRAVEL ON THE ROADWAY.
5. WHEN USED, THE DOWNSTREAM TAPER DEVICE SPACING SHOULD BE 20' O.C.

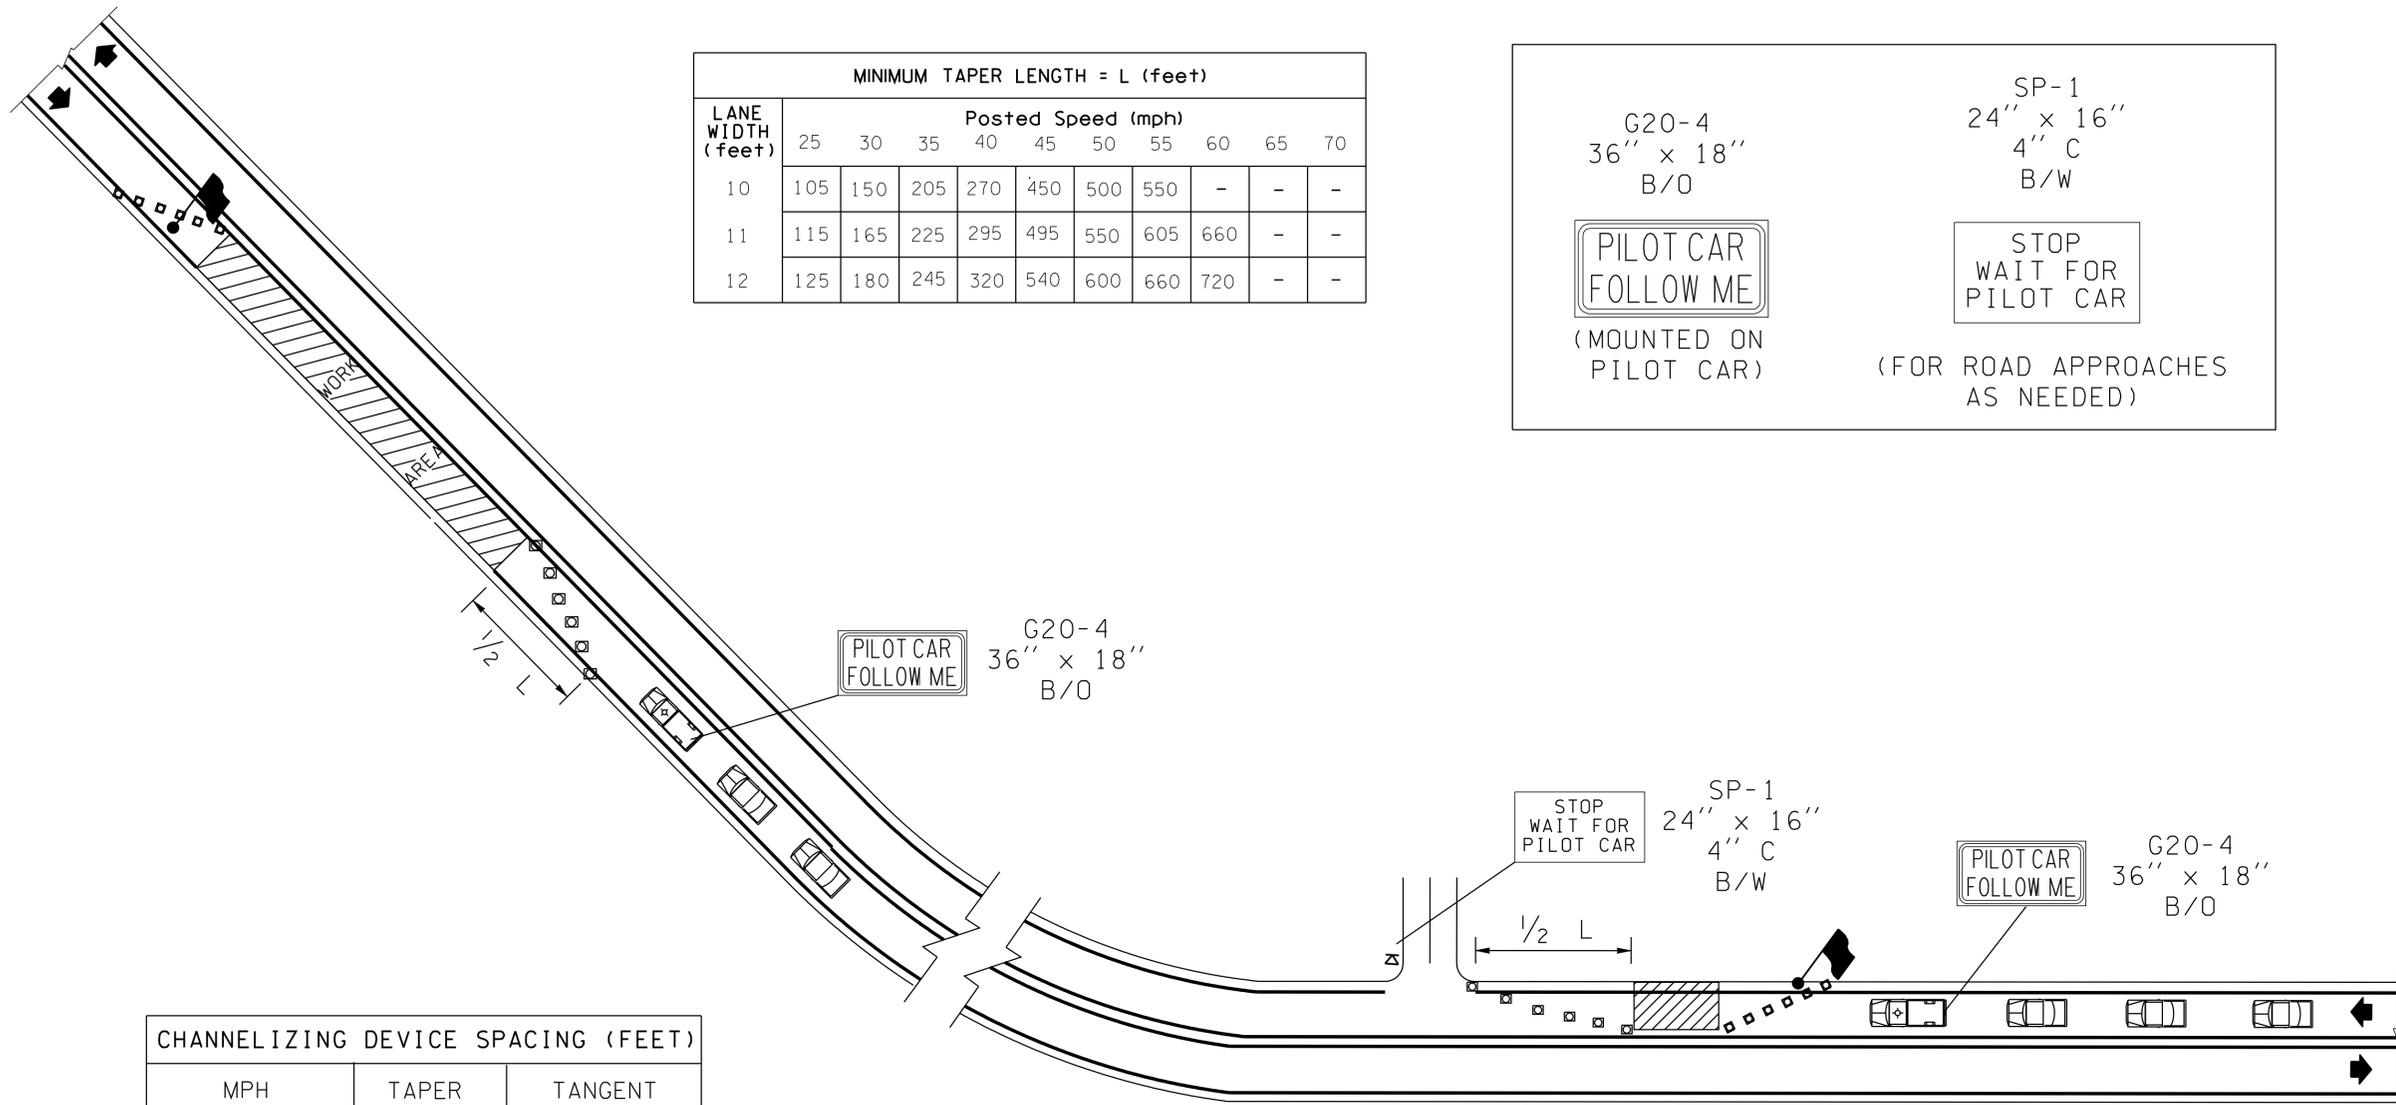


LANE WIDTH (feet)	MINIMUM TAPER LENGTH = L (feet)									
	Posted Speed (mph)									
10	105	150	205	270	450	500	550	-	-	-
11	115	165	225	295	495	550	605	660	-	-
12	125	180	245	320	540	600	660	720	-	-

G20-4 36" x 18" B/O  (MOUNTED ON PILOT CAR)	SP-1 24" x 16" 4" C B/W  (FOR ROAD APPROACHES AS NEEDED)
--	--

CHANNELIZING DEVICE SPACING (FEET)		
MPH	TAPER	TANGENT
50/65	40	80
35/45	30	60
25/30	20	40

LEGEND

-  FLAGGING STATION
-  SIGN LOCATION
-  CHANNELIZING DEVICES
-  PILOT VEHICLE
-  MOTORIST VEHICLE

GENERAL NOTES

- REFER TO SHEET TCP1 FOR ADDITIONAL SIGNING AND FLAGGING DETAILS NOT SHOWN.
- CHANNELIZING DEVICES ARE RECOMMENDED ALONG CENTERLINE TO SEPARATE TRAFFIC FROM WORK OPERATION. DEVICES ARE REQUIRED AT TAPERS TO SHIFT TRAFFIC MOVEMENT BETWEEN LANES AND TO PROTECT ALL FLAGGING STATIONS.

BUFFER DATA											
LONGITUDINAL BUFFER SPACE = B											
SPEED (MPH)	25	30	35	40	45	50	55	60	65	70	
LENGTH (feet)	155	200	250	305	360	425	495	570	645	730	
PROTECTIVE VEHICLE WITH TMA ROLL AHEAD DISTANCE											
TYPICAL PROTECTIVE VEHICLE TYPE WITH TMA	TYPICAL PROTECTIVE VEHICLE (WITH TMA) LOADED WEIGHT (LBS)						STATIONARY OPERATION (feet)				
4 YARD DUMP TRUCK, SERVICE TRUCK, FLAT BED, ETC.	MINIMUM WEIGHT 15,000 LBS. (MAXIMUM WEIGHT SHALL BE IN ACCORDANCE WITH MANUFACTURER RECOMMENDATION)						30 MIN.				
ROLL AHEAD STOPPING DISTANCE ASSUMES DRY PAVEMENT											
* A PROTECTIVE VEHICLE IS RECOMMENDED REGARDLESS IF A TMA IS AVAILABLE. IF NO TMA IS USED, THE PROTECTIVE VEHICLE SHALL BE STRATEGICALLY LOCATED IN THE FIELD TO SHIELD WORKERS AND NO ROLL AHEAD DISTANCE IS SPECIFIED.											


MINIMUM TAPER LENGTH = L (feet)										
LANE WIDTH (feet)	Posted Speed (mph)									
	25	30	35	40	45	50	55	60	65	70
10	105	150	205	270	450	500	550	-	-	-
11	115	165	225	295	495	550	605	660	-	-
12	125	180	245	320	540	600	660	720	780	840

CHANNELIZING DEVICE SPACING (FEET)		
MPH	TAPER	TANGENT
50/70	40	80
35/45	30	60
25/30	20	40

SIGN SPACING = X (feet) (1)		
Freeways & Expressways	55/70 MPH	1500'+- (OR AS PER MUTCD)
Rural Highways	60/65 MPH	800'+-
Rural Roads	45/55 MPH	500'+-
Rural Roads & Urban Arterials	35/40 MPH	350'+-
Rural Roads, Urban Arterials Residential & Business Districts	25/30 MPH	200'+- (2)
Urban Streets	25 MPH or LESS	100'+- (2)
ALL SIGNS ARE 48" x 48" BLACK ON ORANGE UNLESS OTHERWISE DESIGNATED.		

(1) All spacing may be adjusted to accommodate interchange ramps, at-grade intersections, and driveways.
 (2) This spacing may be reduced in urban areas to fit roadway conditions.

** COMPLIANCE DATE 12/23/13

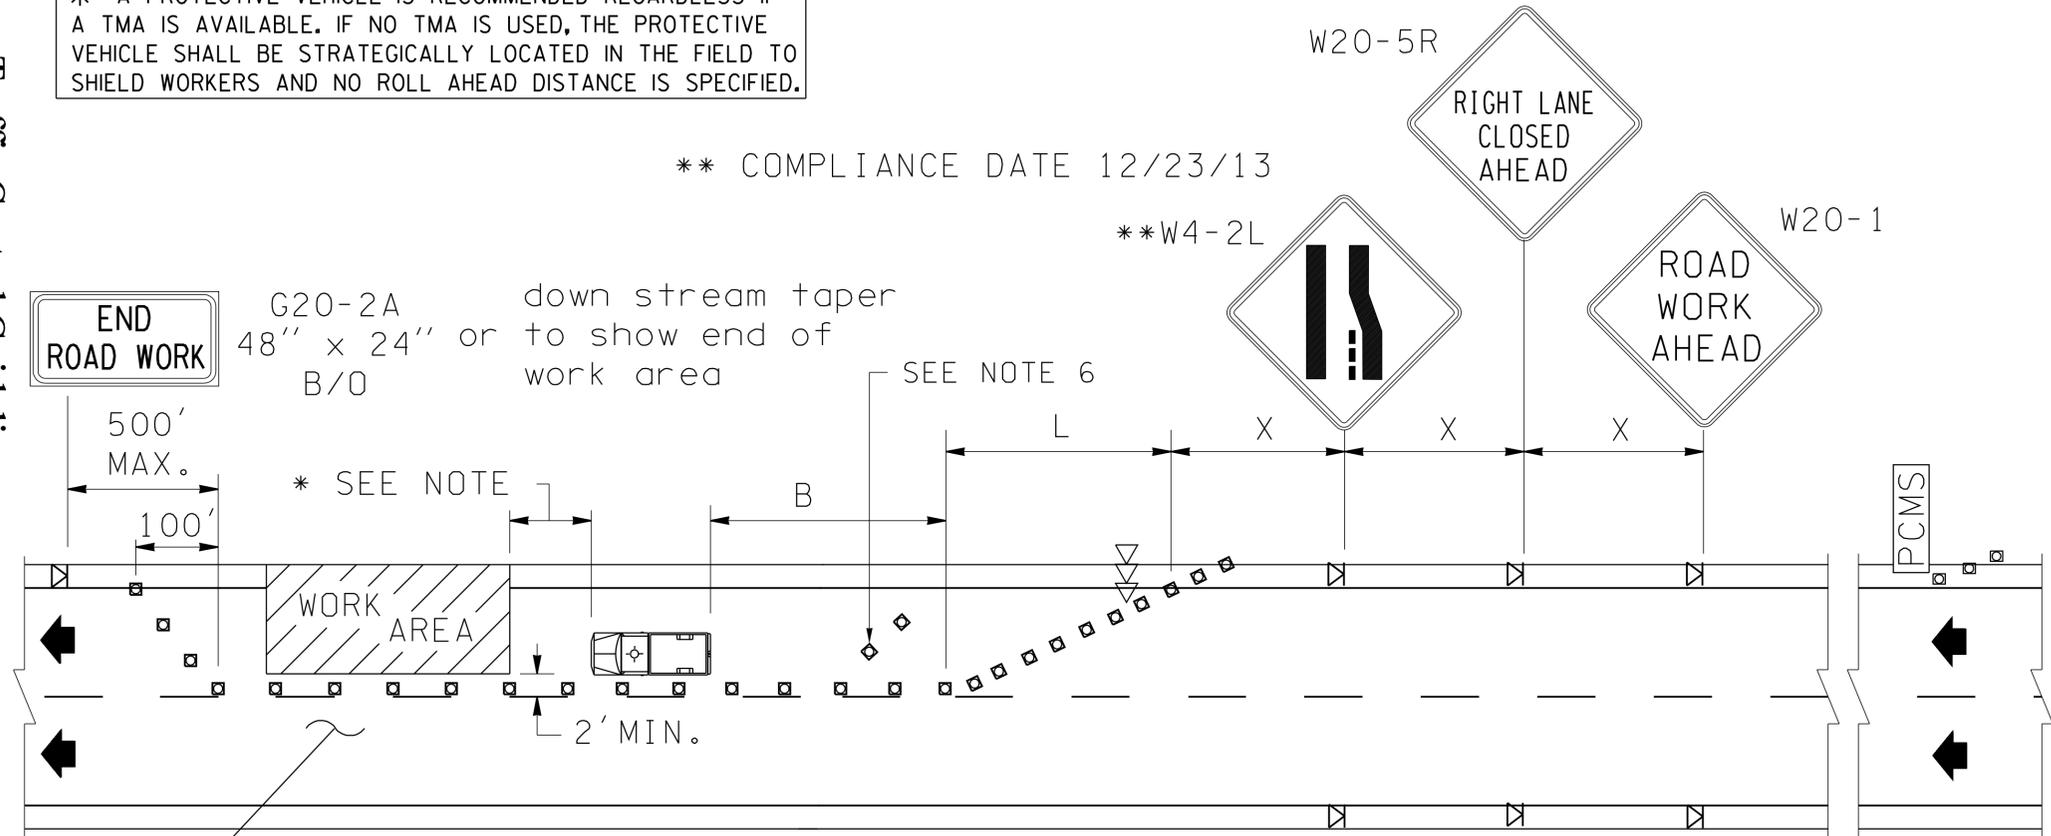

(SAMPLE MESSAGE)

PCMS	
1	2
LANE CLOSED	1 MILE AHEAD
1.5 SEC	1.5 SEC

Field locate 1 mile +- in advance of lane closure.

SEE SHEET TCD3 FOR ALTERNATE ENCROACHMENT DETAIL.


LEGEND

- ▤ SIGN LOCATION
- ▤▤▤ ARROW PANEL
- ▣▣▣ CHANNELIZING DEVICES
- 🚚 PROTECTIVE VEHICLE - RECOMMENDED
- PCMS PORTABLE CHANGEABLE MESSAGE SIGN

GENERAL NOTES

- PROTECTIVE VEHICLE RECOMMENDED - MAY BE A WORK VEHICLE.
- CONTACT REGION TRAFFIC OFFICE FOR WORK HOUR RESTRICTIONS.
- RECOMMEND EXTENDING DEVICE TAPER ACROSS SHOULDER. (L/3 TAPER)
- DEVICES SHOULD NOT ENCROACH INTO ADJACENT LANES.
- PCMS RECOMMENDED.
- USE TRANSVERSE DEVICES IN CLOSED LANE EVERY 1000'+- (RECOMMENDED).
- TRAFFIC SAFETY DRUMS RECOMMENDED FOR ALL TAPERS ON HIGH SPEED ROADWAYS. (SEE DEVICE MATRIX)
- WHEN USED, DEVICE SPACING FOR THE DOWNSTREAM TAPER SHOULD BE 20' O.C.

SINGLE-LANE CLOSURE FOR MULTI-LANE ROADWAYS
 TCP 3

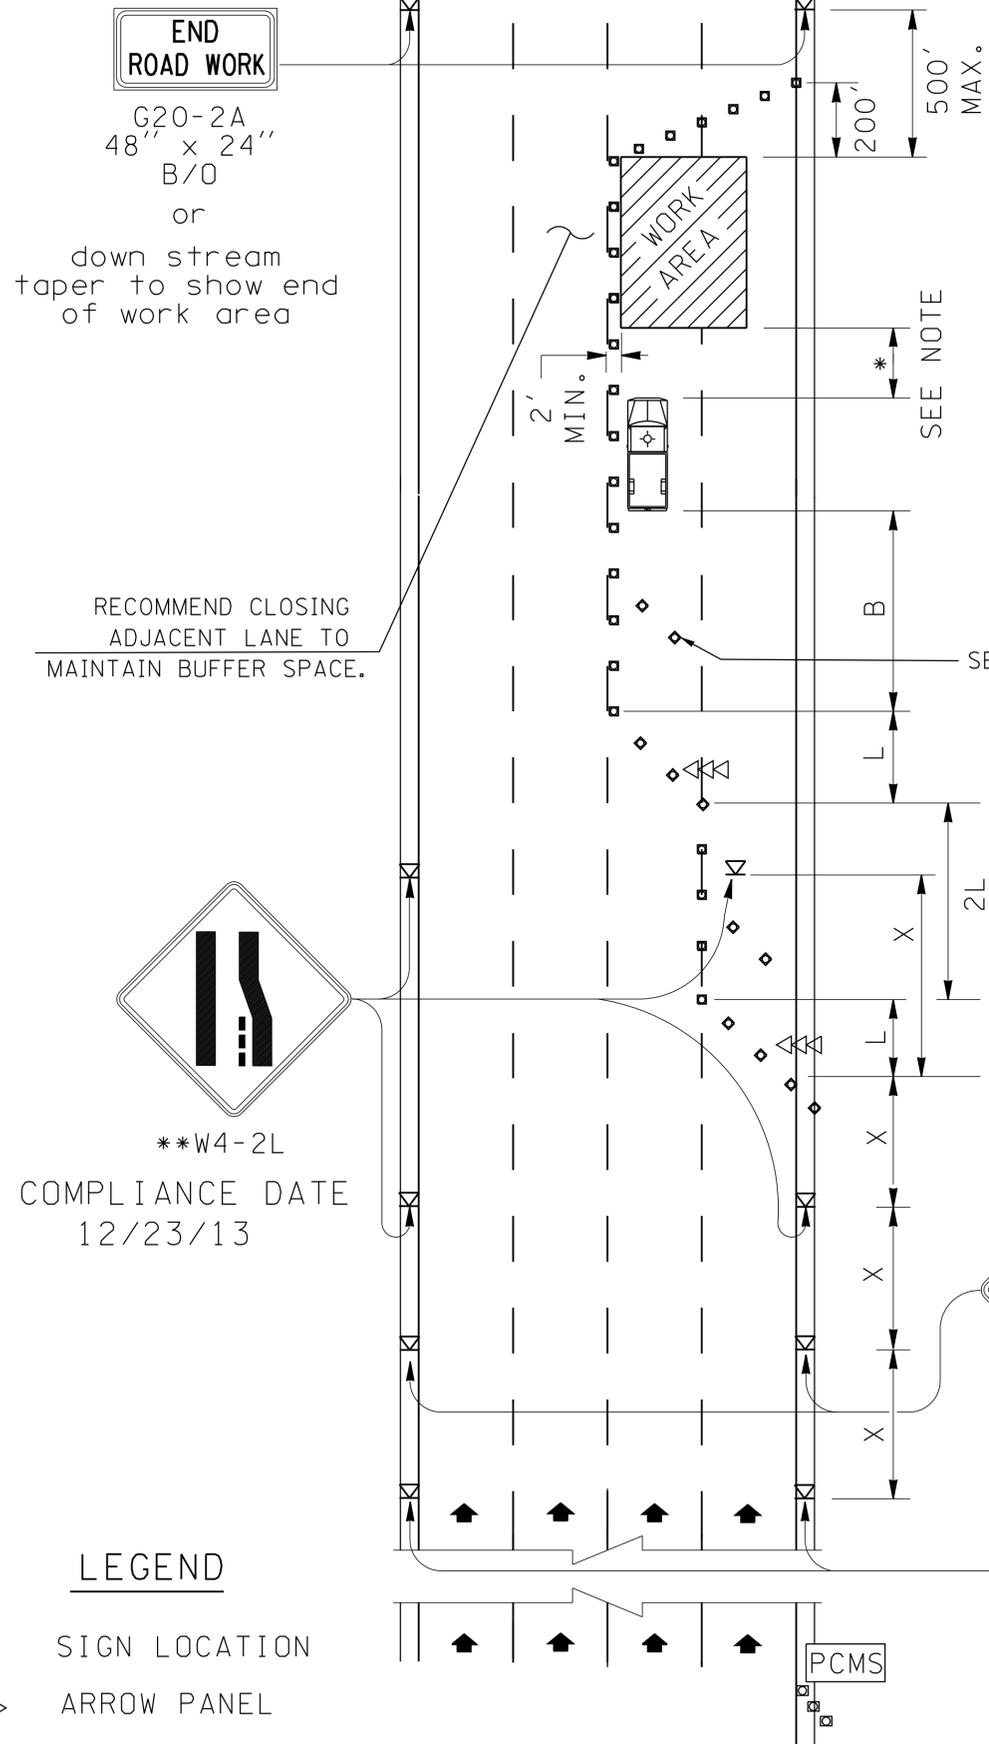

**W4-2L
 ** COMPLIANCE DATE
 12/23/13

RECOMMEND CLOSING
 ADJACENT LANE TO
 MAINTAIN BUFFER SPACE.

LEGEND

- ▣ SIGN LOCATION
- ▢▢▢ ARROW PANEL
- ▣▣▣ CHANNELIZING DEVICES
- ▣ PROTECTIVE VEHICLE - RECOMMENDED
- PCMS PORTABLE CHANGEABLE MESSAGE SIGN

CHANNELIZING DEVICE SPACING (FEET)

MPH	TAPER	TANGENT
50/70	40	80
40/45	30	60

(SAMPLE MESSAGE)

PCMS	
1	2
2 LANES CLOSED	1 MILE AHEAD
1.5 SEC	1.5 SEC

Field locate 1 mile +/- in
 advance of lane closure.

SEE NOTE 6

SEE NOTE

BUFFER DATA

LONGITUDINAL BUFFER SPACE = B

SPEED (MPH)	25	30	35	40	45	50	55	60	65	70
LENGTH (feet)	155	200	250	305	360	425	495	570	645	730

PROTECTIVE VEHICLE WITH TMA ROLL AHEAD DISTANCE

TYPICAL PROTECTIVE VEHICLE TYPE WITH TMA	TYPICAL PROTECTIVE VEHICLE (WITH TMA) LOADED WEIGHT (LBS)	STATIONARY OPERATION (feet)
4 YARD DUMP TRUCK, SERVICE TRUCK, FLAT BED, ETC.	MINIMUM WEIGHT 15,000 LBS. (MAXIMUM WEIGHT SHALL BE IN ACCORDANCE WITH MANUFACTURER RECOMMENDATION)	30 MIN.

ROLL AHEAD STOPPING DISTANCE ASSUMES DRY PAVEMENT

* A PROTECTIVE VEHICLE IS RECOMMENDED REGARDLESS IF A TMA IS AVAILABLE. IF NO TMA IS USED, THE PROTECTIVE VEHICLE SHALL BE STRATEGICALLY LOCATED IN THE FIELD TO SHIELD WORKERS AND NO ROLL AHEAD DISTANCE IS SPECIFIED.

MINIMUM TAPER LENGTH (L) IN FEET

Lane Width (feet)	Posted Speed (mph)									
	25	30	35	40	45	50	55	60	65	70
10	-	-	-	265	450	500	550	-	-	-
11	-	-	-	295	495	550	605	660	-	-
12	-	-	-	320	540	600	660	720	780	840

SIGN SPACING = X (feet) (1)

Freeways & Expressways	55/70 MPH	1500'+- (OR AS PER MUTCD)
Rural Highways	60/65 MPH	800'+-
Rural Roads	45/55 MPH	500'+-
Rural Roads & Urban Arterials	35/40 MPH	350'+-
Rural Roads, Urban Arterials Residential & Business Districts	25/30 MPH	200'+- (2)
Urban Streets	25 MPH or LESS	100'+- (2)

(1) All spacing may be adjusted to accommodate interchange ramps, at-grade intersections, and driveways.
 (2) This spacing may be reduced in urban areas to fit roadway conditions.

GENERAL NOTES

1. PROTECTIVE VEHICLE RECOMMENDED - MAY BE A WORK VEHICLE.
2. CONTACT REGION TRAFFIC OFFICE FOR WORK HOUR RESTRICTIONS.
3. RECOMMEND EXTENDING DEVICE TAPER ACROSS SHOULDER. (L/3 TAPER)
4. DEVICES SHALL NOT ENCR OACH INTO ADJACENT LANES.
5. PCMS RECOMMENDED.
6. USE TRANSVERSE DEVICES IN CLOSED LANE EVERY 1000'+- (RECOMMENDED).
7. TRAFFIC SAFETY DRUMS RECOMMENDED FOR ALL TAPERS ON HIGH SPEED ROADWAYS. (SEE DEVICE MATRIX)
8. WHEN USED, DEVICE SPACING FOR THE DOWNSTREAM TAPER SHOULD BE 20' O.C.

**DOUBLE-LANE CLOSURE
 FOR MULTI-LANE ROADWAYS
 TCP 4**


BUFFER DATA										
LONGITUDINAL BUFFER SPACE = B										
SPEED (MPH)	25	30	35	40	45	50	55	60	65	70
LENGTH (feet)	155	200	250	305	-	-	-	-	-	-
PROTECTIVE VEHICLE WITH TMA ROLL AHEAD DISTANCE										
TYPICAL PROTECTIVE VEHICLE TYPE WITH TMA	TYPICAL PROTECTIVE VEHICLE (WITH TMA) LOADED WEIGHT (LBS)					STATIONARY OPERATION (feet)				
4 YARD DUMP TRUCK, SERVICE TRUCK, FLAT BED, ETC.	MINIMUM WEIGHT 15,000 LBS. (MAXIMUM WEIGHT SHALL BE IN ACCORDANCE WITH MANUFACTURER RECOMMENDATION)					30 MIN.				
ROLL AHEAD STOPPING DISTANCE ASSUMES DRY PAVEMENT										
* A PROTECTIVE VEHICLE IS RECOMMENDED REGARDLESS IF A TMA IS AVAILABLE. IF NO TMA IS USED, THE PROTECTIVE VEHICLE SHALL BE STRATEGICALLY LOCATED IN THE FIELD TO SHIELD WORKERS AND NO ROLL AHEAD DISTANCE IS SPECIFIED.										

SIGN SPACING = X (FEET) (1)			
Rural Roads & Urban Arterials	35/40 MPH	350'+-	
Rural Roads, Urban Arterials Residential & Business Districts	25/30 MPH	200'+- (2)	
Urban Streets	25 MPH or LESS	100'+- (2)	
All signs are 48" x 48" black on orange unless otherwise designated.			

(1) All spacing may be adjusted to accommodate interchange ramps, at-grade intersections, and driveways.
 (2) This spacing may be reduced in urban areas to fit roadway conditions.

CHANNELIZING DEVICE SPACING (FEET)		
MPH	TAPER	TANGENT
35/40	30	60
25/30	20	40

MINIMUM SHOULDER TAPER LENGTH IN FEET (L)										
Shoulder Width (feet)	Posted Speed (mph)									
	25	30	35	40	45	50	55	60	65	70
6	63	90	123	165	-	-	-	-	-	-
8	84	120	162	210	-	-	-	-	-	-
10	105	150	204	270	-	-	-	-	-	-
3 DEVICES MINIMUM SPACED 10' O.C. IN TAPERS FOR SHOULDER WIDTHS LESS THAN 6 FEET										

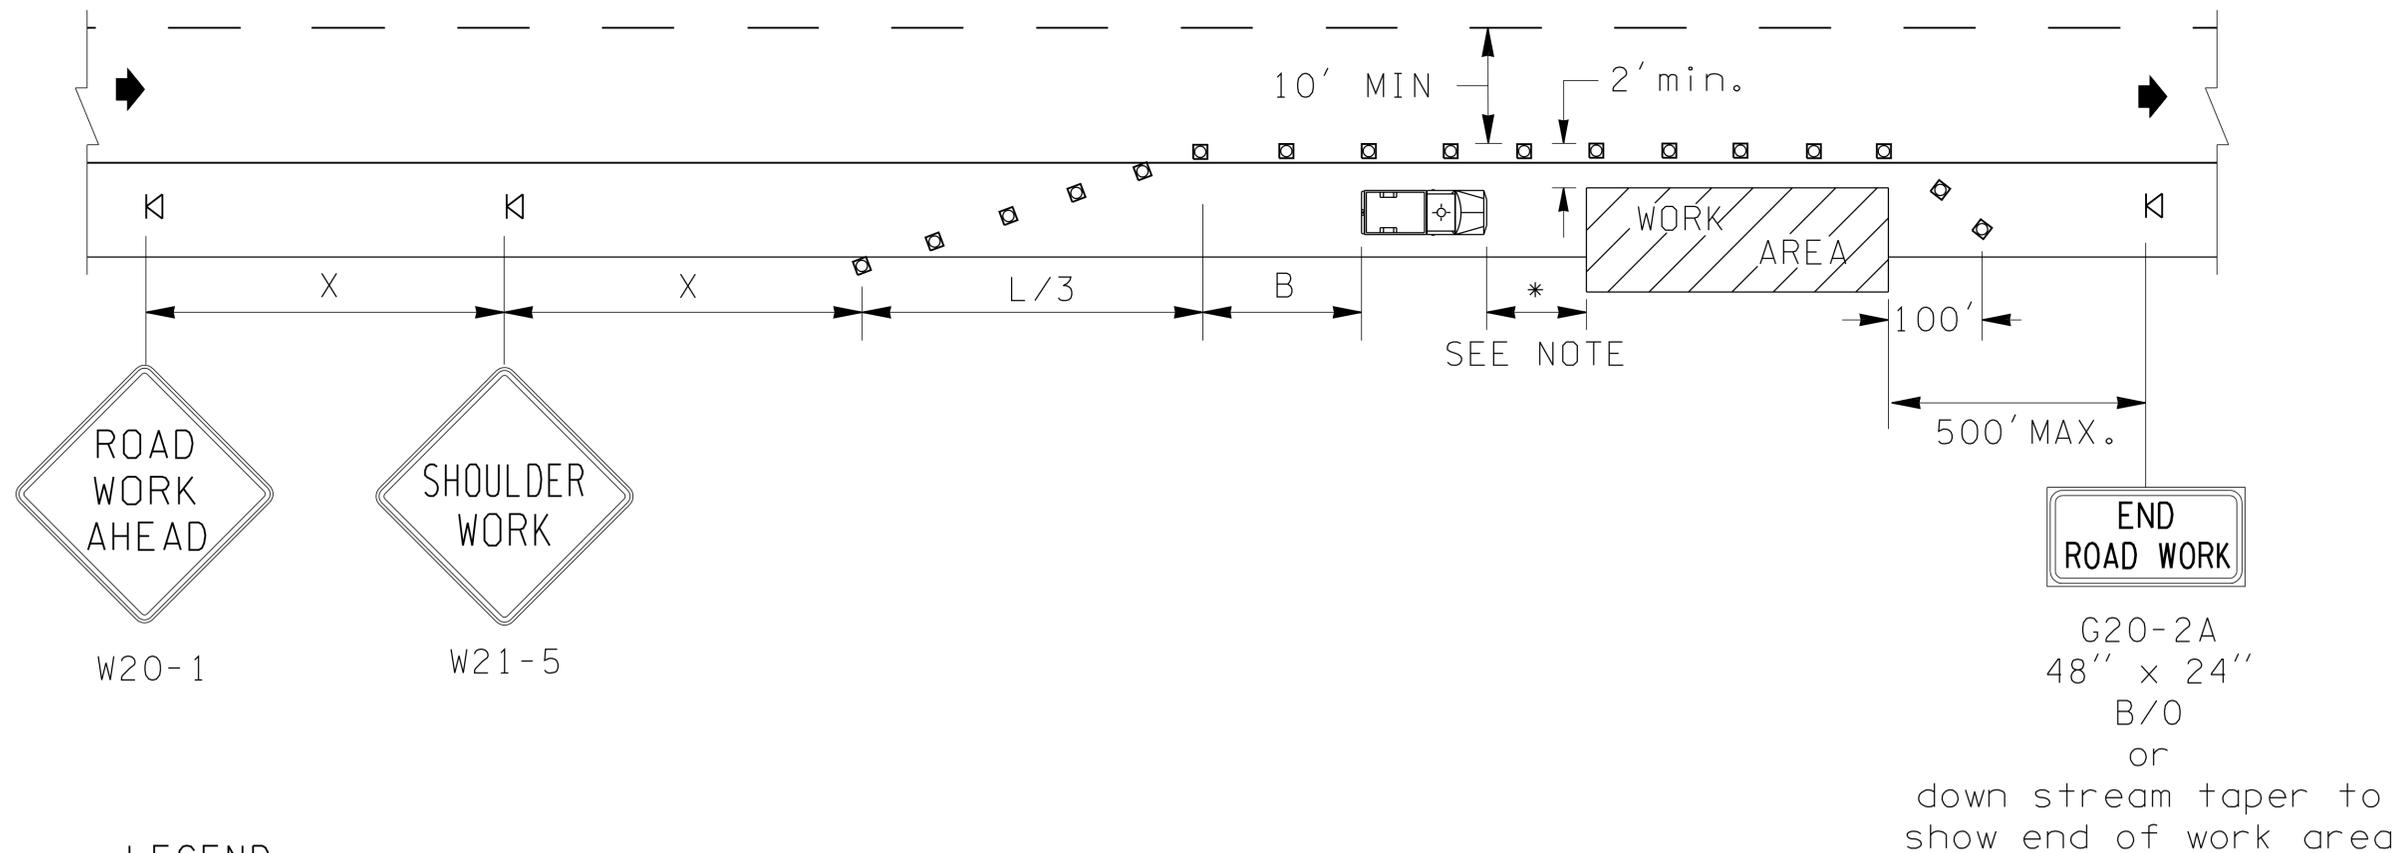

LEGEND

- SIGN LOCATION
- □ □ CHANNELIZING DEVICES
- PROTECTIVE VEHICLE - RECOMMENDED

GENERAL NOTES

1. PROTECTIVE VEHICLE RECOMMENDED - MAY BE A WORK VEHICLE.
2. WHEN USED, THE DEVICE SPACING FOR THE DOWNSTREAM TAPER SHOULD BE 20' O.C.


BUFFER DATA										
LONGITUDINAL BUFFER SPACE = B										
SPEED (MPH)	25	30	35	40	45	50	55	60	65	70
LENGTH (feet)	-	-	-	-	360	425	495	570	645	730
PROTECTIVE VEHICLE WITH TMA ROLL AHEAD DISTANCE										
TYPICAL PROTECTIVE VEHICLE TYPE WITH TMA	TYPICAL PROTECTIVE VEHICLE (WITH TMA) LOADED WEIGHT (LBS)							STATIONARY OPERATION (feet)		
4 YARD DUMP TRUCK, SERVICE TRUCK, FLAT BED, ETC.	MINIMUM WEIGHT 15,000 LBS. (MAXIMUM WEIGHT SHALL BE IN ACCORDANCE WITH MANUFACTURER RECOMMENDATION)							30 MIN.		
ROLL AHEAD STOPPING DISTANCE ASSUMES DRY PAVEMENT										
* A PROTECTIVE VEHICLE IS RECOMMENDED REGARDLESS IF A TMA IS AVAILABLE. IF NO TMA IS USED, THE PROTECTIVE VEHICLE SHALL BE STRATEGICALLY LOCATED IN THE FIELD TO SHIELD WORKERS AND NO ROLL AHEAD DISTANCE IS SPECIFIED.										

CHANNELIZING DEVICE SPACING (FEET)		
MPH	TAPER	TANGENT
50/70	40	80
45/50	30	60

MINIMUM SHOULDER TAPER LENGTH IN FEET (L)										
Shoulder Width (feet)	Posted Speed (mph)									
	25	30	35	40	45	50	55	60	65	70
6	-	-	-	-	270	300	330	360	390	420
8	-	-	-	-	360	405	450	480	525	570
10	-	-	-	-	450	510	555	600	660	705
3 DEVICES MINIMUM SPACED 10' O.C. IN TAPERS FOR SHOULDER WIDTHS LESS THAN 6 FEET										

SIGN SPACING = X (feet)		
Freeways & Expressways	55/70 MPH	1500'+- (OR AS PER MUTCD)
Rural Highways	60/65 MPH	800'+-
Rural Roads	45/55 MPH	500'+-
ALL SIGNS ARE 48" x 48" BLACK ON ORANGE UNLESS OTHERWISE DESIGNATED.		

All spacing may be adjusted to accommodate interchange ramps, at-grade intersections, and driveways.

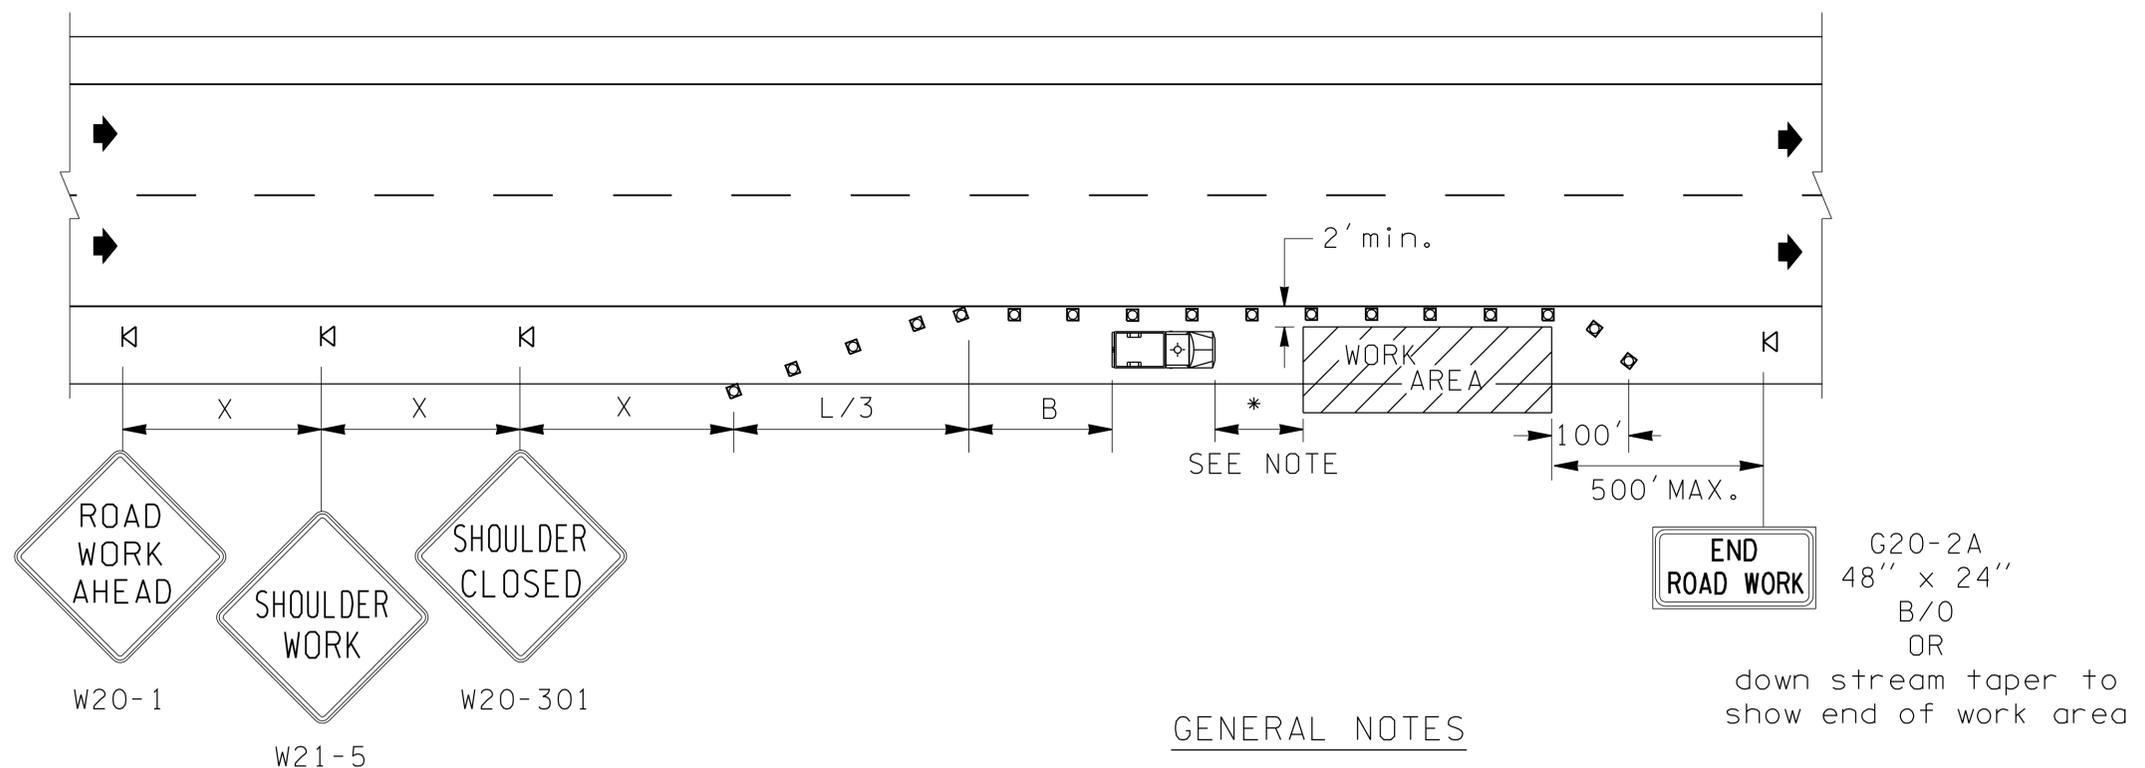


LEGEND

- SIGN LOCATION
- ▣ ▣ ▣ CHANNELIZING DEVICES
- PROTECTIVE VEHICLE - RECOMMENDED

GENERAL NOTES

1. NO ENCROACHMENT ON TRAVELED LANE. IF ENCROACHMENT IS NECESSARY, LANE SHALL BE CLOSED.
2. PROTECTIVE VEHICLE RECOMMENDED - MAY BE A WORK VEHICLE.
3. WHEN USED, DEVICE SPACING FOR THE DOWNSTREAM TAPER SHOULD BE 20' O.C.

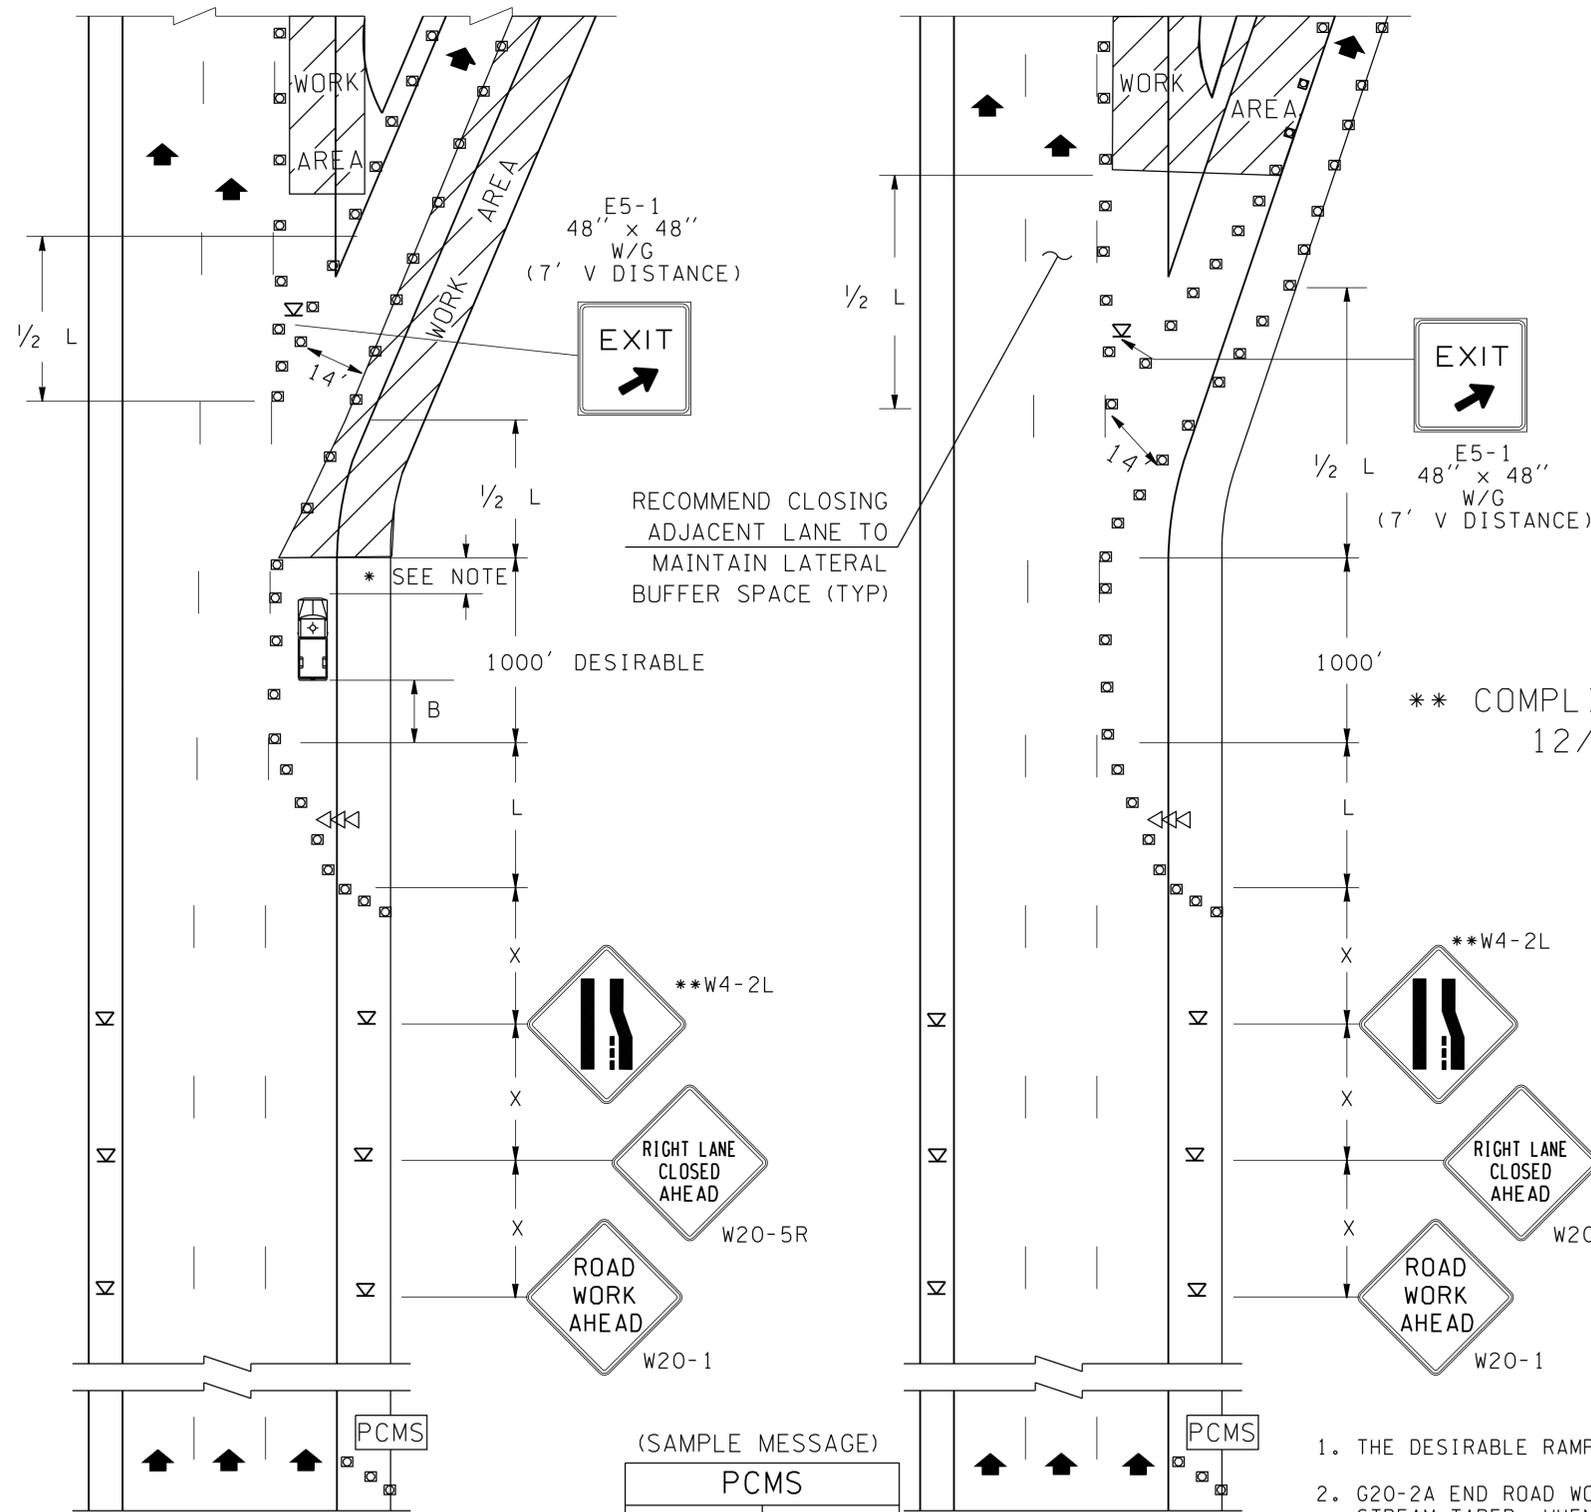

LEGEND

- ▣ SIGN LOCATION
- ▢▢▢ ARROW PANEL
- ▣▣▣ CHANNELIZING DEVICES
- 🚚 PROTECTIVE VEHICLE - RECOMMENDED
- PCMS PORTABLE CHANGEABLE MESSAGE SIGN (RECOMMENDED)

(SAMPLE MESSAGE)

PCMS	
1	2
LANE CLOSED	1 MILE AHEAD
1.5 SEC	1.5 SEC

Field locate 1 mile +/- in advance of lane closure.

TEMPORARY OFF-RAMP FOR MULTI-LANE ROADWAYS
TCP 7

BUFFER DATA										
LONGITUDINAL BUFFER SPACE = B										
SPEED (MPH)	25	30	35	40	45	50	55	60	65	70
LENGTH (feet)	155	200	250	305	360	425	495	570	645	730
PROTECTIVE VEHICLE WITH TMA ROLL AHEAD DISTANCE										
TYPICAL PROTECTIVE VEHICLE TYPE WITH TMA	TYPICAL PROTECTIVE VEHICLE (WITH TMA) LOADED WEIGHT (LBS)						STATIONARY OPERATION (feet)			
4 YARD DUMP TRUCK, SERVICE TRUCK, FLAT BED, ETC.	MINIMUM WEIGHT 15,000 LBS. (MAXIMUM WEIGHT SHALL BE IN ACCORDANCE WITH MANUFACTURER RECOMMENDATION)						30 MIN.			
ROLL AHEAD STOPPING DISTANCE ASSUMES DRY PAVEMENT										
* A PROTECTIVE VEHICLE IS RECOMMENDED REGARDLESS IF A TMA IS AVAILABLE. IF NO TMA IS USED, THE PROTECTIVE VEHICLE SHALL BE STRATEGICALLY LOCATED IN THE FIELD TO SHIELD WORKERS AND NO ROLL AHEAD DISTANCE IS SPECIFIED.										

MINIMUM TAPER LENGTH = L (feet)										
LANE WIDTH (feet)	Posted Speed (mph)									
	25	30	35	40	45	50	55	60	65	70
10	-	-	-	270	450	500	550	-	-	-
11	-	-	-	295	495	550	605	660	-	-
12	-	-	-	320	540	600	660	720	780	840

** COMPLIANCE DATE
12/23/13

SIGN SPACING = X (feet)		
Freeways & Expressways	55/70 MPH	1500'+- (OR AS PER MUTCD)
Rural Highways	60/65 MPH	800'+-
Rural Roads	45/55 MPH	500'+-
Rural Roads & Urban Arterials	35/40 MPH	350'+-
ALL SIGNS ARE 48" x 48" BLACK ON ORANGE UNLESS OTHERWISE DESIGNATED.		

All spacing may be adjusted to accommodate interchange ramps, at-grade intersections, and driveways.

CHANNELIZING DEVICE SPACING (FEET)		
MPH	TAPER	TANGENT
50/70	40	80
40/45	30	60

GENERAL NOTES

- THE DESIRABLE RAMP WIDTH IS 14' AND A 20:1 TAPER.
- G20-2A END ROAD WORK SIGN SHOULD BE INSTALLED 500' BEYOND THE WORK AREA OR USE A DOWN STREAM TAPER. WHEN USED, DEVICE SPACING FOR THE DOWN STREAM TAPER SHOULD BE 20' O.C.
- CONTACT REGION TRAFFIC OFFICE FOR WORK HOURS RESTRICTIONS.
- PROTECTIVE VEHICLE RECOMMENDED - MAY BE A WORK VEHICLE.
- RECOMMEND EXTENDING CHANNELIZATION DEVICE TAPER ACROSS SHOULDER. (L/3 TAPER)
- DEVICES SHOULD NOT ENCROACH INTO ADJACENT LANES.
- TRAFFIC SAFETY DRUMS RECOMMENDED FOR ALL TAPERS ON HIGH SPEED ROADWAYS. (SEE DEVICE MATRIX)
- USE TRANSVERSE DEVICES IN CLOSED LANE EVERY 1000' +- (RECOMMENDED)
- CONSIDER SHORT TERM CLOSURE OF RAMP.

BUFFER DATA										
LONGITUDINAL BUFFER SPACE = B										
SPEED (MPH)	25	30	35	40	45	50	55	60	65	70
LENGTH (feet)	155	200	250	305	360	425	495	570	645	730
PROTECTIVE VEHICLE WITH TMA ROLL AHEAD DISTANCE										
TYPICAL PROTECTIVE VEHICLE TYPE WITH TMA	TYPICAL PROTECTIVE VEHICLE (WITH TMA) LOADED WEIGHT (LBS)							STATIONARY OPERATION (feet)		
4 YARD DUMP TRUCK, SERVICE TRUCK, FLAT BED, ETC.	MINIMUM WEIGHT 15,000 LBS. (MAXIMUM WEIGHT SHALL BE IN ACCORDANCE WITH MANUFACTURER RECOMMENDATION)							30 MIN.		
ROLL AHEAD STOPPING DISTANCE ASSUMES DRY PAVEMENT										
* A PROTECTIVE VEHICLE IS RECOMMENDED REGARDLESS IF A TMA IS AVAILABLE. IF NO TMA IS USED, THE PROTECTIVE VEHICLE SHALL BE STRATEGICALLY LOCATED IN THE FIELD TO SHIELD WORKERS AND NO ROLL AHEAD DISTANCE IS SPECIFIED.										


SIGN SPACING = X (feet)		
Freeways & Expressways	55/70 MPH	1500'+- (OR AS PER MUTCD)
Rural Highways	60/65 MPH	800'+-
Rural Roads	45/55 MPH	500'+-
Rural Roads & Urban Arterials	35/40 MPH	350'+-
ALL SIGNS ARE 48" x 48" BLACK ON ORANGE UNLESS OTHERWISE DESIGNATED.		

MINIMUM TAPER LENGTH = L (feet)										
LANE WIDTH (feet)	Posted Speed (mph)									
	25	30	35	40	45	50	55	60	65	70
10	-	-	-	270	450	500	550	-	-	-
11	-	-	-	295	495	550	605	660	-	-
12	-	-	-	320	540	600	660	720	780	840

All spacing may be adjusted to accommodate interchange ramps, at-grade intersections, and driveways.

CHANNELIZING DEVICE SPACING (FEET)		
MPH	TAPER	TANGENT
50/70	40	80
40/45	30	60

SEE SHEET TCD3 FOR ALTERNATE ENCROACHMENT DETAIL.

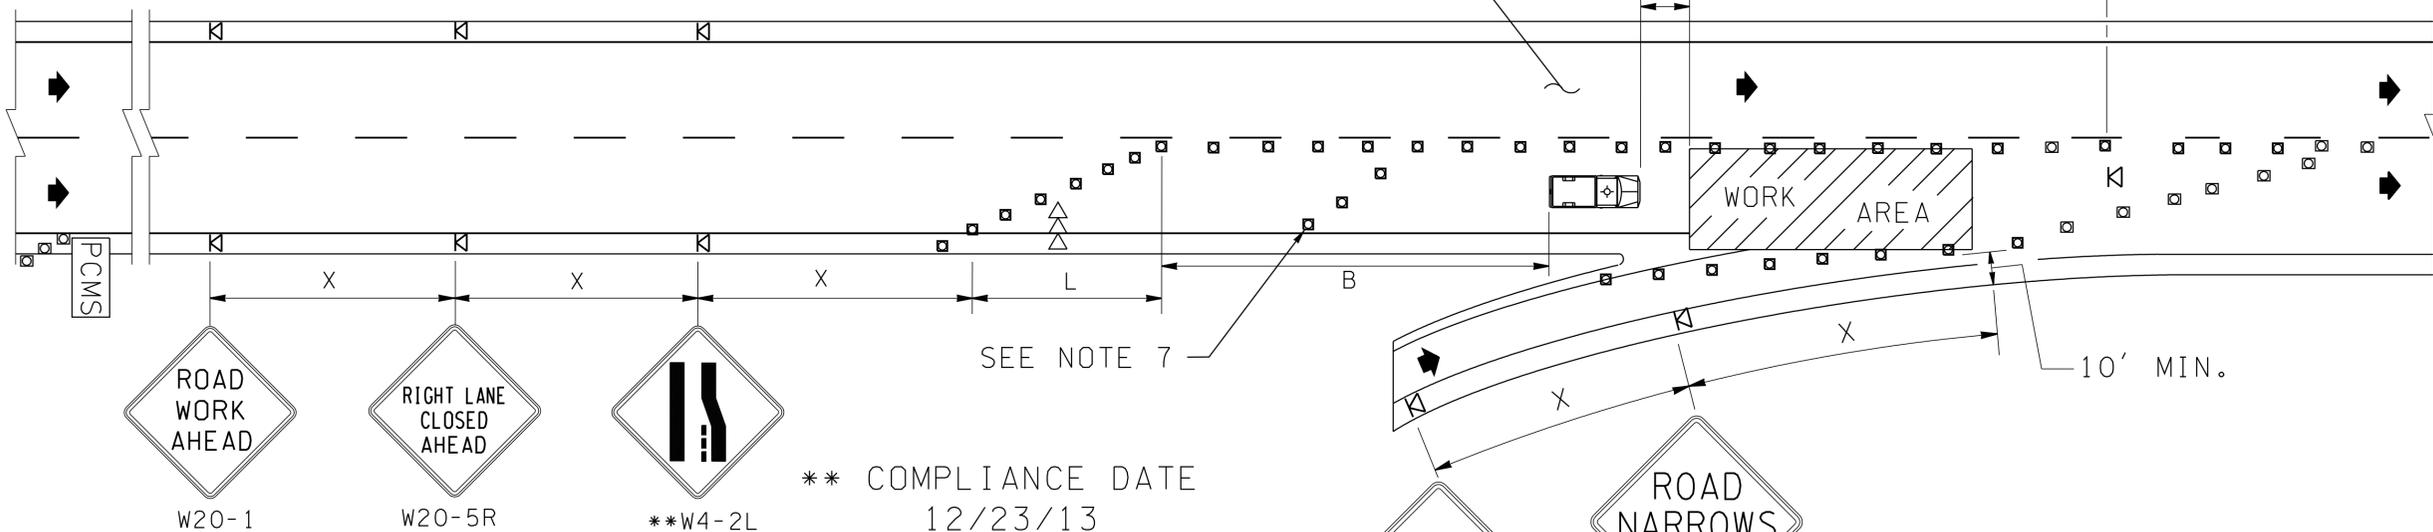

** COMPLIANCE DATE
12/23/13

(SAMPLE MESSAGE)

PCMS	
1	2
LANE CLOSED	1 MILE AHEAD
1.5 SEC	1.5 SEC

Field locate 1 mile +- in advance of lane closure.

LEGEND

- SIGN LOCATION
- ARROW PANEL
- ▣▣▣ CHANNELIZING DEVICES
- 🚚 PROTECTIVE VEHICLE - RECOMMENDED
- PCMS PORTABLE CHANGEABLE MESSAGE SIGN (RECOMMENDED)

GENERAL NOTES

1. THE DESIRABLE RAMP WIDTH IS 14 FT.
2. A G20-2A END ROAD WORK SIGN SHOULD BE INSTALLED 500' BEYOND THE WORK AREA OR USE A DOWN STREAM TAPER. WHEN USED, DEVICE SPACING FOR THE DOWNSTREAM TAPER SHOULD BE 20' O.C.
3. CONTACT REGION TRAFFIC OFFICE FOR WORK HOUR RESTRICTIONS.
4. PROTECTIVE VEHICLE RECOMMENDED - MAY BE A WORK VEHICLE.
5. RECOMMEND EXTENDING CHANNELIZATION DEVICE TAPER ACROSS SHOULDER. (L/3 TAPER)
6. TRAFFIC SAFETY DRUMS RECOMMENDED FOR ALL TAPERS ON HIGH SPEED ROADWAYS. (SEE DEVICE MATRIX)
7. USE TRANSVERSE DEVICES IN CLOSED LANE EVERY 1000'+-. (RECOMMENDED)
8. DEVICES SHOULD NOT ENCROACH INTO ADJACENT LANES.
9. CONSIDER SHORT DURATION CLOSURE OF RAMP.

**TEMPORARY ON-RAMP
FOR MULTI-LANE ROADWAYS
TCP 8**


BUFFER DATA										
LONGITUDINAL BUFFER SPACE = B										
SPEED (MPH)	25	30	35	40	45	50	55	60	65	70
LENGTH (feet)	155	200	250	305	360	425	495	570	645	730
PROTECTIVE VEHICLE WITH TMA ROLL AHEAD DISTANCE										
TYPICAL PROTECTIVE VEHICLE TYPE WITH TMA	TYPICAL PROTECTIVE VEHICLE (WITH TMA) LOADED WEIGHT (LBS)						STATIONARY OPERATION (feet)			
4 YARD DUMP TRUCK, SERVICE TRUCK, FLAT BED, ETC.	MINIMUM WEIGHT 15,000 LBS. (MAXIMUM WEIGHT SHALL BE IN ACCORDANCE WITH MANUFACTURER RECOMMENDATION)						30 MIN.			
ROLL AHEAD STOPPING DISTANCE ASSUMES DRY PAVEMENT										
* A PROTECTIVE VEHICLE IS RECOMMENDED REGARDLESS IF A TMA IS AVAILABLE. IF NO TMA IS USED, THE PROTECTIVE VEHICLE SHALL BE STRATEGICALLY LOCATED IN THE FIELD TO SHIELD WORKERS AND NO ROLL AHEAD DISTANCE IS SPECIFIED.										

SIGN SPACING = X (feet)		
Freeways & Expressways	55/70 MPH	1500'+- (OR AS PER MUTCD)
Rural Highways	60/65 MPH	800'+-
Rural Roads	45/55 MPH	500'+-
Rural Roads & Urban Arterials	35/40 MPH	350'+-
ALL SIGNS ARE 48" x 48" BLACK ON ORANGE UNLESS OTHERWISE DESIGNATED.		

All spacing may be adjusted to accommodate interchange ramps, at-grade intersections, and driveways.

LANE WIDTH (feet)	MINIMUM TAPER LENGTH = L (feet)									
	Posted Speed (mph)									
	25	30	35	40	45	50	55	60	65	70
10	-	-	-	270	450	500	550	-	-	-
11	-	-	-	295	495	550	605	660	-	-
12	-	-	-	320	540	600	660	720	780	840

CHANNELIZING DEVICE SPACING (FEET)		
MPH	TAPER	TANGENT
50/70	40	80
40/45	30	60

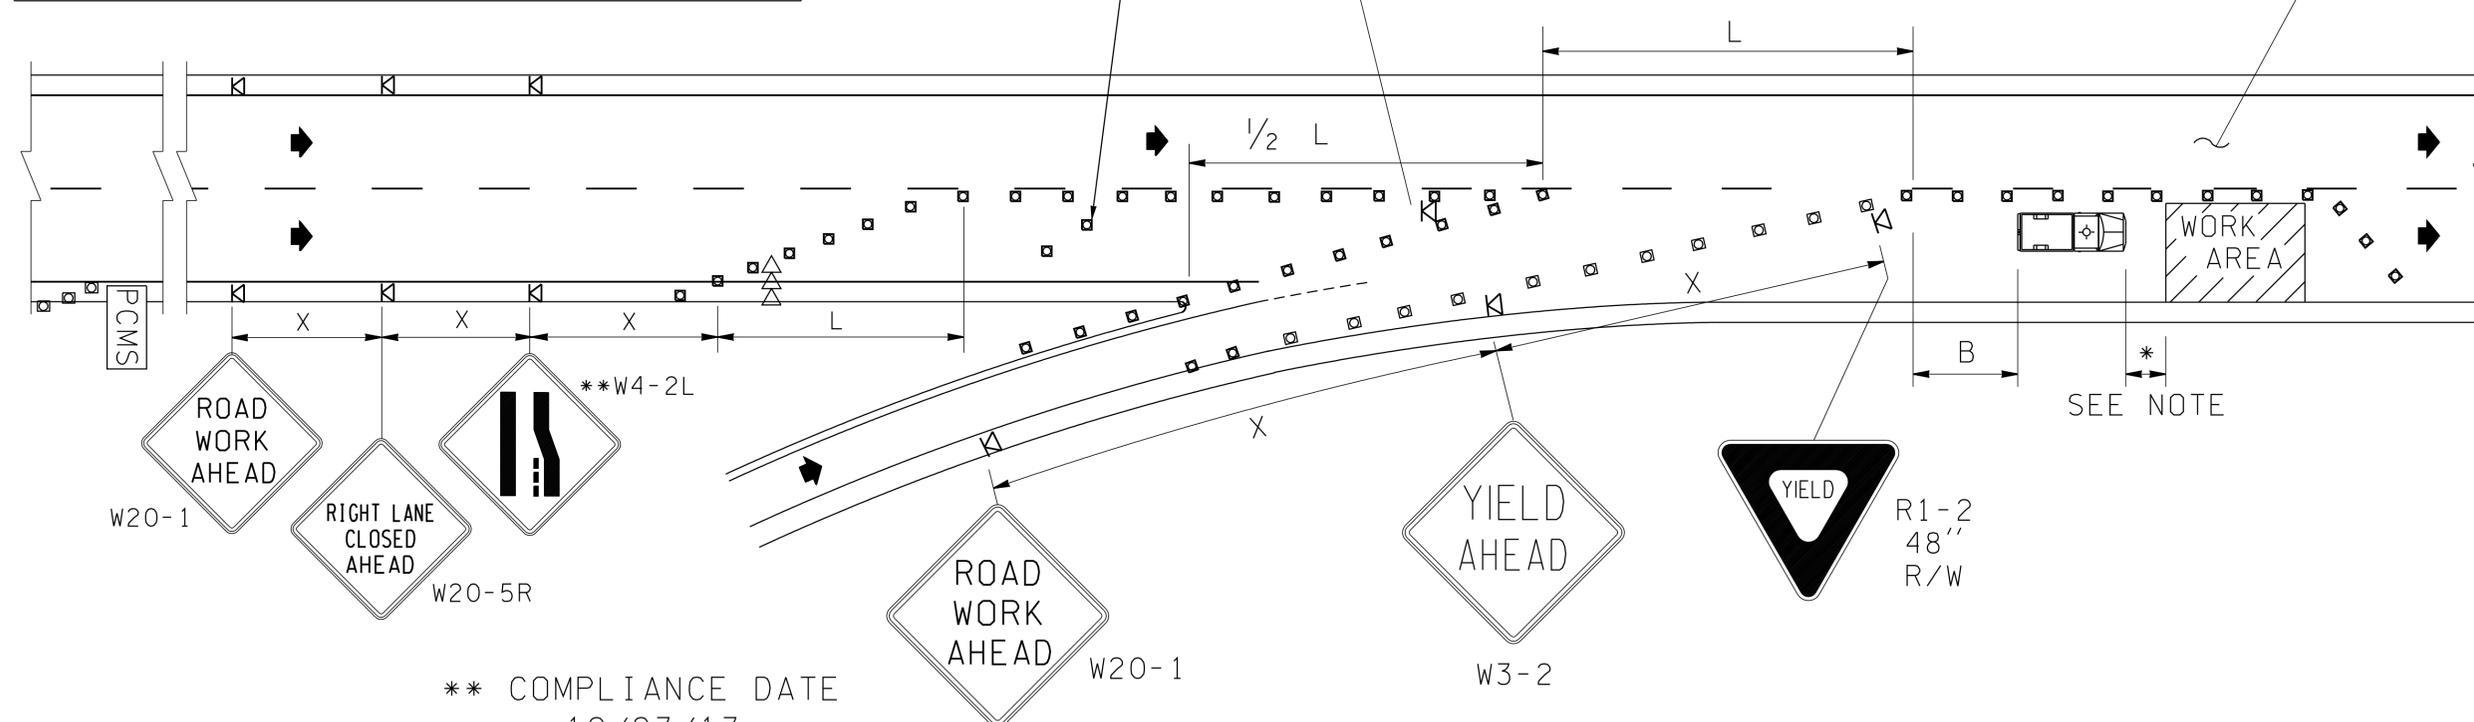

** COMPLIANCE DATE 12/23/13

(SAMPLE MESSAGE)

PCMS	
1	2
LANE CLOSED	1 MILE AHEAD
1.5 SEC	1.5 SEC

Field locate 1 mile +- in advance of lane closure.

GENERAL NOTES

1. THE DESIRABLE RAMP WIDTH IS 14 FT.
2. A G20-2A END ROAD WORK SIGN SHOULD BE INSTALLED 500' BEYOND THE WORKAREA OR USE A DOWN STREAM TAPER. WHEN USED, DEVICE SPACING FOR THE DOWNSTREAM TAPER SHOULD BE 20' O.C.
3. CONTACT REGION TRAFFIC OFFICE FOR WORK HOUR RESTRICTIONS.
4. PROTECTIVE VEHICLE RECOMMENDED - MAY BE A WORK VEHICLE.
5. RECOMMEND EXTENDING DEVICE TAPER ACROSS SHOULDER. (L/3 TAPER)
6. PCMS RECOMMENDED.
7. TRAFFIC SAFETY DRUMS RECOMMENDED FOR ALL TAPERS ON HIGH SPEED ROADWAYS. (SEE DEVICE MATRIX)
8. USE TRANSVERSE DEVICES IN CLOSED LANE EVERY 1000'+-. (RECOMMENDED)
9. WHERE INADEQUATE ACCELERATION DISTANCE EXISTS FOR THE TEMPORARY ENTRANCE RAMP, CONSIDER SHORT TERM CLOSURE OF RAMP.

TEMPORARY ON-RAMP FOR MULTI-LANE ROADWAYS
TCP 9

LEGEND

- ▣ SIGN LOCATION
- ▶▶▶ ARROW PANEL
- ▣▣▣ CHANNELIZING DEVICES
- 🚚 PROTECTIVE VEHICLE - RECOMMENDED
- PCMS PORTABLE CHANGEABLE MESSAGE SIGN


BUFFER DATA										
LONGITUDINAL BUFFER SPACE = B										
SPEED (MPH)	25	30	35	40	45	50	55	60	65	70
LENGTH (feet)	155	200	250	305	360	425	-	-	-	-
PROTECTIVE VEHICLE WITH TMA ROLL AHEAD DISTANCE										
TYPICAL PROTECTIVE VEHICLE TYPE WITH TMA	TYPICAL PROTECTIVE VEHICLE (WITH TMA) LOADED WEIGHT (LBS)						STATIONARY OPERATION (feet)			
4 YARD DUMP TRUCK, SERVICE TRUCK, FLAT BED, ETC.	MINIMUM WEIGHT 15,000 LBS. (MAXIMUM WEIGHT SHALL BE IN ACCORDANCE WITH MANUFACTURER RECOMMENDATION)						30 MIN.			
ROLL AHEAD STOPPING DISTANCE ASSUMES DRY PAVEMENT										
* A PROTECTIVE VEHICLE IS RECOMMENDED REGARDLESS IF A TMA IS AVAILABLE. IF NO TMA IS USED, THE PROTECTIVE VEHICLE SHALL BE STRATEGICALLY LOCATED IN THE FIELD TO SHIELD WORKERS AND NO ROLL AHEAD DISTANCE IS SPECIFIED.										

SIGN SPACING = X (feet)		
Rural Roads	45/55 MPH	500'+-
Rural Roads & Urban Arterials	35/40 MPH	350'+-
Rural Roads, Urban Streets Residential & Business Districts	25/30 MPH	200'+-
ALL SIGNS ARE 48" x 48" BLACK ON ORANGE UNLESS OTHERWISE DESIGNATED.		

All spacing may be adjusted to accommodate interchange ramps, at-grade intersections, and driveways.

LANE WIDTH (feet)	MINIMUM TAPER LENGTH = L (feet)									
	Posted Speed (mph)									
	25	30	35	40	45	50	55	60	65	70
10	105	150	205	270	450	500	-	-	-	-
11	115	165	225	295	495	550	-	-	-	-
12	125	180	245	320	540	600	-	-	-	-

CHANNELIZING DEVICE SPACING (FEET)		
MPH	TAPER	TANGENT
50	40	80
35/45	30	60
25/30	20	40

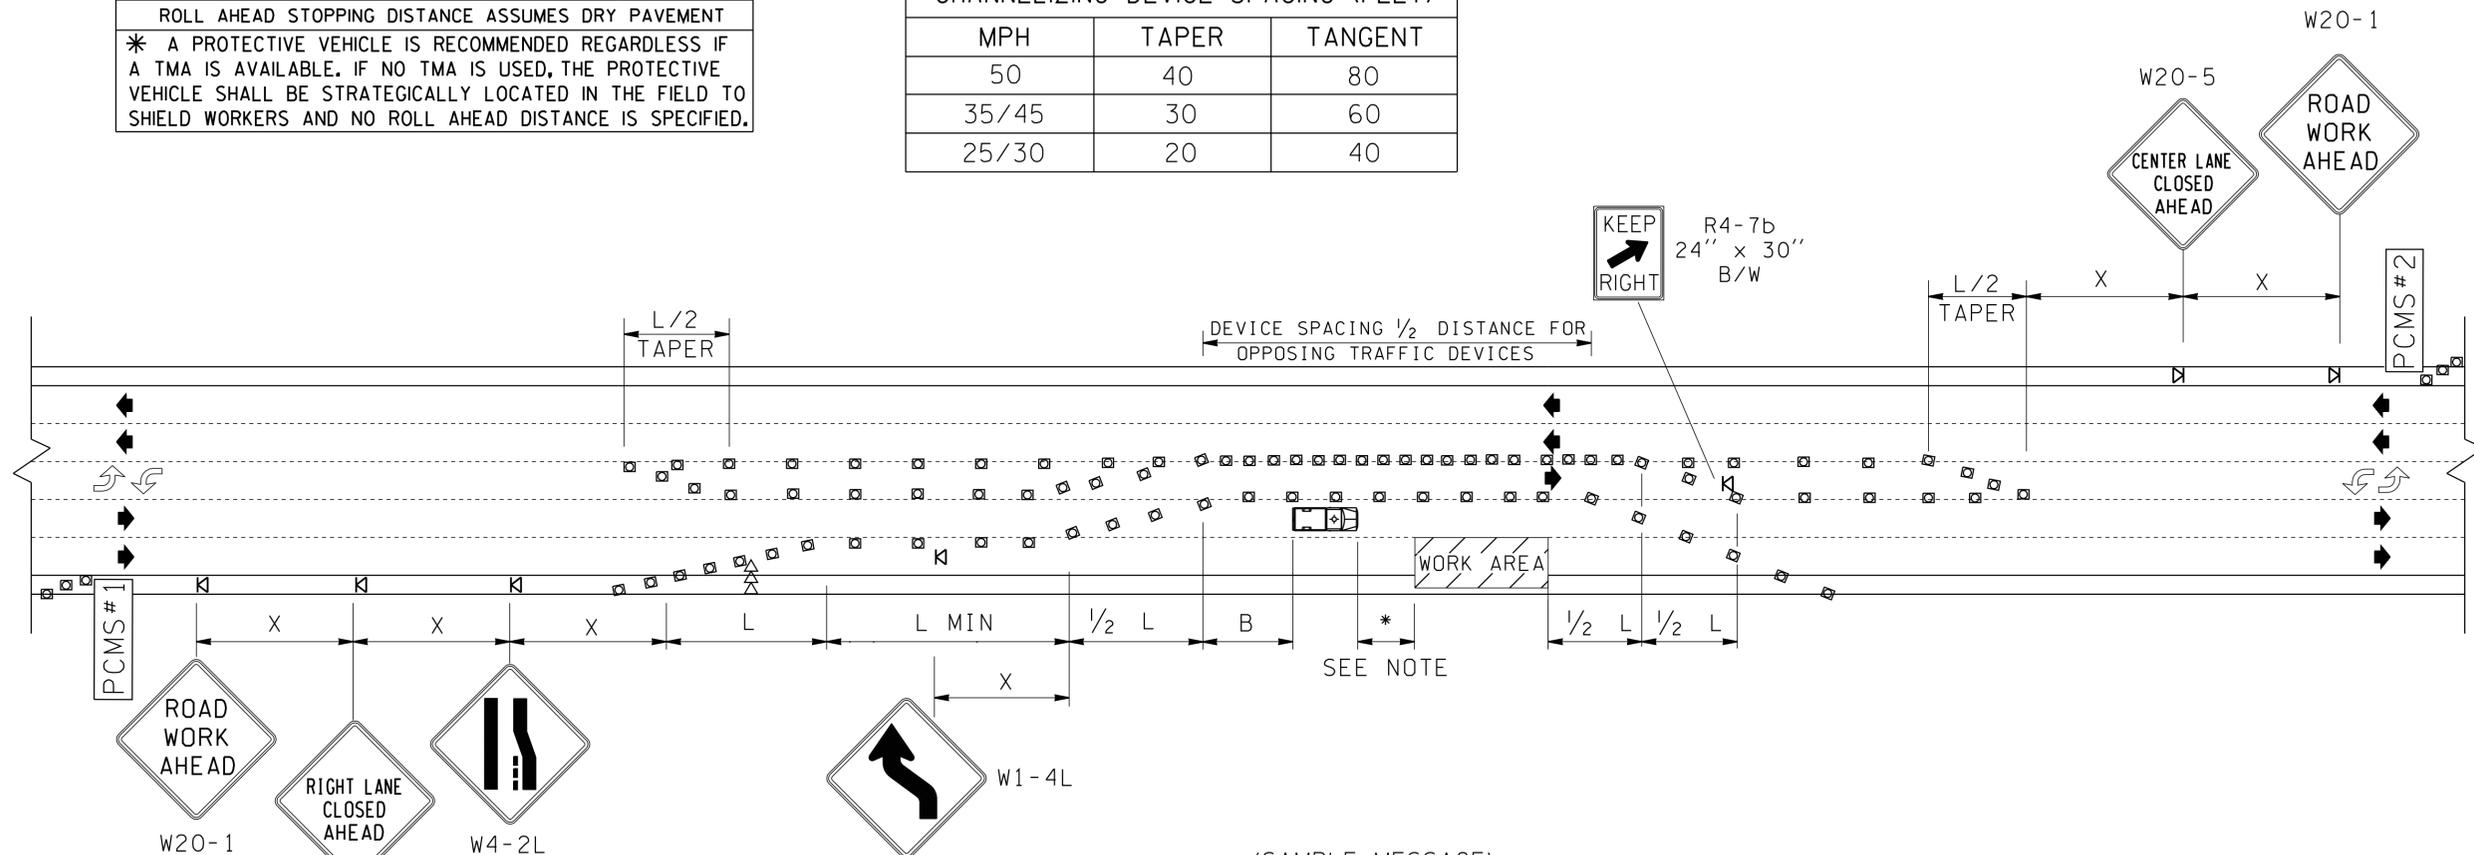

LEGEND

- ▤ SIGN LOCATION
- ▤▤▤ ARROW PANEL
- ▣▣▣ CHANNELIZING DEVICES
- 🚚 PROTECTIVE VEHICLE - RECOMMENDED
- PCMS PORTABLE CHANGEABLE MESSAGE SIGN

(SAMPLE MESSAGE)

PCMS #1	
1	2
LANES CLOSED AHEAD	NO LEFT TURNING
1.5 SEC	1.5 SEC

Field locate in advance of lane closure signing.

(SAMPLE MESSAGE)

PCMS #2	
1	2
CENTER LANE CLOSED	NO LEFT TURNING
1.5 SEC	1.5 SEC

Field locate in advance of lane closure signing.

GENERAL NOTES

1. PROTECTIVE VEHICLE RECOMMENDED - MAY BE A WORK VEHICLE.
2. RECOMMEND EXTENDING DEVICE TAPER ACROSS SHOULDER. (L/3 TAPER)
3. CONTACT REGION TRAFFIC OFFICE FOR WORK HOUR RESTRICTIONS.
4. IF THE LANE SHIFT IS SHORT AND HAS MINIMAL RADIUS CURVES (30 MPH OR LESS) USE SIGN W1-3 IN LIEU OF SIGN W1-4.
5. PCMS RECOMMENDED FOR EACH DIRECTION.


BUFFER DATA										
LONGITUDINAL BUFFER SPACE = B										
SPEED (MPH)	25	30	35	40	45	50	55	60	65	70
LENGTH (feet)	155	200	250	305	360	425	495	570	-	-
PROTECTIVE VEHICLE WITH TMA ROLL AHEAD DISTANCE										
TYPICAL PROTECTIVE VEHICLE TYPE WITH TMA	TYPICAL PROTECTIVE VEHICLE (WITH TMA) LOADED WEIGHT (LBS)							STATIONARY OPERATION (feet)		
4 YARD DUMP TRUCK, SERVICE TRUCK, FLAT BED, ETC.	MINIMUM WEIGHT 15,000 LBS. (MAXIMUM WEIGHT SHALL BE IN ACCORDANCE WITH MANUFACTURER RECOMMENDATION)							30 MIN.		
ROLL AHEAD STOPPING DISTANCE ASSUMES DRY PAVEMENT										
* A PROTECTIVE VEHICLE IS RECOMMENDED REGARDLESS IF A TMA IS AVAILABLE. IF NO TMA IS USED, THE PROTECTIVE VEHICLE SHALL BE STRATEGICALLY LOCATED IN THE FIELD TO SHIELD WORKERS AND NO ROLL AHEAD DISTANCE IS SPECIFIED.										

LANE WIDTH (feet)	MINIMUM TAPER LENGTH = L (FEET)									
	Posted Speed (mph)									
	25	30	35	40	45	50	55	60	65	70
10	105	150	205	270	450	500	550	-	-	-
11	115	165	225	295	495	550	605	660	-	-
12	125	180	245	320	540	600	660	720	-	-

CHANNELIZING DEVICE SPACING (FEET)		
MPH	TAPER	TANGENT
50/60	40	80
35/45	30	60
25/30	20	40

SIGN SPACING = X (feet) (1)		
Rural Highways	60/65 MPH	800'+-
Rural Roads	45/55 MPH	500'+-
Rural Roads & Urban Arterials	35/40 MPH	350'+-
Rural Roads, Urban Arterials Residential & Business Districts	25/30 MPH	200'+- (2)
Urban Streets	25 MPH or LESS	100'+- (2)

(1) All spacing may be adjusted to accommodate interchange ramps, at-grade intersections, and driveways.
 (2) This spacing may be reduced in urban areas to fit roadway conditions.

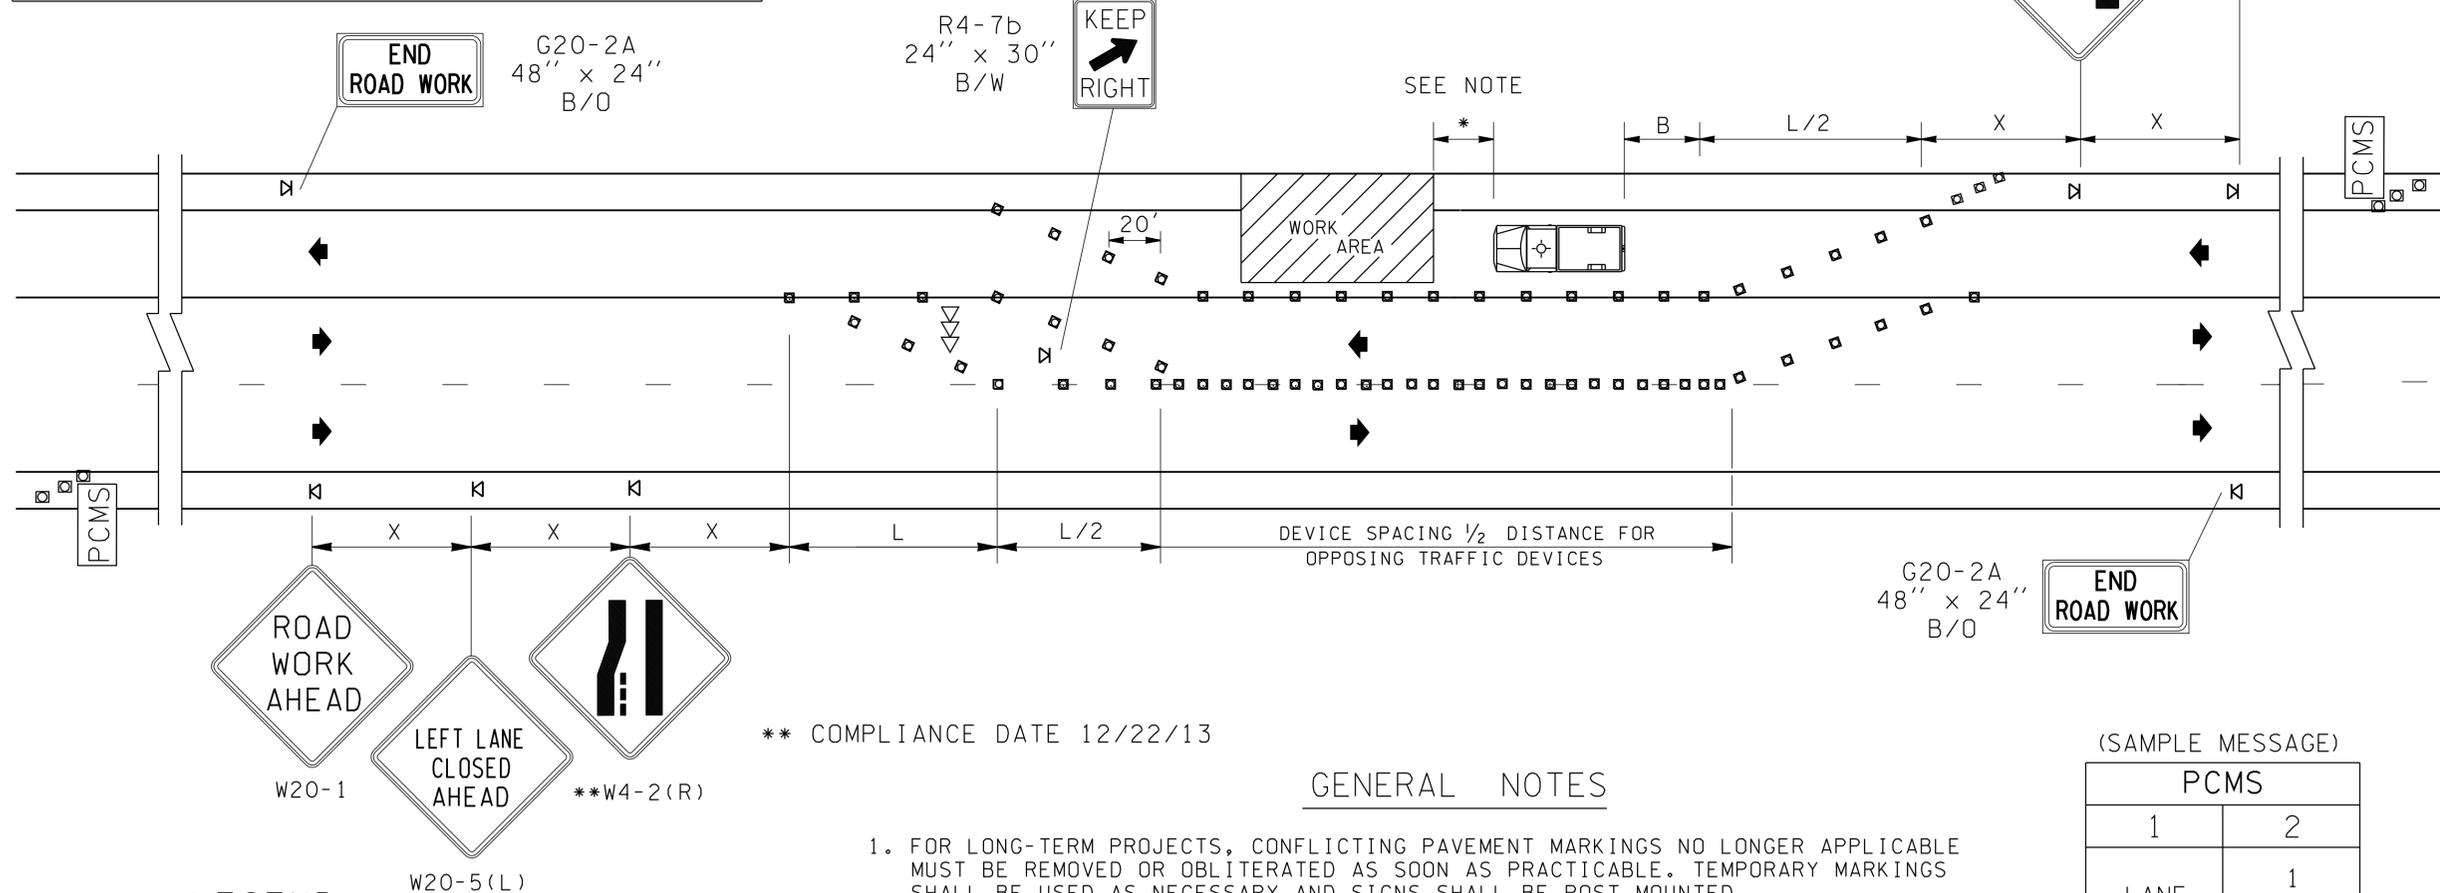

LEGEND

- ⊠ SIGN LOCATION
- ⇨⇨ ARROW PANEL
- ▣▣▣ CHANNELIZING DEVICES
- 🚚 PROTECTIVE VEHICLE - RECOMMENDED
- PCMS PORTABLE CHANGEABLE MESSAGE SIGN


GENERAL NOTES

- FOR LONG-TERM PROJECTS, CONFLICTING PAVEMENT MARKINGS NO LONGER APPLICABLE MUST BE REMOVED OR OBLITERATED AS SOON AS PRACTICABLE. TEMPORARY MARKINGS SHALL BE USED AS NECESSARY AND SIGNS SHALL BE POST MOUNTED.
- STEADY BURN WARNING LIGHTS (TYPE C, MUTCD) SHOULD BE USED ON CHANNELIZING DEVICES AT NIGHT FOR DELINEATION.
- FOR SPEED LIMITS OF 30 MPH OR LESS, USE SIGN W1-3 IN LIEU OF SIGN W1-4.
- RECOMMEND EXTENDING CHANNELIZATION DEVICE TAPER ACROSS SHOULDER. (L/3 TAPER)
- PCMS RECOMMENDED.

(SAMPLE MESSAGE)

PCMS	
1	2
LANE CLOSED	1 MILE AHEAD
1.5 SEC	1.5 SEC


Field locate 1 mile +- in advance of lane closure.

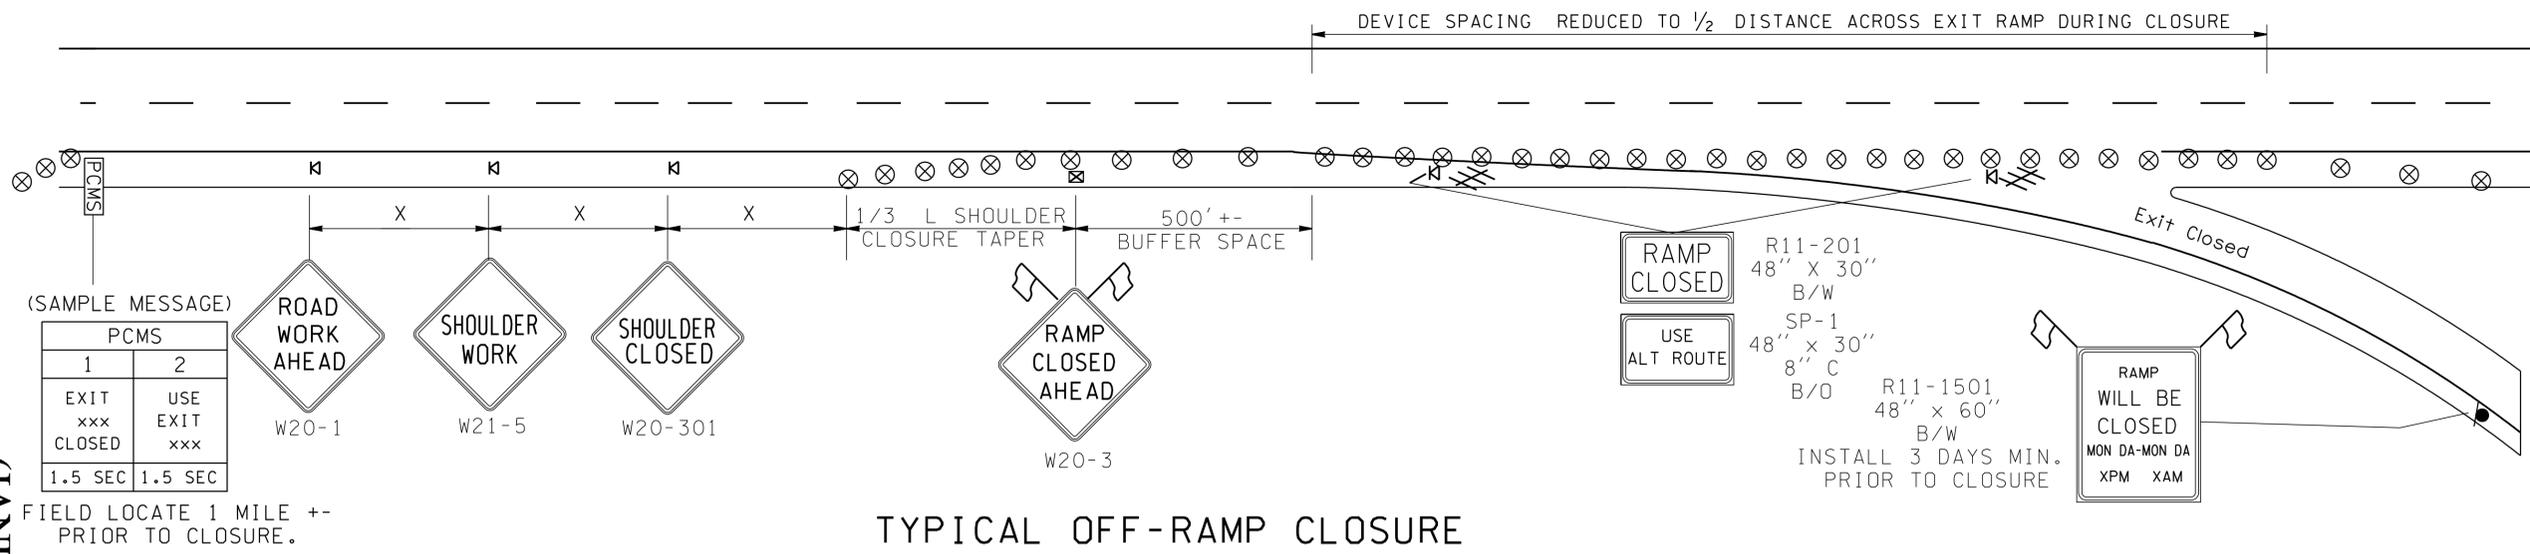

(SAMPLE MESSAGE)

PCMS	
1	2
EXIT xxx CLOSED	USE EXIT xxx
1.5 SEC	1.5 SEC

FIELD LOCATE 1 MILE +/- PRIOR TO CLOSURE.

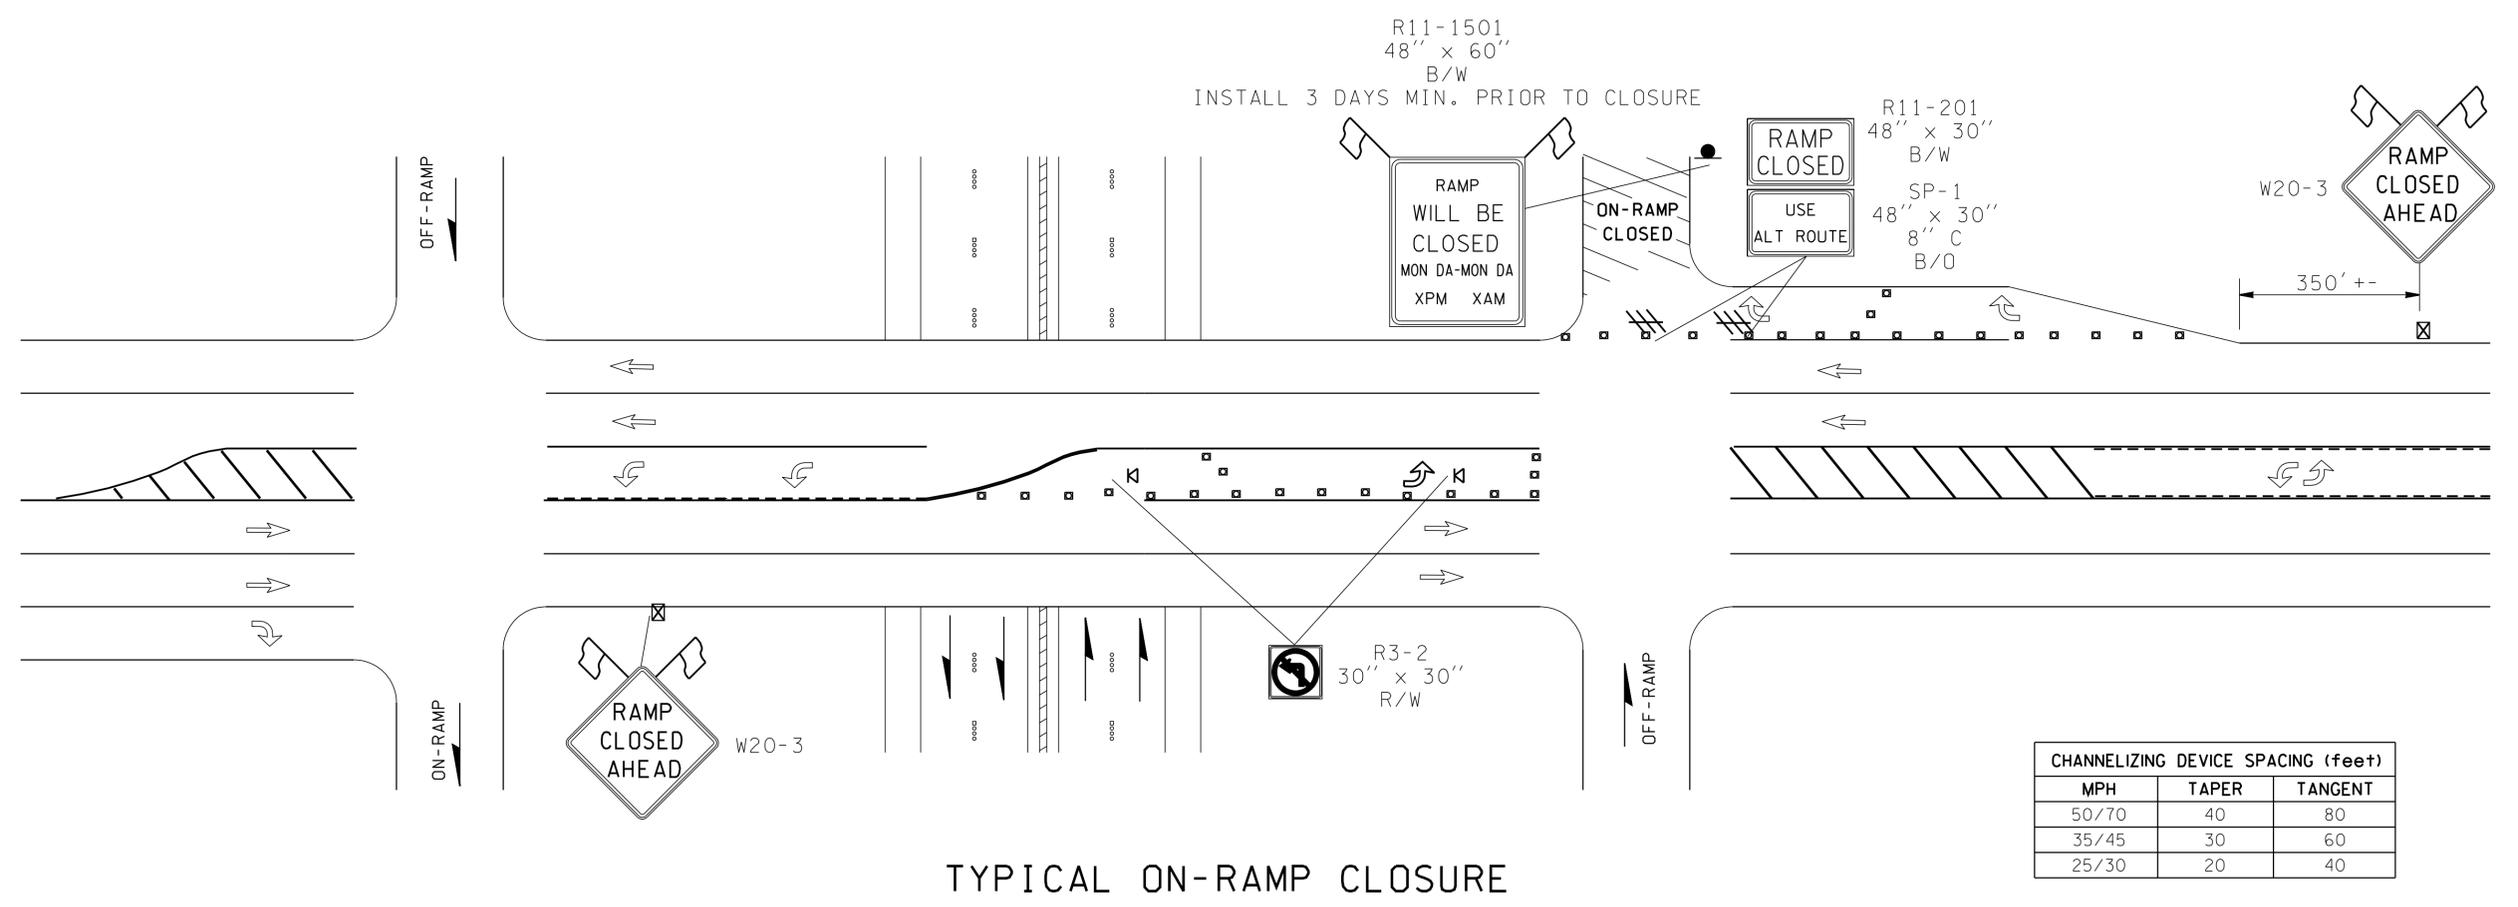

CHANNELIZING DEVICE SPACING (feet)		
MPH	TAPER	TANGENT
50/70	40	80
35/45	30	60
25/30	20	40

GENERAL NOTES

- CONTACT REGION TRAFFIC OFFICE FOR WORK HOUR RESTRICTIONS
- TYPICAL APPLICATION SHOWN, ADJUST FOR SITE CONDITIONS.

LEGEND

- PCMS PORTABLE CHANGEABLE MESSAGE SIGN (RECOMMENDED)
- ⊗ TRAFFIC SAFETY DRUM
- ⊞ SIGN LOCATION - TRIPOD MOUNT
- SIGN LOCATION - POST MOUNT
- ▣ CHANNELIZING DEVICE
- ⚠ WARNING FLAG - FLUORESCENT RED/ORANGE
- ⊞ SIGN LOCATION - PORTABLE MOUNT - (7 FT MOUNTING HEIGHT)
- ≡ TYPE III BARRICADE

LANE WIDTH (feet)	MINIMUM TAPER LENGTH = L (feet)									
	Posted Speed (mph)									
10	25	30	35	40	45	50	55	60	65	70
11	105	150	205	270	450	500	550	-	-	-
12	115	165	225	295	495	550	605	660	-	-
	125	180	245	320	540	600	660	720	780	840

SIGN SPACING = X (feet) (1)		
Freeways & Expressways	55/70 MPH	1500'+- (OR AS PER MUTCD)
Rural Highways	60/65 MPH	800'+-
Rural Roads	45/55 MPH	500'+-
Rural Roads & Urban Arterials	35/40 MPH	350'+-
Rural Roads, Urban Arterials Residential & Business Districts	25/30 MPH	200'+- (2)
Urban Streets	25 MPH or LESS	100'+- (2)

(1) All spacing may be adjusted to accommodate interchange ramps, at-grade intersections, and driveways.
 (2) This spacing may be reduced in urban areas to fit roadway conditions.

SHORT DURATION WORK ZONES

Traffic Control Plans (TCP's) 14 to 20

Introduction

Short duration work zones are work activities up to 60 minutes. Due to the short work time, simplified traffic control set-ups are allowed to reduce the hazards of traffic exposure to workers. The time it may take to set up a full complement of signs and devices could approach or exceed the amount of time it requires to perform the work.

Short duration work zones provide a safety benefit for both drivers and workers since the time duration is less than implementation of stationary work zones thereby reducing exposure time to traffic and work hazards. Motorists also receive a mobility benefit from reduced traffic impacts and associated rear-ending congestion crashes. These safety and mobility benefits are consistent with the department's responsibility and policy to protect both drivers and workers while maintaining an acceptable level of mobility.

Careful consideration of traffic and roadway conditions must be given to each work zone prior to selecting the most appropriate traffic control set-up. Shoulder work and low-speed, low-volume traffic conditions may only require the use of the work vehicle hazard beacon and personal protective equipment. High-speed, high-volume lane work may require a full lane closure set-up, even though the work duration may be 60 minutes or less. Remember, short duration work is not a "short-cut", it's a traffic control method that reduces worker exposure to traffic hazards by using larger, more dominant and mobile equipment instead of many smaller devices (cones may still be recommended since they are quick to set up for small work zones).

Examples of short duration work zone operations include, re-lamping, pot hole repair, surveying, minor repairs, bridge inspection, field recon, pre-work layout, etc.

Guidance

The following guidance applies standards from the MUTCD to provide more specific direction to those involved in short duration work zones. The following provides decision making rationale to assist with selection of appropriate short duration traffic control and safety measures. Because of the complex and dynamic nature of all the elements involved in work zones the intent of this chapter is to assist supervisors and workers in decision making by resolving some of the confusion and subjectivity previously associated with short duration work zones. The included specific guidance and direction, rules, consideration chart and example TCP's should lead to an informed choice. Remember, there is no single solution that fits all work zones. Reliance on work zone training, including a working knowledge of this section combined with sound judgment of the site conditions is the foundation for safe and effective short duration work zones.

- Consider stationary work zone measures with a full compliment of signs and devices first. Some work operations, traditionally classified as short duration, may be able to be conducted as longer term stationary work by linking several work areas together

under a lane or shoulder closure. Advantages of linking work operations may include reducing exposure of workers to traffic, efficiencies in completing tasks concurrently, reducing the number of lane closures in the same area, and overall reduction in impacts to traffic.

- Consider mobile operations. Other short duration operations may be able to be conducted as mobile operations by progressing through several short duration work areas by making intermittent stops. Advantages are shortened work operations to install traffic control devices and improved worker safety through use of mobile equipment (TMA's, PCMS, mobile work vehicles, etc.) to reduce worker exposure to traffic hazards.
- Consider alternative work operations, materials and equipment, such as:
 - Work crews may be combined to accomplish work more effectively under mobile or stationary work zones, weekend or night closures, and other identified work locations or operations that may be difficult to accomplish with a small crew.
 - Identify “red zones” where short duration work zones are not a desirable choice due to poor traffic conditions (high volume, high speed, weaving areas, bridges, interchanges, etc.).
 - A specialized work zone traffic control crew could be considered for use to support work crew operations. The specialized team can provide a higher level of efficiency and safety for a work crew focused only on the work. This can also reduce the overall time duration, thereby reducing worker exposure to traffic hazards.
- Consider resources needed for unplanned short duration work (non-emergency)
 - These operations may be referred to as “call outs”, not necessarily an emergency but a short notice response to a report of debris, repairs, or other situation where the exact nature of the work or location may not be completely known.
 - An on-site assessment may allow work to proceed with available equipment and devices. Strategic placement of the work vehicle with warning beacon is important. Devices and signs may also be needed. If work is expected to last more than 60 minutes additional resources may be needed to implement a traditional stationary work zone. Work may have to be delayed until the proper work zone equipment and devices are available. Assistance from region WSDOT Incidence Response may also be appropriate.

Key elements of short duration work zones

- Work Location – This element may be the most obvious but it is also the most important, at least initially, since it establishes the relationship to the next three

elements. The location directly influences the assessment of hazards, protection and warning. General roadway locations such as shoulders, lanes, medians, etc. are common but unique locations with narrow shoulders, bridges, undefined shoulders (no edge stripe), poor sight distance, tight radius curves, etc. require even more consideration.

- o Hazards – This element is essential to determine and address safety hazards to workers and drivers. Traffic volume and speed is the primary hazard concern for workers in short duration work zones, while unexpected workers or equipment are the primary hazard for drivers. Assessment of all potential hazards at the work site is important to minimize the occurrence of an unexpected hazardous situation. Contingency plans and an escape route should be part of this assessment.
- o Protection – This element establishes an appropriate level of worker protection based on assessment of the hazards involved. Positive worker protection is always recommended when practical but not necessarily required for less hazardous work zones. The use of a protective vehicle (work vehicle) can offer valuable worker protection in any work zone condition.
- o Warning – This element provides for establishing the appropriate level of warning for drivers approaching and driving through the work zone. Advance warning to drivers is required when working within 15’ of the edge of the traveled way. In many short duration work zone locations the work vehicle warning beacon, assuming there is adequate sight distance, can provide this. Sign(s) may be needed for areas with reduced sight distance.
- o Duration – This element is equally important as work location since it has a direct relationship to worker exposure to hazards. Duration also has the most influence over the other key elements. As mentioned in previous guidance, short duration work zones can offer safety and mobility benefits, but not at the risk of too much worker exposure to hazards.

Short Duration Work Zone Condition

Short duration work zones are categorized into three relative condition types. This helps to establish a practical application level of traffic control and safety devices based on hazard, protection and warning levels related to work location and time duration. The MUTCD allows for simplified traffic control procedures for short duration work, but does not go into any detail on what those simplified procedures might be. Establishing a work zone condition level helps to answer the question; “Which traffic control and safety devices are appropriate for use as part of the allowed simplified procedures?”

The condition levels are:

- A - represents the lowest level of work zone impacts and is typified by:

- Low traffic speed and volume.
- Time durations are short or very short, approximately 0 to 20 minutes. Work locations not within a traveled lane, such as shoulders, may be allowed up to 60 minutes.
- A wide variety of work locations may be encountered at this level.
- Minimum levels of warning, protection and hazards. A work vehicle with warning beacon and personal protective equipment may be adequate. See TCP's.
- B- represents moderate work zone impacts and is typified by:
 - Low or high traffic speed with low to moderate volumes.
 - Moderate time durations, approximately 0 to 40 minutes. Work locations not within a traveled lane, such as medians, may be allowed up to 60 minutes.
 - A wide variety of work locations may be encountered at this level that may include median, gore, lanes and intersections.
 - Moderated levels of warning and protection, such as a spotter, cones or PCMS added to condition "A" devices would be typical considerations. Refer to TCP's.
- C - represents the highest impact level and is typified by:
 - High traffic speed and volume.
 - Maximum time duration, up to 60 minutes.
 - A wide variety of work locations may be encountered at this level, but all should be considered as presenting a significant hazard level even if time durations are short.
 - All applicable traffic control and safety devices should be considered, such as PCMS, TMA's and signs. See TCP's.

While some of the elements within a particular work zone may not all exist within one condition, the relative types of elements that either identify the condition or are representative of those measures and values that could be applied to a work zone of that general condition level are shown. This is an important consideration for use, since it helps to clarify which types of devices could be applied to a work zone within practical time duration.

The short duration work zone condition level does not necessarily provide for a complete or final assessment, but it is a valuable tool for finding the best balance between time duration and the other work zone key elements. Time duration is an important consideration for short duration work zones; worker safety risk consideration cannot be ignored no matter how short the work time duration is. A common example of this condition is high-speed and high-volume traffic (urban freeway) with an in lane work location. Even though the work duration may be very short, work hazards as identified in condition "C" may need to be considered for mobile or stationary lane closures because the safety risk to workers and road users could be too great. Conversely, work zones typified by condition "A" may be allowed for longer (60 minutes maximum) duration since the safety risk to workers and road users is low.

Short duration Traffic Control Plans (TCP)

The example TCP's in this section are representative of several types of short duration work zones. The TCP's show the types of devices and equipment that can be applied for various work zone conditions. Work crews should review these TCP's for application and use in establishing their work zones. Additional TCP's should be developed to address work operations not covered by these TCP's.

No distinction is made as to the type of work operation for these TCP's. These TCP's are typical by nature and are adaptable to most work operations such as surveying, maintenance work, utility work and some minor construction operations. Unique work crews and operations may need more specific TCP's. The Region Traffic Offices can assist with TCP development.

Short duration work zone rules

- 1. When working in a live lane or intersection workers must be adequately protected and/or warned as appropriate for the work zone condition.**
 - Positive protection – TMA's, Buffer Vehicle, Barriers – (typically condition “C”).
 - Lane closure – Channelizing devices, PCMS, etc. – (typically condition “B”)
 - Spotter – Audible warning device or verbal as needed. – (typically condition “A” or “B” when working between adequately safe gaps in traffic. Sufficient warning allows worker to safely return to shoulder)
 - Escape routes/plans must be considered prior to starting work.
- 2. Drivers must be adequately warned as they approach the work zone** – (see sight distance chart on TCP 27) Consider the following types of warning:
 - Flashing warning beacon on work vehicle
 - Warning signs
 - PCMS, Arrow Board (caution mode), Flag Tree or other approved dominant device.
 - TCP's and work zone condition dictate the specific level of warning required.
- 3. Several intermittent work operations within a one-mile area lasting for more than 60 minutes should be considered for a mobile or stationary work zone and are not typically acceptable for short duration work zone operations. An assessment of the most effective and safe operation should be made.**
- 4. Live traffic areas (lanes & intersections) in high speed and high volume work locations** may not be good candidates for short duration work zones since the conditions are not desirable for driver warning or worker protection. Work zone condition “C” would apply to most of these type of locations and may be acceptable

based on a positive site assessment and working only on the shoulder or adjacent lane as follows:

- **No unprotected work in interior lanes of multi-lane, (3 or more lanes) roads and no “island” work areas are allowed.**
 - **Lanes of multi-lane roads may only be accessed from the adjacent shoulder.** (see TCP 19)
 - **Intersections may be accessed following the same manner as above and consideration should be given to incorporating the existing intersection control into the work zone traffic control.....all red signal control or all way stop control may supplement the selected traffic control measures.** (see TCP’s 28 & 29).
- 5. Short duration flagging operations are not allowed.** All flagging requirements must be complied with and there currently is no exception for short duration work. Emergencies are the only exception to full flagging requirements. Flagging is defined by the MUTCD as stopping, directing or alerting road users. For the purposes of this section a spotter or worker may, and should be prepared to, warn or stop drivers of errant or unexpected vehicles, but not as a routine form of traffic control.
- 6. A determination of a safe work location as it relates to acceptable worker exposure to potential traffic hazards must be made.** A basic determination can be made by observing traffic conditions (speed, volume, location, visibility, etc.) and assessing the following conditions:
- Is the work location out of the traffic path? (shoulder, median, sidewalk, etc.)
 - Is there sufficient time for a worker to safely walk (not run) to and return from the work location? (across lanes to shoulder, into lane and back, etc., typically condition “A”)
 - Are there other hazards (traffic or non-traffic) at the location that could affect worker safety?
 - Is there an effective contingency or escape plan?
 - Is there adequate sight distance from the work location to approaching traffic? (see chart TCP 27)

Understanding the intent and application of this section should provide valuable guidance while at the same time provide for the flexibility needed to respond to a wide variety of work operations. As with any work zone, worker safety and driver safety should be the first priority when planning for and conducting work operations. This is of even greater concern for short duration work zones since workers may be without the benefit of positive protection and extensive driver warning. Motorists may tend to encounter short duration work zones unexpectedly with a minimum of guidance and protection. Supervisors should be confident that the guidance of this section is understood and applied by their work crews, that worker and driver safety is acceptable or improved through the use of short duration work zones and that the balance between safety and work duration is appropriate.

Very Short Duration Work Zones

The overall guidance of the short duration work zone section of this guidebook applies to work zones that may last up to 60 minutes. However, it is important to recognize that many work actions or portions of work operations may take only a few seconds or minutes to perform.

These types of actions might be:

- Debris retrieval; locating drainage structures or other roadway features or components
- Retrieval of lost cargo; work zone sign or device installation and removal
- Crash debris retrieval; a survey “shot”, monument or other reference check
- Crossing or walking along the roadway, motorist assistance

In many cases it is necessary and allowable for workers to walk on a roadway shoulder, cross traffic lanes or momentarily step into a lane to access work locations or to perform work. These actions can only be accomplished if they are not in conflict with traffic or other hazards and it is safe to do so. See the applicable rules of this section for worker safety and protection.

Very short duration work is typified by the following:

- The primary intent is not to conduct an actual work operation in total, but more related to gathering information, accessing a location, or a non-repetitive action as described above.
- Generally these actions occur at isolated locations or the locations are spaced far enough apart that they would constitute separate work zones.
- Equipment is usually not required, other than the possibility of simple hand tools.

Because of the very short duration and nature of these actions, there is a possibility that adequate work zone measures may not be fully considered by those involved or by supervisors. Even though these are very short duration actions, the key work zone elements must still be considered. High worker exposure locations, such as in a live lane and undesirable traffic conditions, such as high volumes, would still dictate the decision on implementing the appropriate work zone. It may be acceptable to perform some very short duration actions under work zone condition “A” & “B”, with the minimum required equipment and devices. In most cases this would be a strategically placed work vehicle with warning beacon and personal protective equipment. It is recommended to apply more work zone safety measures if the level of safety can be raised without adding to worker exposure time. Working in teams of two, where one worker can act as a spotter from a safe location, may be a good example of an additional safety measure. The workers ability to maintain awareness of traffic conditions and potential hazards is a key concern.

Normally, specific TCP’s are not required for these very short actions since the typical example TCP’s for very short duration work zones can cover a wide variety of applications.

Short Duration Work Zone Considerations Chart

This chart provides for a logical process to evaluate short duration work zones based on the five key elements described earlier and several related issues for each element. Consideration of these elements in a step-by-step process will help to ensure that an adequate assessment is made leading to selection of the appropriate traffic control and safety measures incorporated into the Traffic Control Plan (TCP). The chart alone does not provide for a complete or final decision on the level of traffic control and safety measures needed, but is a valuable tool for conducting the assessment and identifying issues that need to be addressed.

Step 1

Consider the work zone location

- Lane – traffic hazard, see TCP's for work zone details
- Intersection – traffic hazard, see TCP's for work zone details
- Median – potential traffic hazards on both sides
- Shoulder – consider narrow shoulders and potential for errant vehicles
- Off Roadway – traffic control is not required for work areas 15' or more off the traveled edge, but protection should be considered.

Step 2

Consider hazards to workers and road users

- Traffic – volume, speed, configuration, driver confusion
- Equipment – clearance to traffic, operator access
- Fall/Trip – clear worker path, barriers, obstacles
- Debris – crash, cargo, etc. (remove manually or equipment)
- Other – as determined at the site

Step 3

Consider worker protection measures

- Positive Protection – TMA, buffer/shadow vehicle (may be a work vehicle), barriers
- Devices – cones, drums, etc., may alert drivers and delineates work and traffic separation
- Spotter – effective to warn workers (requires safe location for spotter)
- Escape Route or Refuge – as part of a contingency plan for unexpected events

Step 4

Consider road user warning measures (may include guidance and protection as needed)

- Dominant Warning Devices – PCMS, Arrow board, flag tree
- Signs – advance warning message or specific to work operation

- Channelizing & Warning Devices – cones, drums, type A or B lights
- Vehicle Warning Beacon – requires adequate sight distance
- Protective Equipment – TMA, buffer/shadow vehicle (may be a work vehicle), personal protective equipment

Step 5

Consider time duration of work (directly related to worker & road user exposure to hazards)

- Low – 0 to 20 minutes
- Moderate – 0 to 40 minutes
- High – 0 to 60 minutes, consider stationary or mobile traffic control

High traffic volume and high-speed work locations require careful consideration of traffic control devices as shown on the typical TCP's regardless of how short the time duration may be.

Step 6

Consider which Short Duration TCP is appropriate for the work operation based on the previous 5 consideration steps and any other considerations that may be applicable. Also, consider the need to develop a new TCP if the example TCP's do not fit the work operation. Contact the Region Traffic Office for assistance.

SHORT DURATION WORK ZONES

DO'S and DON'TS

Don't –

- Take “short cuts” or hurry to accomplish work. Determination of all work zone hazards is a must.
- Run across or “dodge” traffic in live lanes.
- Work in a live lane under adverse traffic conditions or without proper traffic control in place.....even if it's only for a minute or few seconds.
- Assume that shoulder areas are automatically safe because you are not in a live traffic lane. Distracted, aggressive or impaired drivers may encroach into shoulder areas. Also, oversized loads may present a hazard.
- Turn your back to oncoming traffic if possible. Awareness of traffic is an important self-protection element.
- Put yourself in an unexpected location that may surprise a driver.

Do –


- Use the work vehicle as protection and warning whenever possible.
- Take advantage of any resources that provide protection and warning without causing additional worker exposure. (TMA's, buffer/shadow vehicles, PCMS, etc.)
- Plan ahead. Poor planning is not a valid excuse for lack of equipment, devices or awareness of traffic conditions.
- Whenever possible, find the safest available location to park or unload equipment.
- Avoid high traffic volume hours and locations. Plan ahead for better traffic conditions or consider alternate work operations.
- Work on the same side of the road as the work vehicle and warning beacon whenever possible.

WORK ZONE CONDITION (SEE CONDITION GUIDANCE)

- A - ALLOWED, VEHICLE #1 REQUIRED, ALL OTHER DEVICES OPTIONAL.
- B - ALLOWED, VEHICLE #1 REQUIRED, CONSIDER USE OF SPOTTER, DEVICES, VEHICLE #2 AND LOW VOLUME WORK HOURS.
- C - NOT ALLOWED, CONSIDER MOBILE OR STATIONARY TCP'S.

NOTES:

1. STOPPING TRAFFIC FOR UP TO 20 MINUTES MAY ALSO BE ALLOWED.
(CONTACT & COORDINATE WITH REGION TRAFFIC OFFICE)
2. RESTRICTED SIGHT DISTANCE REQUIRES ADDITIONAL ADVANCE WARNING DEVICES OR SIGNS, SEE TCP 27 FOR SIGHT DISTANCE CHART.
3. REFER TO PAGE 17 FOR ROLL AHEAD AND BUFFER DATA INFORMATION.

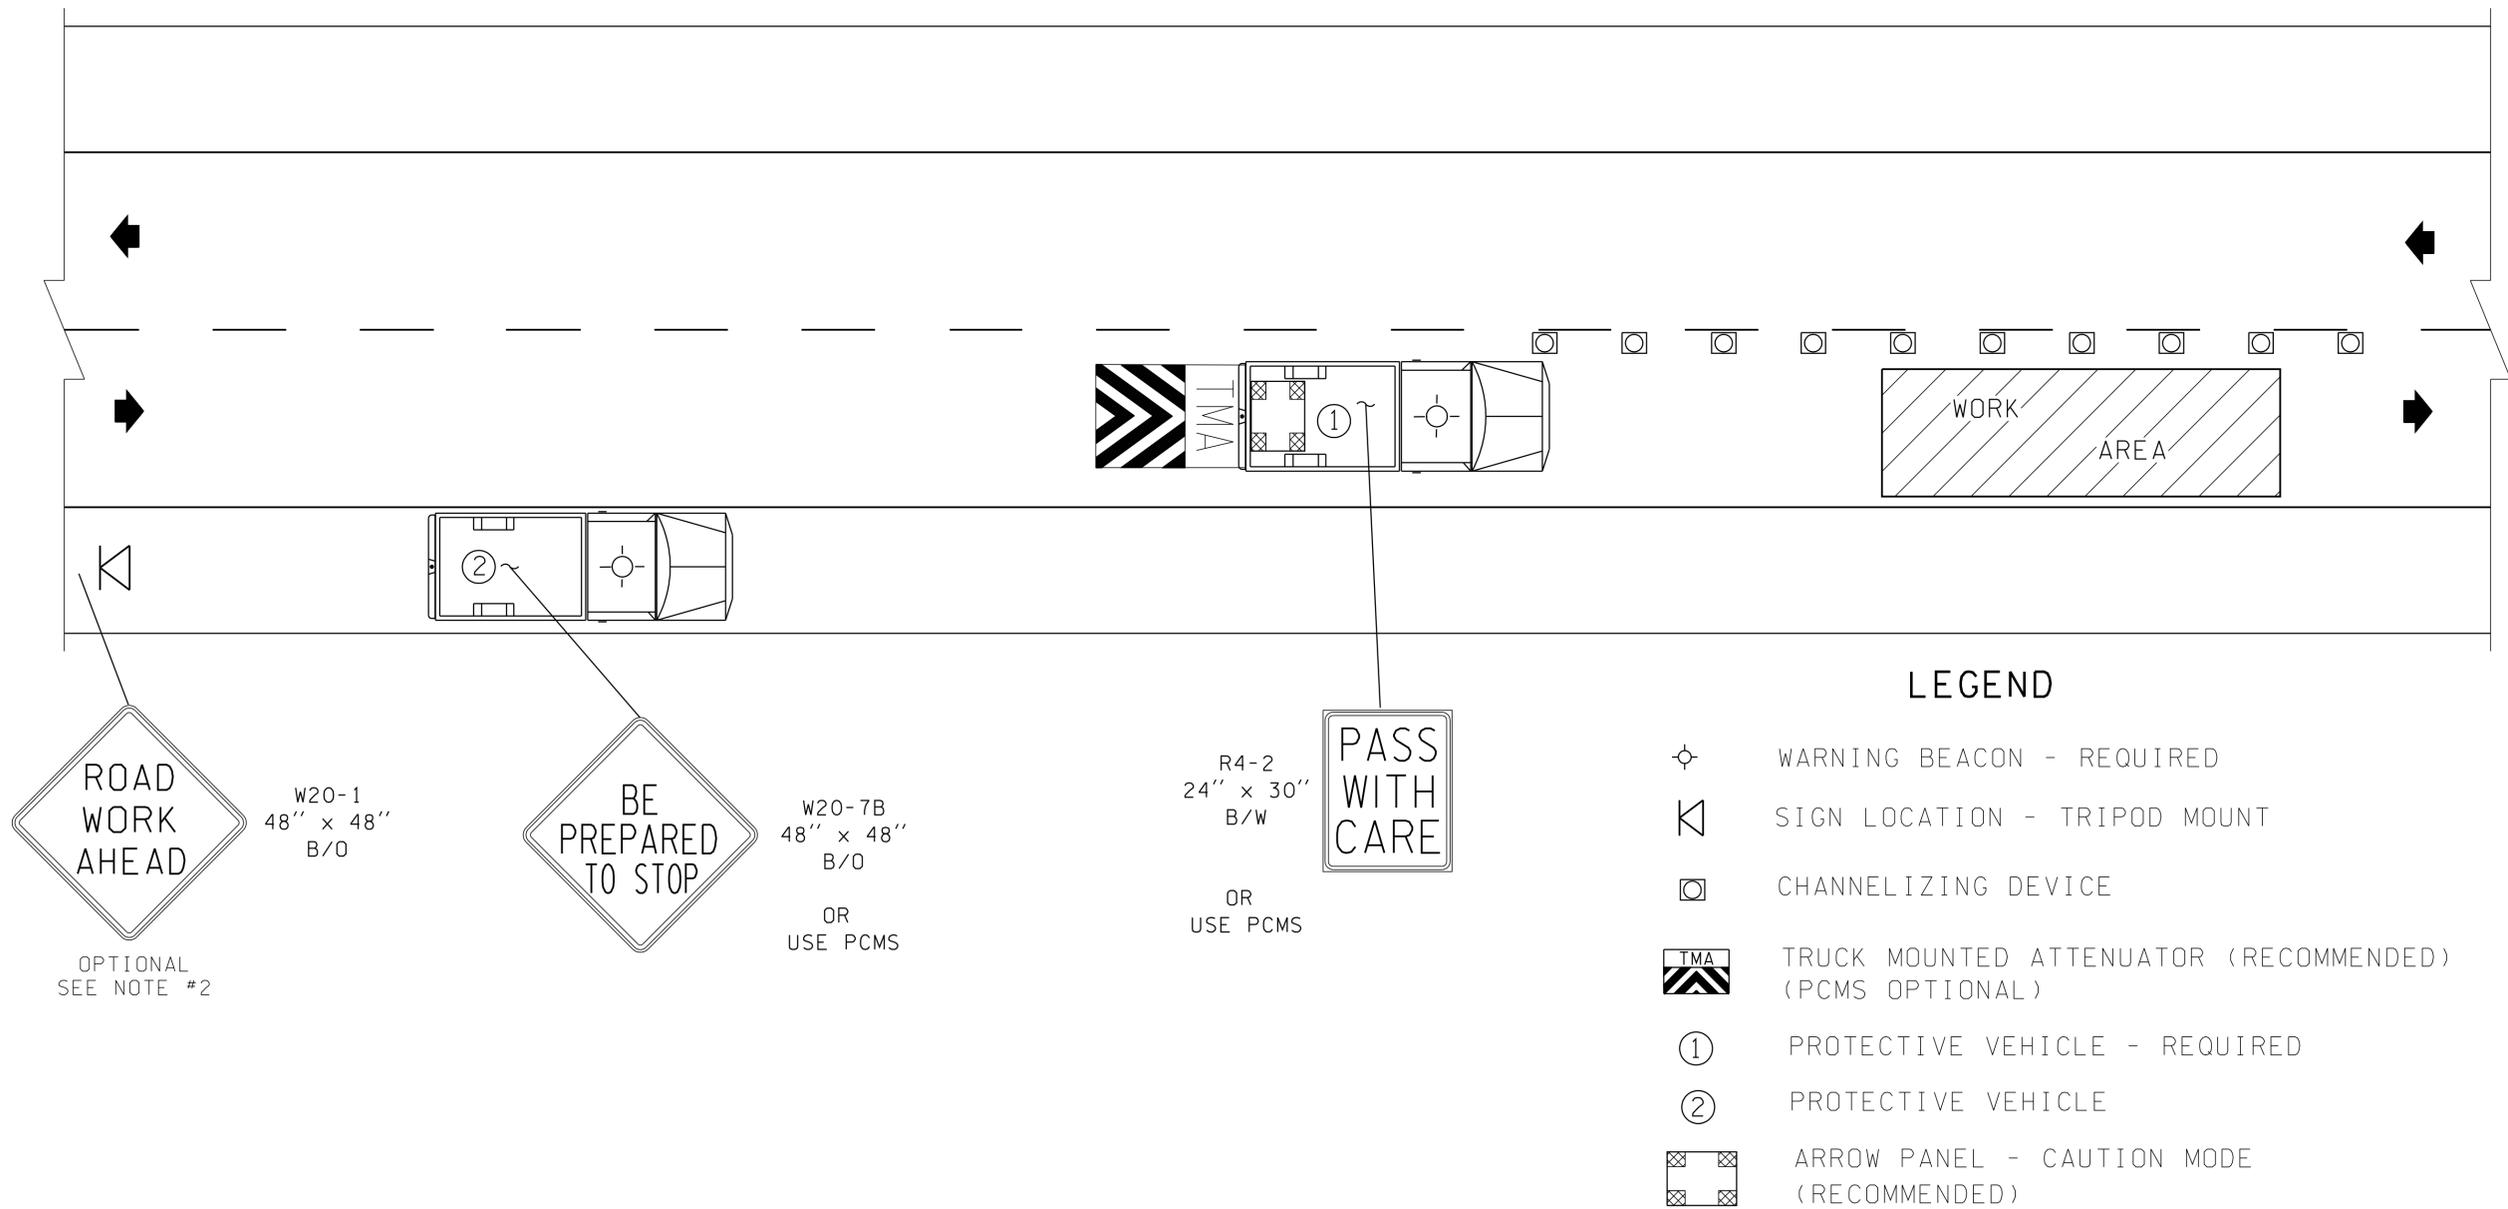


TYPICAL SHORT DURATION LANE CLOSURE
 2 LANE OPERATION
 TCP 14

WORK ZONE CONDITION (SEE CONDITION GUIDANCE)

- A - ALLOWED, VEHICLE #1 REQUIRED, ALL OTHER DEVICES OPTIONAL.
- B - ALLOWED, VEHICLE #1 REQUIRED, CONSIDER USE OF SPOTTER, DEVICES.
- C - NOT ALLOWED, CONSIDER MOBILE OR STATIONARY TCP'S.

NOTES:

- 1. VEHICLE #3 MAY BE NEEDED BASED ON TRAFFIC VOLUMES.
- 2. RESTRICTED SIGHT DISTANCE REQUIRES ADDITIONAL ADVANCE WARNING DEVICES OR SIGNS, SEE TCP 27 FOR SIGHT DISTANCE CHART.
- 3. REFER TO PAGE 17 FOR ROLL AHEAD AND BUFFER DATA INFORMATION.

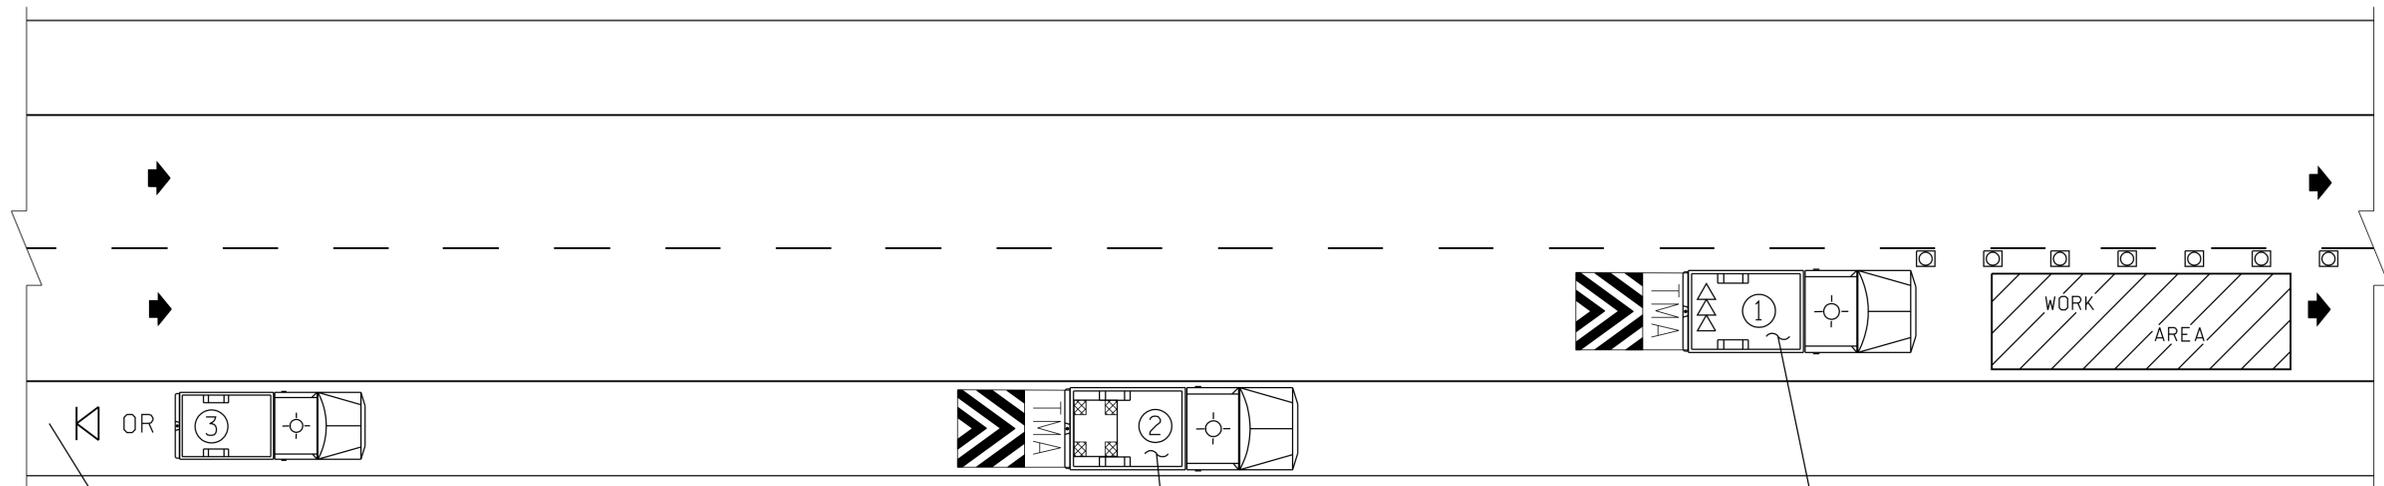

OPTIONAL
SEE NOTE #2



W20-5R
48" x 48"
B/O
OR
USE PCMS

PCMS	
1	2
LANE CLOSED	MERGE LEFT
1.5 SEC	1.5 SEC

TRUCK MOUNTED PCMS

LEGEND

- WARNING BEACON - REQUIRED
- SIGN LOCATION - TRIPOD MOUNT
- CHANNELIZING DEVICE
- TRUCK MOUNTED ATTENUATOR (RECOMMENDED) (PCMS OPTIONAL)
- PROTECTIVE VEHICLE - REQUIRED
- PROTECTIVE VEHICLE
- PROTECTIVE VEHICLE
- ARROW PANEL - REQUIRED
- ARROW PANEL - CAUTION MODE (RECOMMENDED)

TYPICAL SHORT DURATION LANE CLOSURE
MULTI-LANE OPERATION
TCP 15


WORK ZONE CONDITION (SEE CONDITION GUIDANCE)

- A - ALLOWED - CONSIDER USING A SPOTTER
- B - ALLOWED - SPOTTER AND/OR CHANNELIZING DEVICES RECOMMENDED, CONSIDER TMA AND/OR PCMS/ARROW CAUTION MODE.
- C - ALLOWED - SPOTTER, CHANNELIZATION DEVICES AND PCMS/ARROW RECOMMENDED, CONSIDER TMA.

NOTES:

1. RESTRICTED SIGHT DISTANCE REQUIRES ADDITIONAL ADVANCE WARNING DEVICES OR SIGNS, SEE TCP 27 FOR SIGHT DISTANCE CHART.
2. NARROW SHOULDERS THAT DO NOT PROVIDE FOR WORK OPERATIONS WITHOUT LANE ENCROACHMENT - 10' LANE MINIMUM, REQUIRES LANE CLOSURE, SEE TCP 14 OR 15.
3. REFER TO PAGE 17 FOR ROLL AHEAD AND BUFFER DATA INFORMATION.

** ROADWAY EXAMPLE REPRESENTS TYPICAL LOCATION.
 OPTIONAL LOCATION MAY BE - LEFT OR RIGHT SHOULDERS, MEDIAN OR GORE AREA

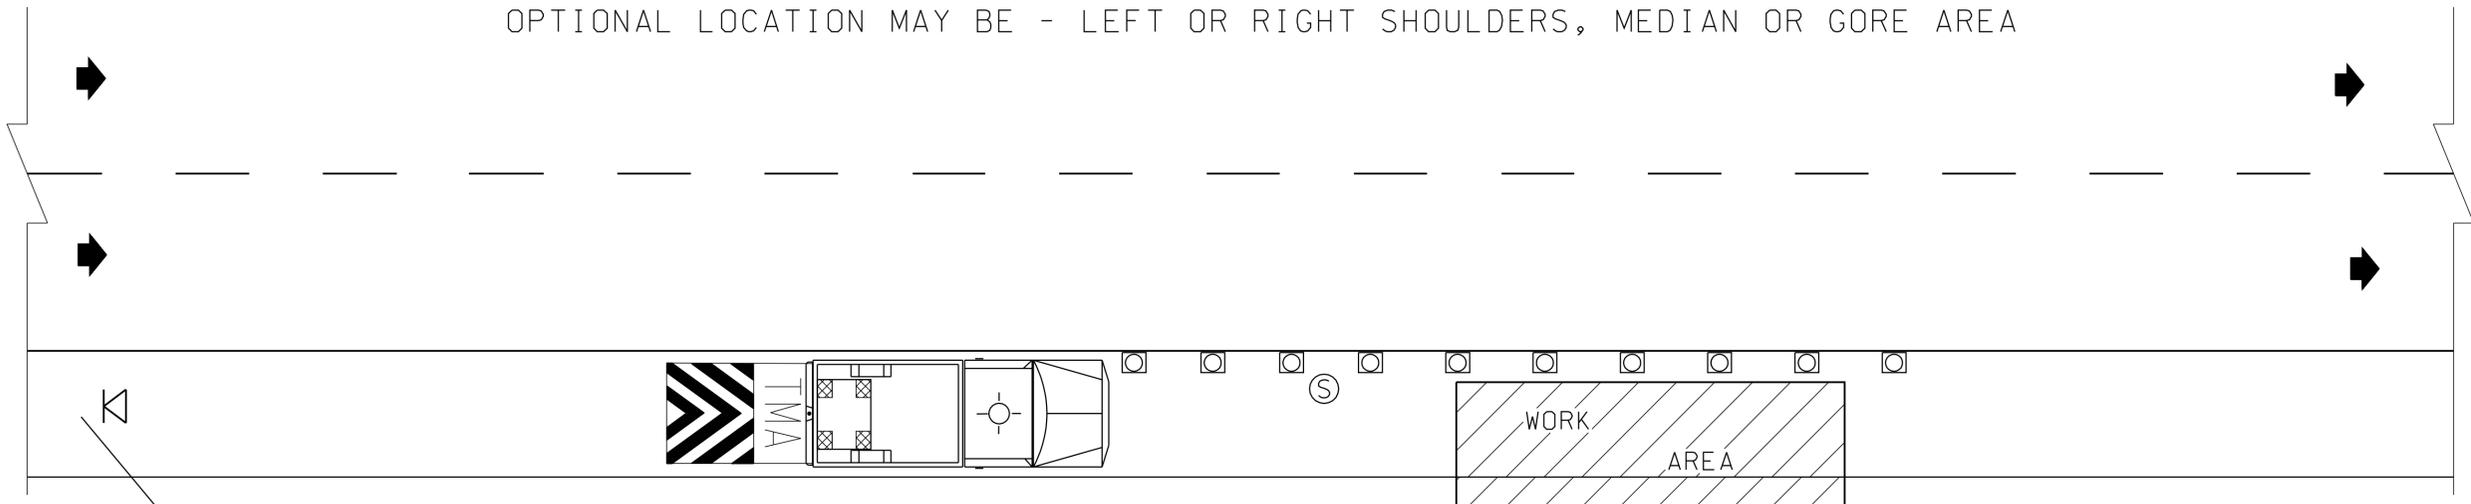

W21-1 48" x 48" B/O
 OR W21-5 48" x 48" B/O
 OR OTHER APPROPRIATE
 ADVANCE WARNING SIGN
 OR PCMS
 (OPTIONAL SEE NOTE 1)


LEGEND

- WORK VEHICLE W/ WARNING BEACON
- SIGN LOCATION - (SEE NOTE 1)
- CHANNELIZING DEVICE
- SPOTTER
- ARROW PANEL - TYPE "B"
(CAUTION MODE)
- TRUCK MOUNTED ATTENUATOR
(RECOMMENDED)

TYPICAL SHORT DURATION SHOULDER WORK
 TCP 16

WORK ZONE CONDITION (SEE CONDITION GUIDANCE)


- A - ALLOWED - CONSIDER USING A SPOTTER, WORK VEHICLE REQUIRED.
- B - ALLOWED - SPOTTER AND/OR CHANNELIZING DEVICES RECOMMENDED, CONSIDER TMA AND/OR PCMS/ARROW CAUTION MODE.
- C - ALLOWED - CHANNELIZATION DEVICES AND PCMS/ARROW, TMA, SPOTTER RECOMMENDED.

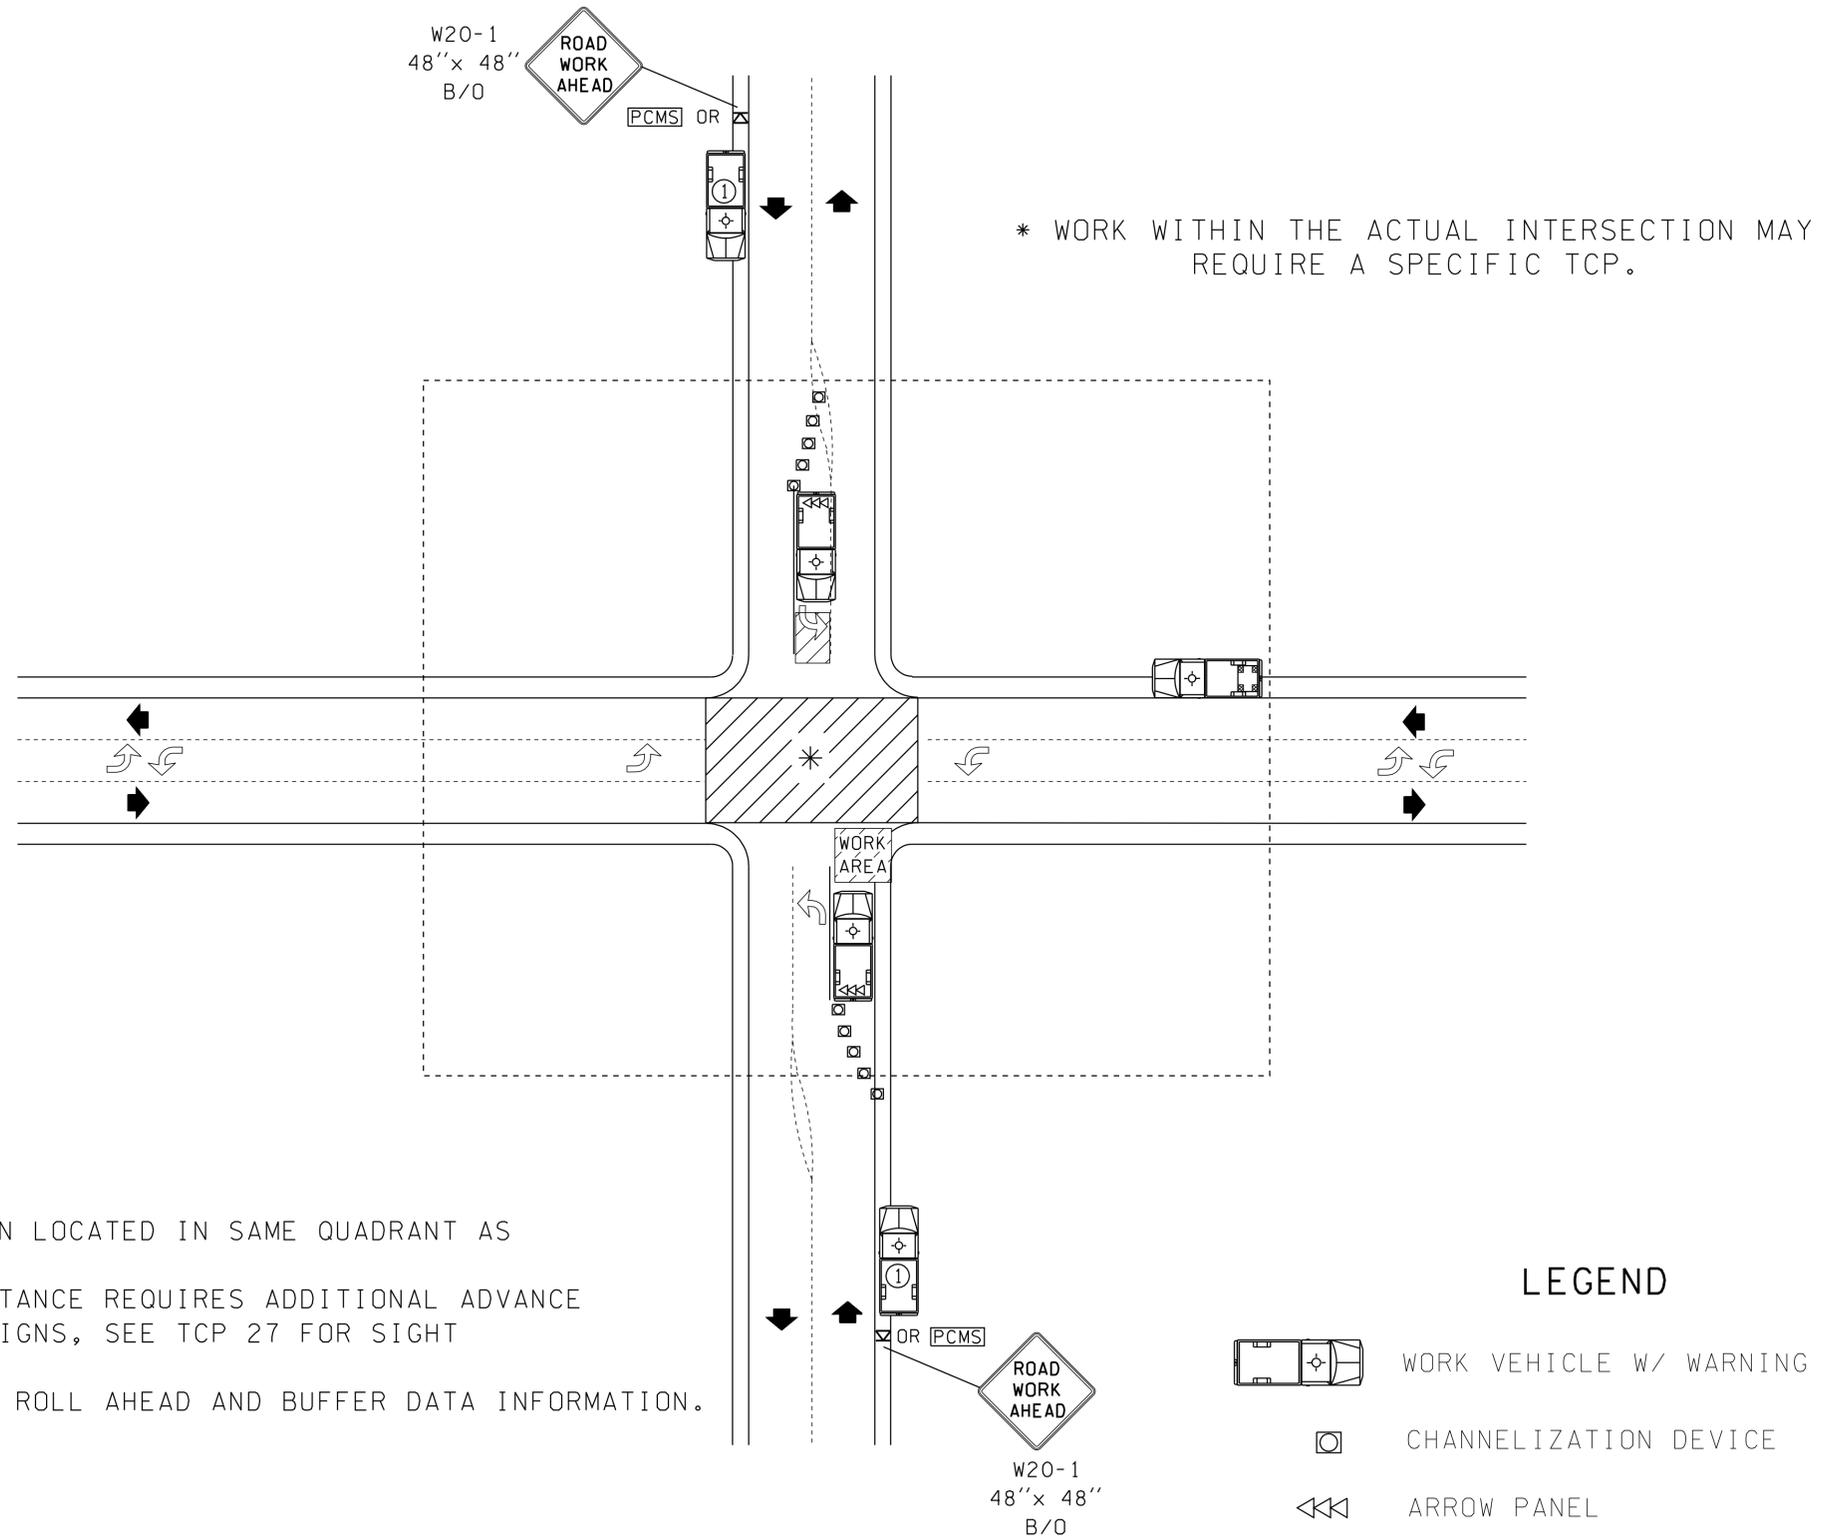

NOTES:

1. WORK VEHICLE W/BEACON LOCATED IN SAME QUADRANT AS WORK LOCATION.
2. RESTRICTED SIGHT DISTANCE REQUIRES ADDITIONAL ADVANCE WARNING DEVICES OR SIGNS, SEE TCP 27 FOR SIGHT DISTANCE CHART.
3. REFER TO PAGE 17 FOR ROLL AHEAD AND BUFFER DATA INFORMATION.

LEGEND

-  WORK VEHICLE W/ WARNING BEACON
-  CHANNELIZATION DEVICE
-  ARROW PANEL
-  SIGN LOCATION
-  PROTECTIVE VEHICLE #1 REQUIRED


TYPICAL SHORT DURATION WORK OPERATION
INTERSECTION LOCATION
(SEE GUIDANCE TEXT FOR ADDITIONAL DIRECTION)
TCP 17

WORK ZONE CONDITION (SEE CONDITION GUIDANCE)

- A - ALLOWED - CONSIDER USING A SPOTTER
- B - ALLOWED - SPOTTER RECOMMENDED WORKER ACCESS TO LANE ALLOWED BASED ON SITE ASSESSMENT OF TRAFFIC CONDITIONS.
- C - NOT ALLOWED - SEE TCP 3 FOR WORK ZONE REQUIREMENTS.

NOTES:

1. VERY SHORT WORK OPERATIONS MAY BE CONDUCTED AT VARIOUS LOCATIONS OR A WORKER MAY WALK TO THOSE LOCATIONS AS PART OF THE WORK OPERATION.
2. RESTRICTED SIGHT DISTANCE REQUIRES ADDITIONAL ADVANCE WARNING DEVICES OR SIGNS, SEE TCP 27 FOR SIGHT DISTANCE CHART.
3. REFER TO PAGE 17 FOR ROLL AHEAD AND BUFFER DATA INFORMATION.

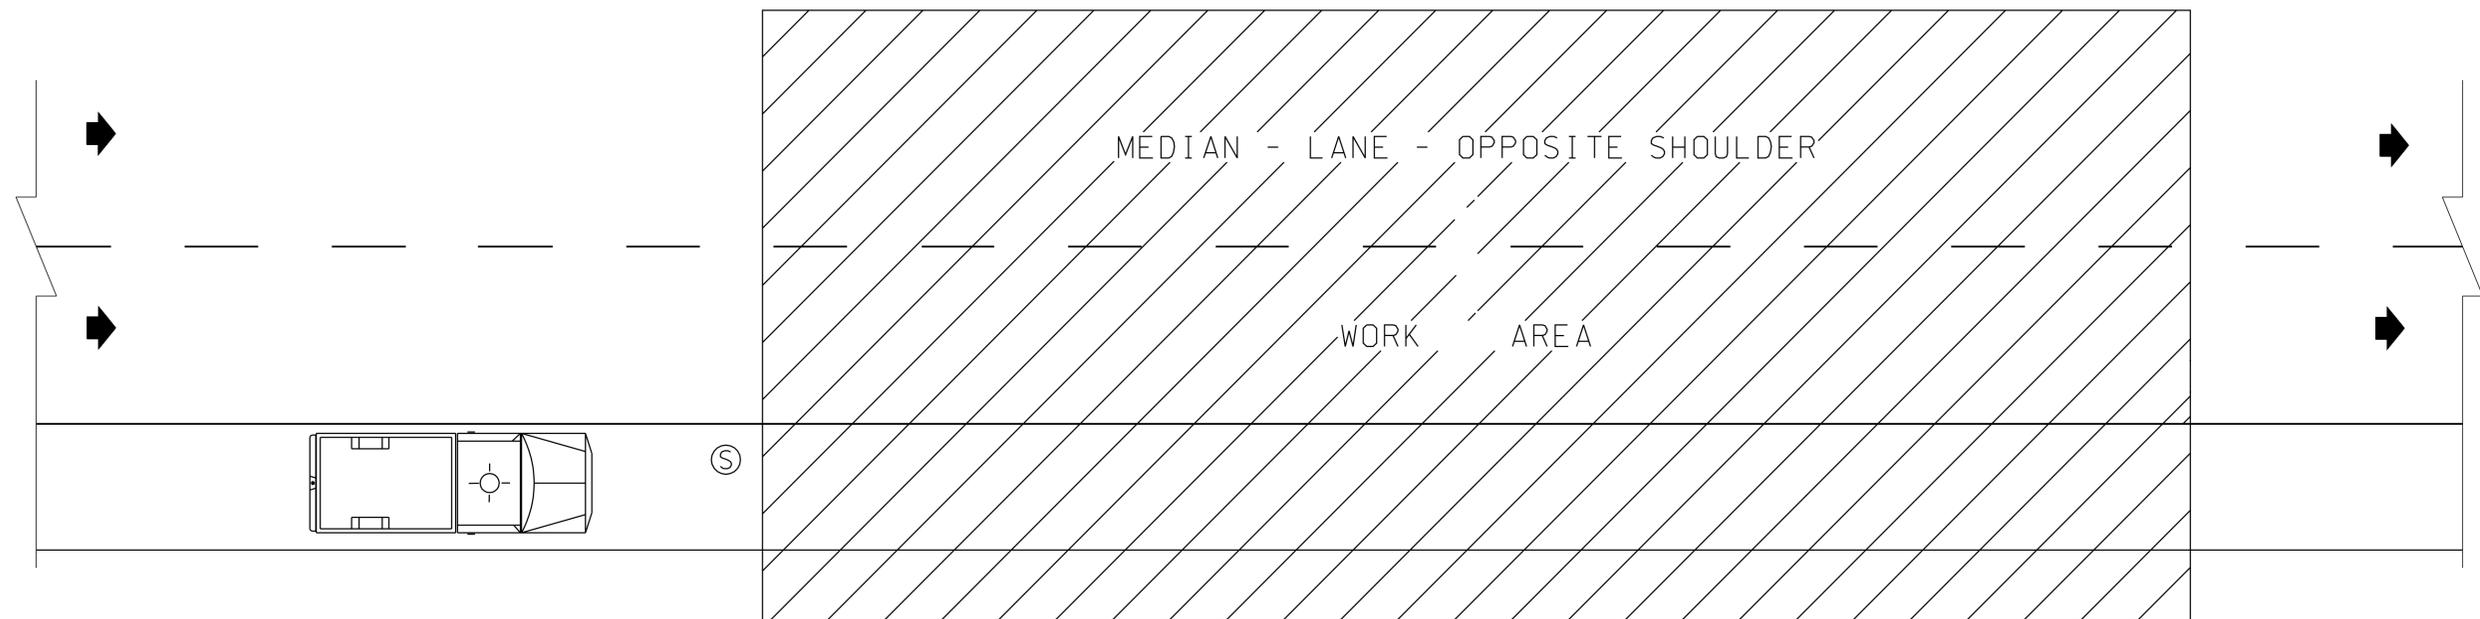

** ROADWAY EXAMPLE REPRESENTS - LEFT OR RIGHT SHOULDERS, MEDIAN OR GORE AREA


LEGEND

-  WORK VEHICLE W/ WARNING BEACON
-  SPOTTER

TYPICAL VERY SHORT DURATION WORK OPERATION
(SEE GUIDANCE TEXT FOR ADDITIONAL INFORMATION)
TCP 18

WORK ZONE CONDITION (SEE CONDITION GUIDANCE)


- A - ALLOWED - CONSIDER USING A SPOTTER
- B - ALLOWED - SPOTTER RECOMMENDED WORKER ACCESS TO LANE ALLOWED BASED ON SITE ASSESSMENT OF TRAFFIC CONDITIONS.
- C - NOT ALLOWED - SEE TCP 15 FOR WORK ZONE REQUIREMENTS.

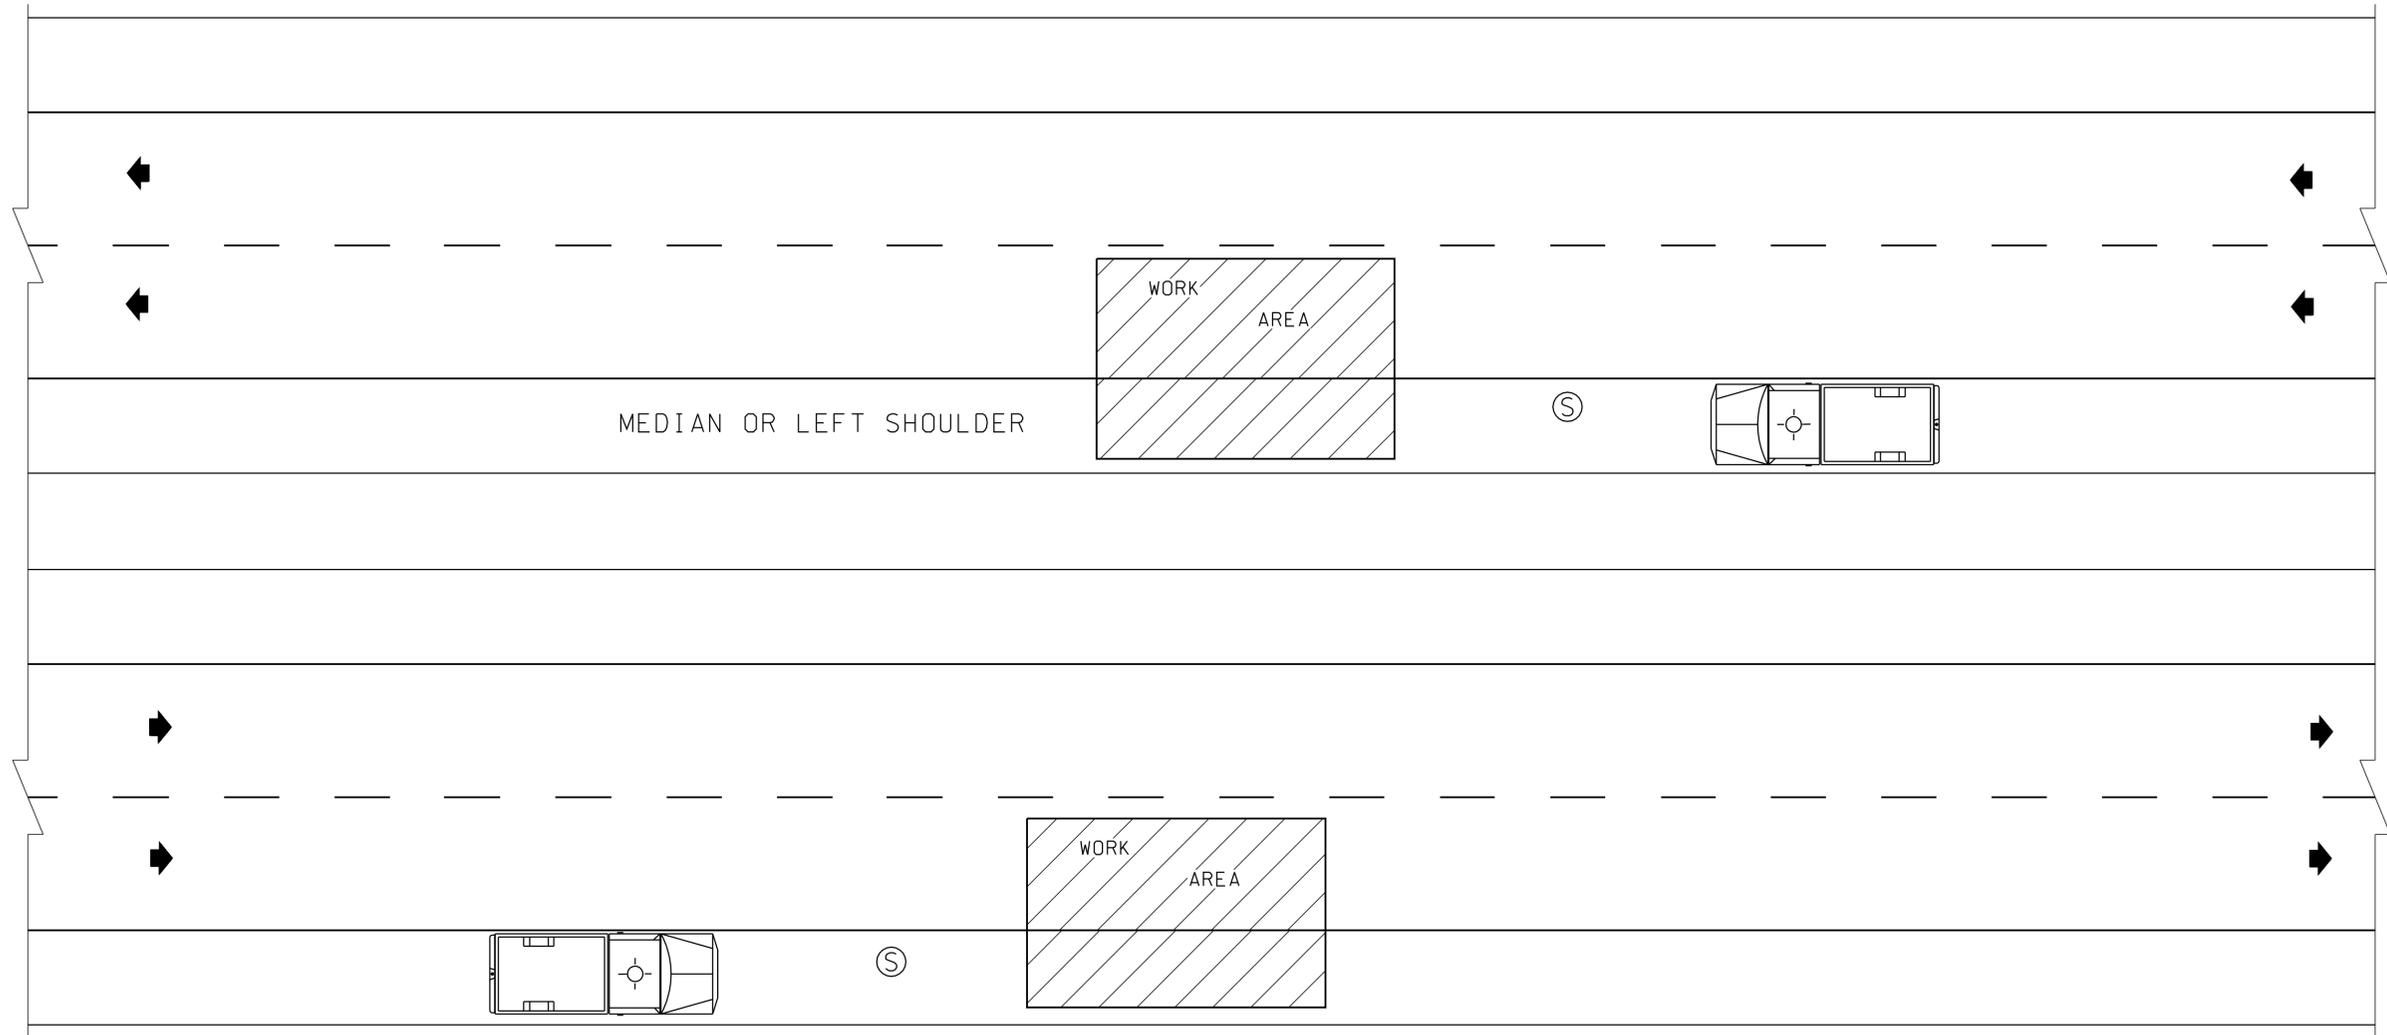

NOTES:

1. WORKER(S) MUST MOVE TO SHOULDER ADJACENT TO WORK LANE IF TRAFFIC APPROACHES PRIOR TO COMPLETION OF WORK.
2. REPEATED ACCESS TO WORK LANE NOT ALLOWED. SEE TCP 15 FOR WORK ZONE REQUIREMENTS - CONDITION "C".
3. RESTRICTED SIGHT DISTANCE REQUIRES ADDITIONAL ADVANCE WARNING DEVICES OR SIGNS, SEE TCP 27 FOR SIGHT DISTANCE CHART.
4. REFER TO PAGE 17 FOR ROLL AHEAD AND BUFFER DATA INFORMATION.


LEGEND

- Ⓢ SPOTTER
-  WORK VEHICLE W/ WARNING BEACON

TYPICAL VERY SHORT DURATION WORK OPERATION
 (SEE GUIDANCE TEXT FOR ADDITIONAL DIRECTION)
 TCP 19

WORK ZONE CONDITION (SEE CONDITION GUIDANCE)

- A - ALLOWED - CONSIDER SPOTTER, WORKER ACCESS TO OR ACROSS LANE(S) ALLOWED BASED ON SITE ASSESSMENT OF TRAFFIC CONDITIONS.
- B - ALLOWED - SPOTTER RECOMMENDED CONSIDER ADDITIONAL WARNING.
- C - NOT ALLOWED - SEE TCP 28 & 29 FOR WORK ZONE REQUIREMENTS.

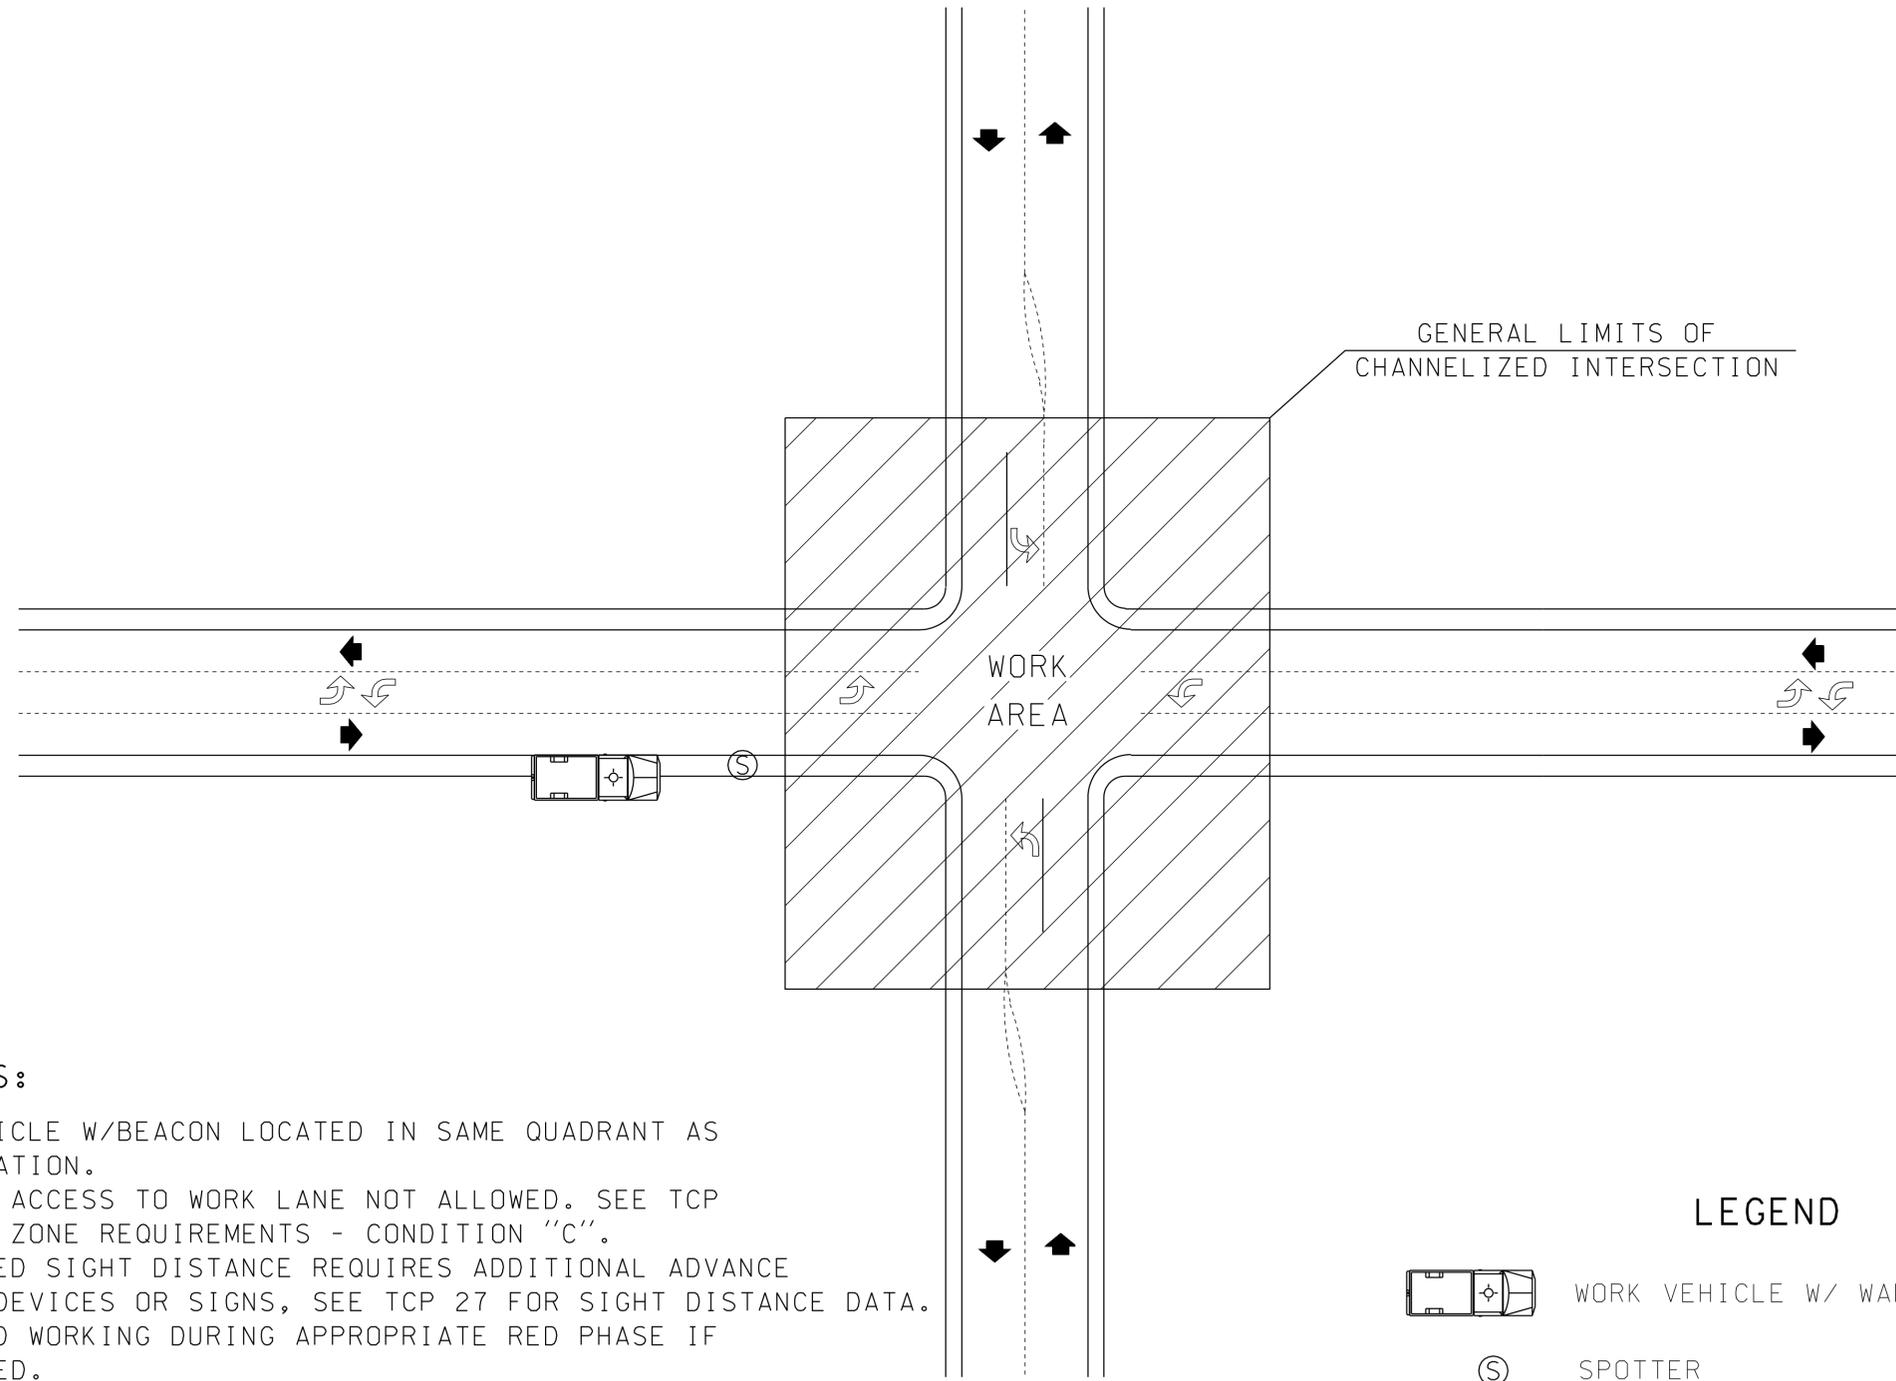

NOTES:

1. WORK VEHICLE W/BEACON LOCATED IN SAME QUADRANT AS WORK LOCATION.
2. REPEATED ACCESS TO WORK LANE NOT ALLOWED. SEE TCP FOR WORK ZONE REQUIREMENTS - CONDITION "C".
3. RESTRICTED SIGHT DISTANCE REQUIRES ADDITIONAL ADVANCE WARNING DEVICES OR SIGNS, SEE TCP 27 FOR SIGHT DISTANCE DATA.
4. RECOMMEND WORKING DURING APPROPRIATE RED PHASE IF SIGNALIZED.
5. REFER TO PAGE 17 FOR ROLL AHEAD AND BUFFER DATA INFORMATION.

LEGEND

-  WORK VEHICLE W/ WARNING BEACON
-  SPOTTER

TYPICAL VERY SHORT DURATION WORK OPERATION
 INTERSECTION LOCATION
 (SEE GUIDANCE TEXT FOR ADDITIONAL DIRECTION)
 TCP 20

ROLLING SLOWDOWN

Traffic Control Plan (TCP) 21

A rolling slowdown is a legitimate form of traffic control commonly practiced by the WSP, contractors and highway maintenance crews. This use is valuable for emergency, or **very specific** short duration closures (e.g. to set bridge girders, pick debris from the roadway, to push a blocking disabled to the shoulder, or to pull power lines across the roadway). The traffic control vehicles form a moving blockade, which reduces traffic speeds and creates a large gap in traffic, or clear area, allowing very short-term work to be accomplished without completely stopping the traffic.

Other traditional forms of traffic control should be considered first and be the primary choice when possible. If the slowdown is to be a scheduled operation, then the Regional Traffic Office needs to be contacted with a work request so a site specific traffic control plan (TCP) can be developed and/or reviewed and approved. The gap in traffic created by the rolling slowdown, and other traffic issues, should be addressed on an approved TCP. Also, use of WSP is encouraged whenever possible, at a minimum coordination is necessary.

In the event of debris in the roadway, a blocking disabled vehicle, or other emergency, the use of experience and resources at hand, along with sound judgment and common sense, will suffice in lieu of an approved, site specific, TCP. TCP 21 on page 51 has been developed as a guideline to represent the basic requirements for performing a safe and effective rolling slowdown. Site specific TCP's can be developed based on this plan.

Equipment availability is a prime consideration. Before starting this operation, ensure there are at least one traffic control vehicle (with flashing amber lights) per lane to be slowed, **and** one vehicle to cover every point of access onto the 'rolling slowdown' segment of roadway. (Only during emergencies should less than one traffic control vehicle per lane be considered.) Truck mounted PCMS boards stating, "Slow or Stopped Vehicles" or "Rolling Slowdown In Progress" are very helpful. **Be sure that every crewmember participating is well briefed and knows what is needed from them. Good communications for this operation are essential!**


The traffic control vehicles leading the rolling slowdown must enter the roadway far enough upstream from the work operation site to allow a clear area in front of them to develop. The traffic control vehicles will work into position so that each lane is controlled. As in every other form of traffic control, sight distance is important, so that drivers are not surprised. While traveling at a fixed and reduced rate of speed, a gap in traffic must be created which is long enough to provide the estimated time needed for the work to be done.

A separate traffic control vehicle, "chase vehicle", shall follow the slowest, or last, vehicle ahead of the blockade. When that last vehicle passes, the crew can begin the work operation.

All ramps and entrances to the roadway between the moving blockade and work operation must be temporarily closed using traffic control equipment and personnel. Each of those ramps must remain closed until the crew doing the work gives the "all clear" signal, **or** until the front of the moving blockade passes the closed on-ramp(s).

Radio communications between the work crew and the moving blockade are required so the speed of the blockade can be adjusted, if necessary, to increase or decrease the closure time. Release traffic only after you have confirmation that all workers and their vehicles are clear of the roadway.

THIS PLAN DEPICTS THE MINIMUM REQUIREMENTS TO PERFORM AN EMERGENCY ROLLING SLOWDOWN. IF THE SLOWDOWN IS, OR CAN BE, A PLANNED EVENT, THEN A SITE SPECIFIC TRAFFIC CONTROL PLAN SHOULD BE DEVELOPED AND APPROVED BY THE REGION TRAFFIC OFFICE PRIOR TO THE OPERATION OCCURRING.

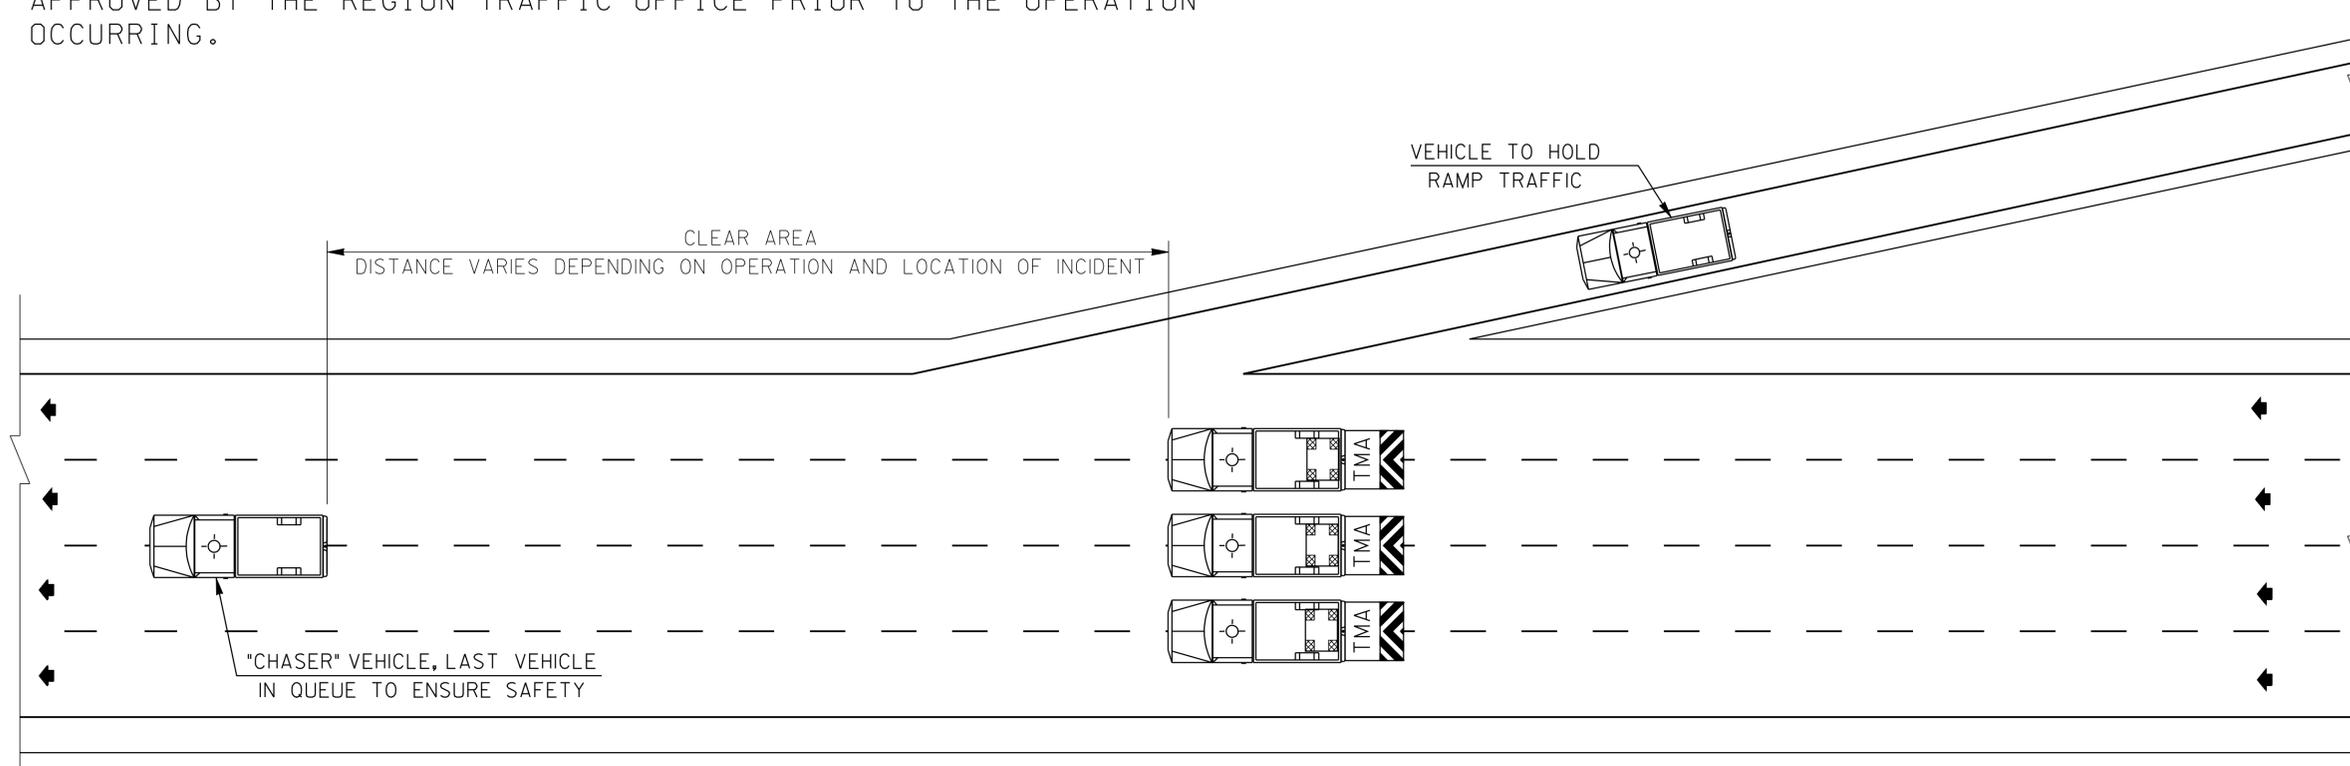

(SAMPLE MESSAGE)

TRUCK MOUNTED PCMS	
1	2
SLOW OR STOPPED VEHICLES	DO NOT PASS
1.5 SEC	1.5 SEC

LEGEND



TRUCK MOUNTED ATTENUATOR (RECOMMENDED)



WARNING BEACON - REQUIRED



ARROW PANEL - CAUTION MODE (REQUIRED)

OPERATIONAL NOTES

1. ALL WORK VEHICLES SHALL USE WARNING BEACONS.
2. THE NUMBER OF VEHICLES SHOWN IS A MINIMUM. IF POSSIBLE USE ONE VEHICLE PER LANE DURING CLOSURE.
3. WSP SHALL BE NOTIFIED AND ON SITE WHEN AVAILABLE.
4. ALL ON-RAMP TRAFFIC SHALL BE STOPPED DURING SLOWDOWN.

TYPICAL ROLLING SLOWDOWN
TCP 21

MOBILE WORK ZONES

Traffic Control Plans (TCP's) 22 to 27

Mobile work zones are work activities that typically move along the road either intermittently or continuously. Frequent short stops may be used for pothole patching, litter cleanup, herbicide spraying, lane marker replacement or other similar operations. Channelizing devices, truck mounted signs or Portable Changeable Message Signs (PCMS), warning lights and flaggers may be needed for these operations.

Mobile work zones also include slow moving operations where workers and equipment move along the road without stopping. Operations such as sweeping and paint striping are typical mobile operations. The warning signs move ahead with the work, usually mounted on a shadow vehicle. Truck mounted signs or PCMS, Truck Mounted Attenuator (TMA) and warning lights are some of the devices that may be used for moving operations. Messages for truck mounted PCMS's should conform to standard work messages whenever possible. Contact the Region Traffic Office Staff for assistance with selecting appropriate messages.



Mobile work zones are well suited to maintenance operations and can be an efficient way to accomplish many types of work, but due to the moving nature of these operations it is imperative that the crew is carefully coordinated. Careful consideration of traffic and roadway conditions as they relate to the specific operation must be done prior to starting work.

The following TCP's show typical examples of mobile work zones.


Many work operations that may have been previously conducted as short-term operations can be significantly improved by converting to a mobile operation. Contact the region traffic office for assistance.

TYPICAL FREEWAY APPLICATION

(ACTUAL NUMBER OF LANES MAY VARY)

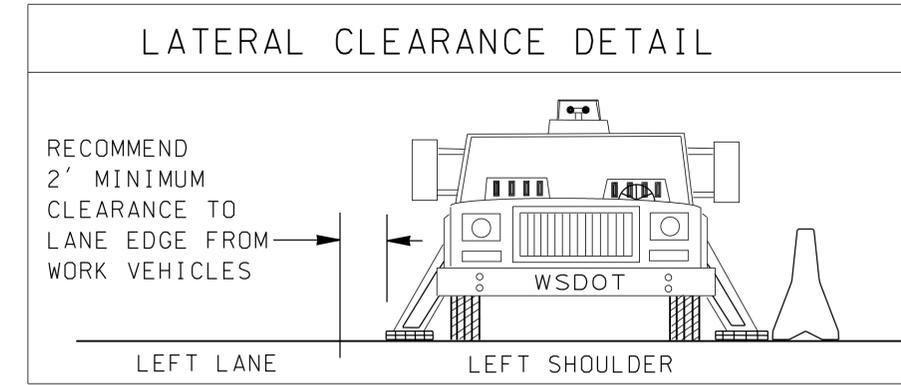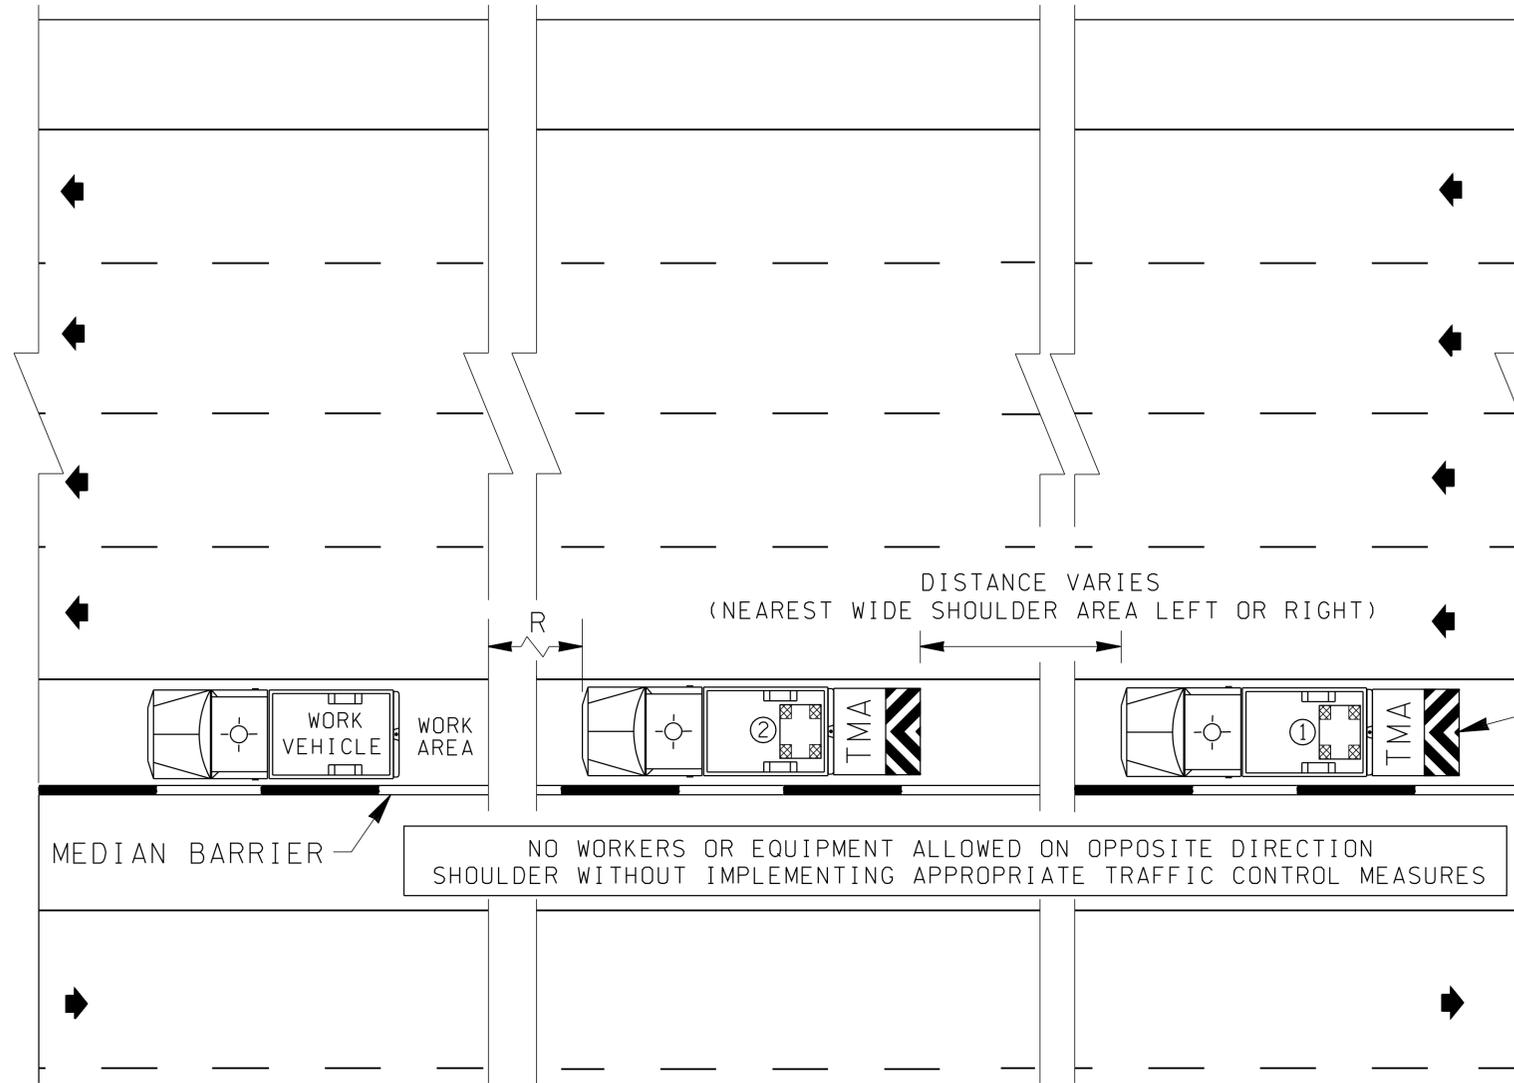

W21-5
48" x 48"
B/O



(SAMPLE MESSAGE)

PCMS	
1	2
LEFT SHOULDER CLOSED	SLOW MOVING VEHICLES
1.5 SEC	1.5 SEC

Field locate in advance of lane closure.
(TRUCK MOUNTED OR TRAILER MOUNTED OPTIONAL)

PROTECTIVE VEHICLE ROLL AHEAD DISTANCE = R

ROLL AHEAD DISTANCES VARY AND SHALL BE DETERMINED IN FIELD BASED ON WORK OPERATION AND SITE SPECIFIC CONDITIONS.

USE OF A TRUCK MOUNTED ATTENUATOR RECOMMENDED

OPERATIONAL NOTES

1. SHADOW VEHICLE #1, MOUNT SHOULDER CLOSURE SIGN ON BACK OF VEHICLE. DO NOT OBSCURE ARROW PANEL. MAINTAIN 1000' TO 1500' OF SIGHT DISTANCE TO APPROACHING TRAFFIC (TMA RECOMMENDED).
2. PROTECTIVE VEHICLE #2, POSITION VEHICLE TO PROVIDE PROTECTION OF CREW. MAINTAIN ROLL-AHEAD DISTANCE (TMA RECOMMENDED).
3. 2' MINIMUM CLEARANCE RECOMMENDED BETWEEN LANE EDGE AND WORK VEHICLE. ADJACENT LANE MUST BE CLOSED IF ADDITIONAL CLEARANCE IS REQUIRED OR IF WORK ACTIVITIES ADVERSELY INFLUENCE TRAFFIC.
4. CONTACT REGION TRAFFIC MANAGEMENT CENTER PRIOR TO WORK BEGIN AND END.
5. PCMS RECOMMENDED.

LEGEND



ARROW PANEL - TYPE "B"
(CAUTION MODE)



TRUCK MOUNTED ATTENUATOR



WARNING BEACON - REQUIRED

MOBILE FREEWAY OPERATION
LEFT SHOULDER CLOSED
 TCP 22


(SAMPLE MESSAGE)

PCMS	
1	2
LEFT LANE CLOSED	MERGE RIGHT
1.5 SEC	1.5 SEC

Field locate in advance of lane closure.
(TRUCK MOUNTED OR TRAILER MOUNTED OPTIONAL)

PROTECTIVE VEHICLE ROLL AHEAD DISTANCE = R
ROLL AHEAD DISTANCES VARY AND SHALL BE DETERMINED IN FIELD BASED ON WORK OPERATION AND SITE SPECIFIC CONDITIONS.
USE OF A TRUCK MOUNTED ATTENUATOR RECOMMENDED

TYPICAL FREEWAY APPLICATION
 (ACTUAL NUMBER OF LANES MAY VARY)

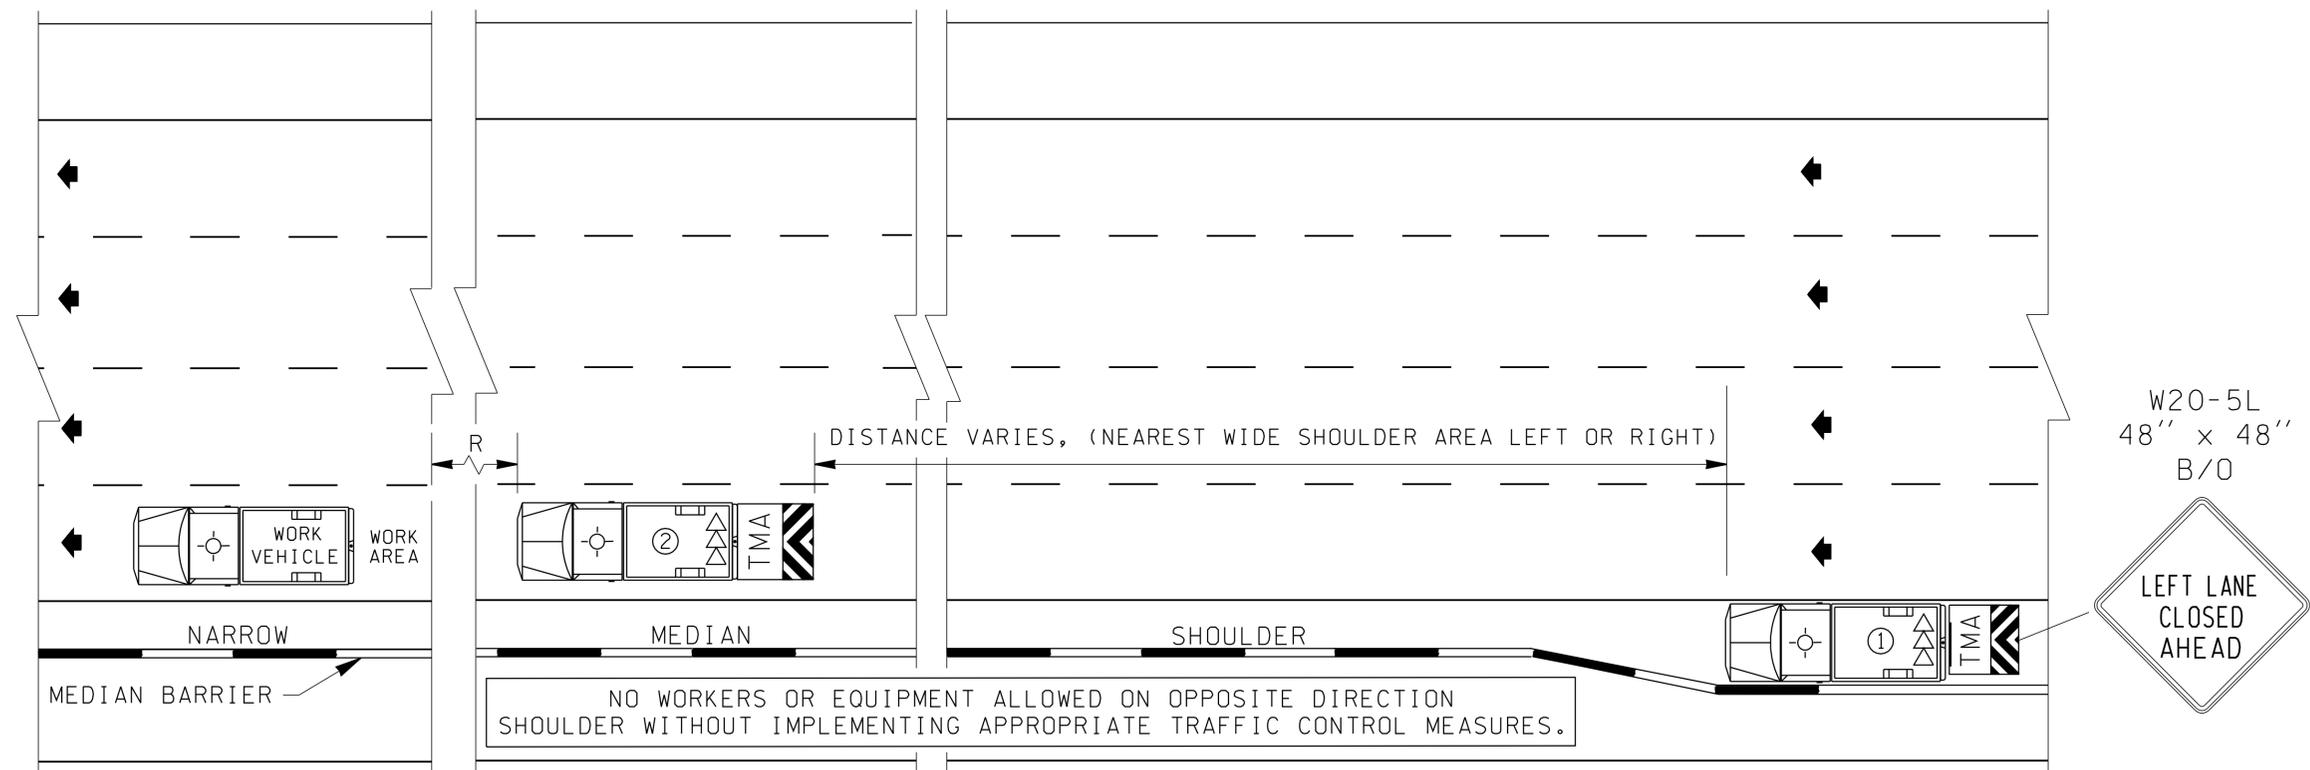

NO WORKERS OR EQUIPMENT ALLOWED ON OPPOSITE DIRECTION SHOULDER WITHOUT IMPLEMENTING APPROPRIATE TRAFFIC CONTROL MEASURES.

OPERATIONAL NOTES

1. SHADOW VEHICLE #1, MOUNT LANE CLOSURE SIGN ON BACK OF VEHICLE. DO NOT OBSCURE ARROW PANEL. MAINTAIN 1000' TO 1500' OF SIGHT DISTANCE TO APPROACHING TRAFFIC (TMA RECOMMENDED).
2. PROTECTIVE VEHICLE #2, POSITION VEHICLE TO PROVIDE PROTECTION OF CREW. MAINTAIN ROLL AHEAD DISTANCE (TMA RECOMMENDED).
3. 2' MINIMUM CLEARANCE RECOMMENDED BETWEEN LANE EDGE AND WORK VEHICLE. ADJACENT LANE MUST BE CLOSED IF ADDITIONAL CLEARANCE IS REQUIRED OR IF WORK ACTIVITIES ADVERSELY INFLUENCE TRAFFIC.
4. CONTACT REGION TRAFFIC MANAGEMENT CENTER PRIOR TO WORK BEGINS AND AFTER ENDING.
5. PCMS RECOMMENDED.

LEGEND


ARROW PANEL - TYPE "B" MIN.

TRUCK MOUNTED ATTENUATOR

WARNING BEACON - REQUIRED

PROTECTIVE VEHICLE ROLL AHEAD DISTANCE = R
ROLL AHEAD DISTANCES VARY AND SHALL BE DETERMINED IN FIELD BASED ON WORK OPERATION AND SITE SPECIFIC CONDITIONS.
USE OF A TRUCK MOUNTED ATTENUATOR RECOMMENDED

TYPICAL FREEWAY APPLICATION
 (ACTUAL NUMBER OF LANES MAY VARY)

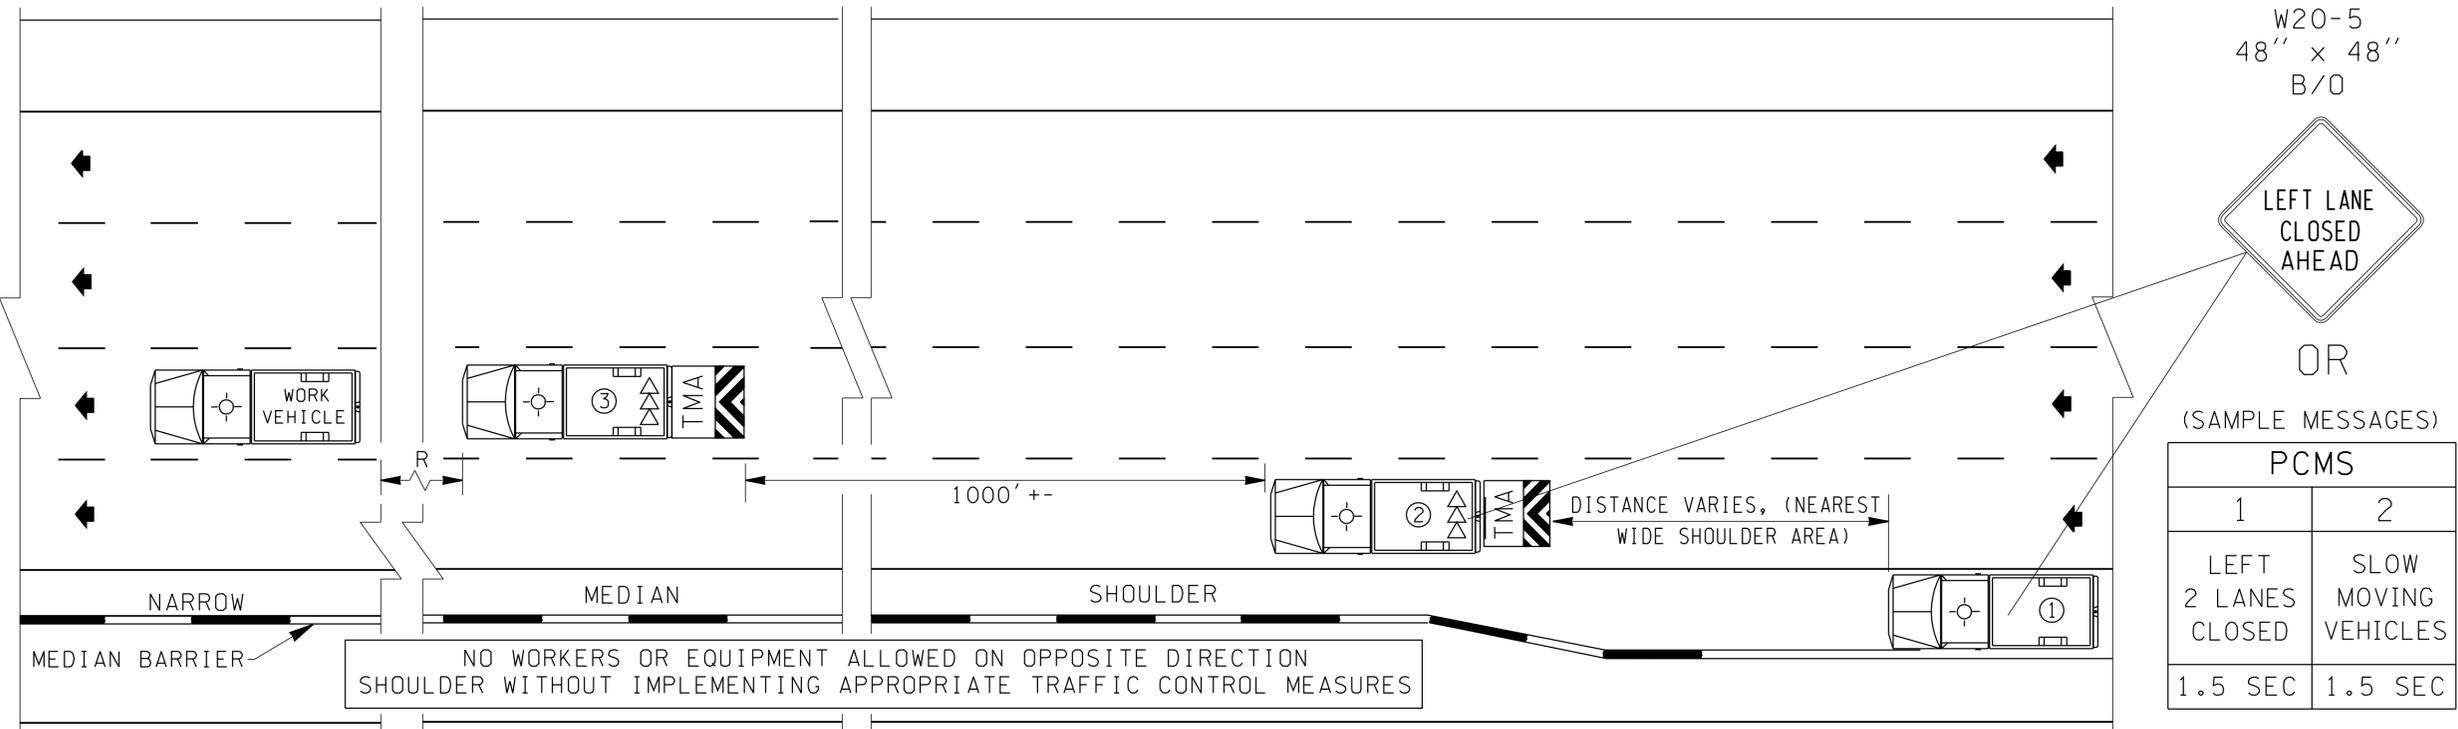

OPERATIONAL NOTES

1. ADVANCE WARNING VEHICLE #1, MOUNT LANE CLOSURE SIGN ON BACK OF VEHICLE. MAINTAIN 1000' TO 1500' SIGHT DISTANCE TO APPROACHING VEHICLES. (TMA RECOMMENDED)
2. SHADOW VEHICLE #2, MOUNT LANE CLOSURE SIGN ON BACK OF VEHICLE. DO NOT OBSCURE ARROW PANEL. MAINTAIN 1000' TO 1500' OF SIGHT DISTANCE TO APPROACHING TRAFFIC (TMA RECOMMENDED).
3. PROTECTIVE VEHICLE #3, POSITION VEHICLE TO PROVIDE PROTECTION OF CREW. MAINTAIN ROLL AHEAD DISTANCE (TMA RECOMMENDED).
4. 2' MINIMUM CLEARANCE RECOMMENDED BETWEEN LANE EDGE AND WORK VEHICLE. ADJACENT LANE MUST BE CLOSED IF ADDITIONAL CLEARANCE IS REQUIRED OR IF WORK ACTIVITIES ADVERSELY INFLUENCE TRAFFIC.
5. CONTACT REGION TRAFFIC MANAGEMENT CENTER PRIOR TO WORK BEGIN AND END.
6. PCMS RECOMMENDED.

LEGEND

- ARROW PANEL - TYPE "B" MIN.
- TRUCK MOUNTED ATTENUATOR (RECOMMENDED)
- WARNING BEACON - REQUIRED

PROTECTIVE VEHICLE ROLL AHEAD DISTANCE = R ROLL AHEAD DISTANCES VARY AND SHALL BE DETERMINED IN FIELD BASED ON WORK OPERATION AND SITE SPECIFIC CONDITIONS. USE OF A TRUCK MOUNTED ATTENUATOR RECOMMENDED
--


PCMS	
1	2
SLOW MOVING VEHICLE	YIELD TO ONCOMING TRAFFIC
1.5 SEC	1.5 SEC

TRUCK MOUNTED PCMS (OPTIONAL)

R4-1
 36" x 48"
 B/W
 (OPTIONAL)
 MOUNT ON PROTECTIVE VEHICLE

OR

SP-1
 36" x 48"
 R/W
 (OPTIONAL)

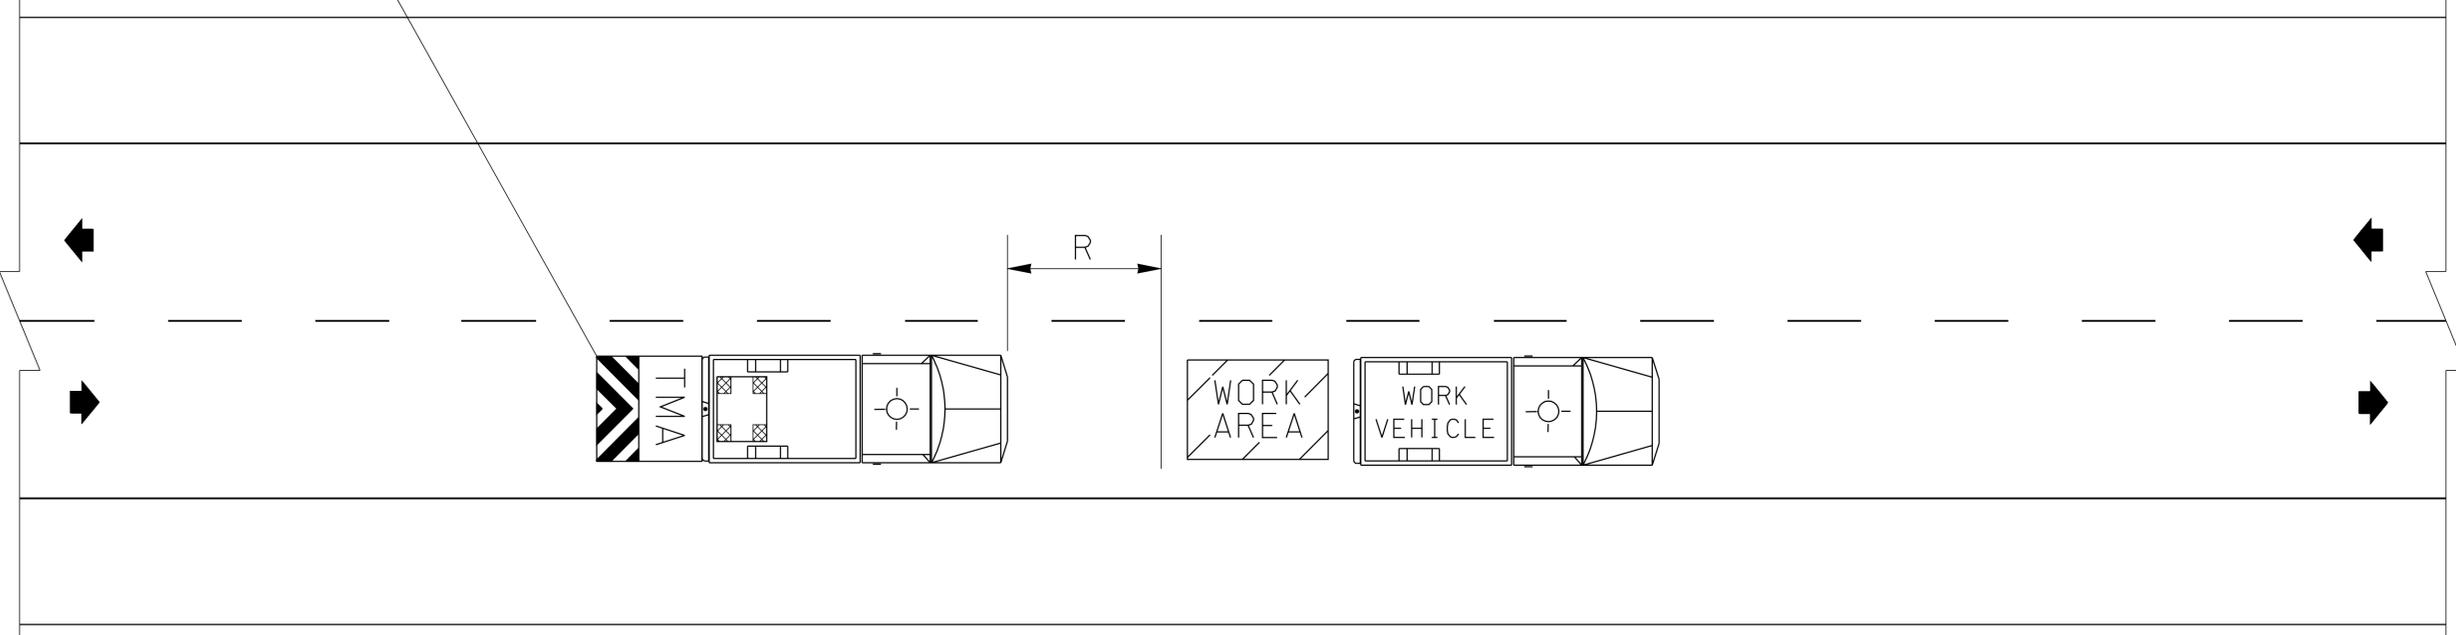

OPERATIONAL NOTES

1. WORK VEHICLE AND PROTECTIVE VEHICLE SHALL USE WARNING BEACONS.
2. PROTECTIVE VEHICLE SHALL MAINTAIN 500'-1000' OF SIGHT DISTANCE TO APPROACHING TRAFFIC.
3. CONTACT REGIONAL TRAFFIC OFFICE STAFF FOR ASSISTANCE WITH SPECIFIC IN LANE OPERATIONS SUCH AS STRIPING, FOG SEAL, ETC. THAT REQUIRE ADDITIONAL PLANS AND DETAILS.
4. "DO NOT PASS" SIGN CAN BE REPLACED WITH "PASS WITH CARE" SIGN WHEN APPROPRIATE.
5. PCMS RECOMMENDED.


LEGEND

-  ARROW PANEL - TYPE "B" (CAUTION MODE)
-  TRUCK MOUNTED ATTENUATOR (RECOMMENDED)
-  WARNING BEACON - REQUIRED

TYPICAL MOBILE OPERATION
 TWO LANE ROADWAY
 LANE CLOSURE
 TCP 25


PROTECTIVE VEHICLE ROLL AHEAD DISTANCE = R
ROLL AHEAD DISTANCES VARY AND SHALL BE DETERMINED IN FIELD BASED ON WORK OPERATION AND SITE SPECIFIC CONDITIONS.
USE OF A TRUCK MOUNTED ATTENUATOR RECOMMENDED

W21-5
48" x 48"
B/O

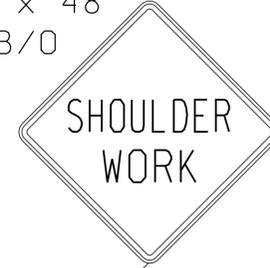

MOUNT ON SHADOW VEHICLE

{ NO ENCROACHMENT INTO TRAFFIC LANE }

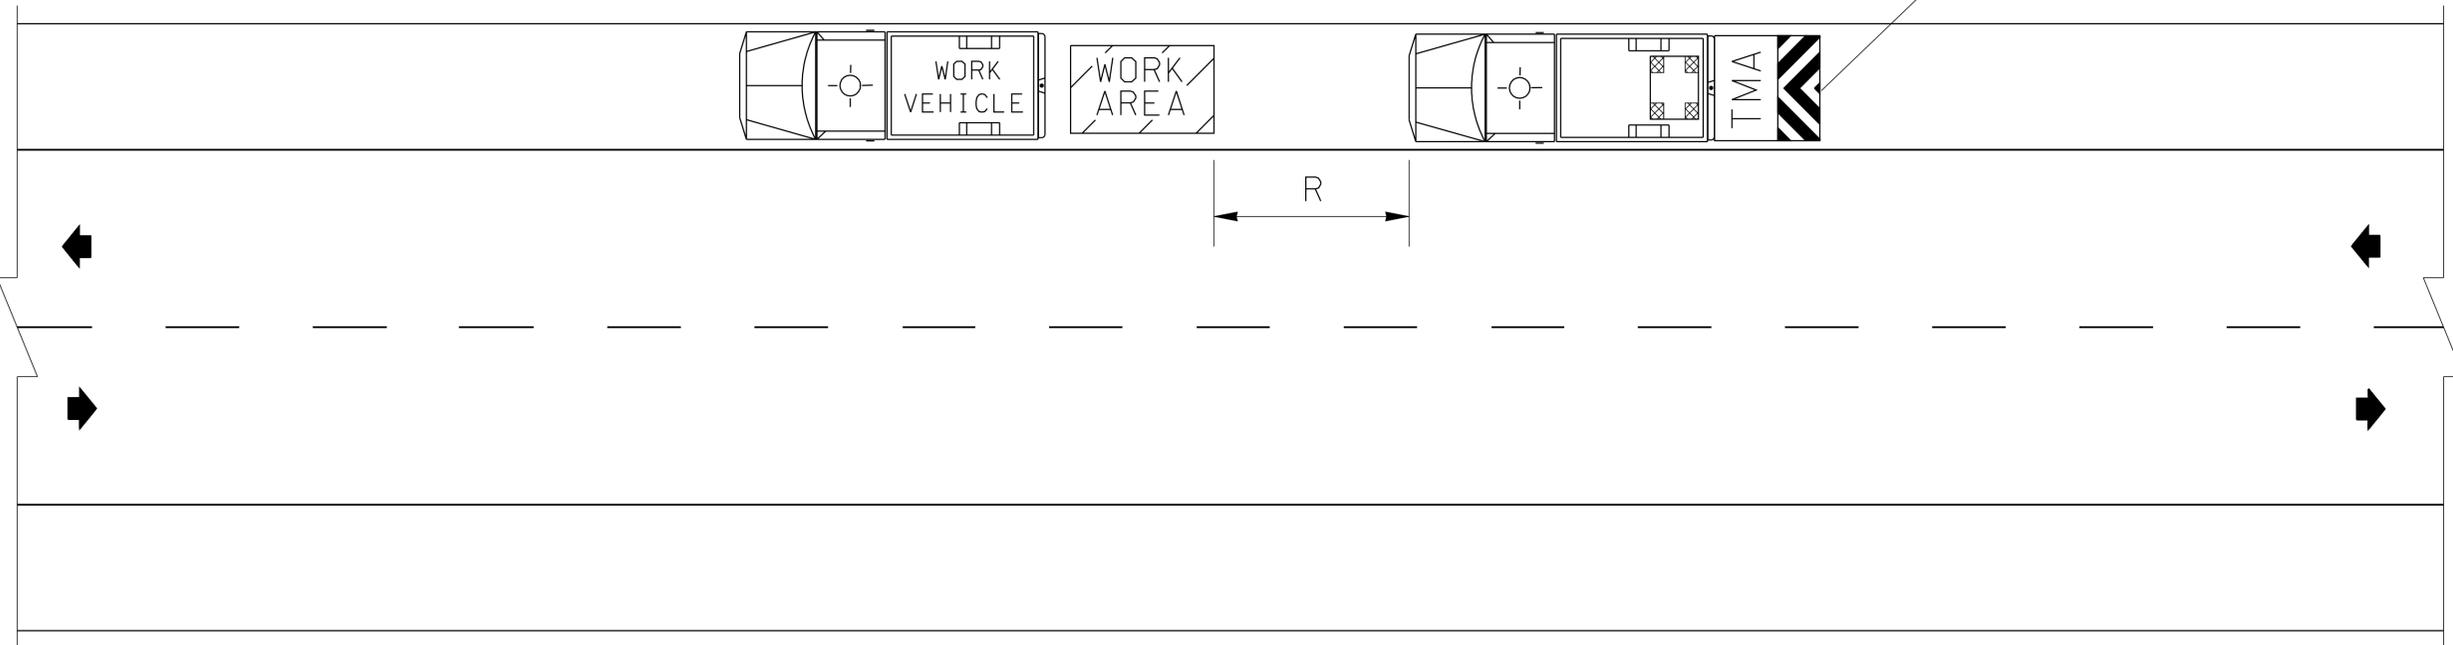

OPERATIONAL NOTES


1. WORK VEHICLE AND PROTECTIVE VEHICLE SHALL USE WARNING BEACONS.
2. PROTECTIVE VEHICLE SHALL MAINTAIN 500'-1000' OF SIGHT DISTANCE TO APPROACHING TRAFFIC.
3. CONTACT REGIONAL TRAFFIC OFFICE STAFF FOR ASSISTANCE WITH SPECIFIC IN LANE OPERATIONS SUCH AS STRIPING, FOG SEAL, ETC. THAT REQUIRE ADDITIONAL PLANS AND DETAILS.

LEGEND

-  ARROW PANEL - TYPE "B" (CAUTION MODE)
-  TRUCK MOUNTED ATTENUATOR (RECOMMENDED)
-  WARNING BEACON - REQUIRED

TYPICAL MOBILE OPERATION
TWO LANE ROADWAY
SHOULDER CLOSURE
TCP 26


SIGHT DISTANCE DATA									
MIN. STOPPING SIGHT DIST. = S									
SPEED LIMIT MPH	25	30	35	40	45	50	55	60	65
DISTANCE FEET	155	200	250	305	360	425	495	570	645
DISTANCES SHOWN ARE MINIMUMS, USE ADDITIONAL DISTANCE WHEN POSSIBLE.									

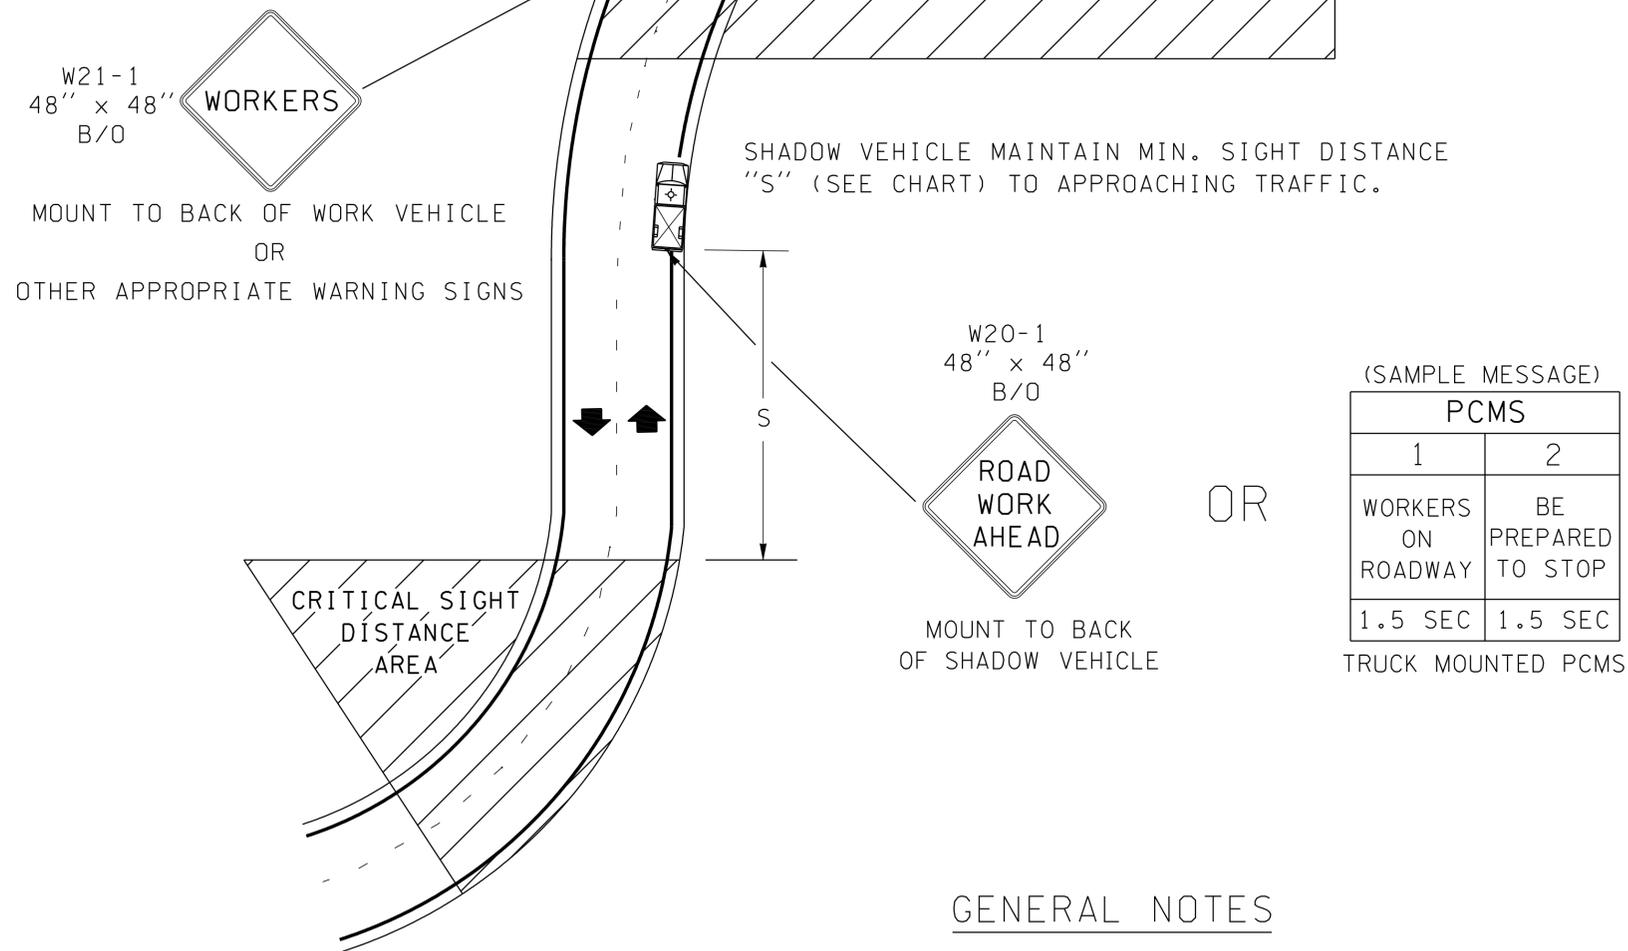

LEGEND



WORK VEHICLE WITH FLASHING AMBER WARNING BEACON



SHADOW VEHICLE WITH FLASHING AMBER WARNING BEACON
(TMA RECOMMENDED, BUT NOT REQUIRED)

GENERAL NOTES

1. DAYLIGHT HOURS ONLY.
2. RADIO CONTACT BETWEEN WORK CREW AND SHADOW VEHICLE REQUIRED.
3. PCMS RECOMMENDED.

INTERSECTION OPERATIONS

Traffic Control Plans (TCP's) 28 to 30

Traffic control at intersections requires specific attention because traffic is usually in-bound from all directions. The traffic on all approaches needs to be given the same advance warning with the messages on the warning signs to be appropriate for the situation ahead of them. When an intersection is to be controlled by flaggers, always be sure that an existing signal does not give the drivers a conflicting message. For example, don't stop traffic when the signal is green. It is always best to turn off the signal during flagging operations.

The traffic control plans in this section show a pair of rather complex intersections. In general, use these examples as guidelines and prepare specific traffic control plans for the intersections you will be working in, showing the lanes and turning movements as they appear on the roadway.

BUFFER DATA											
LONGITUDINAL BUFFER SPACE = B											
SPEED (MPH)	25	30	35	40	45	50	55	60	65	70	
LENGTH (feet)	155	200	250	305	360	425	495	570	-	-	
PROTECTIVE VEHICLE WITH TMA ROLL AHEAD DISTANCE											
TYPICAL PROTECTIVE VEHICLE TYPE WITH TMA	TYPICAL PROTECTIVE VEHICLE (WITH TMA) LOADED WEIGHT (LBS)						STATIONARY OPERATION (feet)				
4 YARD DUMP TRUCK, SERVICE TRUCK, FLAT BED, ETC.	MINIMUM WEIGHT 15,000 LBS. (MAXIMUM WEIGHT SHALL BE IN ACCORDANCE WITH MANUFACTURER RECOMMENDATION)						30 MIN.				
ROLL AHEAD STOPPING DISTANCE ASSUMES DRY PAVEMENT											
* A PROTECTIVE VEHICLE IS RECOMMENDED REGARDLESS IF A TMA IS AVAILABLE. IF NO TMA IS USED, THE PROTECTIVE VEHICLE SHALL BE STRATEGICALLY LOCATED IN THE FIELD TO SHIELD WORKERS AND NO ROLL AHEAD DISTANCE IS SPECIFIED.											


LANE WIDTH (feet)	MINIMUM TAPER LENGTH = L (feet)									
	Posted Speed (mph)									
	25	30	35	40	45	50	55	60	65	70
10	105	150	205	270	450	500	550	-	-	-
11	115	165	225	295	495	550	605	660	-	-
12	125	180	245	320	540	600	660	720	-	-

SIGN SPACING = X (feet) (1)		
Rural Highways	60/65 MPH	800'+-
Rural Roads	45/55 MPH	500'+-
Rural Roads & Urban Arterials	35/40 MPH	350'+-
Rural Roads, Urban Arterials Residential & Business Districts	25/30 MPH	200'+- (2)
Urban Streets	25 MPH or LESS	100'+- (2)

ALL SIGNS ARE 48" x 48" BLACK ON ORANGE UNLESS OTHERWISE DESIGNATED.

(1) All spacing may be adjusted to accommodate interchange ramps, at-grade intersections, and driveways.
 (2) This spacing may be reduced in urban areas to fit roadway conditions.

CHANNELIZING DEVICE SPACING (feet)		
MPH	TAPER	TANGENT
50/70	40	80
35/45	30	60
25/30	20	40

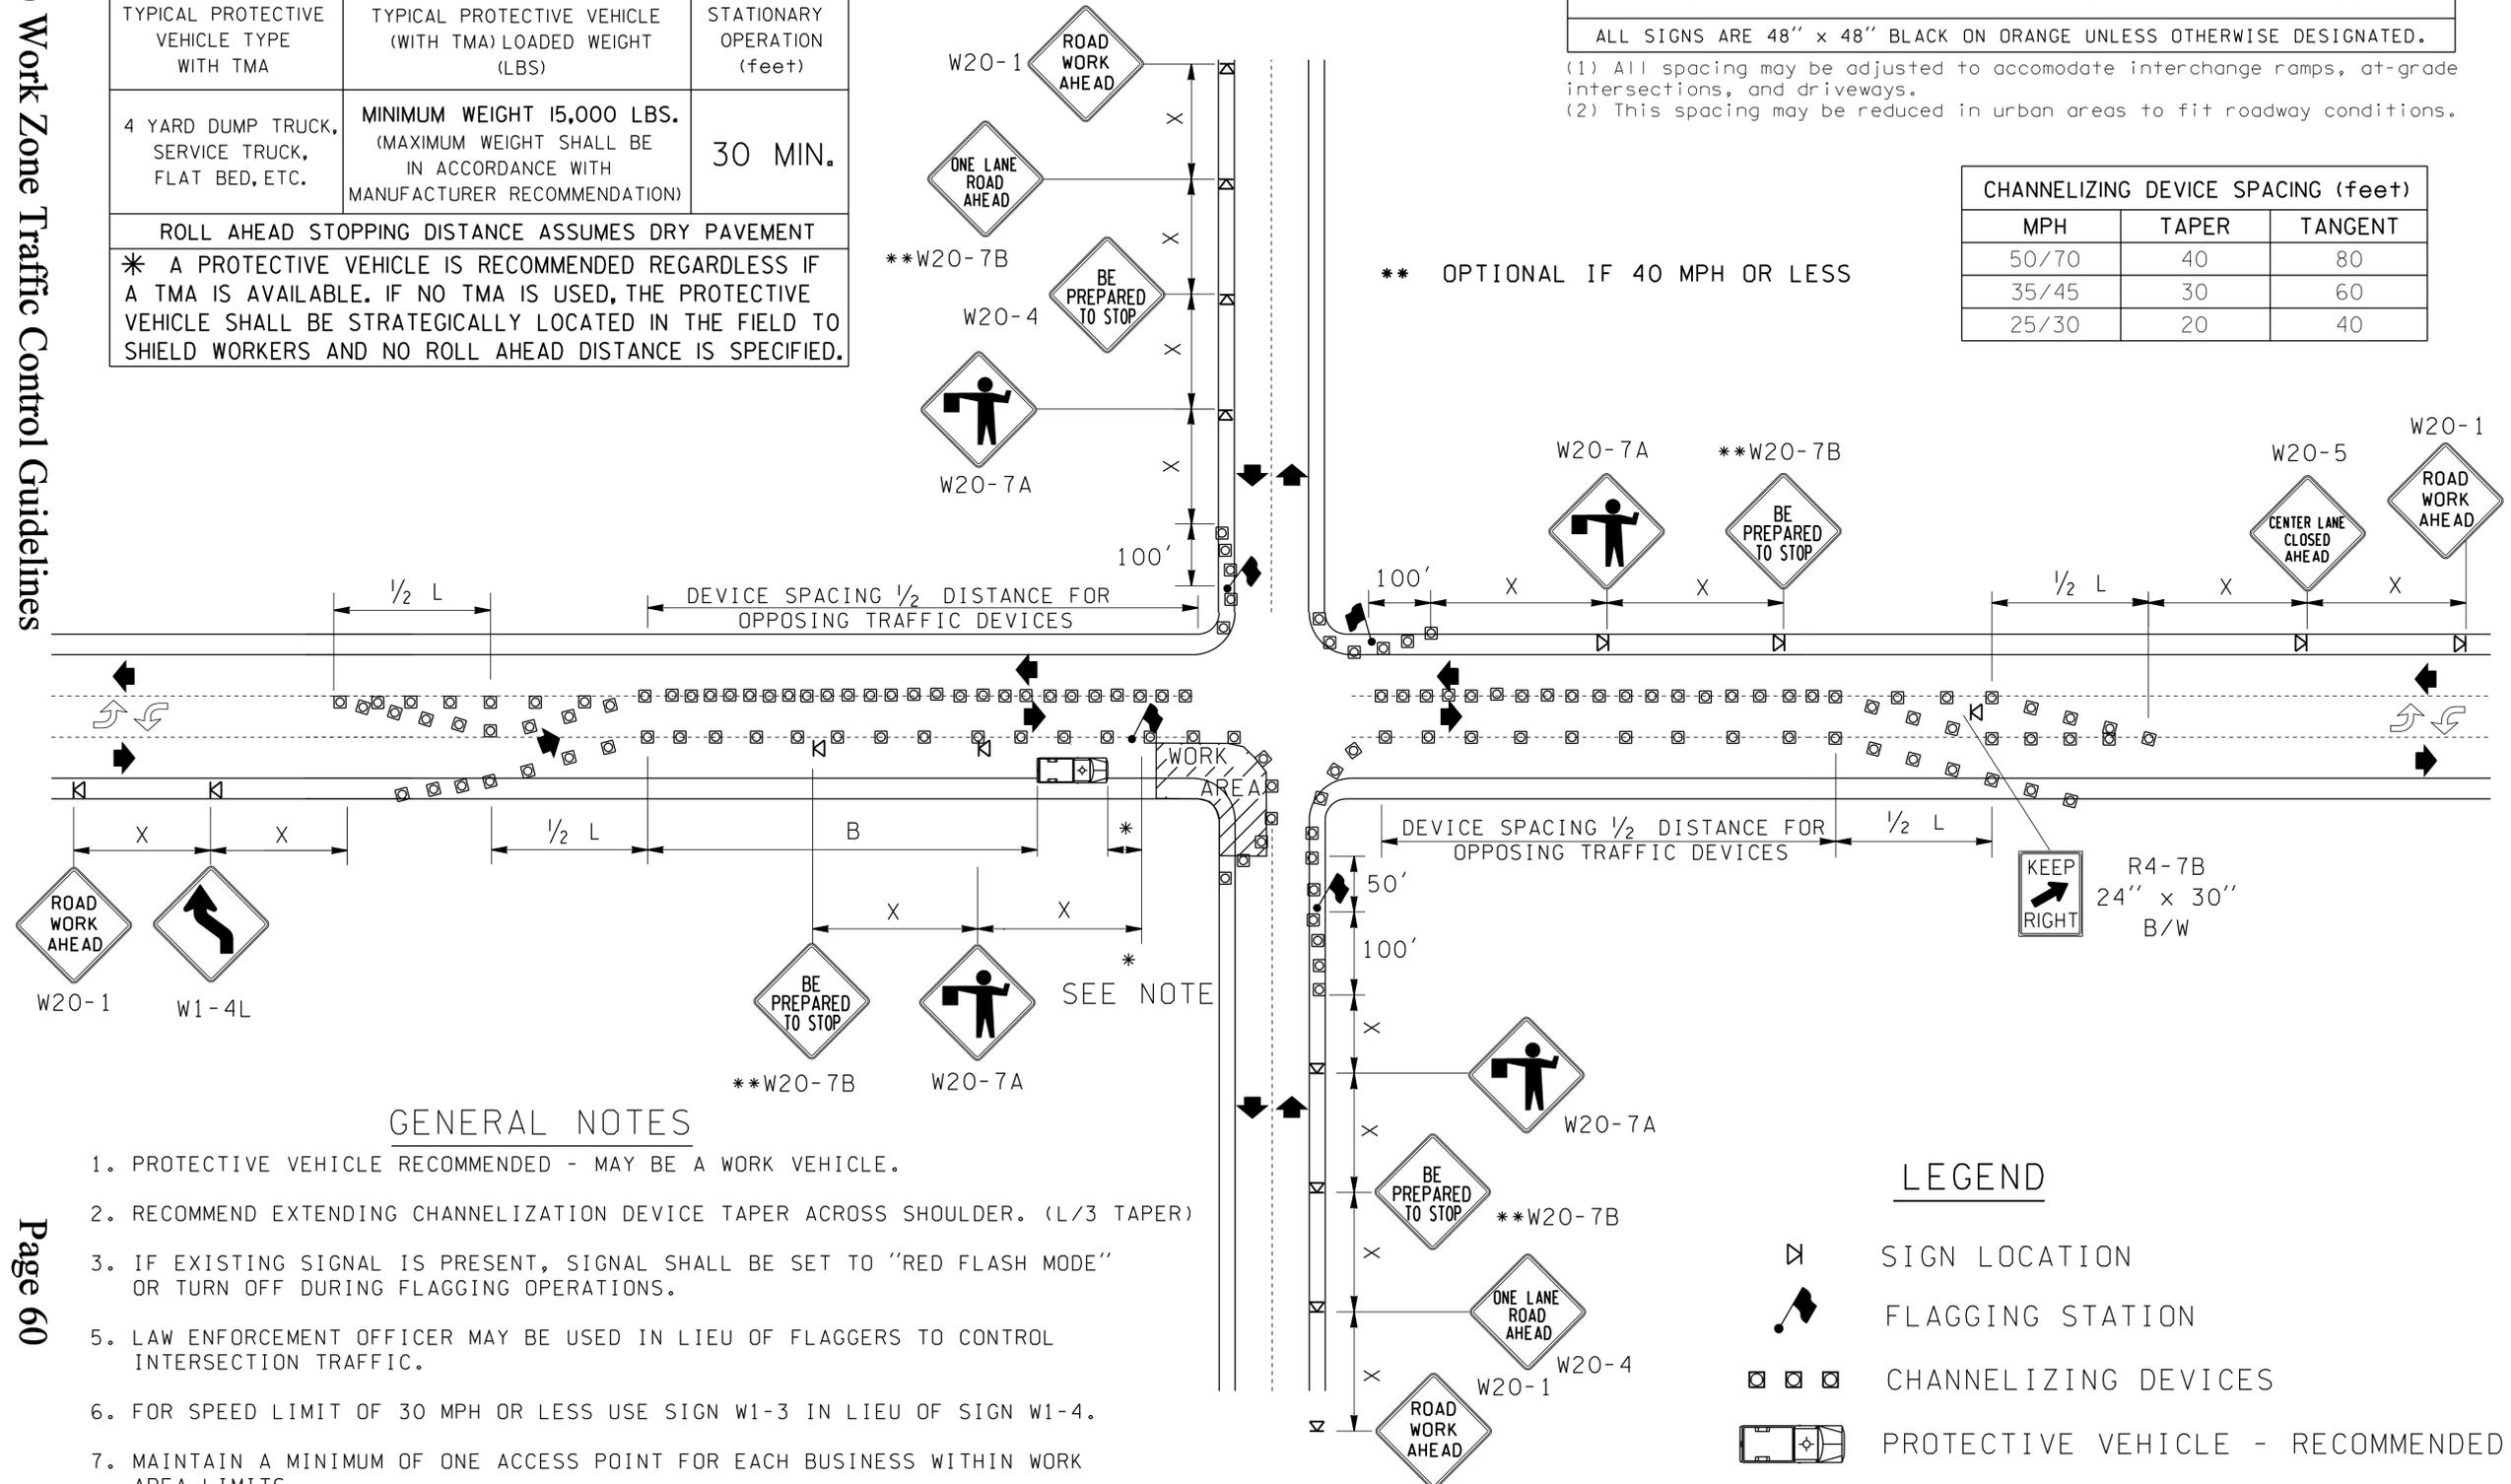

GENERAL NOTES

1. PROTECTIVE VEHICLE RECOMMENDED - MAY BE A WORK VEHICLE.
2. RECOMMEND EXTENDING CHANNELIZATION DEVICE TAPER ACROSS SHOULDER. (L/3 TAPER)
3. IF EXISTING SIGNAL IS PRESENT, SIGNAL SHALL BE SET TO "RED FLASH MODE" OR TURN OFF DURING FLAGGING OPERATIONS.
5. LAW ENFORCEMENT OFFICER MAY BE USED IN LIEU OF FLAGGERS TO CONTROL INTERSECTION TRAFFIC.
6. FOR SPEED LIMIT OF 30 MPH OR LESS USE SIGN W1-3 IN LIEU OF SIGN W1-4.
7. MAINTAIN A MINIMUM OF ONE ACCESS POINT FOR EACH BUSINESS WITHIN WORK AREA LIMITS.
8. CONSIDER USING PCMS FOR ADDITIONAL ADVANCE WARNING.

**INTERSECTION LANE CLOSURE
TCP 28**

LEGEND


- SIGN LOCATION
- FLAGGING STATION
- CHANNELIZING DEVICES
- PROTECTIVE VEHICLE - RECOMMENDED
- WARNING BEACON - REQUIRED

BUFFER DATA										
LONGITUDINAL BUFFER SPACE = B										
SPEED (MPH)	25	30	35	40	45	50	55	60	65	70
LENGTH (feet)	155	200	250	305	360	425	495	570	645	730
PROTECTIVE VEHICLE WITH TMA ROLL AHEAD DISTANCE										
TYPICAL PROTECTIVE VEHICLE TYPE WITH TMA	TYPICAL PROTECTIVE VEHICLE (WITH TMA) LOADED WEIGHT (LBS)						STATIONARY OPERATION (feet)			
4 YARD DUMP TRUCK, SERVICE TRUCK, FLAT BED, ETC.	MINIMUM WEIGHT 15,000 LBS. (MAXIMUM WEIGHT SHALL BE IN ACCORDANCE WITH MANUFACTURER RECOMMENDATION)						30 MIN.			
ROLL AHEAD STOPPING DISTANCE ASSUMES DRY PAVEMENT										
* A PROTECTIVE VEHICLE IS RECOMMENDED REGARDLESS IF A TMA IS AVAILABLE. IF NO TMA IS USED, THE PROTECTIVE VEHICLE SHALL BE STRATEGICALLY LOCATED IN THE FIELD TO SHIELD WORKERS AND NO ROLL AHEAD DISTANCE IS SPECIFIED.										

CHANNELIZING DEVICE SPACING (feet)		
MPH	TAPER	TANGENT
50/70	40	80
35/45	30	60
25/30	20	40

SIGN SPACING = X (feet) (1)		
Rural Highways	60/65 MPH	800'+-
Rural Roads	45/55 MPH	500'+-
Rural Roads & Urban Arterials	35/40 MPH	350'+-
Rural Roads, Urban Arterials Residential & Business Districts	25/30 MPH	200'+- (2)
Urban Streets	25 MPH or LESS	100'+- (2)
ALL SIGNS ARE 48" x 48" BLACK ON ORANGE UNLESS OTHERWISE DESIGNATED.		

(1) All spacing may be adjusted to accommodate interchange ramps, at-grade intersections, and driveways.
 (2) This spacing may be reduced in urban areas to fit roadway conditions.

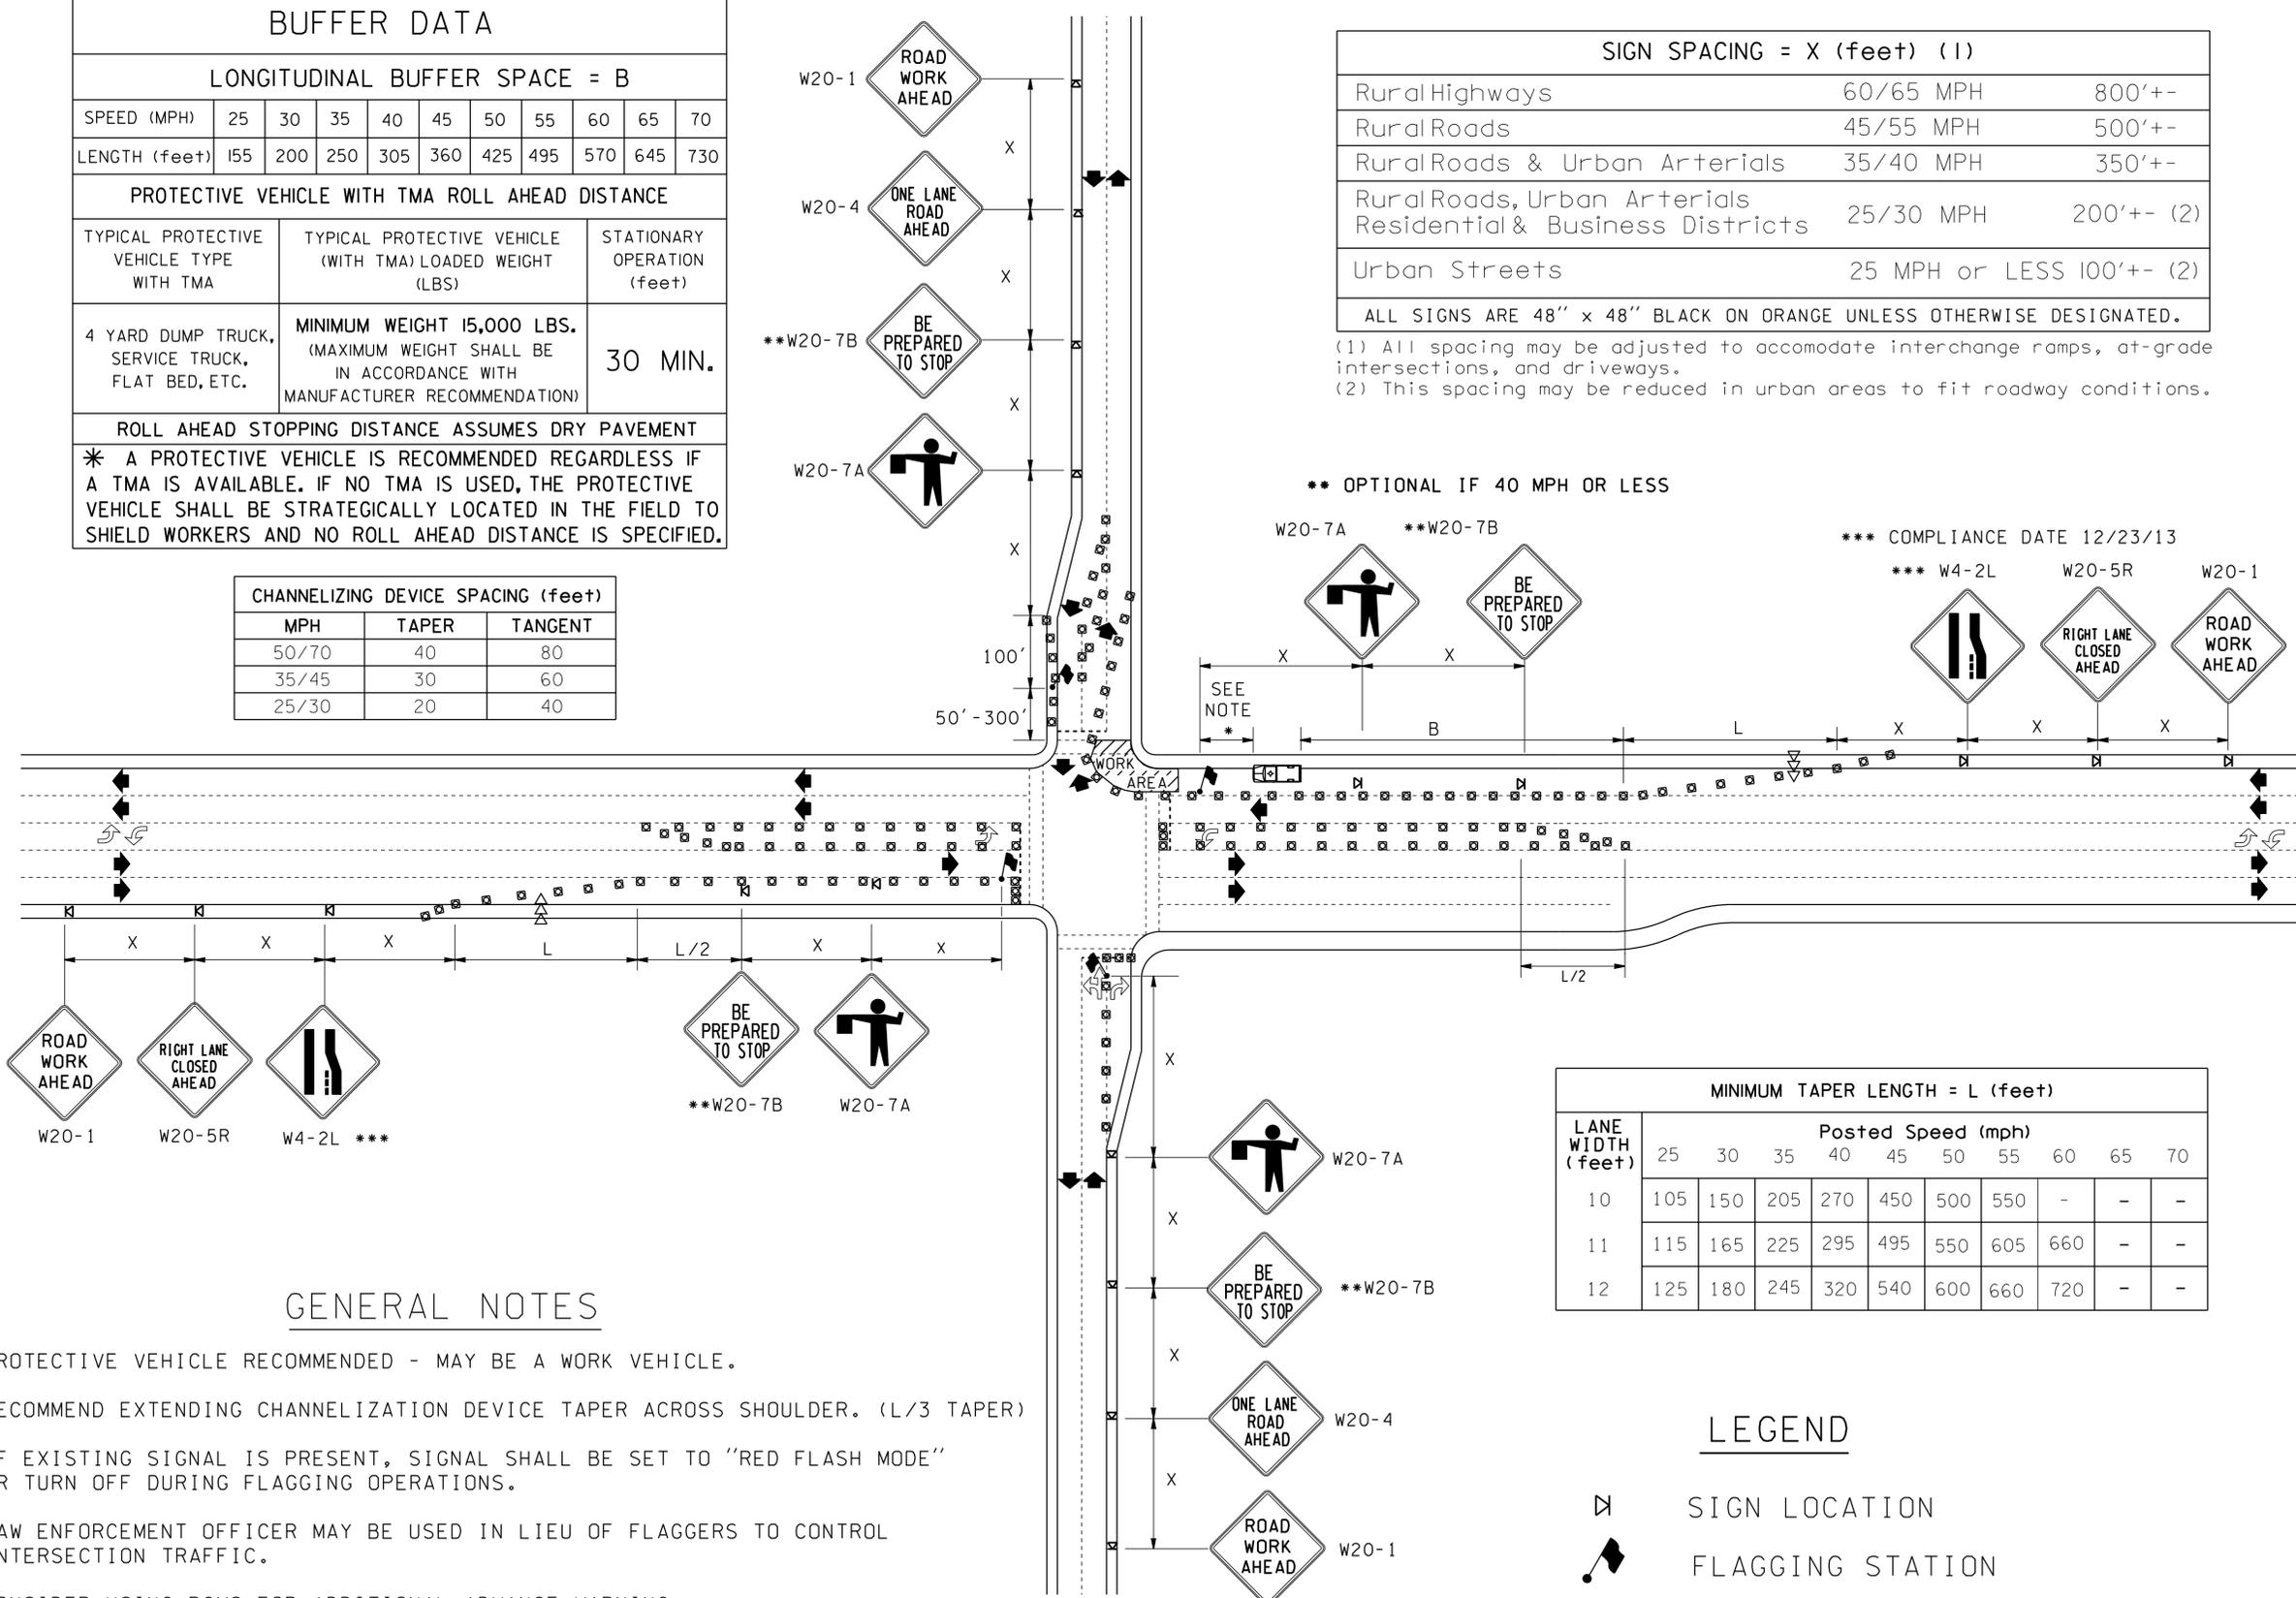

GENERAL NOTES

1. PROTECTIVE VEHICLE RECOMMENDED - MAY BE A WORK VEHICLE.
2. RECOMMEND EXTENDING CHANNELIZATION DEVICE TAPER ACROSS SHOULDER. (L/3 TAPER)
3. IF EXISTING SIGNAL IS PRESENT, SIGNAL SHALL BE SET TO "RED FLASH MODE" OR TURN OFF DURING FLAGGING OPERATIONS.
5. LAW ENFORCEMENT OFFICER MAY BE USED IN LIEU OF FLAGGERS TO CONTROL INTERSECTION TRAFFIC.
6. CONSIDER USING PCMS FOR ADDITIONAL ADVANCE WARNING.
7. MAINTAIN A MINIMUM OF ONE ACCESS POINT FOR EACH BUSINESS WITHIN WORK AREA LIMITS.
8. RECOMMEND CLOSING LANE IN ADVANCE OF FLAGGING LOCATION WHEN MULTIPLE LANES ARE ON APPROACH LEG.


LANE WIDTH (feet)	MINIMUM TAPER LENGTH = L (feet)									
	Posted Speed (mph)									
	25	30	35	40	45	50	55	60	65	70
10	105	150	205	270	450	500	550	-	-	-
11	115	165	225	295	495	550	605	660	-	-
12	125	180	245	320	540	600	660	720	-	-

LEGEND

- SIGN LOCATION
- FLAGGING STATION
- CHANNELIZING DEVICES
- ARROW PANEL
- PROTECTIVE VEHICLE - RECOMMENDED
- WARNING BEACON - REQUIRED

INTERSECTION LANE CLOSURE
TCP 29


* INSTALL ON TYPE II BARRICADES THROUGHOUT THE WORK AREA 24 HOURS PRIOR TO IMPLEMENTING TRAFFIC CONTROL. PRIOR NOTIFICATION OF LOCAL LAW ENFORCEMENT REQUIRED.

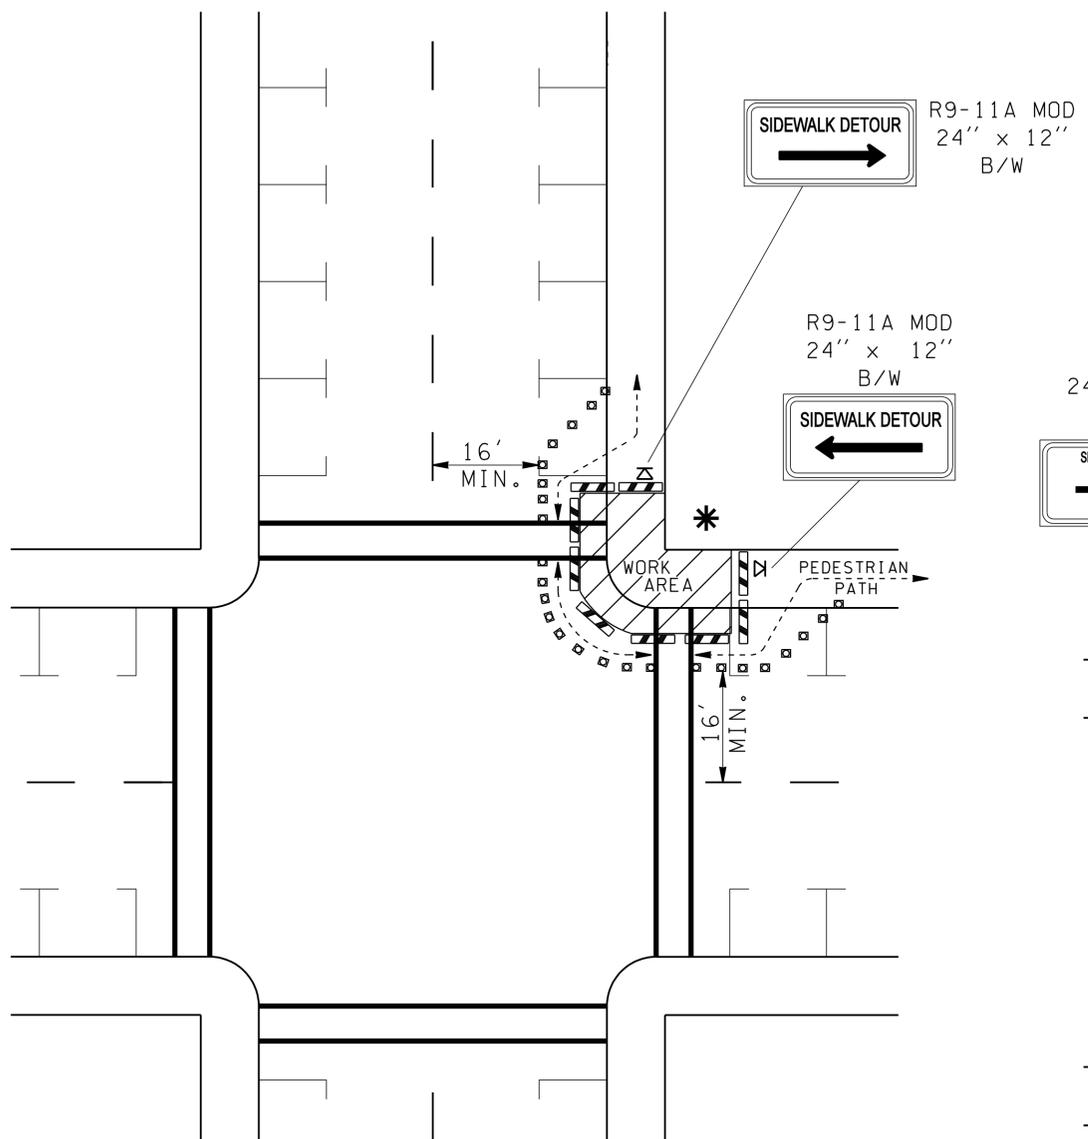

PEDESTRIAN DETOUR (NONWORKING HOURS)

LEGEND

- ⚡ SIGN LOCATION
- ▣▣▣ CHANNELIZING DEVICES
- ▨▨▨ TYPE II BARRICADE

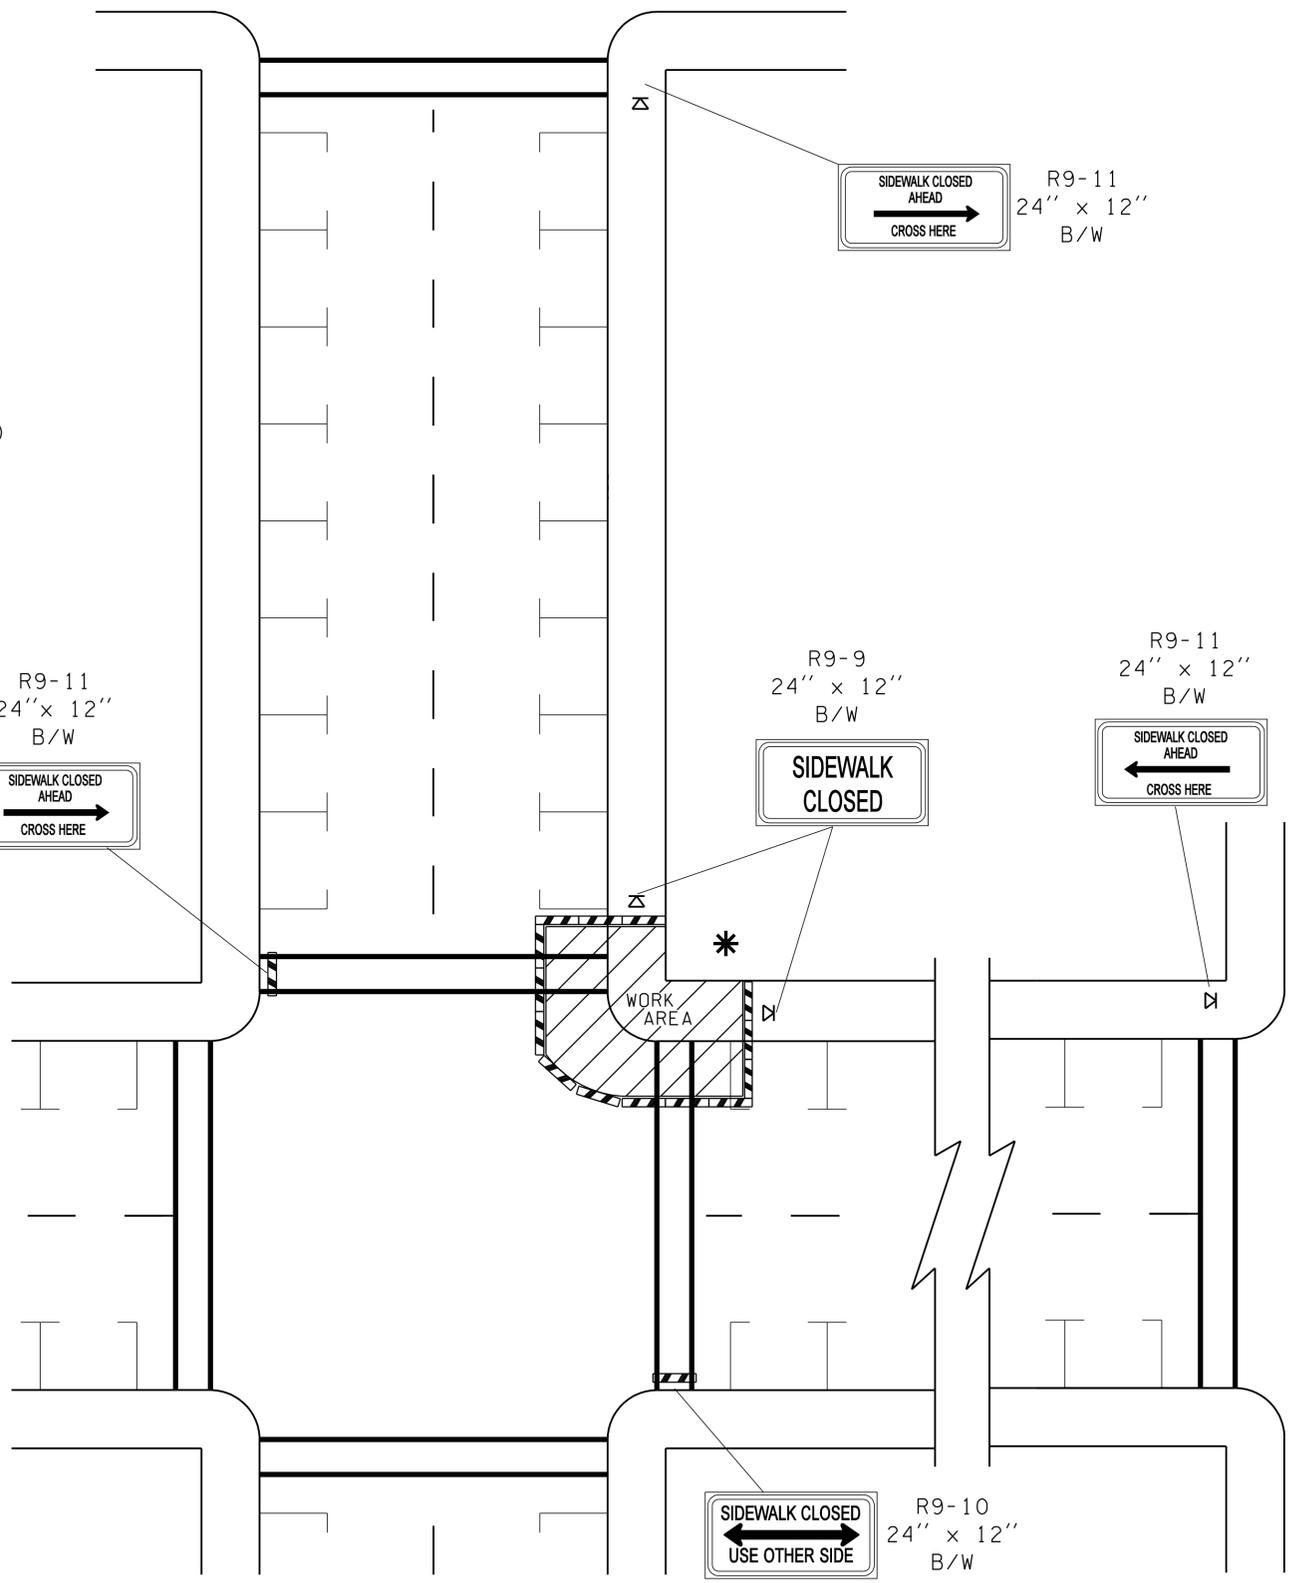

PEDESTRIAN DETOUR (WORKING HOURS)

GENERAL NOTES

1. CONTROLS SHOWN ARE FOR PEDESTRIAN TRAFFIC ONLY.
2. USE WARNING LIGHTS ON BARRICADES.
3. MAINTAIN A MINIMUM WIDTH OF 36" FOR PEDESTRIAN PATH.
4. CONTACT AND COORDINATE IMPACTED TRANSIT AGENCIES PRIOR TO IMPLEMENTING ANY CLOSURES.

INTERSECTION PEDESTRIAN TRAFFIC CONTROL TCP 30

EMERGENCY OPERATIONS

Traffic Control Plan (TCP) 31

The immediate response to an emergency situation must, by necessity, make use of whatever devices and equipment are available. Assistance from the Washington State Patrol and WSDOT Incident Response Team may be appropriate. The use of flares is allowed unless flammable material is present, electronic flares are an option.

Implement the appropriate traffic control plan (lane closure, etc.) if the situation is expected to last longer than 60 minutes. This allows for a short duration operation, until traffic control assistance arrives.


Response to an emergency situation is inherently more dangerous than planned situations. Do not expose yourself to a life-threatening situation. Wait for assistance and protect yourself at all times.

INSTALL THESE OR OTHER WARNING SIGNS AS NEEDED FOR THE SPECIFIC HAZARD.

							
W20-4 48" x 48" B/O	W8-1501 48" x 48" B/Y	R11-4 5' x 30" B/W	R1-2 36" x 36" R/W	W8-1 48" x 48" B/O	W8-1801 48" x 48" B/O	W21-1701 48" x 48" B/O	W21-801 48" x 48" B/O

PCMS	
1	2
CAUTION STORM DEBRIS	ON ROAD NEXT XX MILES
1.5 SEC	1.5 SEC

FIELD LOCATE IN ADVANCE OF DEBRIS

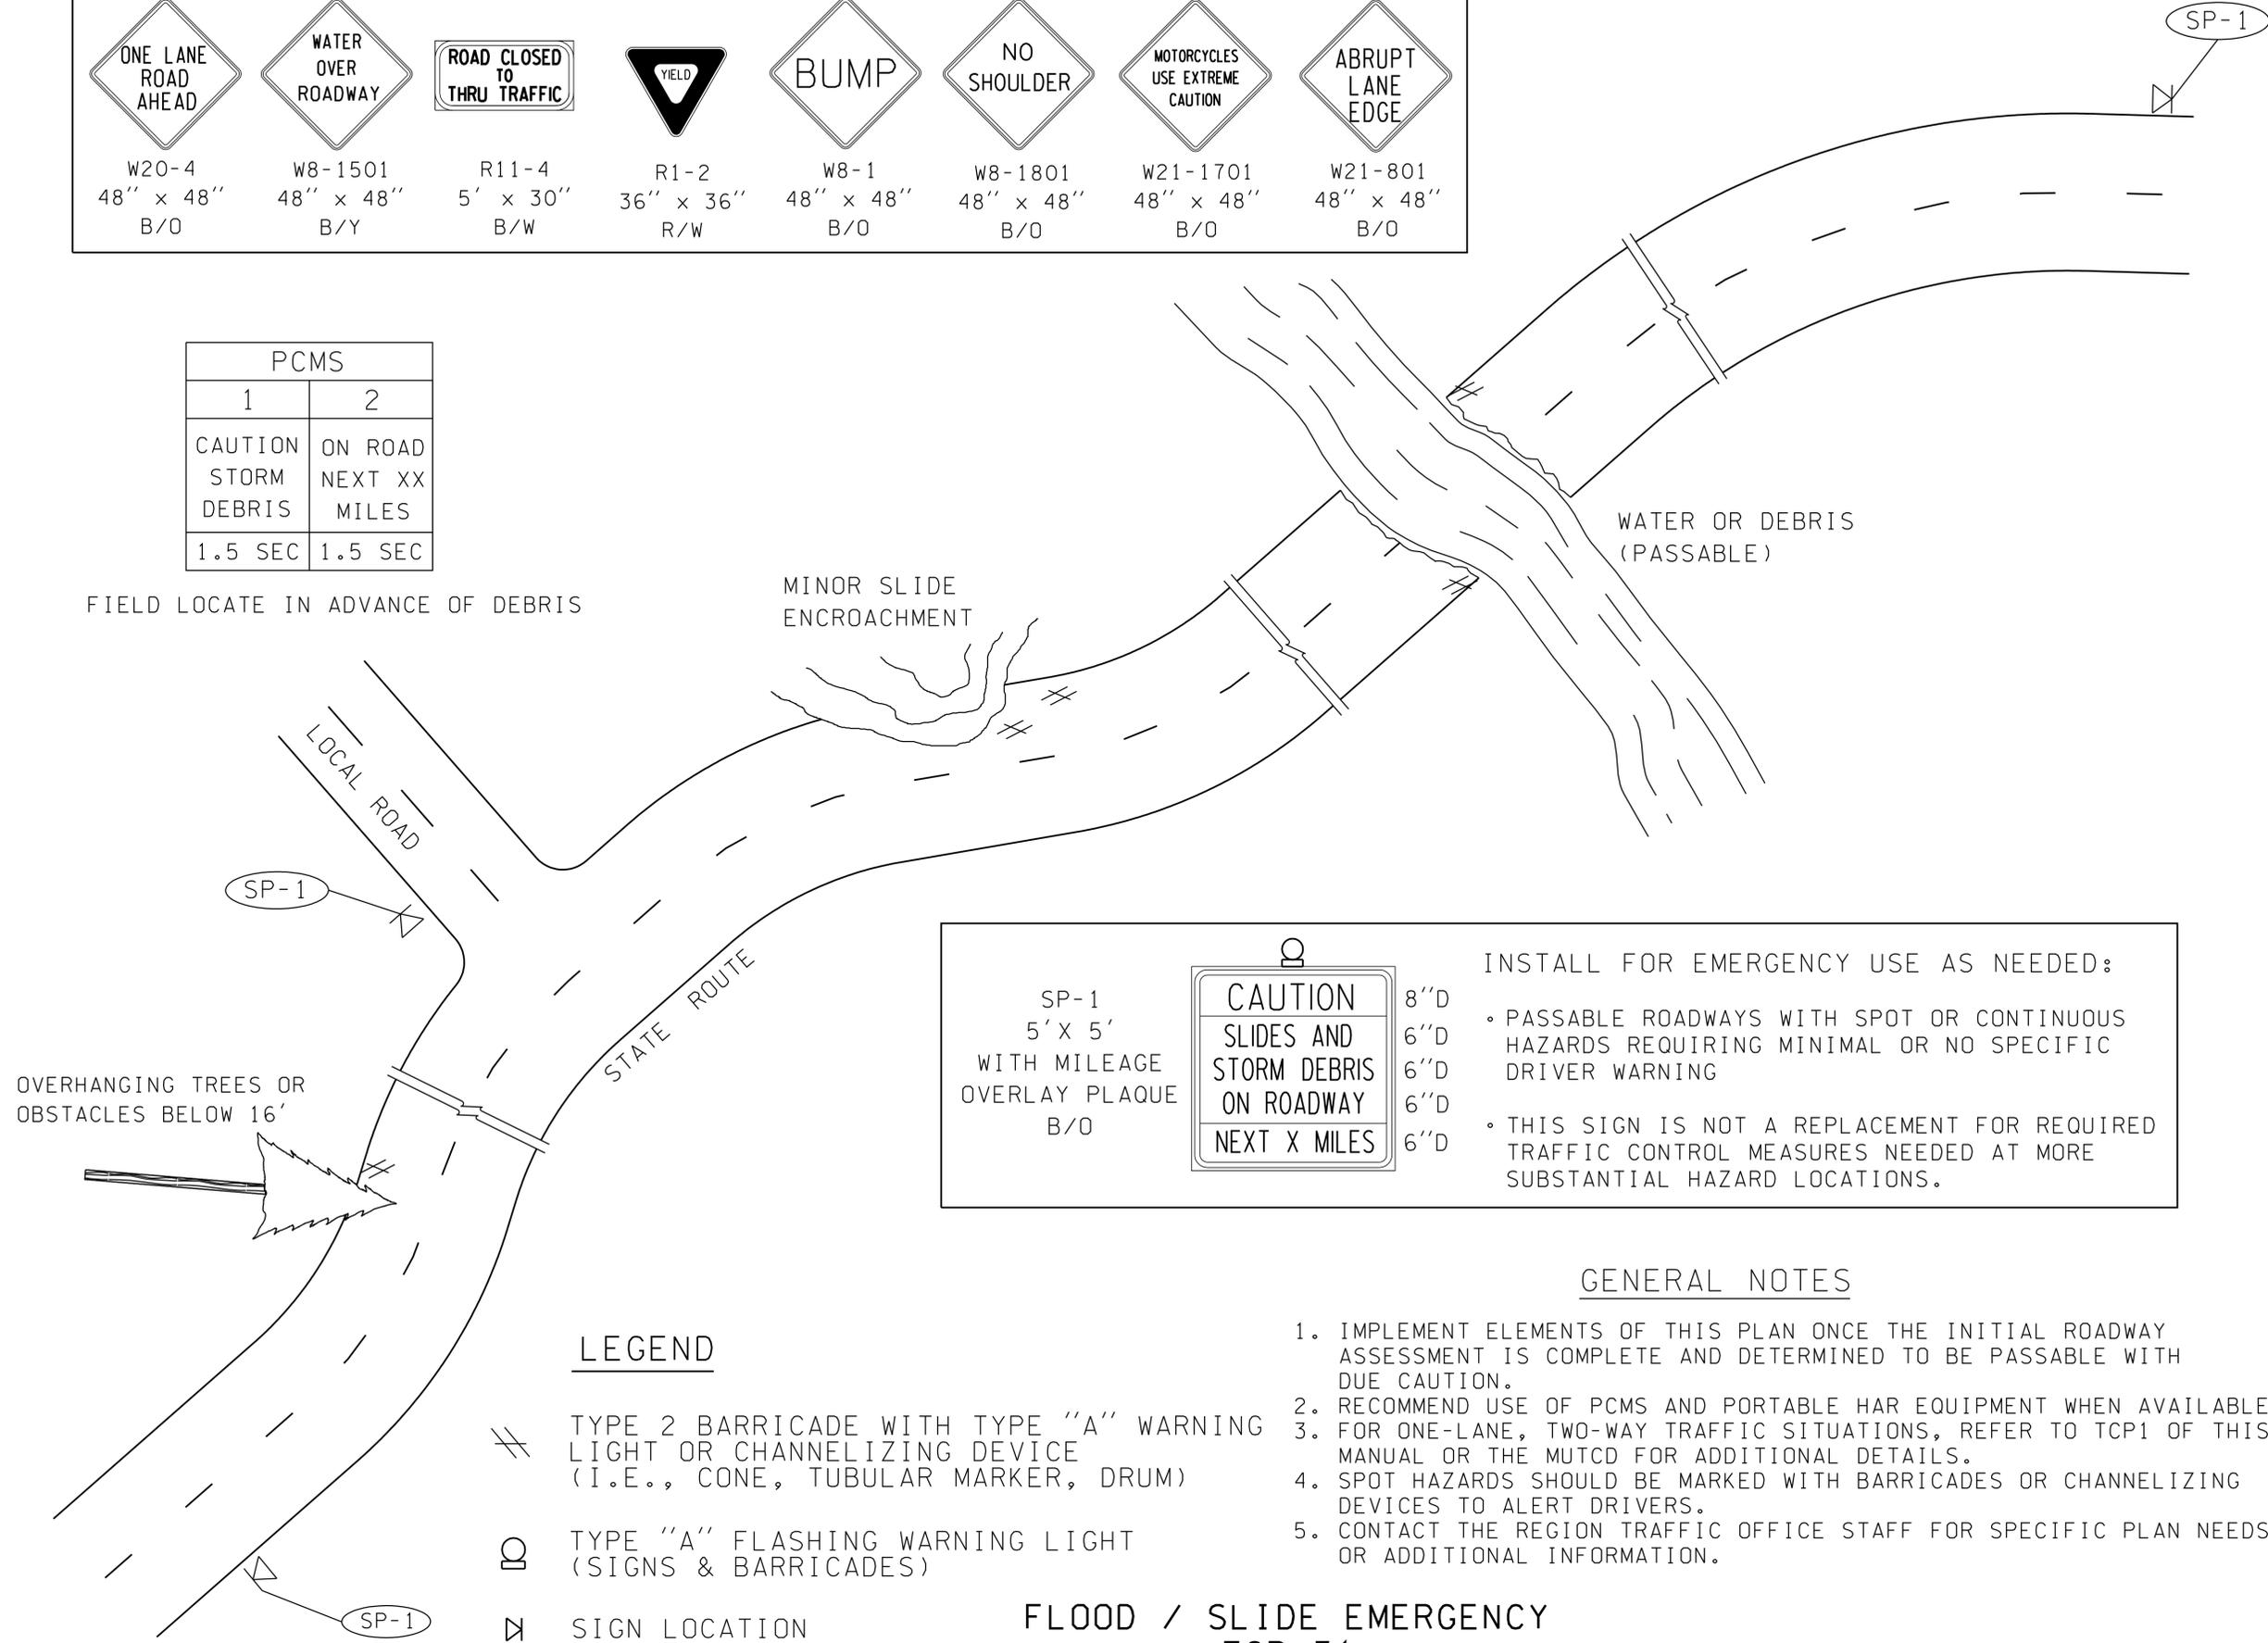

INSTALL FOR EMERGENCY USE AS NEEDED:

SP-1 5' X 5' WITH MILEAGE OVERLAY PLAQUE B/O		8"D 6"D 6"D 6"D 6"D	<ul style="list-style-type: none"> PASSABLE ROADWAYS WITH SPOT OR CONTINUOUS HAZARDS REQUIRING MINIMAL OR NO SPECIFIC DRIVER WARNING THIS SIGN IS NOT A REPLACEMENT FOR REQUIRED TRAFFIC CONTROL MEASURES NEEDED AT MORE SUBSTANTIAL HAZARD LOCATIONS.
--	---	---------------------------------	--

GENERAL NOTES

1. IMPLEMENT ELEMENTS OF THIS PLAN ONCE THE INITIAL ROADWAY ASSESSMENT IS COMPLETE AND DETERMINED TO BE PASSABLE WITH DUE CAUTION.
2. RECOMMEND USE OF PCMS AND PORTABLE HAR EQUIPMENT WHEN AVAILABLE.
3. FOR ONE-LANE, TWO-WAY TRAFFIC SITUATIONS, REFER TO TCP1 OF THIS MANUAL OR THE MUTCD FOR ADDITIONAL DETAILS.
4. SPOT HAZARDS SHOULD BE MARKED WITH BARRICADES OR CHANNELIZING DEVICES TO ALERT DRIVERS.
5. CONTACT THE REGION TRAFFIC OFFICE STAFF FOR SPECIFIC PLAN NEEDS OR ADDITIONAL INFORMATION.



LEGEND

-  TYPE 2 BARRICADE WITH TYPE "A" WARNING LIGHT OR CHANNELIZING DEVICE (I.E., CONE, TUBULAR MARKER, DRUM)
-  TYPE "A" FLASHING WARNING LIGHT (SIGNS & BARRICADES)
-  SIGN LOCATION

SPECIAL DETAILS AND TCP'S

Traffic Control Details (TCD's) 1 to 5

The following detail plans show the placement of signs, channelizing devices, and pavement markings, which are difficult to show on other traffic control plans or where additional guidance is necessary. A detail is also included as a guideline for signing a chip seal operation (TCD 4) and this includes an example reduced speed limit scenario. Be sure to include specific warning signs along with any reduction in the legal speed so the drivers have proper expectancy and know why they are being asked to slow down.

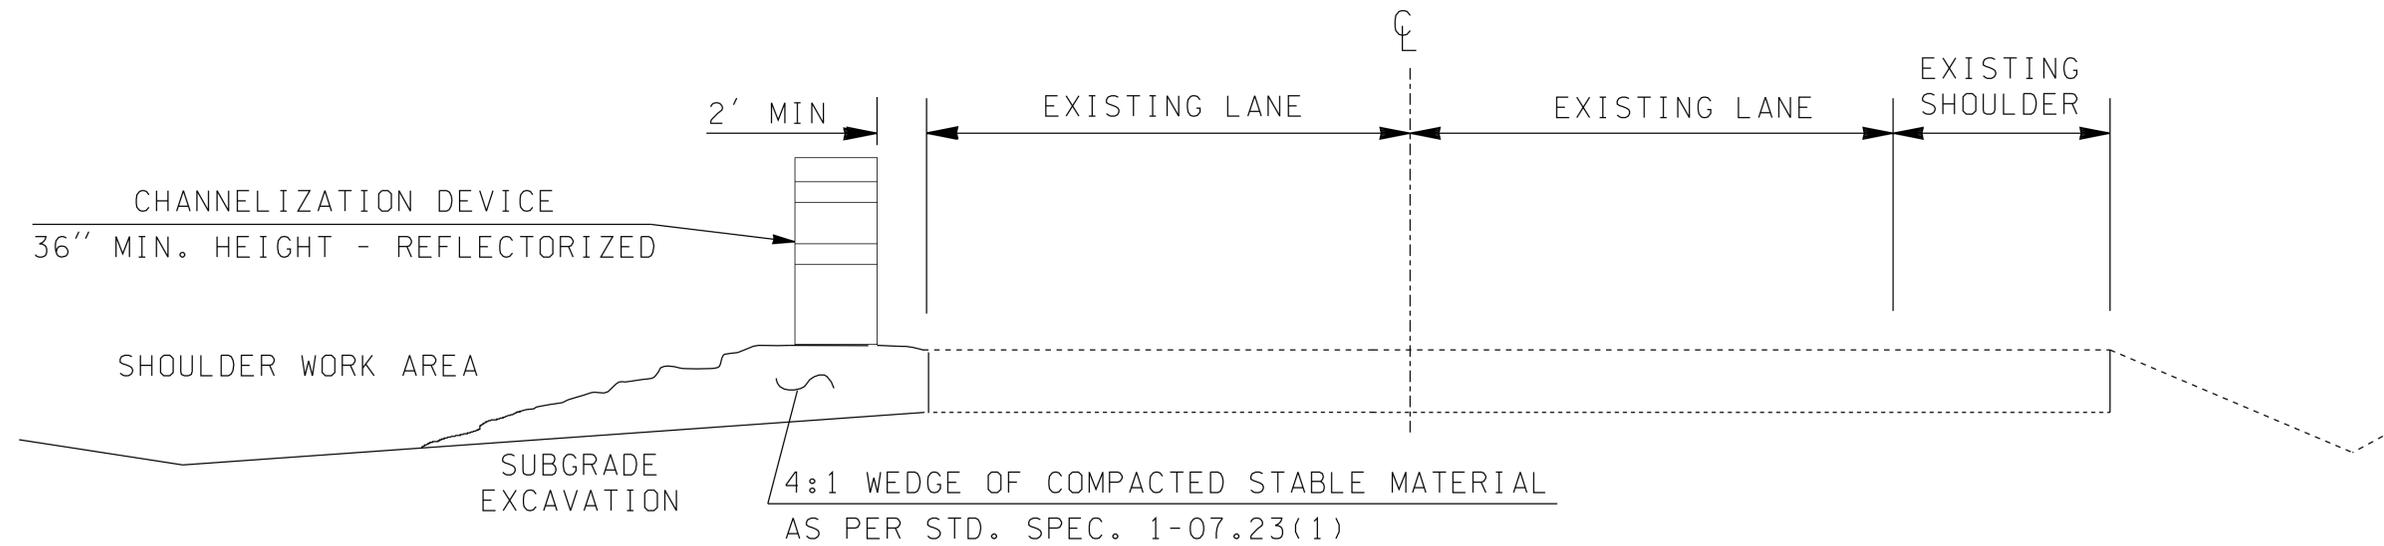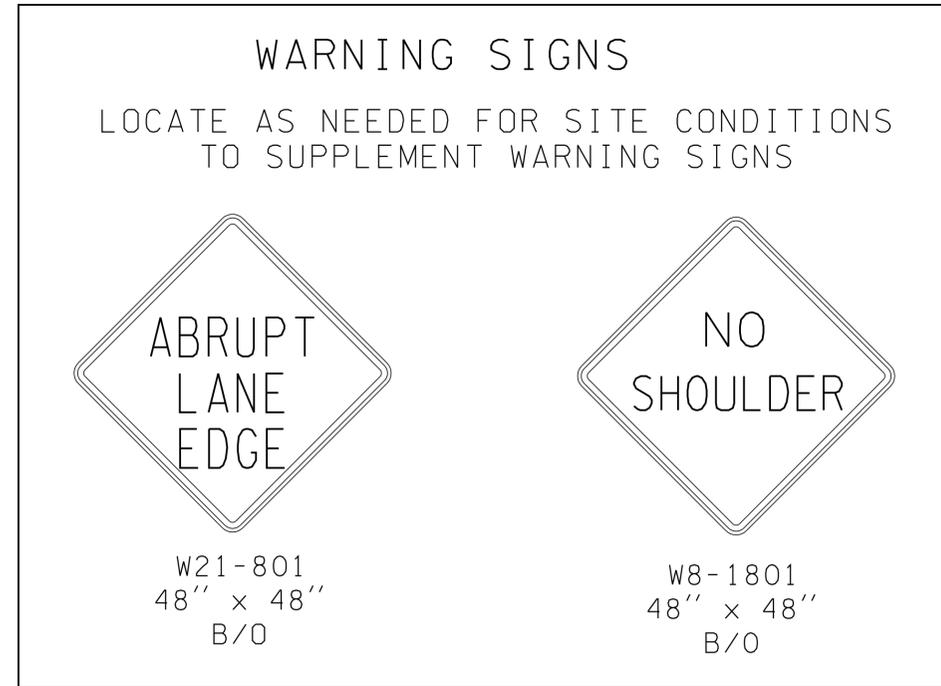

OPERATIONAL NOTES

1. SHOULDER EXCAVATION SHALL BE LIMITED TO ONE SIDE OF ROADWAY AT A TIME.
2. TYPE "C" STEADY BURN LIGHTS ARE RECOMMENDED ON CHANNELIZATION DEVICES TO PROVIDE ADDITIONAL DELINEATION.
3. REFER TO STD. SPEC. 1-07.23 FOR ADDITIONAL DETAILS ON THE MITIGATION REQUIREMENTS FOR DROP OFF PROTECTION.

SHOULDER WORK AREA PROTECTION
NON-WORKING HOURS
TCD 1


SIGN SPACING = X (feet) (1)		
Freeways & Expressways	55/70 MPH	1500'+- (OR AS PER MUTCD)
Rural Highways	60/65 MPH	800'+-
Rural Roads	45/55 MPH	500'+-
Rural Roads & Urban Arterials	35/40 MPH	350'+-
Rural Roads, Urban Arterials Residential & Business Districts	25/30 MPH	200'+- (2)
Urban Streets	25 MPH or LESS	100'+- (2)
ALL SIGNS ARE 48" x 48" BLACK ON ORANGE UNLESS OTHERWISE DESIGNATED.		

(1) All spacing may be adjusted to accommodate interchange ramps, at-grade intersections, and driveways.
 (2) This spacing may be reduced in urban areas to fit roadway conditions.



W21-801 W8-1 W8-2001

FIELD LOCATE AS NEEDED THROUGH WORK AREA TO SUPPLEMENT MOTORCYCLE WARNING SIGN. (1 MILE INCREMENTS)

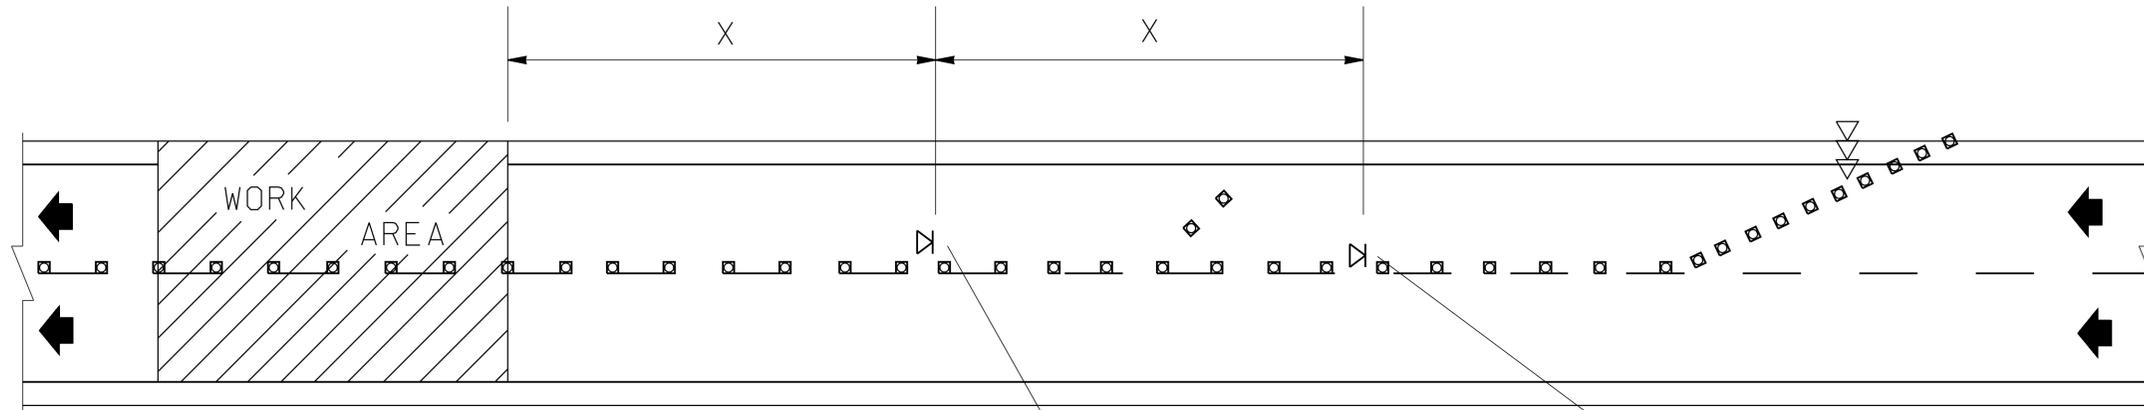

CHANNELIZING DEVICE SPACING (FEET)		
MPH	TAPER	TANGENT
50/70	40	80
35/45	30	60
25/30	20	40

MOTORCYCLES
USE EXTREME
CAUTION
W21-1701


GROOVED
PAVEMENT
W8-2001

NOTES

- REFER TO TCP3 FOR TYPICAL LANE CLOSURE SIGNING DETAILS, DEVICE SPACING REQUIREMENTS AND LANE CLOSURE TAPER LENGTHS.

LEGEND

- ▤ SIGN LOCATION
- ▷▷ ARROW PANEL
- ▣▣▣ CHANNELIZING DEVICES

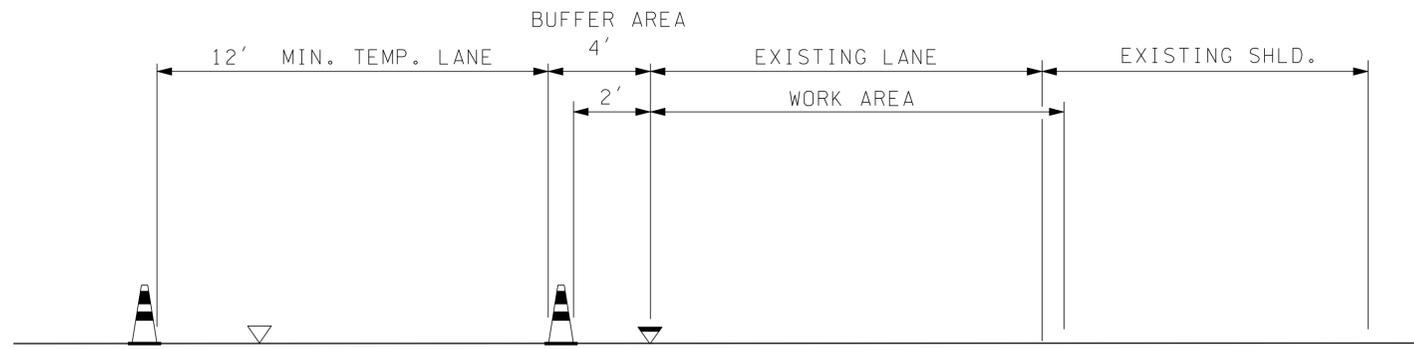

TYPICAL SECTION A-A

SIGN SPACING = X (feet) (1)		
Freeways & Expressways	55/70 MPH	1500'+- (OR AS PER MUTCD)
Rural Highways	60/65 MPH	800'+-
Rural Roads	45/55 MPH	500'+-
Rural Roads & Urban Arterials	35/40 MPH	350'+-
Rural Roads, Urban Arterials Residential & Business Districts	25/30 MPH	200'+- (2)
Urban Streets	25 MPH or LESS	100'+- (2)


(1) All spacing may be adjusted to accommodate interchange ramps, at-grade intersections, and driveways.
 (2) This spacing may be reduced in urban areas to fit roadway conditions.

- TEMPORARY TRAFFIC CONTROL DEVICES
- EXISTING EDGE STRIPE
- EXISTING LANE STRIPE

CHANNELIZING DEVICE SPACING (FEET)		
MPH	TAPER	TANGENT
50/70	40	80
35/45	30	60
25/30	20	40

** COMPLIANCE DATE
12/23/13

** W4-2L

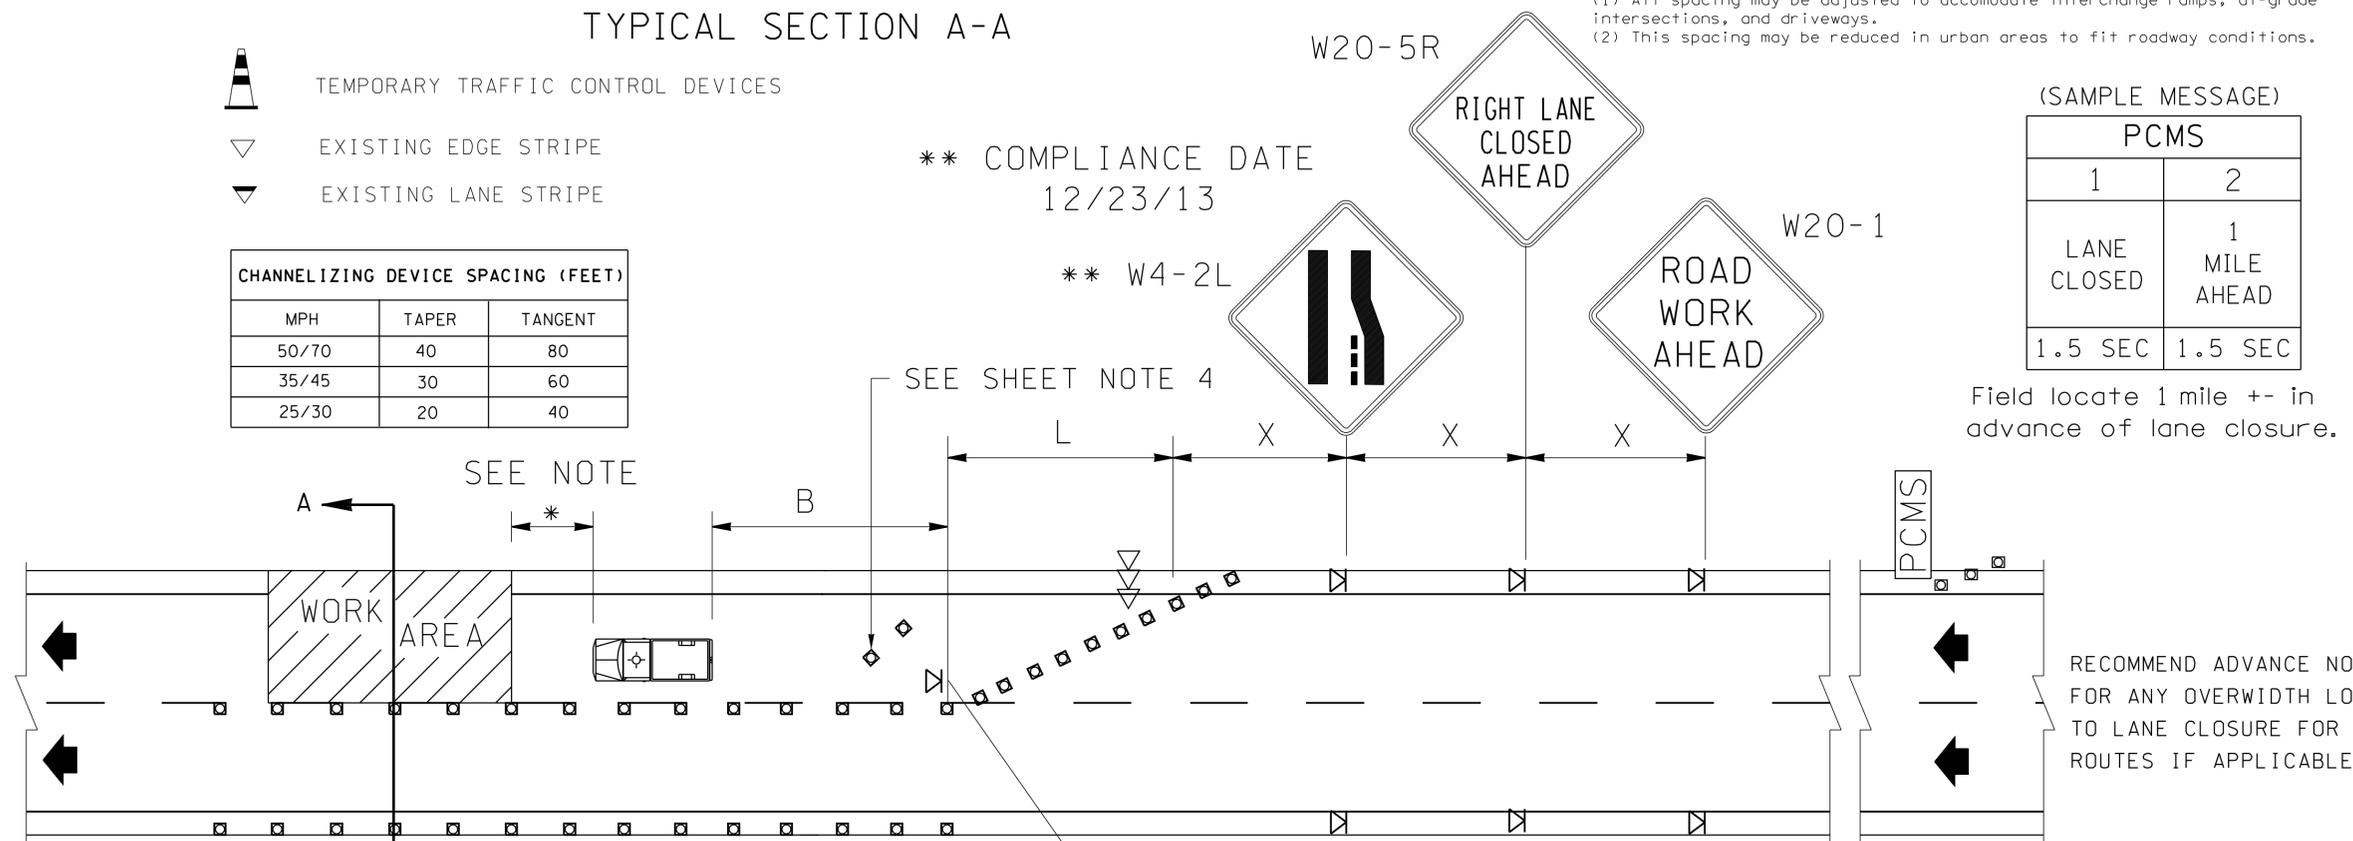

(SAMPLE MESSAGE)

PCMS	
1	2
LANE CLOSED	1 MILE AHEAD
1.5 SEC	1.5 SEC

Field locate 1 mile +- in advance of lane closure.

RECOMMEND ADVANCE NOTICE FOR ANY OVERWIDTH LOADS PRIOR TO LANE CLOSURE FOR ALTERNATE ROUTES IF APPLICABLE.

NOTES

1. PROTECTIVE VEHICLE RECOMMENDED-MAY BE A WORK VEHICLE.
2. CONTACT REGION TRAFFIC OFFICE FOR WORK HOUR RESTRICTIONS.
3. RECOMMEND EXTENDING DEVICE TAPER ACROSS SHOULDER. (L/3 TAPER)
4. USE TRANSVERSE DEVICES IN CLOSED LANE EVERY 1000'+- (RECOMMENDED).
5. TRAFFIC SAFETY DRUMS RECOMMENDED FOR ALL TAPERS ON HIGH SPEED ROADWAYS. (SEE DEVICE MATRIX)
6. PCMS RECOMMENDED.

LEGEND

- WARNING BEACON - REQUIRED
- SIGN LOCATION
- ARROW PANEL
- CHANNELIZING DEVICES
- PROTECTIVE VEHICLE - RECOMMENDED
- PORTABLE CHANGEABLE MESSAGE SIGN

BUFFER DATA										
LONGITUDINAL BUFFER SPACE = B										
SPEED (MPH)	25	30	35	40	45	50	55	60	65	70
LENGTH (feet)	155	200	250	305	360	425	495	570	645	730
PROTECTIVE VEHICLE WITH TMA ROLL AHEAD DISTANCE										
TYPICAL PROTECTIVE VEHICLE TYPE WITH TMA	TYPICAL PROTECTIVE VEHICLE (WITH TMA) LOADED WEIGHT (LBS)								STATIONARY OPERATION (feet)	
4 YARD DUMP TRUCK, SERVICE TRUCK, FLAT BED, ETC.	MINIMUM WEIGHT 15,000 LBS. (MAXIMUM WEIGHT SHALL BE IN ACCORDANCE WITH MANUFACTURER RECOMMENDATION)								30 MIN.	
ROLL AHEAD STOPPING DISTANCE ASSUMES DRY PAVEMENT										
* A PROTECTIVE VEHICLE IS RECOMMENDED REGARDLESS IF A TMA IS AVAILABLE. IF NO TMA IS USED, THE PROTECTIVE VEHICLE SHALL BE STRATEGICALLY LOCATED IN THE FIELD TO SHIELD WORKERS AND NO ROLL AHEAD DISTANCE IS SPECIFIED.										

MINIMUM TAPER LENGTH = L (feet)										
LANE WIDTH (feet)	Posted Speed (mph)									
	25	30	35	40	45	50	55	60	65	70
10	105	150	205	270	450	500	550	-	-	-
11	115	165	225	295	495	550	605	660	-	-
12	125	180	245	320	540	600	660	720	780	840



TYPICAL LANE CLOSURE WITH SHIFT TCD 3

POSTED SPEED	DECELERATION LENGTH NEEDED TO REACH LISTED ADVISORY SPEED - MPH = D					
	10	20	30	40	50	60
70	525	500	425	350	250	150
65	425	400	350	175	N/A*	N/A*
60	350	300	250	175	N/A*	--
55	275	225	175	100	N/A*	--
50	200	150	100	N/A*	--	--
45	125	N/A*	N/A*	--	--	--
40	N/A*	N/A*	N/A*	--	--	--
35	N/A*	N/A*	N/A*	--	--	--
30	N/A*	N/A*	--	--	--	--
25	N/A*	--	--	--	--	--




* NO SUGGESTED MINIMUM DISTANCES ARE PROVIDED FOR THESE SPEEDS, AS THE PLACEMENT LOCATION IS DEPENDENT ON SITE CONDITIONS AND OTHER SIGNING TO PROVIDE AN ADEQUATE ADVANCE WARNING FOR THE DRIVER.

SIGN SPACING = X (feet) (1)		
Freeways & Expressways	55/70 MPH	1500'+- (OR AS PER MUTCD)
Rural Highways	60/65 MPH	800'+-
Rural Roads	45/55 MPH	500'+-
Rural Roads & Urban Arterials	35/40 MPH	350'+-
Rural Roads, Urban Arterials Residential & Business Districts	25/30 MPH	200'+- (2)
Urban Streets	25 MPH or LESS	100'+- (2)

(1) All spacing may be adjusted to accommodate interchange ramps, at-grade intersections, and driveways.
 (2) This spacing may be reduced in urban areas to fit roadway conditions.

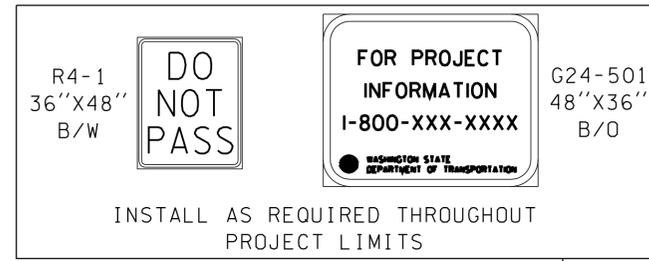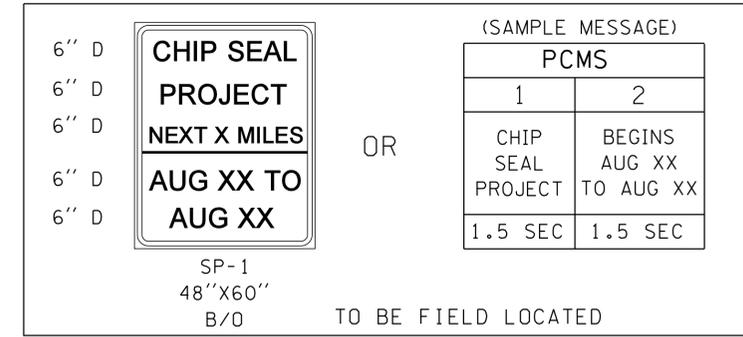

PLACE SIGN TO INDICATE LEGAL TO RESUME SPEED

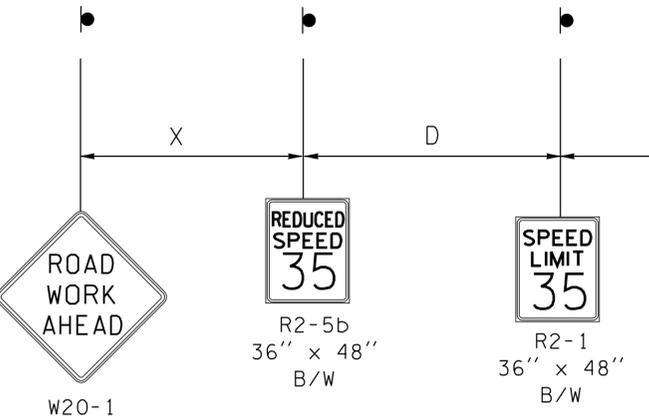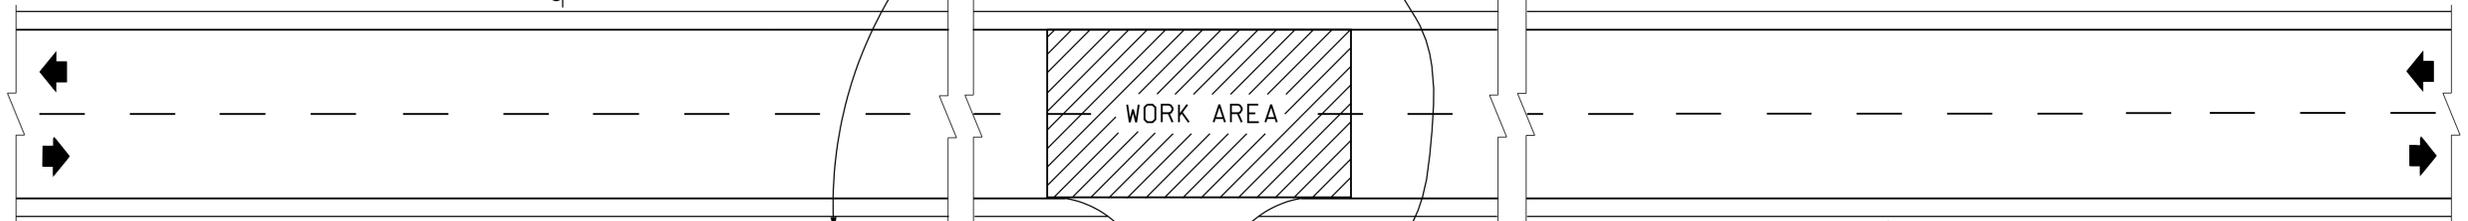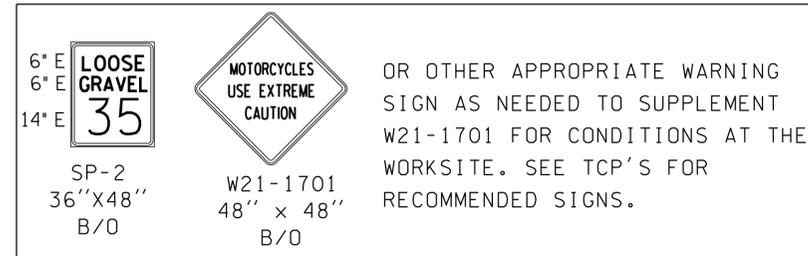

ALL SPEED REDUCTIONS MUST BE APPROVED BY THE REGION TRAFFIC ENGINEER PRIOR TO IMPLEMENTATION.

PLACE SIGN TO INDICATE LEGAL TO RESUME SPEED

GENERAL NOTES

- REFER TO LANE CLOSURE PLANS FOR LANE CLOSURE DETAILS AND SIGNING.
- THE TABLES PROVIDED ARE AN AIDE FOR DETERMINING SIGN LOCATIONS. THE VALUES CONTAINED IN THE TABLES SHOULD BE CONSIDERED MINIMUMS AND APPLIED IN THE FIELD WITH RESPECT TO SITE CONDITIONS.
- CONTACT THE REGION TRAFFIC ENGINEER FOR ADDITIONAL GUIDANCE IF NEEDED DUE TO UNUSUAL SITE CONDITIONS OR TRAFFIC CHARACTERISTICS
- REGULATORY SPEED LIMIT SIGNING IS NOT A SUBSTITUTE FOR WORK ZONE SIGNING REQUIRED TO WARN MOTORISTS.
- SPEED ZONE SIGNING SHALL ONLY REMAIN IN PLACE FOR AS LONG AS THE REDUCED SPEED CONDITION APPLIES.
- CONTACT THE REGION TRAFFIC OFFICE FOR SPECIAL SIGN ORDERS, SPEED REDUCTION NOTICES, ETC.
- SEE TCD1 FOR TEMPORARY PAVEMENT MARKING DETAILS.
- MOTORCYCLE WARNING SIGNS ARE REQUIRED AS PER WAC 468-95-315.
- SPEED LIMIT REDUCTION SHALL CONFORM TO RCW 47.48.020

** CONTINUE SIGNS AS NEEDED BASED ON REQUIRED ROADWAY CONDITION WARNING AS SHOWN ON THE APPROPRIATE TCP.


LEGEND

- SIGN LOCATION
- ▨ WORK AREA LIMITS

TYPICAL SPEEDZONE DETAIL
 CHIP SEAL PROJECTS
 TCD 4


WORK OPERATIONS THAT REMOVE OR OBSCURE EXISTING PAVEMENT MARKINGS MUST PROVIDE FOR TEMPORARY MARKINGS UNTIL THE PERMANENT MARKINGS ARE APPLIED. TEMPORARY MARKINGS MAY BE USED UNTIL IT IS PRACTICAL AND POSSIBLE TO INSTALL PERMANENT MARKINGS. THE DETAILS BELOW SHOW VARIOUS COMMON APPLICATIONS. CONTACT THE REGION TRAFFIC OFFICE FOR ASSISTANCE WITH MORE COMPLEX SITUATIONS.

MULTI-LANE ROADWAYS

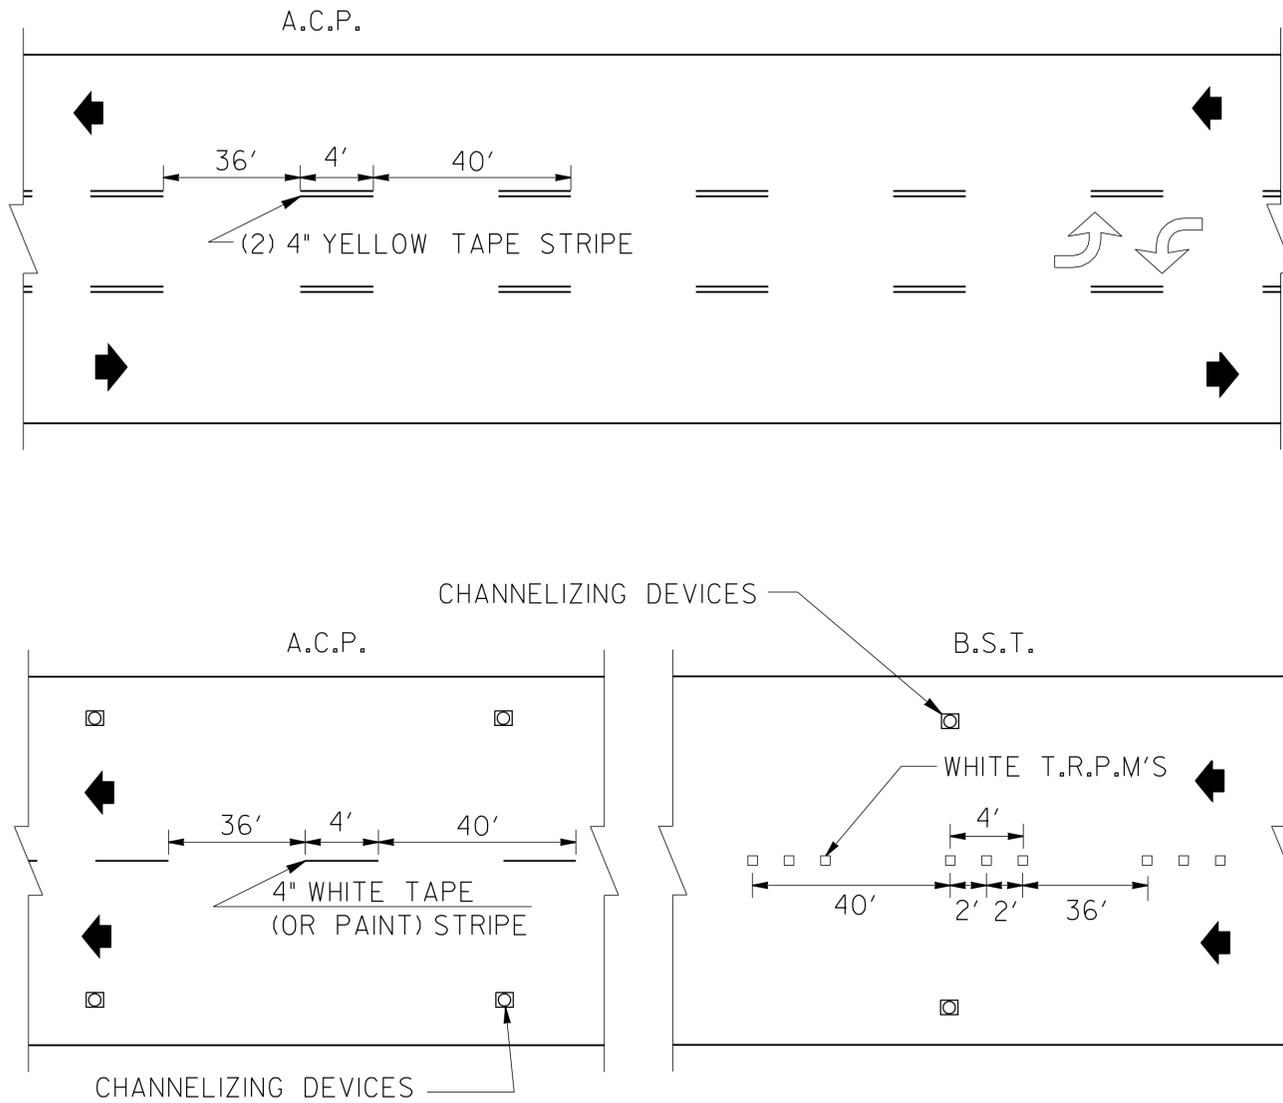

2 LANE ROADWAYS

A.C.P. OVERLAY - TEMPORARY STRIPING TAPE SHALL BE INSTALLED IN CONJUNCTION WITH "PASS WITH CARE" AND "DO NOT PASS" SIGN LOCATIONS.

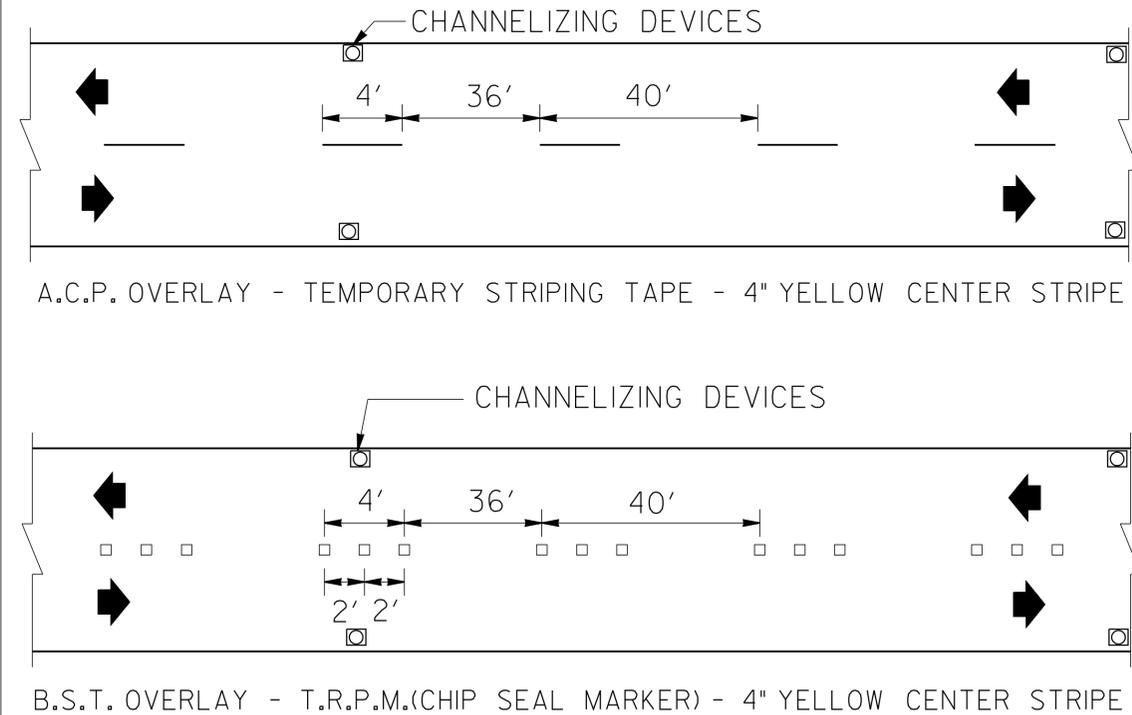

TEMPORARY EDGE STRIPES ARE NOT REQUIRED FOR THE ABOVE SITUATIONS BUT IF USED, T.R.P.M.'S MAY BE USED ON A PATTERN SPACING OF 5' O.C. TO SIMULATE A SOLID LINE. TEMPORARY ROADSIDE DELINEATION WITH CHANNELIZATION DEVICES SHOULD BE CONSIDERED, BUT ARE OPTIONAL. DO NOT USE A "SKIP" PATTERN OF TAPE STRIPE TO SIMULATE AN EDGE STRIPE. FOR LONG TERM PROJECTS, A TEMPORARY CHANNELIZATION/PAVEMENT MARKING PLAN SHOULD BE DEVELOPED.

CHANNELIZATION DEVICE SPACING - TANGENT 200' +-
 CURVES 100' +-
 TAPERS 1/2 L

T.R.P.M. = TEMPORARY RAISED PAVEMENT MARKER

Appendix 1-1 *Work Zone Signs*

- Approved Type X sign sheeting examples

Appendix 2-2 *Channelizing Device Application Matrix*

Additional bulletins and work zone information is available on line at the following webpage:


<http://www.wsdot.wa.gov/biz/trafficoperations/workzone/default.htm>



APPROVED FLUORESCENT ORANGE SIGN SHEETING TYPE X



**3M – Scotchlite “Diamond Grade”
3924, (Formerly Type VII)**

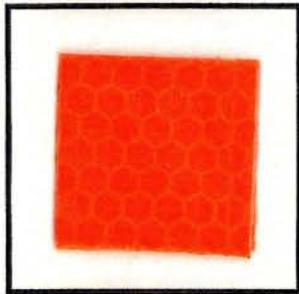

**Avery Dennison – “Super High
Performance” W-7514, (Formerly
Type IV)**



**Nippon Carbide – Nikkalite
“Crystal Grade” Series 94047,
(Formerly Type IV)**

CHANNELIZING DEVICE APPLICATION MATRIX

Device Type	Low Speed (40 mph or less)	High Speed (45 mph or greater)
Cones -Tangent	✓	✓
Cones -Taper	✓	A*
Tall Channelizing Devices - Tangent	✓	✓
Tall Channelizing Devices - Taper	✓	✓*
Drums - Tangent	✓	✓
Drums - Taper	✓	R
Tubular Markers	✓	X*

A - Allowed, consider using a more visible device R - Recommended device

✓ - May be used in this situation X - Requires approval by Region Traffic Engineer

* - Double the amount of devices in taper, use HALF-SPACING column shown below (20')

CHANNELIZING DEVICE SPACING CHART (FEET)			
MPH	*HALF-SPACING*	TAPER	TANGENT
45/70	20	40	80
35/40	N/A	30	60
20/30	N/A	20	40

Design of Channelization Devices (see MUTCD Part VI and appropriate sections of this manual for additional guidance)

- All channelizing devices must comply with the requirements of the MUTCD and the NCHRP 350 traffic control device crash performance requirements.
- Cones – Freeway, high speed and night use requires 28” minimum height cones with 2 white retroreflective bands. Low speed daytime use allows 18” cones without retroreflective bands.
- Tall Channelizing Devices – 42” in height minimum, using a tapered cone type shape of consistent dimensions regardless of orientation to traffic. A minimum of 2 white and 2 orange retroreflective horizontal stripes 6 inches wide. Designs that provide for secure mounting of a warning light are allowed.
- Drums – 36” in height and at least 18” wide of consistent dimensions regardless of orientation to traffic. A minimum of 2 white and 2 orange retroreflective horizontal stripes 4 to 6 inches wide. Designs that provide for secure mounting of a warning light are allowed.
- Tubular markers: Tubular markers should only be used where space restrictions do not allow for the use of other more visible devices or where specific conditions such as high wind may require a device that can be glued in place. Tubular markers may be used to divide opposing traffic lanes, divide open lanes in the same direction and to delineate the edge of a pavement drop off. A 2” minimum width is required. Freeway, high speed and night use requires a 28” minimum height with 2 white retroreflective bands. Low speed daytime use allows 18” tubular markers with 1 retroreflective band.
- Flat panel devices and devices with directional stripe patterns are not allowed. Check with region traffic office for additional information.

Known suppliers of tall channelizing devices that meet WSDOT specifications:
(others may be available)

Traffix Devices: <http://www.traffixdevices.com/>

3D Traffic Works: <http://www.traffiewks.com/product/twprod.html>

Bent Manufacturing: <http://www.bentmfg.com/>

Plastic Safety Systems: <http://www.plasticsafety.com/nav.asp>