

# **Generation and Assessment of Incident Management Strategies**

Volume III:

Seattle-Area Incident Impact Analysis –  
Microcomputer Traffic Simulation Results

WA-RD 204.4

Technical Report  
January 1990



**Washington State Department of Transportation**  
Planning, Research and Public Transportation Division

in cooperation with the  
United States Department of Transportation  
Federal Highway Administration

## TECHNICAL REPORT STANDARD TITLE PAGE

|  |   |  |                   |
|--|---|--|-------------------|
| 1. REPORT NO.<br><b>WA-RD 204.4</b>  | 2. GOVERNMENT ACCESSION NO.<br>                         | 3. RECIPIENT'S CATALOG NO.<br>   |                   |
| 4. TITLE AND SUBTITLE<br><b>GENERATION AND ASSESSMENT OF INCIDENT MANAGEMENT STRATEGIES, VOL. III</b>  |   | 5. REPORT DATE<br><b>January 1990</b>  |                   |
|  |   | 6. PERFORMING ORGANIZATION CODE<br>  |                   |
| 7. AUTHOR(S) <b>Fred Mannering, Assistant Professor, Civil Engineering<br/>Bryan Jones, Dan H. Garrison, Brad Sebranke, and<br/>Lester Janssen, Research Assistants, Civil Engineering</b>   |   | 8. PERFORMING ORGANIZATION REPORT NO.<br>  |                   |
|  |   | 10. WORK UNIT NO.<br>  |                   |
| 9. PERFORMING ORGANIZATION NAME AND ADDRESS<br><b>Washington State Transportation Center (TRAC)<br/>University of Washington, JE-10<br/>The Corbet Building, Suite 204; 4507 University Way N.E.<br/>Seattle, Washington 98105</b>   |   | 11. CONTRACT OR GRANT NO.<br><b>GC8286, Task 23</b>  |                   |
|  |   | 13. TYPE OF REPORT AND PERIOD COVERED<br><b>Technical Report</b>   |                   |
| 12. SPONSORING AGENCY NAME AND ADDRESS<br><b>Washington State Department of Transportation<br/>Transportation Building, KF-10<br/>Olympia, Washington 98504</b>  |   | 14. SPONSORING AGENCY CODE<br>   |                   |
|  |   | 15. SUPPLEMENTARY NOTES<br><b>This study was conducted in cooperation with the U.S. Department of Transportation, Federal Highway Administration.</b>                    |                   |
| 16. ABSTRACT<br><br><p style="text-align: justify;">                     This four-volume technical report describes a study of freeway incidents and incident management strategies in the Seattle area. The study statistically analyzed the frequency and duration of freeway incidents on sections of I-5 and SR 520 in Seattle. In addition, a traffic simulation model was operationalized to assess the traffic related impacts of incidents. The findings show that Seattle-area incident management currently responds well to inclement weather and special events (e.g., major sporting games) but has problems with severe accidents. The ongoing operationalization of accident investigation sites and incident equipment storage sites can be expected to improve severe accident management, but response personnel training and the addition of more dedicated tow truck service are also needed. Finally, the study shows that, from a traffic impact perspective, the section of I-5 in downtown Seattle is in need of the most incident management attention.                 </p> |   |  |                   |
| 17. KEY WORDS<br><br><b>Incident evaluation, incident management, incident frequency, incident duration, traffic impacts, accident analysis</b>  |   | 18. DISTRIBUTION STATEMENT<br><b>No restrictions. This document is available to the public through the National Technical Information Service, Springfield, VA 22616</b> |                   |
| 19. SECURITY CLASSIF. (of this report)<br><br><b>None</b>  | 20. SECURITY CLASSIF. (of this page)<br><br><b>None</b> | 21. NO. OF PAGES<br><br><b>145</b>   | 22. PRICE<br><br> |

**Technical Report**

Research Project GC 8286, Task 23  
Incident Management Strategies

**GENERATION AND ASSESSMENT  
OF INCIDENT MANAGEMENT STRATEGIES**

**VOLUME III:  
SEATTLE-AREA INCIDENT IMPACT ANALYSIS:  
MICROCOMPUTER TRAFFIC  
SIMULATION RESULTS**

by

Dan H. Garrison  
Research Assistant

Dr. Fred Mannering  
Associate Professor of Civil Engineering

Brad Sebranke  
Research Assistant

**Department of Civil Engineering**  
University of Washington, FX-10  
Seattle, Washington 98195

**Washington State Transportation Center (TRAC)**  
University of Washington, JE-10  
The Corbet Building, Suite 204  
4507 University Way N.E.  
Seattle, Washington 98105

Washington State Department of Transportation  
Technical Monitors  
Susan Everett and John Conrad

Prepared for

**Washington State Transportation Commission**  
Department of Transportation  
and in cooperation with  
**U.S. Department of Transportation**  
Federal Highway Administration

January 1990

## **DISCLAIMER**

The contents of this report reflect the views of the authors, who are responsible for the facts and the accuracy of the data presented herein. The contents do not necessarily reflect the official views or policies of the Washington State Transportation Commission, Department of Transportation, or the Federal Highway Administration. This report does not constitute a standard, specification, or regulation.

## TABLE OF CONTENTS

| <u>Section</u>   | <u>Page</u> |
|--|-------------|
| Summary.....   | ix          |
| <b>Chapter 1. Introduction.....</b>  | <b>1</b>    |
| <b>Chapter 2. Research Approach: Model Application .....</b>                                     | <b>3</b>    |
| Network Description.....   | 3           |
| The Puget Sound Area .....   | 3           |
| Links and Nodes .....  | 6           |
| Origin and Destination Data .....  | 6           |
| Model Operation.....   | 9           |
| XXEXQ.EXE.....   | 9           |
| NW.DAT.....  | 9           |
| OD.DAT.....  | 12          |
| CN.DAT.....  | 13          |
| Network Example .....  | 13          |
| Model Output.....  | 19          |
| Calibration of the Model.....  | 20          |
| Adding to the Network.....   | 20          |
| Refining the Network.....  | 21          |
| Adjusting the Origin-Destination Matrix.....   | 21          |
| Results of Calibration .....   | 23          |
| <b>Chapter 3. Findings, Interpretation, Appraisal, and Application: Incident Simulation.....</b> | <b>27</b>   |
| Calibration of System Speed and Time .....   | 27          |
| System Speed.....  | 27          |
| Commute Time .....   | 28          |
| Driver Information.....  | 28          |
| Simulation of Incidents.....   | 31          |
| Simulation 1: Eastbound SR-520.....  | 32          |
| Incident Description.....  | 32          |
| Coding of Incident .....   | 32          |
| Results From Simulation 1.....   | 35          |
| Simulation 2: Northbound I-5.....  | 42          |
| Incident Description.....  | 42          |
| Coding of Incident .....   | 42          |
| Results From Simulation 2.....   | 42          |
| Simulation 3: Visual Interference .....  | 47          |
| Incident Description.....  | 47          |
| Results From Simulation 3.....   | 47          |
| Impact of Incident Location on System Performance.....   | 53          |
| Incident Descriptions .....  | 53          |
| Simulation Results .....   | 55          |
| Summary .....  | 58          |

## TABLE OF CONTENTS (Continued)

| <u>Section</u>  | <u>Page</u> |
|---|-------------|
| <b>Chapter 4. Recommendations: Model Critique</b> ..... | <b>59</b>   |
| Improve the Speed of Operation.....                     | 59          |
| Provide Error Diagnostics.....                          | 59          |
| Provide Calibration Files.....                          | 59          |
| Eliminate Dummy Link and Destination Coding.....        | 60          |
| <b>Appendix A. Review of Existing Models</b> .....      | <b>A-1</b>  |
| Introduction and Criteria.....                          | A-1         |
| Year Designed.....                                      | A-1         |
| Scope.....  | A-1         |
| Predictability.....                                     | A-1         |
| Simulation vs. Function.....                            | A-1         |
| Types of Facility Covered.....                          | A-2         |
| Methodology.....  | A-2         |
| Input Requirements.....                                 | A-2         |
| Outputs.....  | A-2         |
| Models Selected.....                                    | A-3         |
| CORFLO.....   | A-3         |
| Model Development and Description.....                  | A-3         |
| Model Input and Output.....                             | A-3         |
| Model Strengths and Weaknesses.....                     | A-5         |
| CORQ-CORCON.....  | A-5         |
| Model Development and Description.....                  | A-5         |
| Model Input and Output.....                             | A-6         |
| Model Strengths and Weaknesses.....                     | A-6         |
| FREQ FAMILY.....  | A-6         |
| Model Development and Description.....                  | A-6         |
| Model Input and Output.....                             | A-7         |
| Model Strengths and Weaknesses.....                     | A-7         |
| INTRAS.....   | A-8         |
| Model Development and Description.....                  | A-8         |
| Input and Output.....                                   | A-8         |
| Model Strengths and Weaknesses.....                     | A-9         |
| MACK Family.....  | A-9         |
| Model Development and Description.....                  | A-9         |
| Model Inputs and Outputs.....                           | A-9         |
| Model Strengths and Weaknesses.....                     | A-10        |
| RFLO.....   | A-10        |
| Model Development and Description.....                  | A-10        |
| Model Input and Output.....                             | A-10        |
| Model Strengths and Weaknesses.....                     | A-11        |
| SCOT.....   | A-11        |
| Model Development and Description.....                  | A-11        |
| Model Inputs and Outputs.....                           | A-12        |
| Model Strengths and Weaknesses.....                     | A-12        |

## TABLE OF CONTENTS (Continued)

| <u>Section</u>  | <u>Page</u> |
|---|-------------|
| <b>Appendix A. Review of Existing Models (Continued)</b>                        |             |
| SIMX .....  | A-13        |
| Model Development and Description .....   | A-13        |
| Model Input and Output.....   | A-13        |
| Model Strengths and Weaknesses.....   | A-13        |
| TMODEL2 .....   | A-14        |
| Model Development and Description .....   | A-14        |
| Model Input and Output.....   | A-14        |
| Model Strengths and Weaknesses.....   | A-15        |
| XXE .....   | A-15        |
| Model Development and Description .....   | A-15        |
| Model Inputs and Outputs.....   | A-16        |
| Model Strengths and Weaknesses.....   | A-16        |
| XXEXQ.....  | A-16        |
| Model Development and Description .....   | A-16        |
| Model Strengths and Weaknesses.....   | A-17        |
| Model Strengths and Weaknesses.....   | A-17        |
| Conclusion .....  | A-17        |
| References.....   | A-19        |
| <b>Appendix B. Methodology.....</b>   | <b>B-1</b>  |
| Notation.....   | B-1         |
| The Graphical Solution of User-Equilibrium .....                                | B-3         |
| Mathematical Representation of User-Equilibrium .....                           | B-5         |
| The Equivalency and Uniqueness Conditions .....                                 | B-7         |
| The Equivalency Condition .....   | B-7         |
| The Uniqueness Condition.....   | B-7         |
| The Optimization Process .....  | B-8         |
| One-Dimensional Minimization .....  | B-9         |
| The Convex Combinations Method.....   | B-11        |
| Applying the Convex Combinations Method to Solve for User-<br>Equilibrium ..... | B-13        |
| Overview of XXEXQ .....   | B-17        |
| The Subroutines .....   | B-17        |
| The Functions.....  | B-18        |
| Characteristics of XXEXQ .....  | B-18        |
| Link Performance Functions.....   | B-19        |
| Capacity Restriction.....   | B-19        |
| Traffic Intensity Ratio.....  | B-20        |
| Queue Response.....   | B-20        |
| Information Response .....  | B-21        |
| References.....   | B-23        |
| <b>Appendix C. Fortran Listing of XXEXQ.....</b>                                | <b>C-1</b>  |
| <b>Appendix D. NW.DAT as Used for the Central Puget Sound Region .....</b>      | <b>D-1</b>  |



## LIST OF FIGURES

| <u>Figure</u> |  | <u>Page</u> |
|---------------|--|-------------|
| 2.1           | Central Puget Sound Region.....  | 5           |
| 2.2           | The Network .....  | 7           |
| 2.3           | The Network in Downtown Seattle.....   | 8           |
| 2.4           | Aggregated Zones .....   | 10          |
| 2.5           | Example Transportation Network.....  | 14          |
| 2.6           | Network Numbering Convention.....  | 16          |
| 3.1           | The Impacts of Driver Information on System Speed and Average<br>Commute Time .....  | 29          |
| 3.2           | The Impacts of Driver Information on Congestion and Average<br>Commute Distance..... | 30          |
| 3.3           | Traffic Intensity Ratios for the PM Peak Period.....                                 | 33          |
| 3.4           | The Impacts of Incident Duration on System Speed and Average<br>Commute Time .....   | 36          |
| 3.5           | The Impacts of Incident Duration on Congestion and Average<br>Trip Length .....      | 37          |
| 3.6           | The Impacts of Incident Duration as Compared to the Base Run.....                    | 38          |
| 3.7           | The Impacts of Incident Duration as Compared to the Base Run.....                    | 39          |
| 3.8           | The Impacts of Incident Duration on System Speed and Average<br>Commute Time .....   | 43          |
| 3.9           | The Impacts of Incident Duration on Congestion and Average<br>Trip Length .....      | 44          |
| 3.10          | The Impacts of Incident Duration as Compared to the Base Run.....                    | 45          |
| 3.11          | The Impacts of Incident Duration as Compared to the Base Run.....                    | 46          |
| 3.12          | The Impacts of Incident Duration on System Speed and Average<br>Commute Time .....   | 48          |
| 3.13          | The Impacts of Incident Duration on Congestion and Average<br>Trip Length .....      | 49          |
| 3.14          | The Impacts of Incident Duration as Compared to the Base Run.....                    | 50          |
| 3.15          | The Impacts of Incident Duration as Compared to the Base Run.....                    | 51          |
| 3.16          | Incident Zone Locations .....  | 54          |
| 3.17          | Impact of Incident Location on Total Travel Time .....                               | 56          |
| 3.18          | Impact of Incident Location on System Speed .....                                    | 57          |
| B.1           | Graphical Solution of User-Equilibrium Assignment.....                               | B-4         |
| B.2           | The Graphical Representation of the Bisection Method.....                            | B-10        |
| B.3           | A Flow Chart Representing the Bisection Method.....                                  | B-12        |
| B.4           | A Flow Chart Representing the Convex Combinations Method .....                       | B-14        |

## LIST OF TABLES

| <u>Table</u> |   | <u>Page</u> |
|--------------|---|-------------|
| 2.1          | Example of OT.OUT .....   | 19          |
| 2.2          | Calibration Results.....  | 24          |
| 3.1          | Part 2 of NW.DAT for a 40 Minute Incident.....  | 34          |
| 3.2          | CN.DAT for a Simulation with 12 Time Periods .....  | 34          |
| 3.3          | Increase in Vehicle-Hours Resulting from an Incident on Eastbound<br>State Route 520 Near Evergreen Point Floating Bridge .....   | 41          |
| 3.4          | Queues on Restricted Link 780: Evergreen Point Floating Bridge,<br>Eastbound State Route 520 .....  | 41          |
| 3.5          | Increase in Vehicle-Hours Resulting from an Incident on North-<br>bound Interstate 5 Near Ship Canal Bridge .....   | 41          |
| 3.6          | Queues on Restricted Link 532: Ship Canal Bridge, Northbound<br>Interstate 5.....   | 41          |
| 3.7          | Increase in Vehicle-Hours Resulting Solely from the Gapers<br>Phenomena with an Incident on Eastbound State Route<br>520 near Evergreen Point Floating Bridge and the Gaper<br>Effect in the Opposite Lanes of Travel ..... | 52          |
| 3.8          | Queues on Restricted Link 783: Evergreen Point Floating Bridge,<br>Westbound State Route 520.....   | 52          |
| 3.9          | Location Descriptions of Zones Used in Incident Location Analysis   | 52          |
| A.1          | Comparison of Existing Traffic Models .....   | A-4         |
| B.1          | Model Parameters of the Bureau of Public Roads Performances<br>Functions for Different Link Characteristics .....   | B-20        |

## SUMMARY

The XXEXQ model is a traffic simulation model that provides a user equilibrium solution to traffic assignment, a solution that is a better estimate of actual traffic behavior than the incremental or iterative approaches. In addition to this advantage, XXEXQ may be installed on a personal computer that has a math coprocessor. The ability to run a traffic simulation on personal computers could allow widespread use and experimentation that could not be done with models requiring mainframe computers. However, the execution time for large networks in XXEXQ is still excessive and must be reduced to be accepted in the daily routines of engineering office work.

XXEXQ enables the user to describe traffic behavior flows that are not allowed in most other models. The percentage of uninformed drivers is an input that creates a distinction between drivers that respond to the existing traffic conditions and those that do not. Drivers that listen to the radio or other information sources are given knowledge of the system that may justify their diversion to another route. Another input is the description of the location, the duration, and the capacity reduction of an incident anywhere within the network. The model's ability to accept these data allows the simulation of a wide variety of incidents, both incidents that are planned, such as construction activities, and non-planned incidents such as traffic accidents or disablements.

As a result, XXEXQ provides a method of traffic simulation that is relatively simple to use and may be incorporated into the office environment rather easily. A few changes in coding conventions and requirements have been recommended, but the overall application of the model is acceptable.

Simulations of various incidents throughout the transportation network revealed characteristics of the system that suggest a vulnerability to incident location. In particular, the northbound lanes on Interstate 5 near the Seattle Central Business District are sensitive. According to the results, when an incident occurs on the these lanes, the

system performance measures, such as speed and average commute time, become significantly less efficient, a consequence that may be attributed not only to the large volumes of traffic in this area but also to the lack of diversionary routes accessible to the drivers. The incidents simulated in this area added 19,000 vehicle-hours to the total travel time of the system.

System performance on Interstate 5, north of the Seattle CBD, sustained fewer problems and less impact when incidents were simulated, but the impact depended on the direction of travel. System performance in the northbound lanes withstood the most effect; whereas the southbound lanes were influenced less. This directional result reflected the typical afternoon commuting nature of the central Puget Sound region.

System performance on other routes on the network, such as SR-520, appeared to be affected less overwhelmingly, primarily because of the availability of alternative routes and the lower volumes of traffic involved.

# CHAPTER 1

## INTRODUCTION

Traffic congestion, a problem in most metropolitan areas, has been growing ever since the popularity of the automobile and is not expected to stop growing in the foreseeable future. It has caused many people and businesses to relocate home and work away from the congested areas, resulting in what are commonly referred to as suburban sprawl and mini-CBDs. To target attempts at solving congestion problems, the traffic engineer distinguishes between two types of congestion: recurring and nonrecurring.

Recurring congestion occurs when the traffic demand exceeds the transportation supply. This type of congestion is often seen in cities during the peak periods of travel when large volumes of people try to get to work or home at the same time. This mass movement of vehicles overwhelms the facility so that its normal capacity is insufficient for the demand, and queues begin to build. Solutions for recurring congestion may include strategies to improve the efficiency of the facility or, simply, the construction of more facilities.

Nonrecurring congestion occurs when the normal capacity of a facility is reduced below the level of demand. Such capacity reductions may be caused by vehicular accidents and disablements or by construction activity. Incidents account for as much as 60 percent of all traffic congestion on urban facilities.

Unlike recurring congestion, nonrecurring congestion may occur at any location at any time. Therefore, solutions to such congestion problems are difficult to implement and may prove to be unjustifiably expensive. However, proposed solutions to congestion may be simulated by computer models and then analyzed for their effectiveness. Through the use of computer models for traffic behavior simulation, many alternatives may be considered.

This volume will discuss the application and evaluation of a traffic simulation model, XXEXQ. XXEXQ was applied to a network of freeways and arterials, the primary commuting routes, in the central Puget Sound region of Washington state. The evaluation of XXEXQ was based on the reasonableness of the model's results and the extent to which these results described actual traffic behavior.

Chapter 2 describes the actual application of XXEXQ to the central Puget Sound region. It outlines the operative procedures of the model by describing its input requirements and how the resulting output is interpreted. Also discussed in this chapter are the procedures used to calibrate the model. It describes the assumptions made, the acceptance criteria, and the results of the calibration efforts. Chapter 3 continues the discussion of XXEXQ by detailing its attempts to simulate incidents on the transportation network.

Chapter 4 contains the authors' conclusions and recommendations for use and further development of the XXEXQ model.

## CHAPTER 2

### RESEARCH APPROACH: MODEL APPLICATION

In order to analyze the effects of incidents on traffic, the appropriate model is necessary. Appendix A looks at the available models, analyzing each one with several criteria significant to model use. These criteria are year designed, scope, predictability, simulation function, type of facility covered, input requirements, outputs, and other available model features.

As discussed in Appendix A, XXEXQ has limitations that render it imperfect. However, the researchers felt that XXEXQ most easily provided the best compromise between theory, input requirements, and output. XXEXQ is specifically designed for incident evaluation and is readily adaptable to account for new findings and methodological improvements.

This section describes the area selected for the XXEXQ model application, the data needed to construct the network, the data collection process, and the major assumptions of the study.

#### **NETWORK DESCRIPTION**

##### **The Puget Sound Area**

The XXEXQ model was applied to an area within the Central Puget Sound region, an area whose principal activity centers are Seattle, Renton, Bellevue, Kirkland, and Redmond. Generally speaking, this area has developed in a linear, north/south fashion because of the physical constraints of the Puget Sound on the west and the Cascade mountains on the east. This linear spatial arrangement has created some unique transportation problems. For example, Seattle, the largest activity center in this region, is located between two large bodies of water: Puget Sound and Lake Washington.

Currently, only two transportation modes grant access to Seattle by crossing the Puget Sound: the ferry boat and the plane. Both of these modes contribute little volume to

the overall freeway network and were, therefore, considered to be insignificant to this analysis. Lake Washington, however, has two floating bridges that provide access between Seattle and the greater Eastside area. Both of these bridges run east/west and are the only practical means of accessing Seattle from the east without making a lengthy trip around Lake Washington. Because of this transportation limitation, these bridges of I-90 and SR-520 receive heavy volumes of traffic during the peak periods and experience severe congestion on a routine basis.

Traveling north and south in this area, are two interstate freeways that also receive large volumes of traffic. Completed in the 1960s, Interstate 5 is the primary transportation facility for access to Seattle from the north and the south. Although planners had designed a system of freeways and highways that would provide adequate supply for decades to come, the general public expressed its concern that too much of its taxes and land were being used on transportation projects. The public's voiced concerns effectively halted future transportation projects, such as the R.H. Thompson expressway. Thus, I-5 experienced congestion within one year of its completion. To relieve some of this congestion, Interstate 405 was constructed as a Seattle by-pass. However, developers took advantage of this new access to convert small cities such as Bellevue into significant activity generators.

As a result of new freeways, highways, and spurious development processes, the central Puget Sound area no longer experienced a spoked wheel travel pattern with the Seattle CBD as the hub. Instead, this area has a suburb to suburb commuting pattern that is proving to be extremely difficult to accommodate.

The XXEXQ model was applied to a network of freeways, highways, and major arterials within the central Puget Sound Area (Figure 2.1). The principal criterion in developing the network was to describe the freeway and highway system and their common diversion routes, diversion routes that could be used in case of capacity reductions

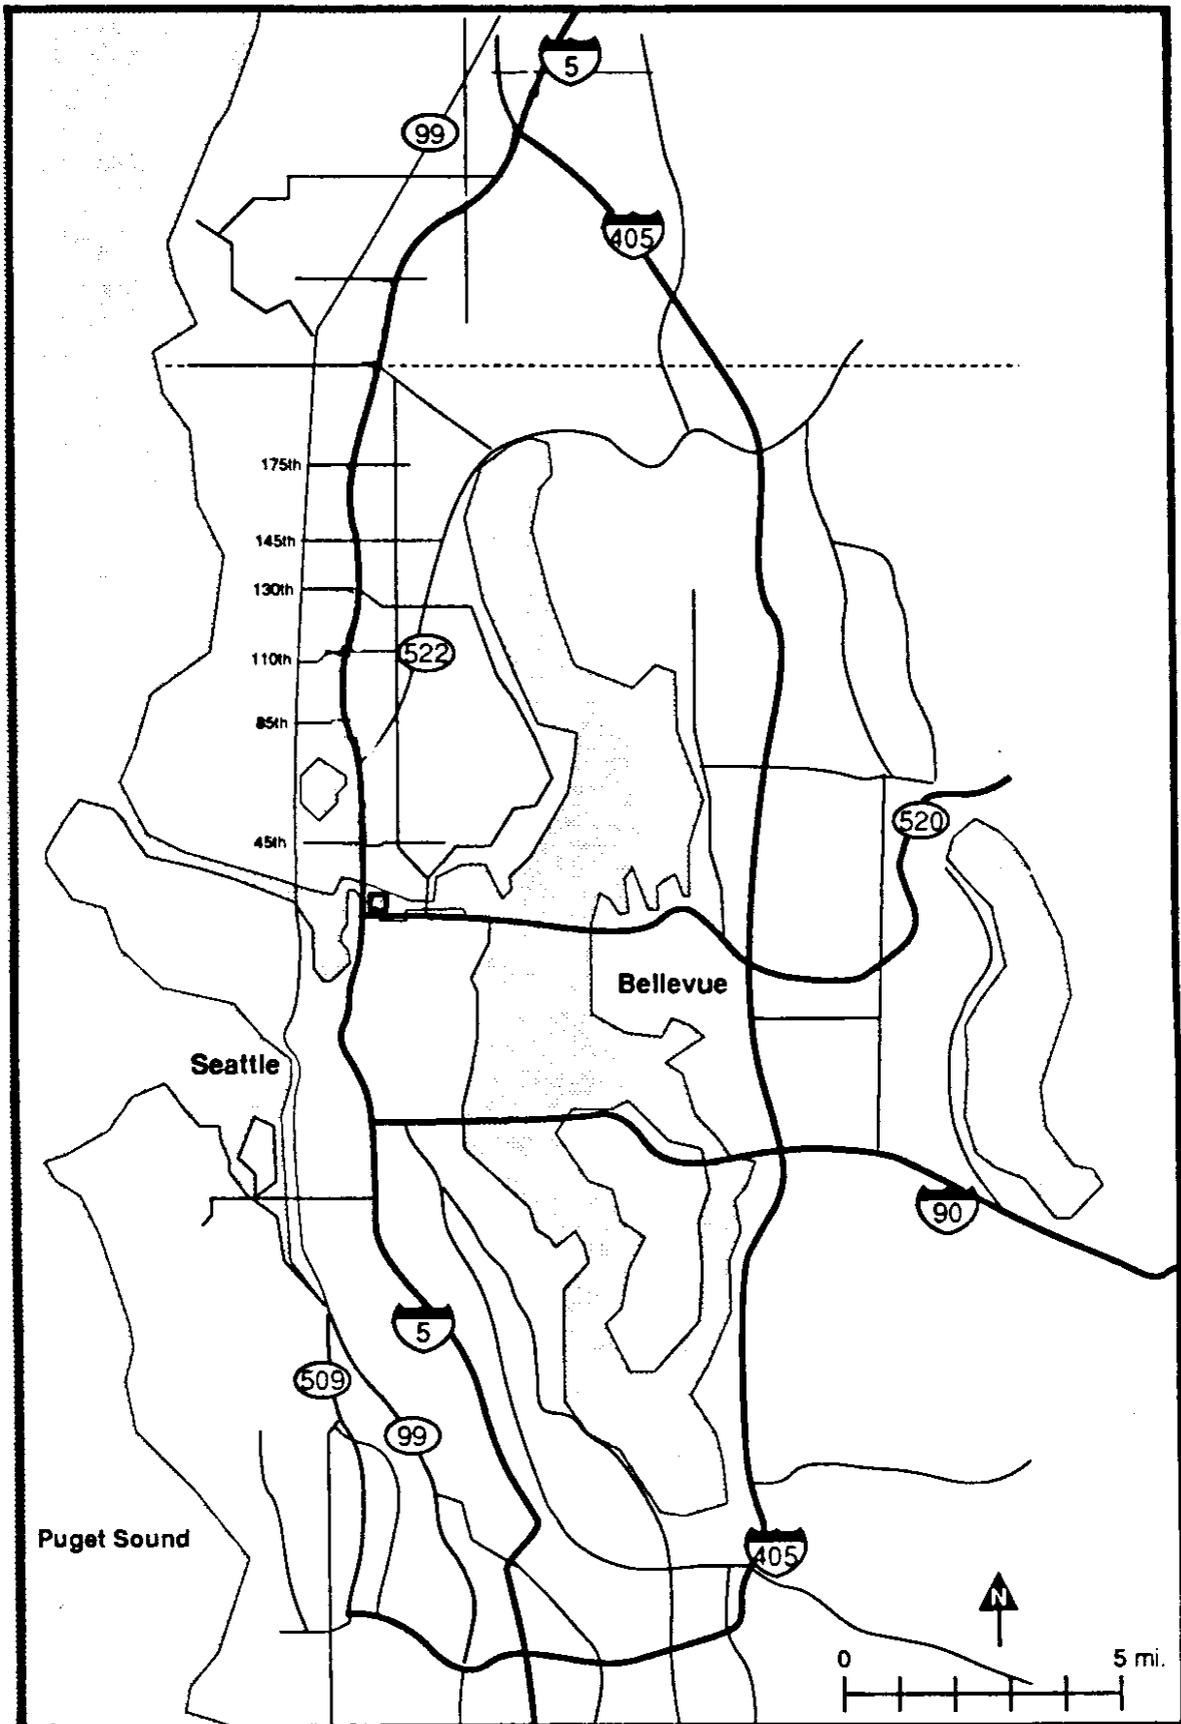


Figure 2.1 Central Puget Sound Region

on the primary system. The resulting network could then be used to estimate queue lengths on the primary routes and the increase of flow on the diversion routes.

### **Links and Nodes**

The network consisted of 1,071 directional links, 256 nodes, and 81 origins and destinations. Of the 1,071 directional links, 387 were transportation links; the remaining 687 links were access links between the transportation network and the zone centroids.

It was impractical to include all the streets and intersections in the model; instead, the freeways, highways, and major arterials were used to represent the whole network. All other streets were assumed to contribute very little to the volumes of interzonal traffic. The transportation links described the primary commuting routes and many common diversion routes within the modeled area (see Figures 2.2 and 2.3). Routes in the study region were I-5, I-90, I-405, SR-99, SR-104, SR-167, SR-202, SR-509, SR-518, SR-520, SR-522, SR-599, SR-900, SR-908, and a number of arterials.

### **Origin and Destination Data**

Origin and destination volumes were obtained from the Puget Sound Council of Governments Planning information. This information was available for the year 1985 at the traffic analysis zone level. The volumes were generated with the Urban Transportation Planning System, and trips originating from zones were calculated by a multilinear function based primarily on population. Trips attracted to a zone were calculated by the same type of function used for calculating the trip origins but were based on employment and retail activities. A gravity model was then used to distribute the trips from an origin to a destination. This model resulted in a trip table with 512 origins and destinations for the p.m. peak period.

The 512 traffic analysis zones proved to be too detailed for this analysis so they were aggregated into 81 zones that roughly corresponded to PSCOG's forecast analysis zones. The detail of the forecast analysis zones was maintained in the immediate vicinity of

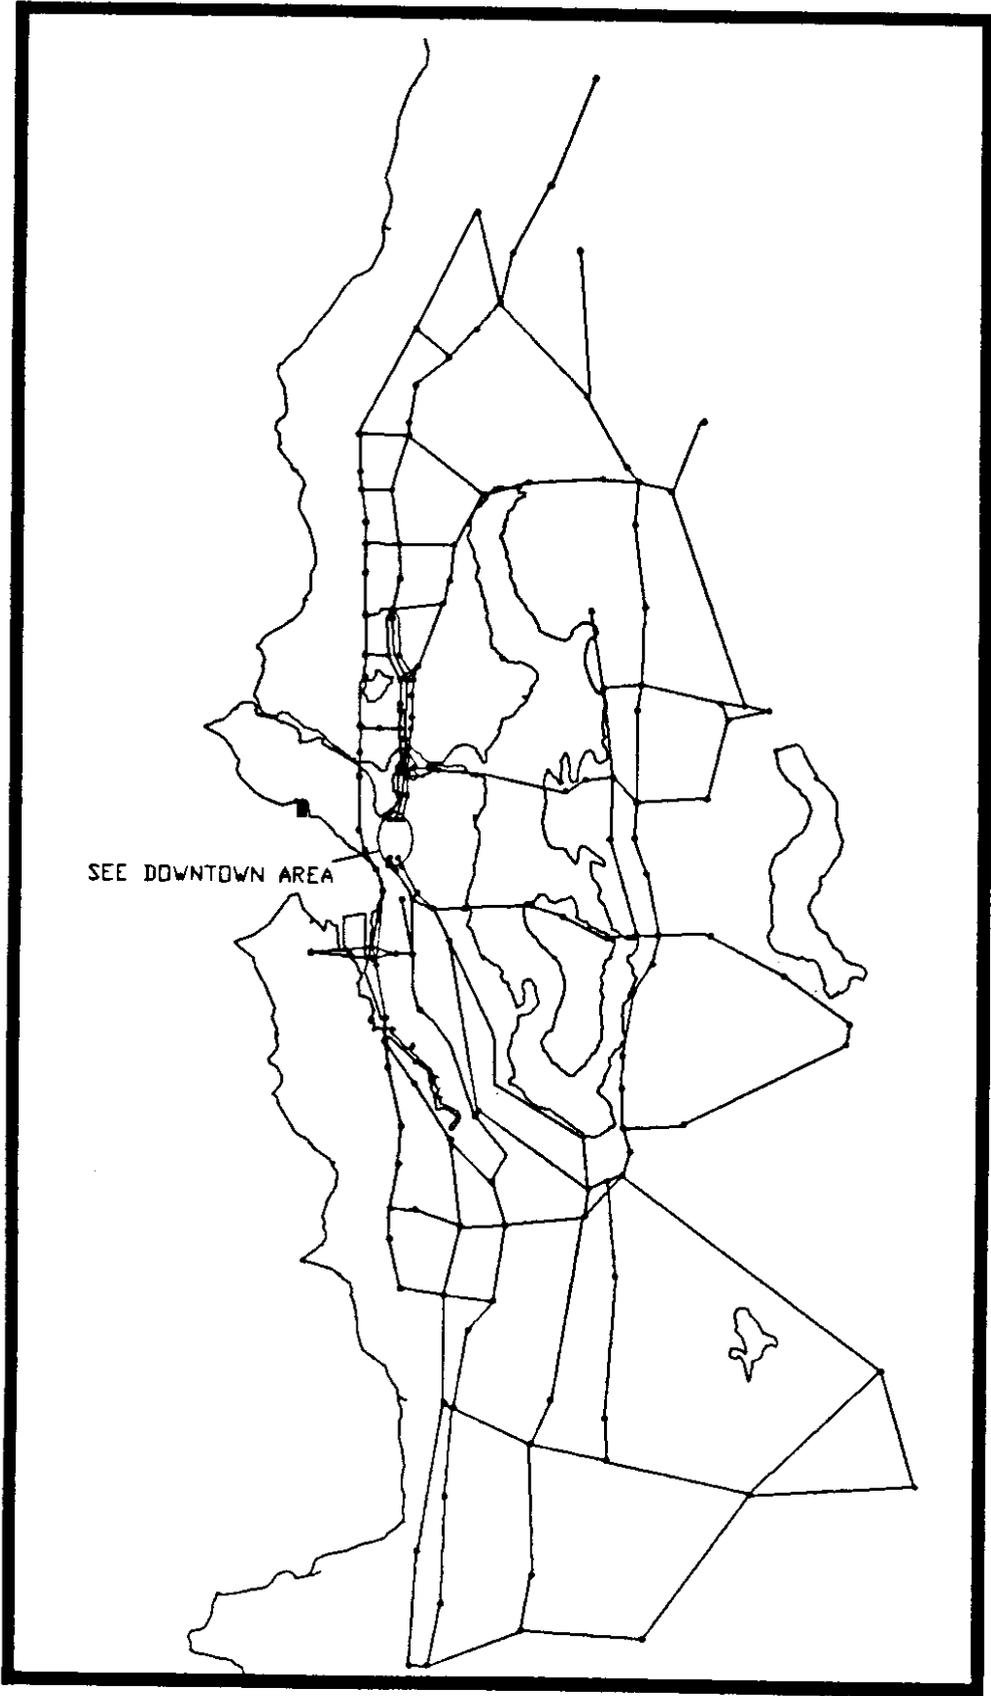


Figure 2.2 The Network

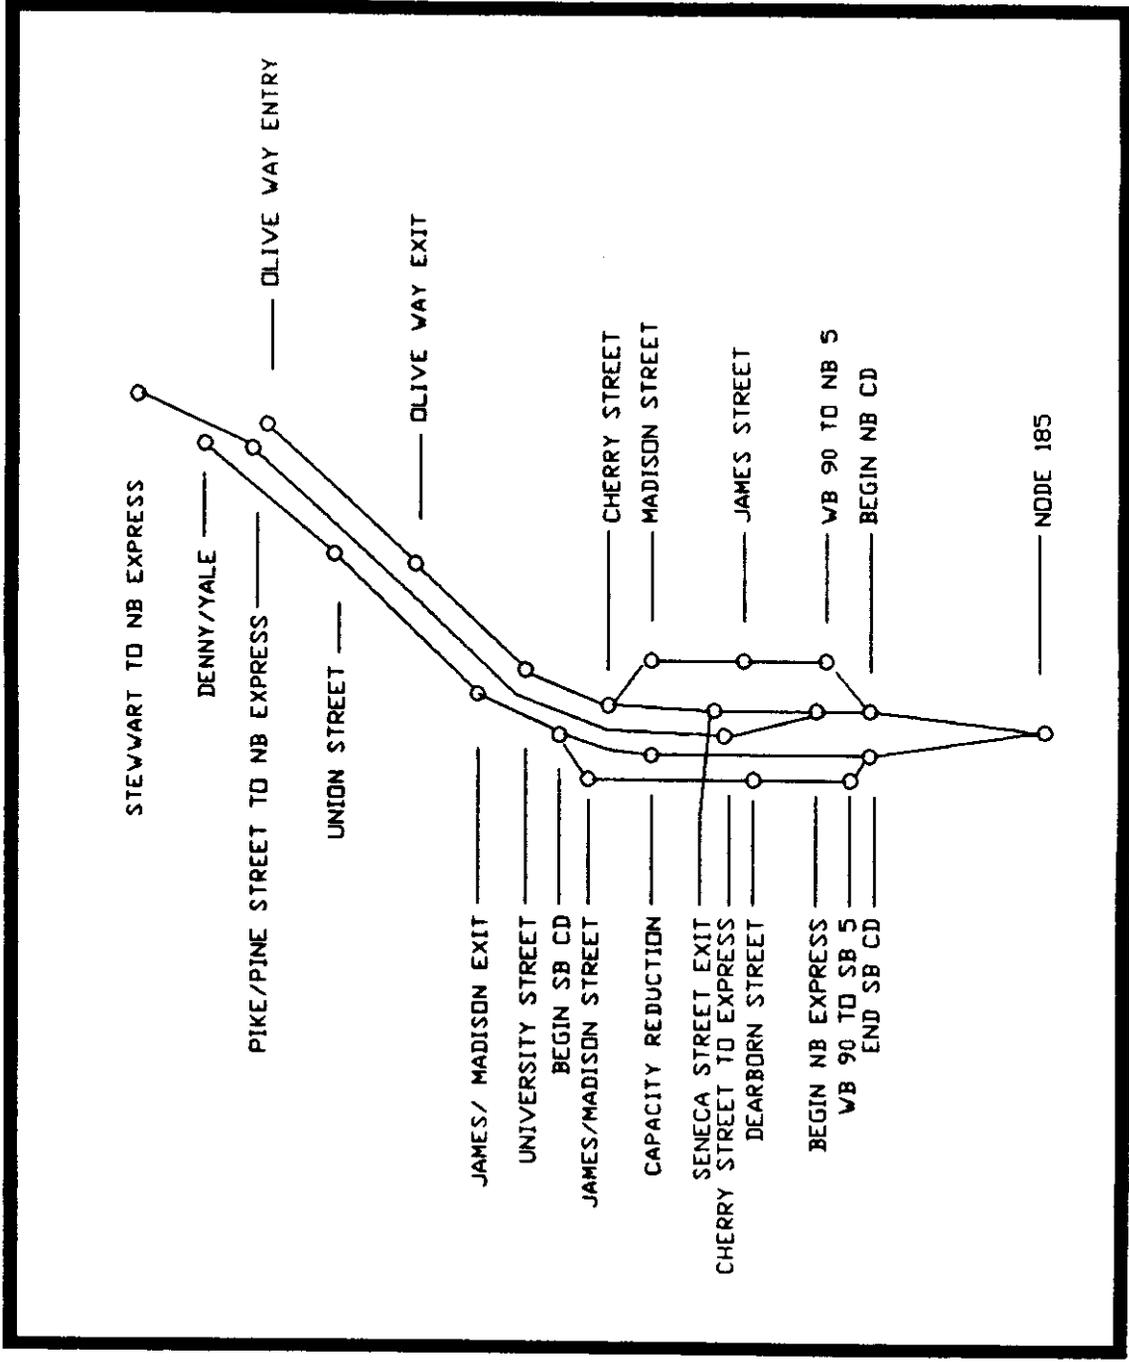


Figure 2.3 The Network in Downtown Seattle

the network, but as the distance between the network and an area increased, zones were aggregated to cover large areas (see Figure 2.4).

## **MODEL OPERATION**

The XXEXQ model may be installed on any IBM compatible personal computer with an 80287 math co-processor and a minimum of 640 kilobytes of random access memory. This model will use nearly 560K of RAM, so special care must be taken to ensure that resident programs are kept to a minimum.

## **XXEXQ.EXE**

The XXEXQ model was programmed in Fortran 77 and compiled in 557,546 bytes of executable code. Besides the computer requirements described above, the model requires the data files NW.DAT, OD.DAT, and CN.DAT in the same directory as XXEXQ.EXE. Execution is initiated by the command XXEXQ, and the results are placed in a file named OT.OUT.

## **NW.DAT**

NW.DAT is a file that contains all the data pertaining to the link performance characteristics. It is structured in two parts. Each line in the first part of NW.DAT contains the link origin, the link destination, the length of the link, the capacity of the link, the speed limit of the link, and a short description of the link. After all links have been listed in terms of their performance characteristics, part 2 of NW.DAT describes the restrictions placed on links of interest during the specified time intervals. The format for NW.dat is described as follows:

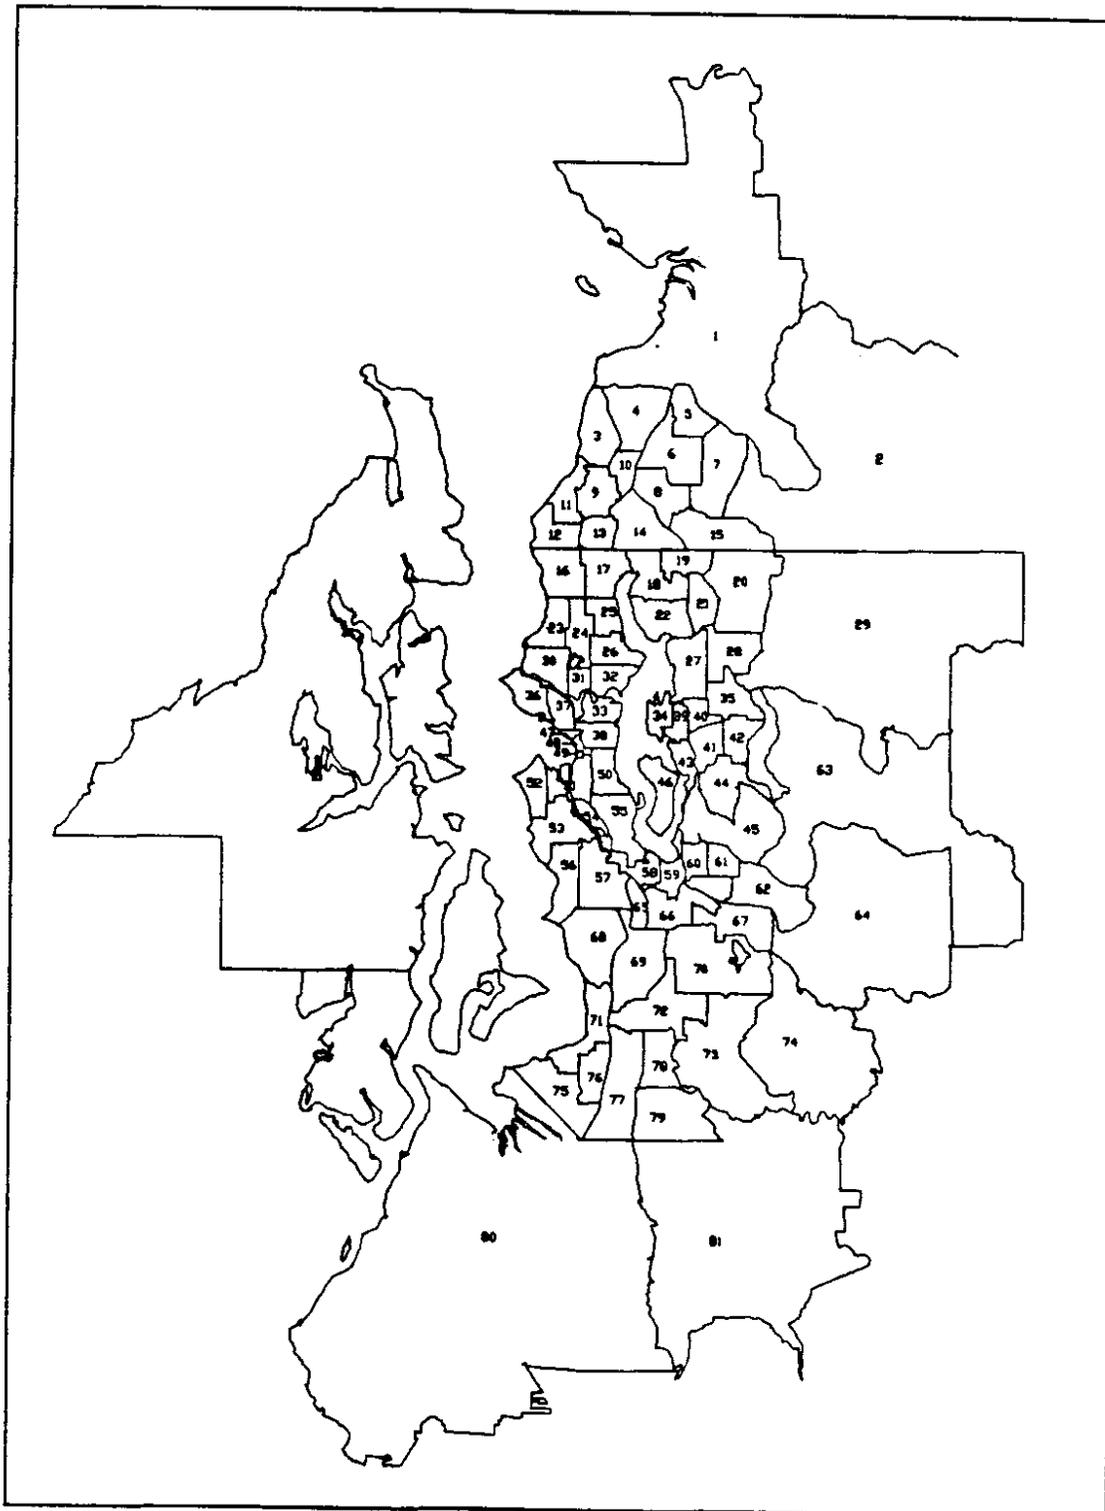


Figure 2.4 Aggregated Zones

### The Format of NW.DAT, Part 1

| Columns | Format | Description  |
|---------|--------|--|
| 1-4     | I4     | "From" node or A-node of link                      |
| 5-8     | I4     | "To" node or B-node of link                        |
| 9-13    | F5.2   | Link length, miles                                 |
| 14-18   | F5.0   | Capacity at level of service E                     |
| 19-21   | F3.0   | Free flow speed on link, mph                       |
| 22-41   | 5A4    | Link description                                   |
| 79      | 11     | 1 if link results are to be printed; blank if not. |

After all links have been listed, the remaining lines follow the format listed below for each time period. For example, if there were two restricted links and 12 10-minute time periods, part 2 would involve the addition of 24 rows (12 for each restricted link) to NW.DAT.

### The Format of NW.DAT, Part 2

| Columns | Format | Description                              |
|---------|--------|--|
| 1-4     | I4     | Restricted link number                   |
| 6-14    | F8.6   | Proportion of full capacity [0.0 to 1.0] |

Although the format for NW.DAT is relatively straightforward, certain coding conventions must be followed to ensure proper execution.

1. All links are directional. Each direction of travel must be coded as a separate link.
2. The network nodes must be numbered consecutively; it is not permissible to skip over integer values.
3. An auxiliary zone centroid must be defined for each zone. If there are N zones, then node N+1 is the auxiliary zone centroid for zone 1, node N+2 is the auxiliary zone centroid for zone 2. In general, node N+i is the auxiliary zone centroid for zone i.
4. If there are N zones, then the first 2N nodes must be zone centroids and their auxiliaries.

5. All links in the NW.DAT file must be sorted in an ascending order, from the origin node and to the destination node.
6. Three connector links must be defined for each connection between a zone and a network node:

| From | To   | Link Properties            |
|------|------|----------------------------|
| i    | node | Regular access time values |
| node | N+i  | Regular access time values |
| N+i  | node | Dummy link                 |

7. The trip table must not contain intrazonal trips, and all other cells must have at least 1 trip.

### **OD.DAT**

The OD.DAT file contains all the information needed from the origin-destination matrix. Each line of this file lists the origin, the destination, and the number of vehicles that travel from the origin to the destination in the time period of interest. The format of this file is as follows:

#### **The Format of OD.DAT**

| Columns | Format | Description                      |
|---------|--------|----------------------------------|
| 1-4     | I4     | Origin zone                      |
| 5-7     | I3     | Destination zone                 |
| 8-12    | F5.0   | Trips from origin to destination |

Similar to the NW.DAT file, the OD.DAT file must be sorted in ascending order from the origin to the destination.

## CN.DAT

The CN.DAT file is a description of the files NW.DAT and OD.DAT and also describes the main program values for convergence, the number of iterations, and the type of printout desired. The format needed is as follows:

### The Format of CN.DAT, Part 1

| Columns | Format | Description  |
|---------|--------|--|
| 1-5     | I5     | Total number of links  |
| 6-10    | I5     | Number of zones  |
| 11-15   | I5     | Total number of nodes  |
| 16-20   | I5     | Number of transportation links   |
| 21-25   | I5     | Number of records on OD.DAT  |
| 26-30   | I5     | Number of first network node   |
| 31-38   | F8.5   | Convergence criterion  |
| 39-41   | I3     | Maximum number of iterations   |
| 42-44   | I3     | Print centroid connectors? (1=yes, 2=no)                                 |
| 45-47   | I3     | Number of restricted routes  |
| 48-51   | I4     | Number of time periods   |
| 53-55   | F3.1   | System travel time adjustment ratio (see Appendix B for full definition) |

The following format requires one line for each time period.


### The Format of CN.DAT, Part 2

| Columns | Format | Description  |
|---------|--------|--|
| 1-4     | F4.2   | Traffic intensity ratio for each time period (see Chapter 6 for full definition)       |
| 5-8     | I4     | Percent of uninformed drivers for each time period (see Chapter 6 for full definition) |

## NETWORK EXAMPLE

To illustrate the coding conventions and the proper format of the data files, NW.DAT, OD.DAT, and CN.DAT, the following example is presented.

Consider an area that is to be simulated for four 30-minute periods, has been divided into four homogeneous zones, and has a simple transportation network, as shown in Figure 2.5, and a peak hour trip table as listed below.

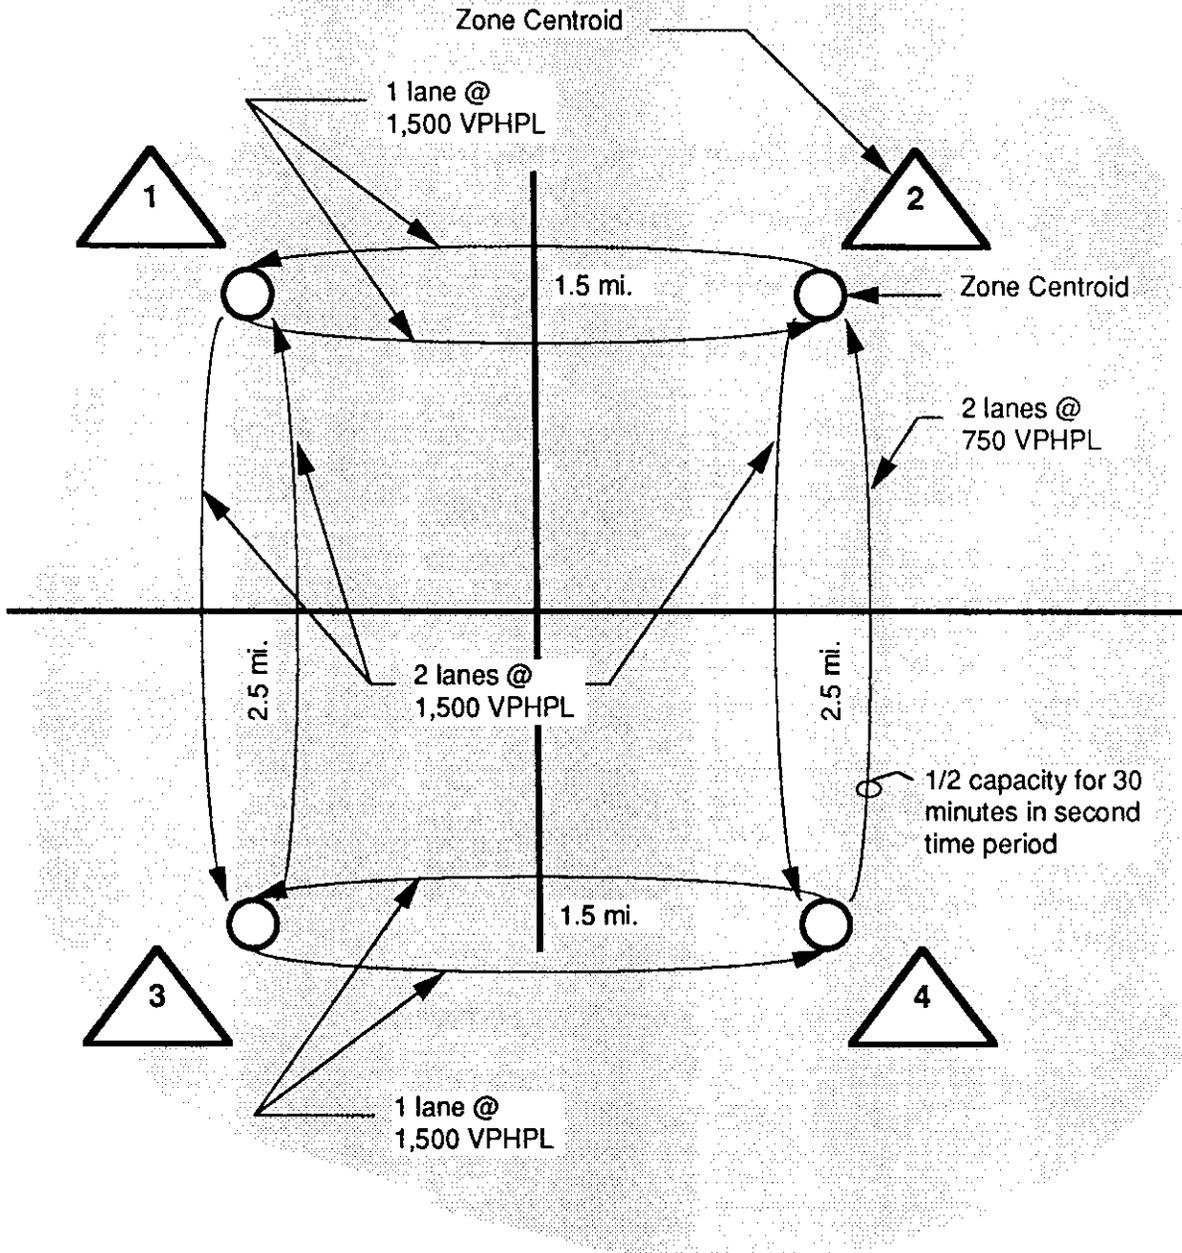

Speed limit on all physical links is 35 mph

Figure 2.5. Example Transportation Network

### Trip Table


| Origin | Destination |     |     |     |
|--------|-------------|-----|-----|-----|
|        | 1           | 2   | 3   | 4   |
| 1      |             | 750 | 500 | 640 |
| 2      | 700         |     | 495 | 250 |
| 3      | 350         | 240 |     | 325 |
| 4      | 575         | 400 | 430 |     |

The zones of this area have been represented by zone centroids (the triangles) and are numbered 1, 2, 3, and 4. For the format of XXEXQ, each zone centroid first serves as an origin and then will be renumbered to serve as a destination. Thus, the zone origins will be numbered 1 through 4 and the zone destinations will be numbered 5 through 8.

Once the zone origins and destinations have been properly numbered, the network nodes may be renumbered. In this case, the four small circles (Figure 2.5) represent the nodes and are assigned the numbers 9 through 12. See Figure 2.6 for an update on the numbering convention. Also added to this figure are the access links from the zone centroids to the network. These access links are an approximation of the transportation supply that allows vehicles to travel from the network to the zones and vice versa. Three connector links are required between a node and a zone centroid, as previously discussed.

With the numbering conventions in place and with the link performance data given in Figure 2.5, the file NW.DAT appears as shown on page 17.

Part 2, or the last four lines of the file, is dedicated to the description of the link restriction, as shown in Figure 2.5. In this case, the link from node 12 to node 10 suffers a 50 percent restriction during the second 30-minute period. This link is described in the nineteenth line of NW.DAT and is, therefore, designated as link 19 in each of the lines of part 2 in NW.DAT. Each of these lines represents one quarter of the simulation period, or 30 minutes. To describe the capacity restriction on link 19 during the second 30-minute period, the number 0.5 is coded in the second line of part 2; all other lines use 1.0 to describe full capacity.

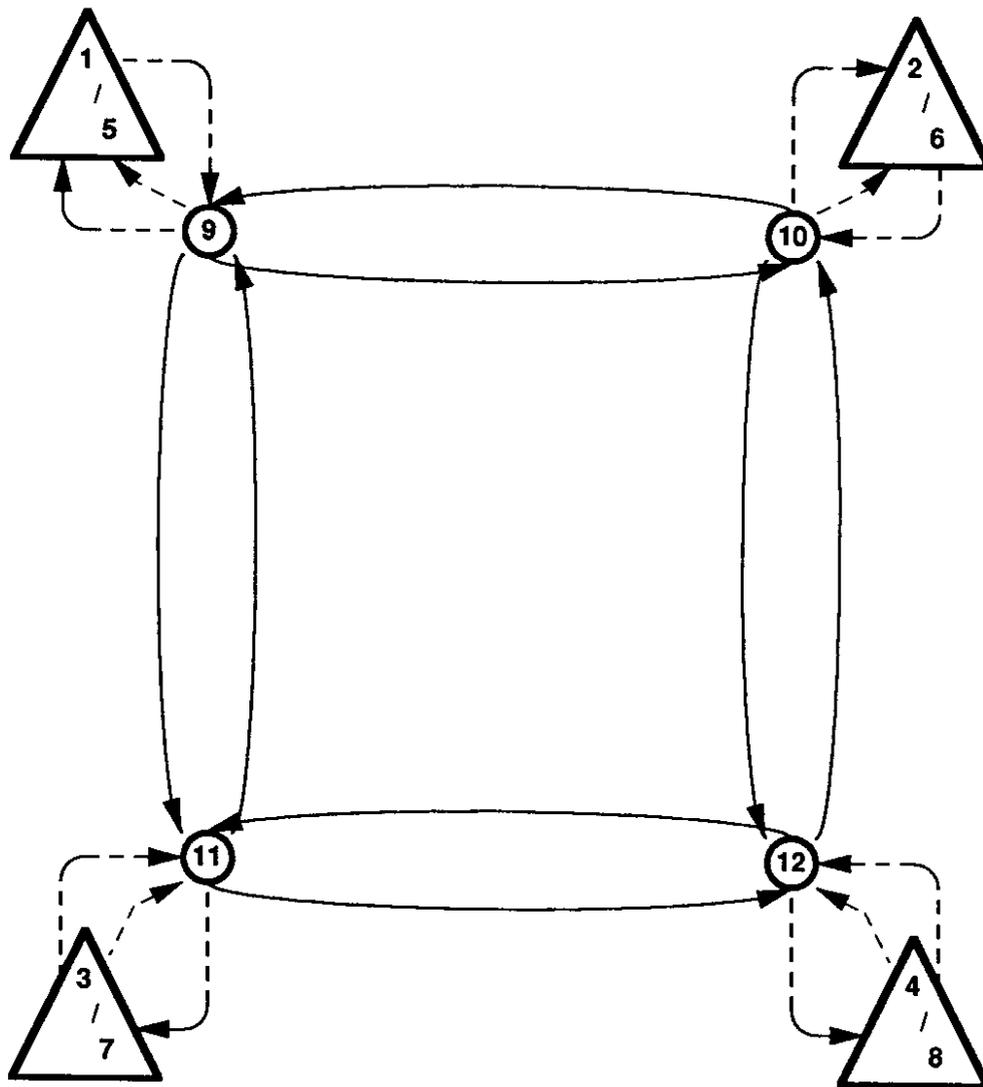

All access links have an assumed capacity of 1,000 VPH, a speed of 25 mph, and a distance of 1 mile

Figure 2.6. Network Numbering Convention

## Example of NW.DAT

| COLUMN NUMBERS   |     |     |      |    |                                      |   |
|--|-----|-----|------|----|--------------------------------------|---|
| 1  | 2   | 3   | 4    | 5  | 6                                    | 7 |
| 1234567890123456789012345678901234567890123456789012345678901234567890 |     |     |      |    |                                      |   |
| 1  | 9   | 1   | 1000 | 25 | ACCESS FROM ORIGIN 1 TO NODE 9       |   |
| 2  | 10  | 1   | 1000 | 25 | ACCESS FROM ORIGIN 2 TO NODE 10      |   |
| 3  | 11  | 1   | 1000 | 25 | ACCESS FROM ORIGIN 3 TO NODE 11      |   |
| 4  | 12  | 1   | 1000 | 25 | ACCESS FROM ORIGIN 4 TO NODE 12      |   |
| 5  | 9   | 99  | 1    | 1  | DUMMY LINK                           |   |
| 6  | 10  | 99  | 1    | 1  | DUMMY LINK                           |   |
| 7  | 11  | 99  | 1    | 1  | DUMMY LINK                           |   |
| 8  | 12  | 99  | 1    | 1  | DUMMY LINK                           |   |
| 9  | 5   | 1   | 1000 | 25 | ACCESS FROM NODE 9 TO DESTINATION 5  |   |
| 9  | 10  | 1.5 | 1500 | 35 | PHYSICAL LINK                        |   |
| 9  | 11  | 2.5 | 3000 | 35 | PHYSICAL LINK                        |   |
| 10   | 6   | 1   | 1000 | 25 | ACCESS FROM NODE 10 TO DESTINATION 6 |   |
| 10   | 9   | 1.5 | 1500 | 35 | PHYSICAL LINK                        |   |
| 10   | 12  | 2.5 | 3000 | 35 | PHYSICAL LINK                        |   |
| 11   | 7   | 1   | 1000 | 25 | ACCESS FROM NODE 11 TO DESTINATION 7 |   |
| 11   | 9   | 2.5 | 3000 | 35 | PHYSICAL LINK                        |   |
| 11   | 12  | 1.5 | 1500 | 35 | PHYSICAL LINK                        |   |
| 12   | 8   | 1   | 1000 | 25 | ACCESS FROM NODE 12 TO DESTINATION 8 |   |
| 12   | 10  | 2.5 | 1500 | 35 | PHYSICAL LINK                        |   |
| 12   | 11  | 1.5 | 1500 | 35 | PHYSICAL LINK                        |   |
| 19   | 1.0 |     |      |    |                                      |   |
| 19   | 0.5 |     |      |    |                                      |   |
| 19   | 1.0 |     |      |    |                                      |   |
| 19   | 1.0 |     |      |    |                                      |   |

With the data from the previous trip table, the OD.DAT data file appears as follows:

## Example of OD.DAT

| COLUMN NUMBERS   |   |     |   |   |   |
|--|---|-----|---|---|---|
| 1  | 2 | 3   | 4 | 5 | 6 |
| 123456789012345678901234567890123456789012345678901234567890 |   |     |   |   |   |
| 1  | 2 | 750 |   |   |   |
| 1  | 3 | 500 |   |   |   |
| 1  | 4 | 640 |   |   |   |
| 2  | 1 | 700 |   |   |   |
| 2  | 3 | 495 |   |   |   |
| 2  | 4 | 250 |   |   |   |
| 3  | 1 | 350 |   |   |   |
| 3  | 2 | 240 |   |   |   |
| 3  | 4 | 325 |   |   |   |
| 4  | 1 | 575 |   |   |   |
| 4  | 2 | 400 |   |   |   |
| 4  | 3 | 430 |   |   |   |

The last remaining file to be created is the CN.DAT file. The information needed to create this file is derived mostly from the NW.DAT and the OD.DAT files; other information that is needed depends on the modeler's preferences. Referring back to the two previous files:

The total number of links (including centroid connectors) is 20.

The number of zones is four.

The number of nodes (including zone centroids) is 12.

The number of transportation or physical links is eight.

The number of records in OD.DAT is 12.

The number of the first network node is nine.

The convergence criterion is .0005 (a typical value).

The maximum number of iterations is 10 (a typical value).

The printing of centroid connectors is not desired, therefore the value is two.

The number of restricted links is one.

The number of time periods is four.

The system travel time adjustment ratio is 1.

The travel intensity ratios for the time periods are 0.9, 1.1, 1.2, and 0.8 for the time periods one through four, respectively.

The percentage of uninformed drivers is 80.

Placed in the proper format, the CN.DAT file incorporates the above information as follows:

### Example of CN.DAT

```

                                COLUMN NUMBERS
                                1         2         3         4         5         6
123456789012345678901234567890123456789012345678901234567890
  20    4   12    8   12    9   .0005 10  2  1   4  1.0
0.90  80
1.10  80
1.20  80
0.80  80

```

## MODEL OUTPUT

When a successful run has been accomplished, XXEXQ creates and places the simulation results in a file named OT.OUT. The length of the output varies depending on the number of links specified to be printed from the NW.DAT file. (Note that in the example NW.DAT file, only link 19 is specified to be printed.) Table 2.1 shows the output that resulted from the example files NW.DAT, OD.DAT, and CN.DAT.

The first three written lines in the output state basic information from the data file CN.DAT: the number of origin-destination pairs was 12, and the criterion set for convergence was .0005. Following these introductory statements are the link performance characteristics that were specified to be printed from the NW.DAT file.

The statement of link performance begins with the link identification number, followed by the origin node and then the destination node: 19, 12, and 10, respectively. The remainder of the link performance statement is a table with one record for each time period, or in this case four. Each record lists the time period, the volume of traffic entering

**Table 2.1 Example of OT.OUT**  
**User Equilibrium Assignment**

No. of OD pairs = 12  
Convergence criterion = 0.50000E-03  
Link Number = 19    Physical Link  
Orig Node = 12  
Dest Node = 10

| 19  | 19  | Capacity | Con Ratio | Veh in Q |
|-----|-----|----------|-----------|----------|
| 30  | 564 | 1500     | 0.47      | 0        |
| 60  | 633 | 750      | 1.06      | 17       |
| 90  | 739 | 1500     | 0.63      | 0        |
| 120 | 501 | 1500     | 0.42      | 0        |

Total travel time (VEH-HRS)= 861  
Average congestion ratio = 0.495026  
Vehicle miles traveled = 27,915

the link, the capacity of the link during the specified time period (notice that capacity of link 19 was reduced to 600 in the second period because of the capacity restriction), the congestion ratio of the link, and the number of vehicles in the queue at the end of the period. After all the specified links have been printed, the remainder of OT.OUT lists system performance measures.

### **CALIBRATION OF THE MODEL**

After the input data were assimilated for the network, XXEXQ was executed a number of times until the volumes on various links matched those of the ground counts. Initially, a simulated volume that came within 10 percent of the ground counts was considered to be calibrated. The process of calibrating the model involved three steps.

1. Additional elements were inserted into the network. This process included the addition of links and nodes that were inadvertently left out of the network and the addition of links and nodes that were initially considered to carry insignificant flows but later proved to be needed.
2. The network was refined. This process included adjusting capacities, lengths, and speeds of various links to closely approximate the actual conditions experienced in the field.
3. The origin destination matrix was adjusted. Trips that were not taken on the model network were removed from the system.

### **Adding to the Network**

The first step in the calibration procedure was to achieve a successful run without errors. This first involved a painstaking search through the data files, NW.DAT and CN.DAT, to determine whether any links had been omitted or whether any had been improperly coded. On the outset, many such links were identified and corrected. However, because of the size of the network, the process of identifying miscoded links and nodes continued throughout the calibration procedure.

Because of the nature of the network node, many alterations to the network were required. Nodes, as defined in XXEXQ, had no turning restrictions. Therefore, turning restrictions that existed in the field had to be emulated in the model network. Furthermore, the researchers found that a vehicle traveling in one direction on a link could suddenly reverse direction at the next node if such a move was the shortest path. This problem proved to be quite significant near the Seattle CBD.

Near the Seattle CBD, many on- and off-ramps were available to only one direction of travel. To prohibit vehicles that were traveling in the opposite direction to exit or enter on these restricted ramps, separate links and nodes were defined for each direction of travel. This type of separated network was constructed on I-5 from Spokane street to North 175th and at other locations as necessary. Fortunately, since most interchanges had no turning restrictions, this coding convention was not needed on the entire network.

### **Refining the Network**

Once a successful run had been accomplished, the links of the modeled network were refined to provide a more accurate description of existing conditions. Initially, many freeway links were assigned with a standard capacity of 2,000 vehicles per hour per lane. However, many of these links experienced a capacity that was significantly less than 2,000 vphpl because of merging, weaving, and geometric effects. To account for the effects caused by roadway geometry, the procedures outlined in the Highway Capacity Manual for the calculation of capacity were used. To account for other effects, maximum ground counts were used to estimate capacity whenever they were available.

### **Adjusting the Origin-Destination Matrix**

After all reasonable refinements were applied to the network, the origin-destination matrix was changed. As mentioned earlier, the original trip table acquired from the Puget Sound Council of Governments had 512 traffic analysis zones. These zones were aggregated into 81 zones to meet the needs of the modeled network. Unfortunately, the

aggregation of zones presented a couple of problems that had to be overcome before the model could be calibrated successfully.

During the aggregation process, small zones were bounded together to form one or more larger zones. The trips that occurred between the smaller zones were nullified, since intrazonal trips were not allowed. For example, consider four zones numbered 1, 2, 3, and 4. If Zones 1 and 2 were aggregated into Zone A and Zones 3 and 4 into Zone B, then the trips between Zones 1 and 2 would no longer exist because Zone A could not have intrazonal trips. Similarly, the trips between Zones 3 and 4 could no longer exist because both zones were incorporated into Zone B. Thus, an overall reduction of trips occurred whenever aggregation took place. Because of this process, 103,999 trips were eliminated from the trip table.

However, the overall reduction of trips may or may not be a problem; the existence of a problem depends entirely on the extent of detail placed within the modeled network. If a modeled network contains much detail, such as local and collector streets, then aggregation will be a significant problem since much of the traffic that used these streets has been eliminated. On the other hand, if a modeled network is rather general and incorporates only major arterials and highways, then the effects of aggregation will not be as great.

Because of the general nature of the modeled network used in this project, the effects of trip reduction due to aggregation were minimal.

Another problem that is both a function of aggregation and the network, involves forcing trips onto the modeled network that would normally not occur. This problem is most significant where zones border each other, and the problem decreases as the distance between zones increases. Placed in the perspective of this network, as the distance between a trip's origin and its corresponding destination decreased, the less likely a real vehicle was to use the modeled network links. Thus, all attempts to adjust the origin-destination matrix did not result in a more accurate matrix but resulted in a matrix that best

described the ground counts on the modeled network. This distinction is important because any significant changes made to the modeled network after calibration would render the calibrated origin-destination matrix useless, or at best, render a sloppy estimation. For this reason, this step of calibration was not used until all major refinements to the network links had been completed.

The first simulation runs resulted in volumes considerably larger than the measured ground counts, sometimes 200 percent greater. To reduce these simulated volumes, trips were subtracted from the origin-destination matrix between neighboring zones immediately near the over-used links. This tactic removed the trips between zones that did not use the modeled network and proved to provide the most significant changes in the simulated volumes. After accounting for most of the trips that did not use the network, most of the simulated volumes were within 25 percent of the ground counts.

The remaining changes to the matrix involved adding or subtracting trips to achieve the 10 percent criterion. These changes were relatively small and were justifiable because of the age of the original trip table. Most changes made to the trip table were the addition of trips across Lake Washington.

## **RESULTS OF CALIBRATION**

The results of the calibration efforts are shown in Table 2.2. This table lists the many links that were considered to be critical in the calibration efforts. The links that received the most attention, during calibration, were those that contained bridges (I-90 and SR-520 floating bridge, and Ship Canal bridge on I-5) or those that were located near an interchange.

The network was considered to be calibrated when 51 of the 55 simulated volumes were within 10 percent of the measured ground counts obtained from the Washington State Department of Transportation's Ramp and Roadway Report, 1988. The other four links had simulated volumes within 15 percent of the ground counts and were accepted as

**TABLE 2.2 CALIBRATION RESULTS**

| LINK DESCRIPTION    | FROM NODE | TO NODE | MEASURED VOLUME | SIM. VOLUME | PERCENT DIFF. |
|---------------------|-----------|---------|-----------------|-------------|---------------|
| SB5: SR526 TO 128   | 163       | 164     | 4,070           | 4,248       | 4.37          |
| NB5: 128 TO SR526   | 164       | 163     | 4,100           | 4,204       | 2.54          |
| SB5: 164 TO I405    | 165       | 166     | 4,700           | 4,651       | -1.04         |
| NB5: I405 TO 164    | 166       | 165     | 4,830           | 4,783       | -0.97         |
| SB5: 44TH TO 220    | 168       | 169     | 4,810           | 4,783       | -0.56         |
| NB5: 220 TO 44TH    | 169       | 168     | 6,140           | 5,750       | -6.35         |
| SB5: 205TH TO 175   | 171       | 172     | 4,490           | 4,401       | -1.98         |
| NB5: 175TH TO 220   | 172       | 171     | 4,710           | 6,301       | -6.10         |
| SB5: 125TH TO NGATE | 174       | 175     | 5,180           | 5,234       | 1.04          |
| NB5: NGATE TO 130TH | 175       | 174     | 8,530           | 8,903       | 4.37          |
| SB5: NGATE TO 85TH  | 175       | 290     | 5,410           | 4,954       | -8.43         |
| NB5: 85TH TO NGATE  | 176       | 175     | 6,370           | 5,883       | -7.65         |
| NB5: LC WAY TO 85TH | 177       | 176     | 6,460           | 6,274       | -2.88         |
| NB5: RAVENNA TO LC  | 178       | 177     | 6,830           | 7,777       | 13.87         |
| NB5: SHIP CANAL     | 181       | 180     | 7,680           | 7,431       | -3.24         |
| RAMP: NB5 TO SR520  | 181       | 325     | 2,310           | 2,443       | 5.76          |
| NB5: RNKE TO SHIP   | 182       | 181     | 7,800           | 7,439       | -4.63         |
| SB5: WSF TO MICH.   | 185       | 186     | 7,090           | 6,673       | -5.88         |
| SB5: MICH TO BOEING | 186       | 187     | 6,930           | 6,838       | -1.33         |
| NB5: BOEING TO MICH | 187       | 186     | 5,100           | 5,261       | 3.16          |
| SB5: BOEING TO 599  | 187       | 188     | 6,290           | 7,039       | 11.91         |
| NB5: 599 TO BOEING  | 188       | 187     | 5,290           | 5,657       | 6.94          |
| NB405: I5 TO SR167  | 189       | 214     | 3,850           | 3,369       | -12.49        |
| EB518: I5 TO SR99   | 189       | 215     | 4,440           | 4,196       | -5.50         |
| SB405: 70TH TO 520  | 202       | 203     | 4,140           | 4,422       | 6.81          |
| NB405: 520 TO 70TH  | 203       | 202     | 6,110           | 6,122       | 0.20          |
| SB405: 44TH TO 30TH | 209       | 210     | 4,480           | 4,067       | -9.22         |
| NB405: 30TH TO 44TH | 210       | 209     | 4,080           | 3,896       | -4.51         |
| SB405: 30TH TO 900  | 210       | 211     | 3,850           | 4,167       | 8.23          |
| NB405: 900 TO 30TH  | 211       | 210     | 4,520           | 4,242       | -6.15         |
| SB405: 169 TO 167   | 213       | 214     | 3,760           | 3,545       | -5.72         |
| NB405: 167 TO 169   | 214       | 213     | 4,250           | 4,554       | 7.15          |
| EB518: SR99 TO I5   | 215       | 189     | 2,910           | 3,222       | 10.72         |
| NB99: 85TH TO HOLM  | 225       | 224     | 2,171           | 2,166       | -0.23         |
| SB99: BRWY TO BAT   | 228       | 229     | 2,533           | 2,625       | 3.63          |
| NB99: BAT TO BRWY   | 229       | 228     | 4,826           | 4,429       | -8.23         |
| SB99: WSF TO EMW    | 230       | 231     | 2,290           | 2,339       | 2.14          |
| NB99: EMW TO WSF    | 231       | 230     | 2,553           | 2,711       | 6.19          |
| SB509: GLEN TO 128  | 240       | 241     | 2,680           | 2,934       | 9.48          |
| SB509: 160TH TO DES | 242       | 243     | 2,020           | 1,981       | -1.93         |
| NB509: DES TO 160TH | 243       | 242     | 1,140           | 1,118       | -1.93         |
| EB520: MONT TO 84TH | 244       | 245     | 3,720           | 3,623       | -2.61         |
| WB520: SR520-I5 INT | 244       | 326     | 3,450           | 3,687       | 6.87          |
| WB520: 84TH TO MONT | 245       | 244     | 3,690           | 3,805       | 3.12          |
| EB520: 908 TO 202   | 249       | 250     | 1,950           | 1,937       | -0.67         |
| EB90: FLOATING BR.  | 252       | 253     | 4,830           | 4,723       | -2.22         |
| WB90: FLOATING BR.  | 253       | 252     | 1,490           | 1,598       | 7.25          |
| EB90: 148TH TO 901  | 257       | 258     | 3,490           | 3,774       | 8.14          |
| WB90: 901 TO 148TH  | 258       | 257     | 2,800           | 2,616       | -6.57         |
| SB5: 85TH TO 70TH   | 290       | 291     | 5,610           | 5,654       | 0.78          |
| SB5: 70TH TO 50TH   | 291       | 292     | 6,230           | 6,457       | 3.64          |
| SB5: SHIP CANAL     | 294       | 295     | 7,270           | 8,012       | 10.21         |
| SB5: 520 TO BOYL    | 296       | 297     | 7,520           | 8,002       | 6.41          |
| RAMP: SB5 TO 520    | 296       | 325     | 1,230           | 1,367       | 11.14         |
| NBEX: LC TO NGATE   | 315       | 314     | 2,840           | 2,563       | -9.75         |
| NBEX: 42ND TO LC    | 316       | 315     | 4,330           | 4,293       | -0.85         |
| RAMP: 520 TO SB5    | 326       | 296     | 2,080           | 1,948       | -6.35         |

satisfactory. Volumes on links for which no volume data were available were checked for reasonableness.

The calibration procedure required 42 trial runs and resulted in 14 hours of personal computer execution and approximately 200 person-hours.



## CHAPTER 3

### FINDINGS, INTERPRETATION, APPRAISAL, AND APPLICATION: INCIDENT SIMULATION

This chapter reviews the simulations of incidents on selected links within the central Puget Sound transportation network.

#### **CALIBRATION OF SYSTEM SPEED AND TIME**

Although referred to as calibration, the calibration procedures used for the simulation of incidents differed from the calibration discussed in Chapter 2. The calibration procedures in Chapter 2 were performed to match simulated link volumes with actual ground counts; the purpose of calibration in this step was to adjust the percentage of driver information so that the average simulated commute times and speeds would match those that were observed in the field.

#### **System Speed**

The system speed is the quotient of the total vehicle miles traveled on the network divided by the total vehicle hours consumed on the network. To simplify the estimation of the system speed, the access links between nodes and zone centroids were not included in this computation. Both the vehicles hours and the vehicle miles are printed in the last three lines of the output, OT.OUT.

The derivation of system speed from the output of the simulation results was a simple task; however, the estimation of actual system speed was less straightforward. The Puget Sound Council of Governments had estimated system speed as approximately 40 to 45 miles per hour. Unfortunately, this estimate pertained only to freeway speeds and did not include many of the signalized arterials included in this analysis. To account for the slower speeds incurred on the slower links, the initial estimate of 45 mph was reduced to 30 to 35 miles per hour.

### **Commute Time**

The average simulation commute time was calculated by dividing the total vehicle hours by the total number of vehicles using the network. As with system speed, the total number of vehicle hours was given in the output, OT.OUT. However, the total number of vehicles was derived as the summation of all trips in the origin-destination matrix, or OD.DAT.

The actual average commute time was estimated to be 16 minutes, a value that included all commutes within the modeled network. The Puget Sound Council of Governments had suggested an average commute time of 21 minutes, but this value included an average number of incidents on the network and network access times that were not included in the estimate. Since it would have been extremely difficult to ascertain the average number of incidents within the system and where they were located, the researchers did not attempt to simulate such a scenario.

### **Driver Information**

The percentage of drivers with information about traffic conditions has a significant effect on the overall system efficiency. By adjusting the percentage of informed drivers, the modeler can alter the values of simulated system speed and average commute times to lie within acceptable limits.

Figures 3.1 and 3.2 show the effects of driver information on system performance. Initially, increasing the percentage of informed drivers increases the performance of the system; as driver information increases, system speed increases and average commute time decreases. However, as these figures indicate, if more than 50 percent of the drivers are aware of existing traffic conditions, then the system performance slowly, but steadily, decreases. Note that the percentage of declining system performance is very network specific and will vary if incidents are present.

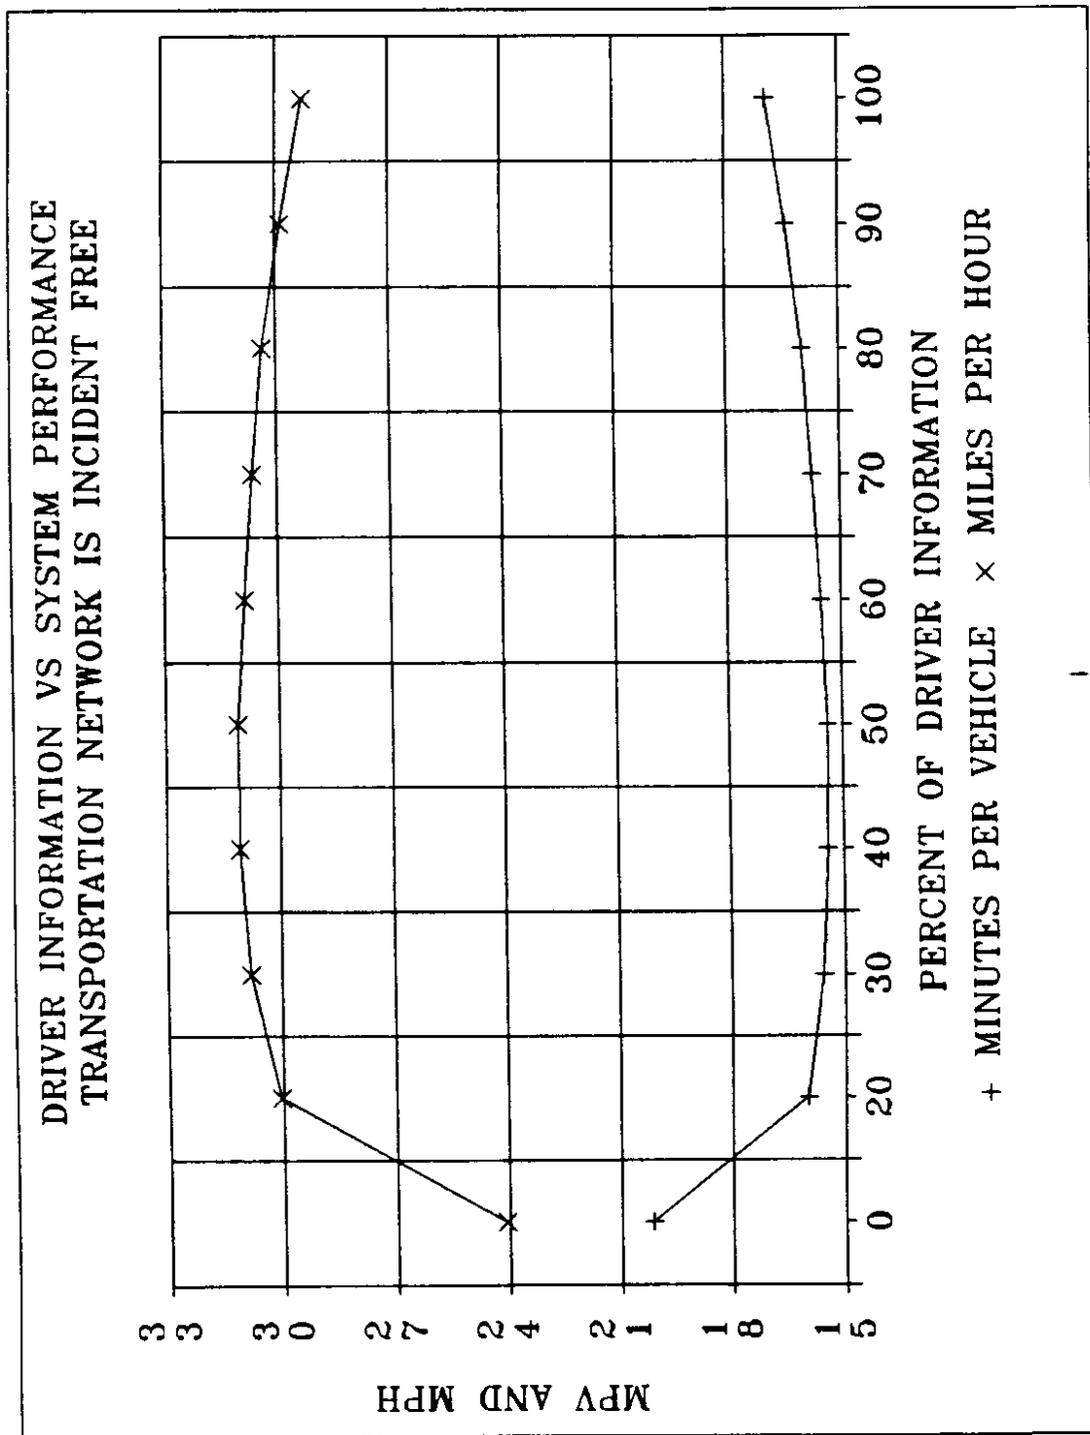


Figure 3.1 The Impacts of Driver Information on System Speed and Average Commute Time

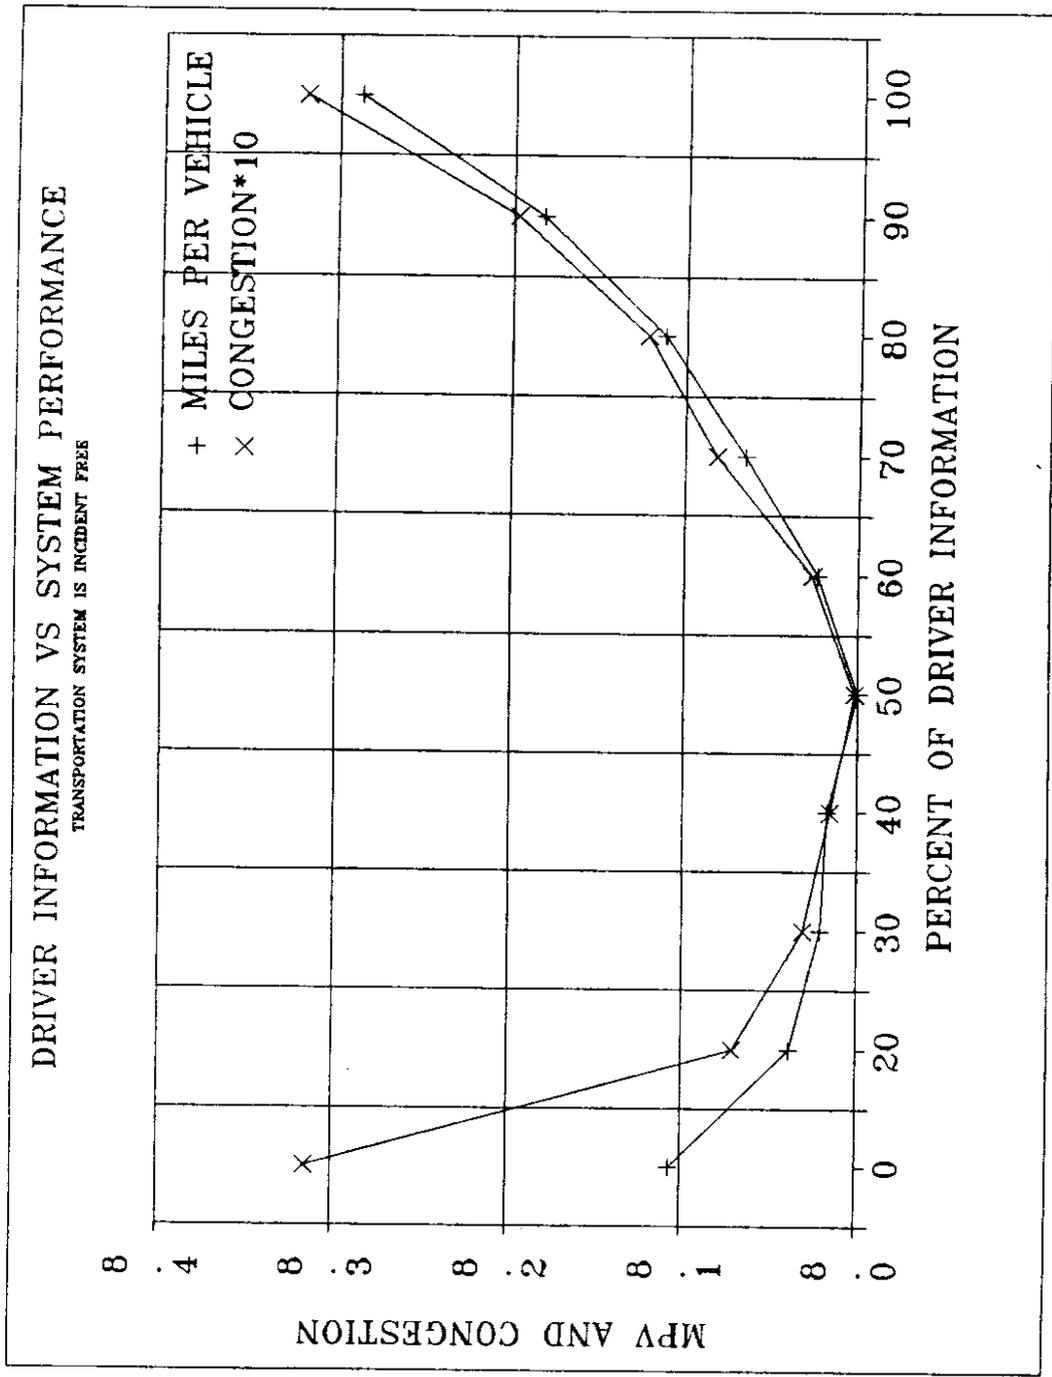


Figure 3.2 The Impacts of Driver Information on Congestion and Ave. Commute Distance

Figure 3.1 shows that two values of percentage of driver information existed for many of the system speeds and average commute times. At this stage, the researchers concluded that the choice of percentage of driver information depends not only on the values for calibrating system performance but also on the route of primary interest.

Within the central Puget Sound region, some commuting routes are more susceptible to traffic congestion than others. Such routes include the floating bridges of SR-520 and I-90 because of their high volumes of traffic and limited space in which cars can maneuver around blocking incidents. Because of their susceptibility to congestion, the drivers on these routes could reasonably be assumed to pay more attention to traffic reports than drivers who use other, less susceptible, routes. Thus, routes with higher susceptibility to congestion have a greater percentage of drivers who are aware of existing traffic conditions.

The conclusion that driver awareness varies with the route chosen leaves the user of XXEXQ with a limitation that can not be overcome. This limitation is the fact that XXEXQ uses the percentage of driver information as a system parameter: it is not route specific. Therefore, the researchers chose a value for driver information that best described the awareness on a particular route or link. In this case, the link containing the floating bridge on SR-520 was chosen, and the selected percentage of informed drivers was 60 percent.

### **SIMULATION OF INCIDENTS**

Various incidents were simulated, and the system speed, average commute times, length of average commute, and system congestion were checked for reasonableness. For each of the first three incidents simulated, seven different XXEXQ simulation runs were made with varying incident durations (10-, 20-, 30-, 40-, 50-, and 60-minute durations) and one run was made free of incidents.

## **Simulation 1: Eastbound SR-520**

### **Incident Description**

For simulation purposes, a hypothetical incident was placed in the eastbound direction of travel on the Evergreen Point floating bridge of SR-520. (Recall that the origin-destination matrix was for the p.m. peak period, so eastbound would be the direction of heaviest travel). This incident was assumed to be a traffic accident that resulted in complete closure of one of the two existing lanes and caused the remaining lane to operate at 50 percent of the original capacity. With this type of incident, the operating capacity of the bridge was reduced to 25 percent of the original capacity. The lanes traveling in the opposite direction were not affected by the incident.

### **Coding of Incident**

The 120-minute simulation duration (4:30 p.m. to 6:30 p.m.) was divided into twelve 10-minute time periods, and the incident was assumed to begin during the second time period, or 10 minutes into the simulation (i.e., 4:40 p.m.). One simulation was run for each of seven incident durations that lasted from 0 to 60 minutes (i.e., one run was executed for an incident duration of 0 minutes, another for 10 minutes . . . , and another for 60 minutes). A different NW.DAT file had to be created for each simulation run.

Since 12 time periods were used, the traffic intensity ratios for these periods had to be determined. The traffic intensity ratio is simply a ratio that translates the average origin-destination traffic demand into the demand expected in individual time periods. For example, a traffic intensity ratio of 1.2 indicates that the corresponding time period has 20 percent more traffic than the peak-hour average. The data used to derive these ratios were obtained from the Traffic Systems Management Center in Seattle. This information was converted into the needed ratios and is shown in Figure 3.3.

The OD.DAT file, regardless of the incident duration or location, remained constant in all simulation runs (OD.DAT was not included in this report because of its length; copies

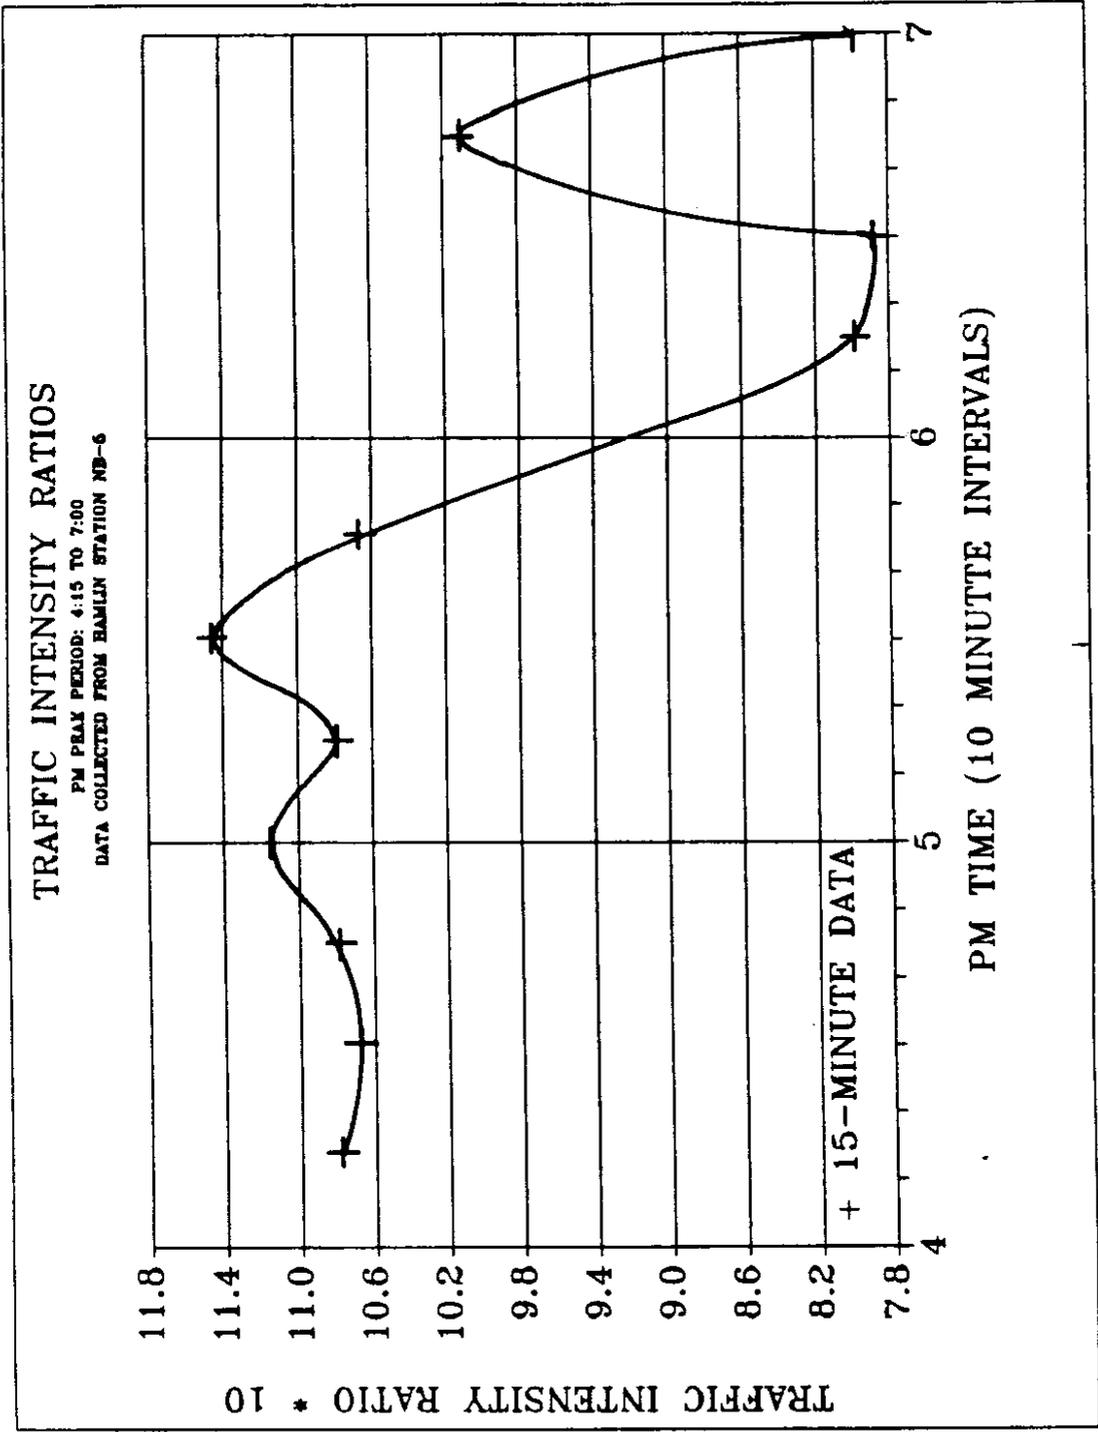


Figure 3.3 Traffic Intensity Ratios for the PM Peak Period

are available upon request). However, the NW.DAT and CN.DAT files had to be changed to reflect the incident description. In this case, part 2 of NW.DAT had 12 lines: one line for each of the 12 periods (for exposition purposes, Appendix B contains the full NW.DAT file for a 40-minute incident simulation). Each of these lines began with the link number that contained the incident or capacity reduction. The link number for the Evergreen Point floating bridge was 780. The proportion of capacity during each time period was placed in each line following the link number. As an example, part 2 of NW.DAT is shown in Table 3.1 for a 40-minute incident in the location described above.

Similar to NW.DAT, CN.DAT also had to be changed to reflect the number of time periods, the percentage of uninformed drivers, and the traffic intensity ratios. The CN.DAT file used for the same incident is shown in Table 3.2.

**TABLE 3.1 PART 2 OF NW.DAT  
FOR A 40 MINUTE INCIDENT**

780 1.0  
780 0.25  
780 0.25  
780 0.25  
780 0.25  
780 1.0  
780 1.0  
780 1.0  
780 1.0  
780 1.0  
780 1.0  
780 1.0

**TABLE 3.2 CN.DAT FOR A  
SIMULATION WITH 12 TIME PERIODS**

1071 81 337 387 6480 163 0.0005 10 2 1 12 1.23  
1.07 40  
1.07 40  
1.09 40  
1.12 40  
1.09 40  
1.10 40  
1.15 40  
1.10 40  
1.03 40  
0.94 40  
0.84 40  
0.79 40

With all changes accounted for in the data files, the simulation runs for the incident on the Evergreen Point floating bridge were executed.

### **Results From Simulation 1**

Seven simulation runs were executed, one run for each incident duration. Each run required approximately 6.5 hours on a 286 10Mhz machine. The results of these runs are shown in Figures 3.4, 3.5, 3.6, and 3.7.

Figure 3.4 reveals the changes in the average commute time and system speed with respect to the duration of the incident on eastbound SR-520. In the base run (a run with an incident duration of 0 minutes) the system speed was approximately 31 miles per hour, and the average commute time was 16 minutes per vehicle. These value results matched the calibration parameters. As the incident duration increased, the system speed decreased and the average commute time increased. For the 60-minute incident, the decline in system speed was 1.4 miles per hour, and the average commute time (all drivers) increased by 0.9 minutes.

Similar to Figure 3.4, Figure 3.5 shows the relationship of the average trip length and system congestion to incident duration. In general terms, as the duration of the incident increases, so does the average trip length and the system congestion.

The results seen in Figures 3.4 and 3.5 followed a general pattern that was expected. The base run described a user equilibrium solution in which all links were capable of operating at full capacity. As this capacity was reduced by link restriction, two consequences resulted. The first consequence was the inability of the uninformed driver to respond to the capacity restriction. This inability resulted in drivers taking the same route as they did in the base run and, subsequently, being delayed by queues in the restricted link and by queues caused by the restricted link. Because the uninformed drivers took the same route, regardless of capacity restrictions, their average trip length remained the same. However, if their normal route had been affected by capacity restrictions, then they would probably have been delayed by queues and the travel time would have increased.

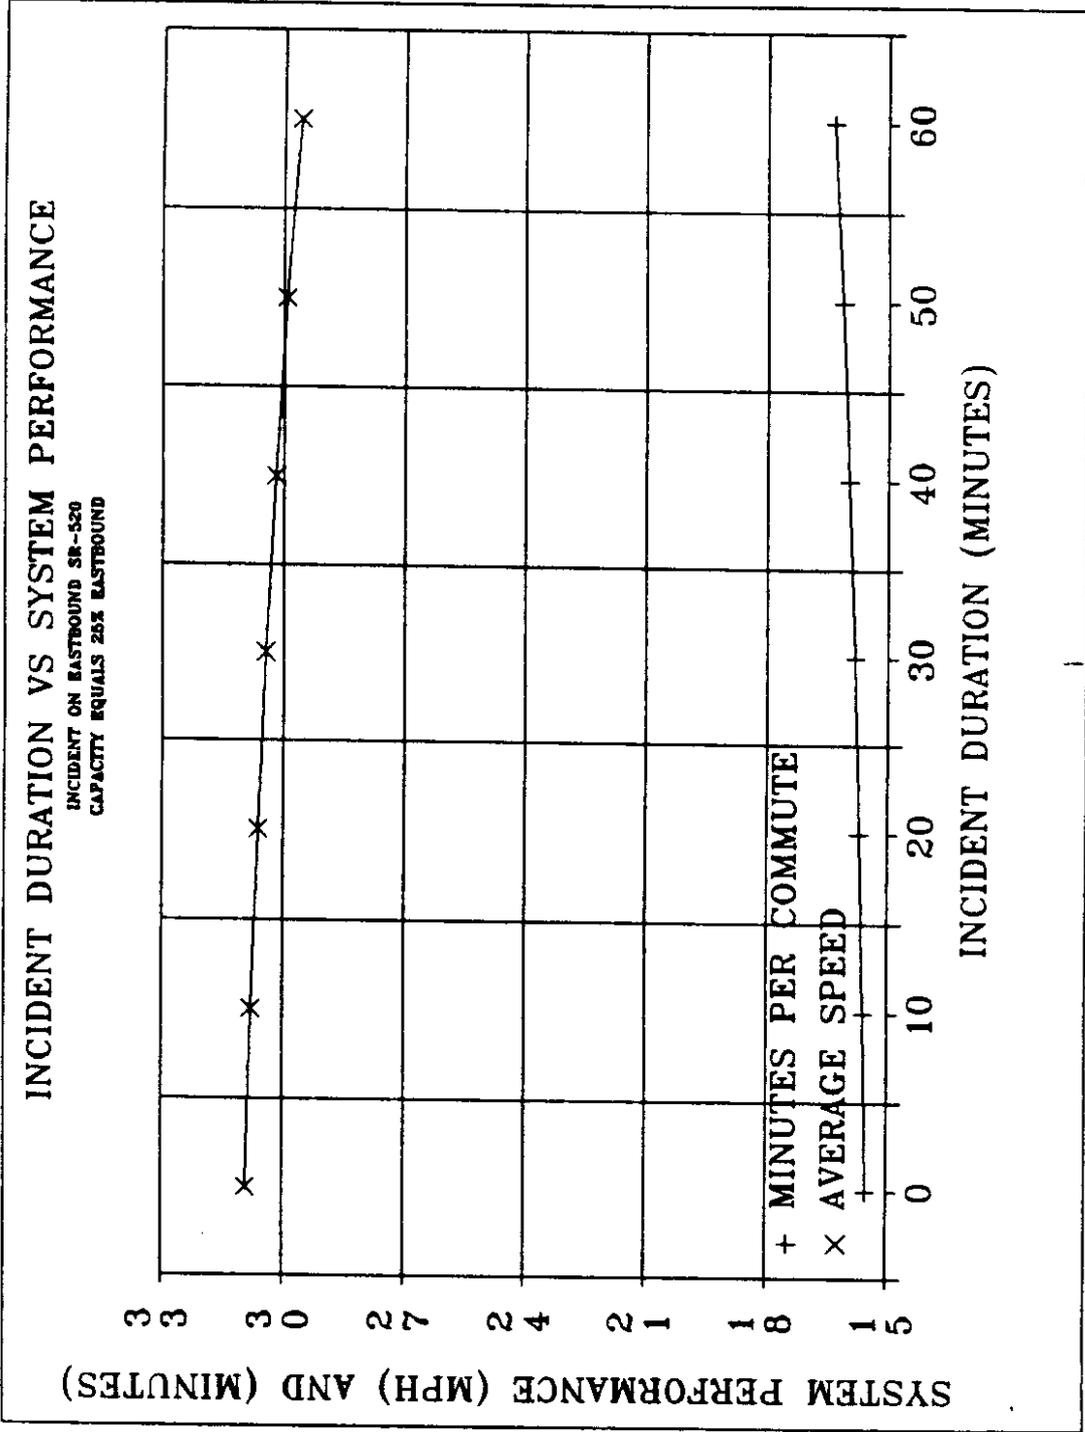


Figure 3.4 The Impacts of Incident Duration on System Speed and Average Commute Time

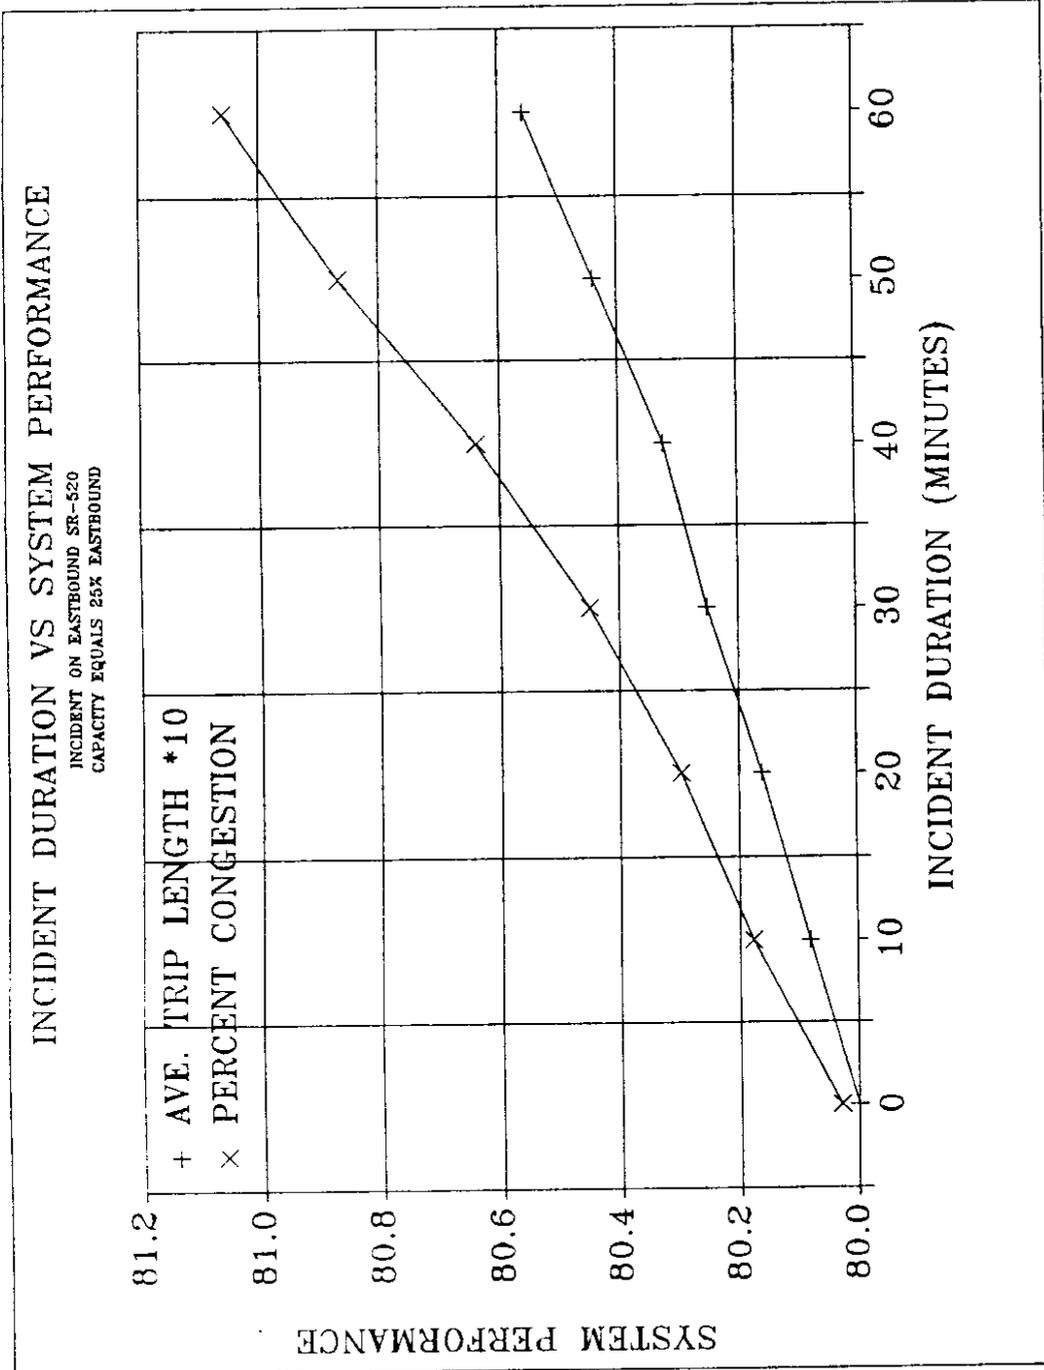


Figure 3.5 The Impacts of Incident Duration on Congestion and Average Trip Length.

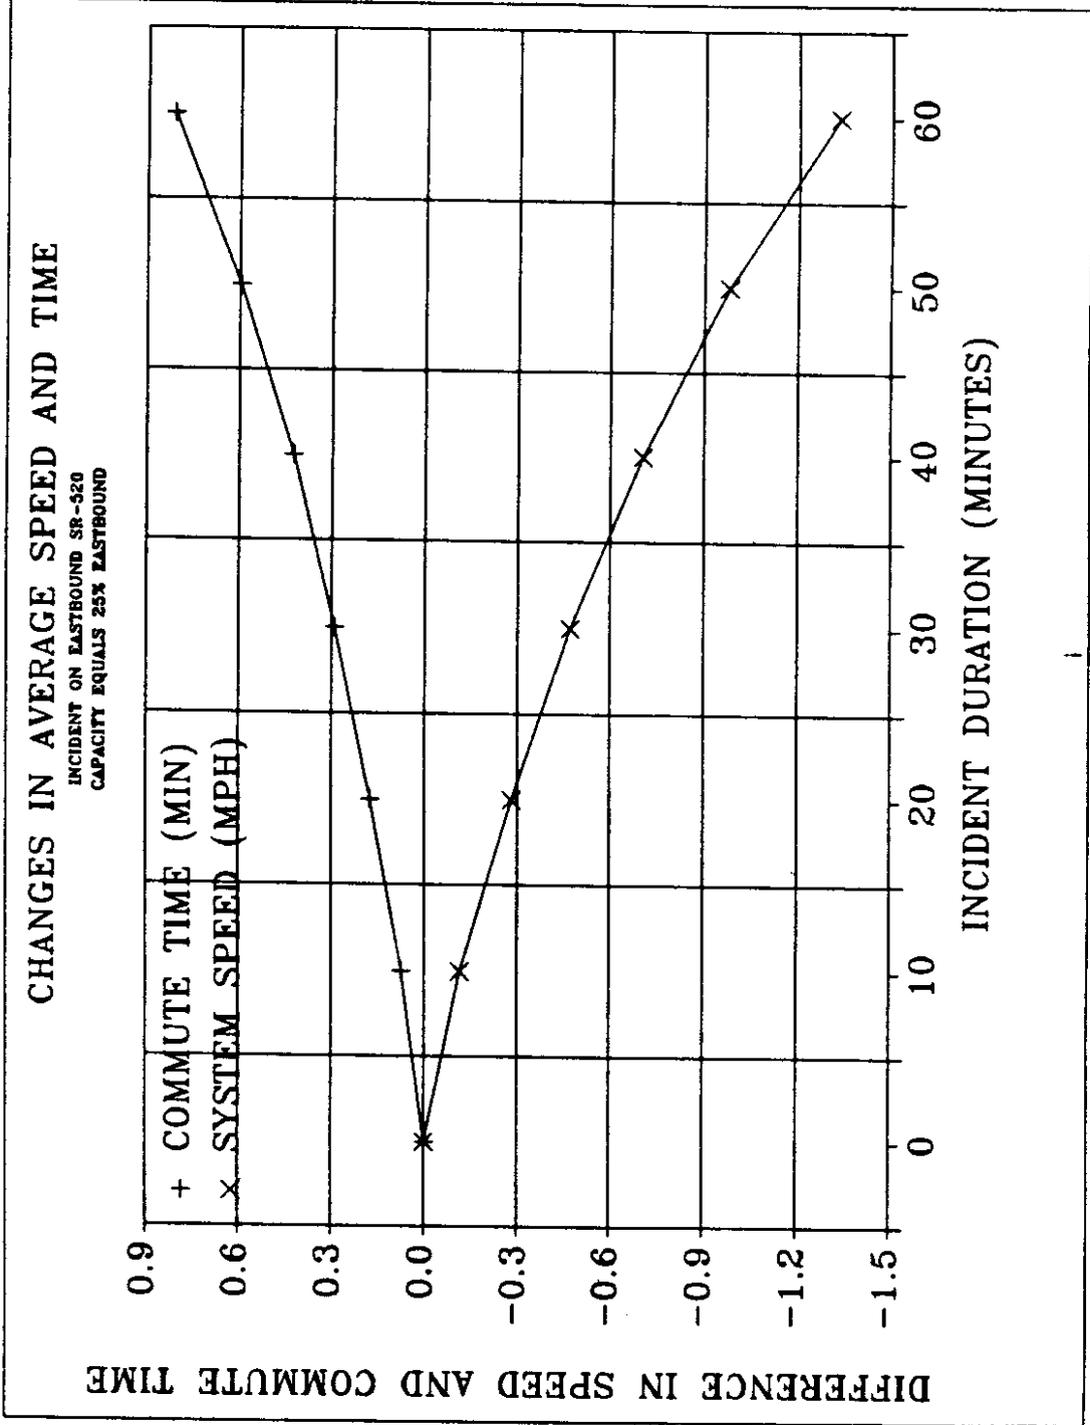


Figure 3.6 The Impacts of Incident Duration as Compared to the Base Run

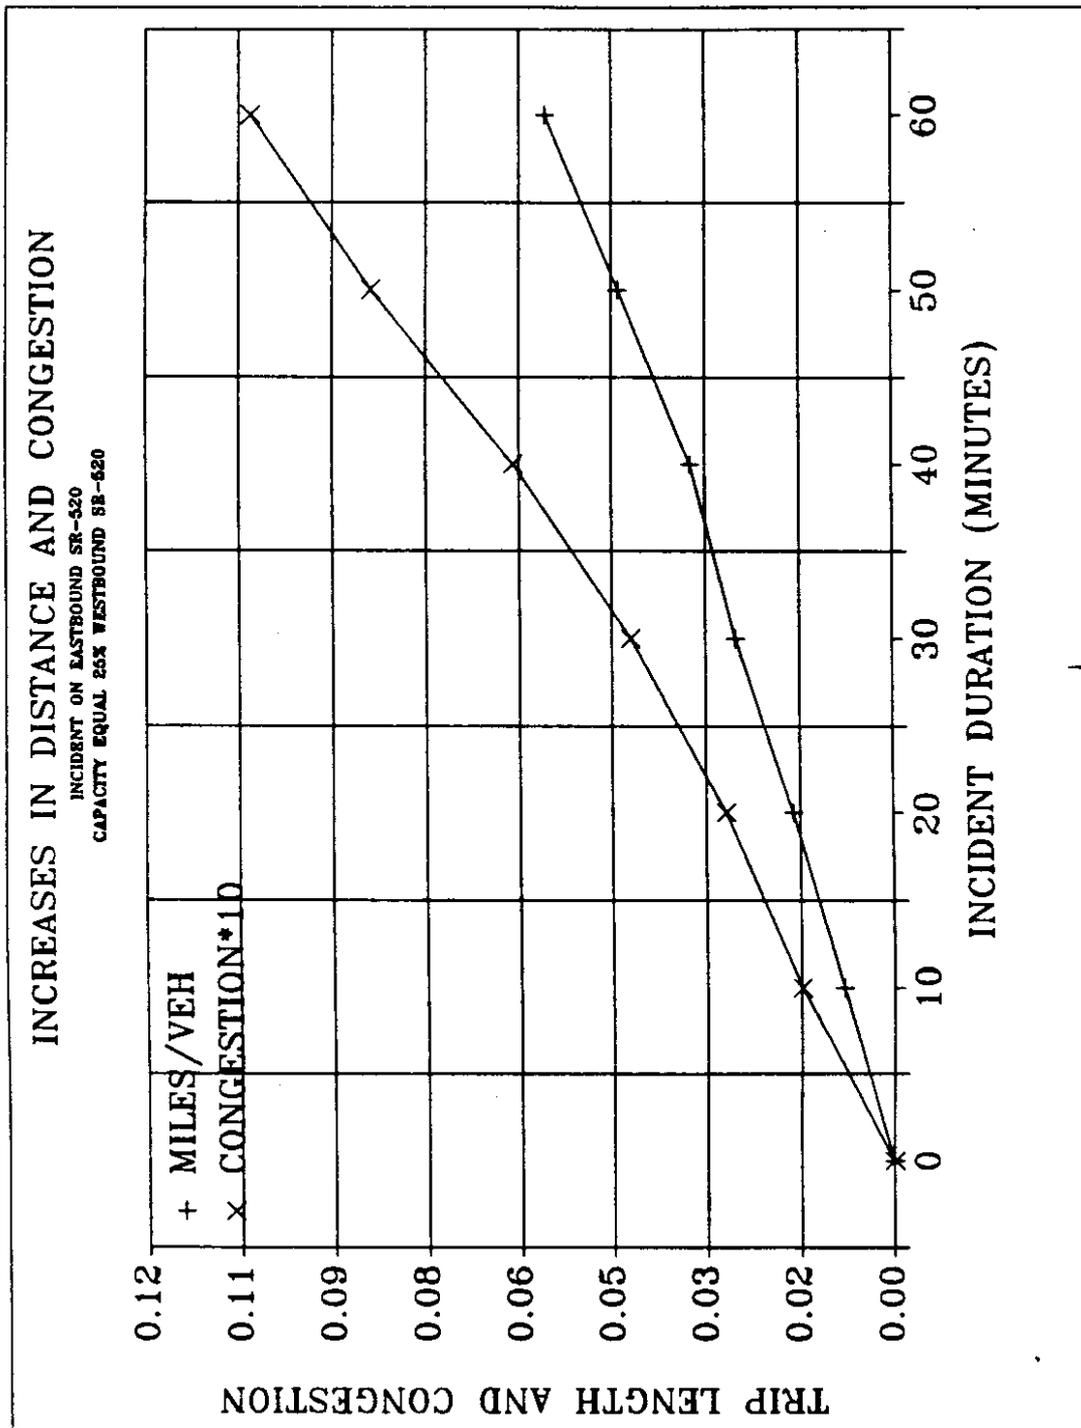


Figure 3.7 The Impacts of Incident Duration as Compared to the Base Run

The second consequence resulted from the informed drivers' ability to respond to queues and capacity restrictions. Unlike the uninformed drivers, the informed drivers found the path that offered the quickest delivery between their origin and destination. In doing so, they often diverted from their normal route to other routes that may have taken significantly shorter time but may have been longer in distance. This diversion of traffic increased congestion on other parts of the system and increased the average number of miles traveled per vehicle.

Figures 3.6 and 3.7 use the same results as Figures 3.4 and 3.5 but plot the difference between the base run and the simulations with incidents. As shown, a 60-minute incident on eastbound SR-520 near the Evergreen Point floating bridge decreased the system speed by approximately 1.33 miles per hour, increased the average commute time by 0.81 minutes, increased the average trip length by 0.06 miles, and increased the system congestion 0.01. Table 3.3 lists the increase in total vehicle-hours consumed by the system (relative to the non-incident "base case") with respect to the length of duration.

Another product of XXEXQ was the number of vehicles in a queue on any specified link. In these simulations, the restricted link was chosen for queue output. Table 3.4 lists the maximum queue in vehicles and equivalent distance for each incident duration; the equivalent distances were calculated with the assumption that headways in queues were equal to 30 feet.

In the base run, XXEXQ predicted a queue length of 1.08 miles. A queue of this length is a common occurrence on eastbound SR-520 because of the large volumes of traffic attempting to cross the lake on a routine basis. As an incident was introduced to the link containing the floating bridge and as the incident duration increased, the length of queue also increased. At a 60-minute incident duration, the maximum queue length reached a distance of 2.24 miles, a distance that would easily have backed up traffic onto Interstate 5.

**TABLE 3.3 INCREASE IN VEHICLE-HOURS RESULTING FROM AN INCIDENT ON EASTBOUND STATE ROUTE 520 NEAR EVERGREEN POINT FLOATING BRIDGE**

| Incident Duration | Vehicle Hours |
|-------------------|---------------|
| Base Case         | 0             |
| 10 min.           | 504           |
| 20 min.           | 1,198         |
| 30 min.           | 1,984         |
| 40 min.           | 2,918         |
| 50 min.           | 4,080         |
| 60 min.           | 5,562         |

**TABLE 3.4 QUEUES ON RESTRICTED LINK 780: EVERGREEN POINT FLOATING BRIDGE, EASTBOUND STATE ROUTE 520**

| Incident Duration | Vehicles in Queue | Equivalent Distance |
|-------------------|-------------------|---------------------|
| Base Case         | 379               | 1.08 mi.            |
| 10 min.           | 480               | 1.36 mi.            |
| 20 min.           | 565               | 1.61 mi.            |
| 30 min.           | 629               | 1.79 mi.            |
| 40 min.           | 695               | 1.97 mi.            |
| 50 min.           | 748               | 2.12 mi.            |
| 60 min.           | 787               | 2.24 mi.            |

**TABLE 3.5 INCREASE IN VEHICLE-HOURS RESULTING FROM AN INCIDENT ON NORTHBOUND INTERSTATE 5 NEAR SHIP CANAL BRIDGE**

| Incident Duration | Vehicle Hours |
|-------------------|---------------|
| Base Case         | 0             |
| 10 min.           | 1,123         |
| 20 min.           | 2,755         |
| 30 min.           | 5,027         |
| 40 min.           | 7,582         |
| 50 min.           | 10,751        |
| 60 min.           | 16,189        |

**TABLE 3.6 QUEUES ON RESTRICTED LINK 532: SHIP CANAL BRIDGE, NORTHBOUND INTERSTATE 5**

| Incident Duration | Vehicles in Queue | Equivalent Distance |
|-------------------|-------------------|---------------------|
| Base Case         | 400               | 0.57 mi.            |
| 10 min.           | 828               | 1.18 mi.            |
| 20 min.           | 1190              | 1.69 mi.            |
| 30 min.           | 1488              | 2.11 mi.            |
| 40 min.           | 1627              | 2.31 mi.            |
| 50 min.           | 1812              | 2.57 mi.            |
| 60 min.           | 1970              | 2.80 mi.            |

## **Simulation 2: Northbound I-5**

### **Incident Description**

For this simulation, an incident was introduced on northbound I-5 on the Ship Canal bridge. The incident was assumed to cause three of the four lanes to be entirely closed, and the fourth lane was assumed to remain at full capacity. Thus, the operating capacity of the bridge would be 25 percent of the original capacity. The lanes providing travel in the opposite direction were not affected by the incident.

### **Coding of Incident**

The data files used for this incident were the same as those used for the previous incident, except that the NW.DAT file was changed to incorporate the link that contained the Ship Canal bridge, link 532. The incident start times, durations and the numbers of simulations were kept the same as in simulation 1.

### **Results From Simulation 2**

In general, the results from the simulated incident on the Ship Canal bridge were very similar to those from the simulation of incidents on the Evergreen Point floating bridge. However, these results (as shown in Figures 3.8, 3.9, 3.10, and 3.11) did differ in the extent to which the system performance characteristics were altered. With an incident duration of 60 minutes, the system speed was reduced by 3.65 miles per hour (a 174 percent greater effect than the previous incident on SR-520); the average commute time was increased by 2.37 minutes (192 percent greater than the previous incident); the trip lengths increased by 0.13 miles (117 percent greater); and the congestion ratio increased by 0.02 (90 percent greater). Table 3.5 lists the increase in total vehicle-hours (relative to the non-incident "base case") with respect to the length of incident duration.

The queues that resulted from the incidents are listed in Table 3.6. Again and as expected, the length of queues increased as the duration of the incident increased. The

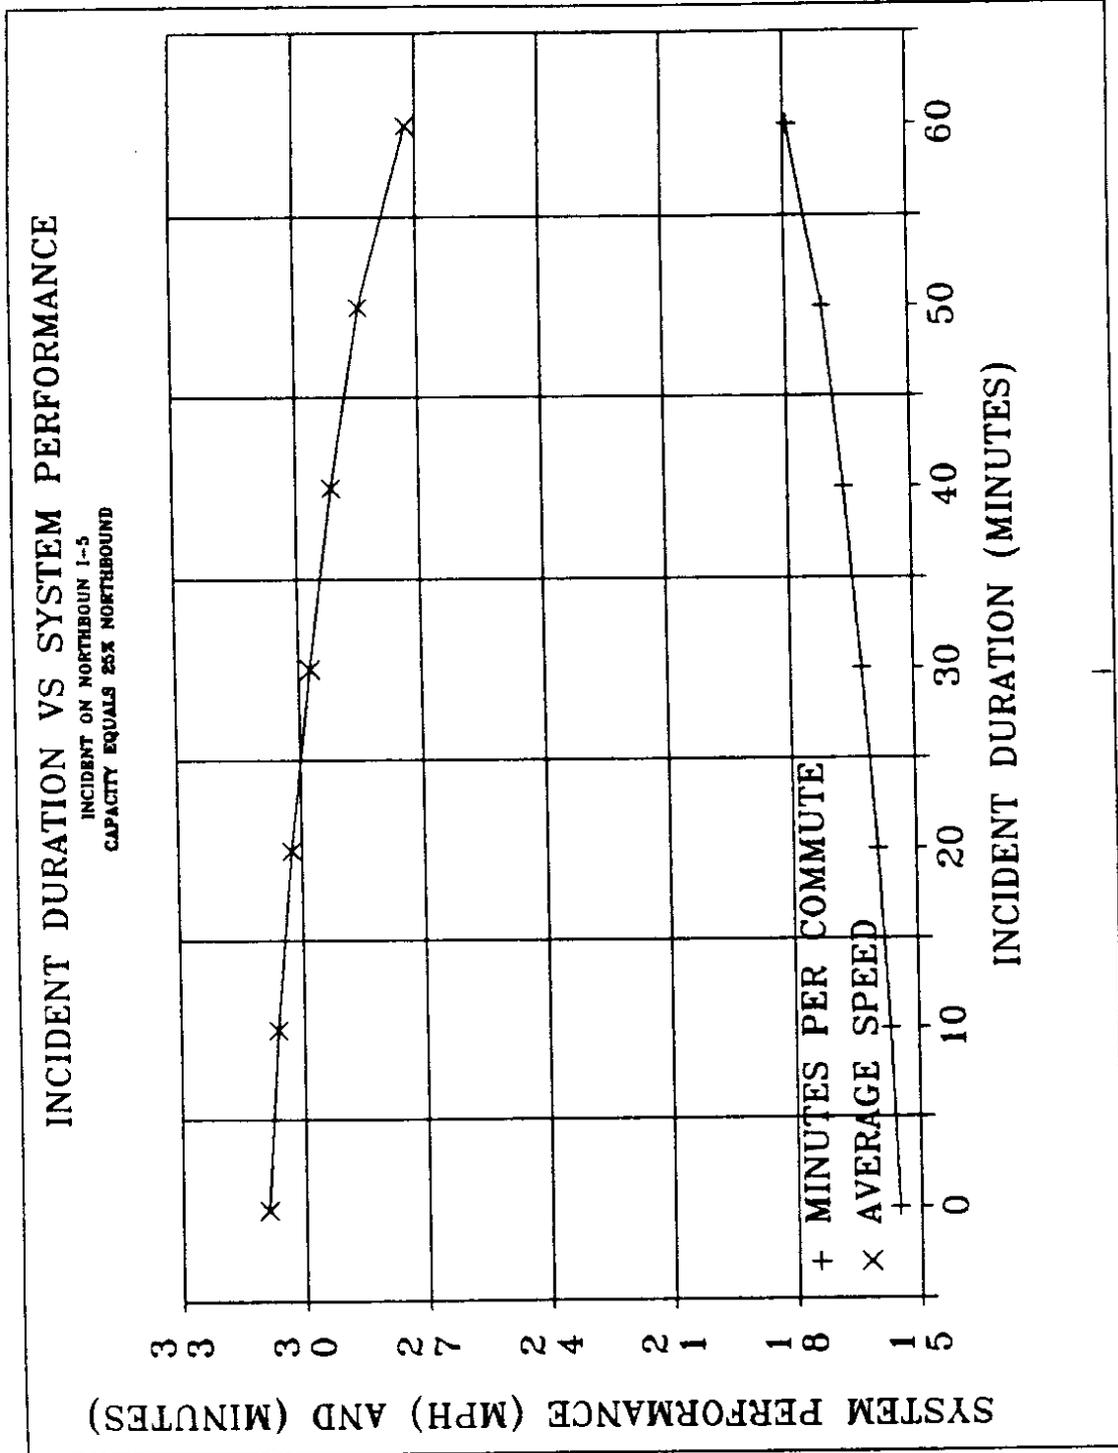


Figure 3.8 The Impacts of Incident Duration on System Speed and Average Commute Time

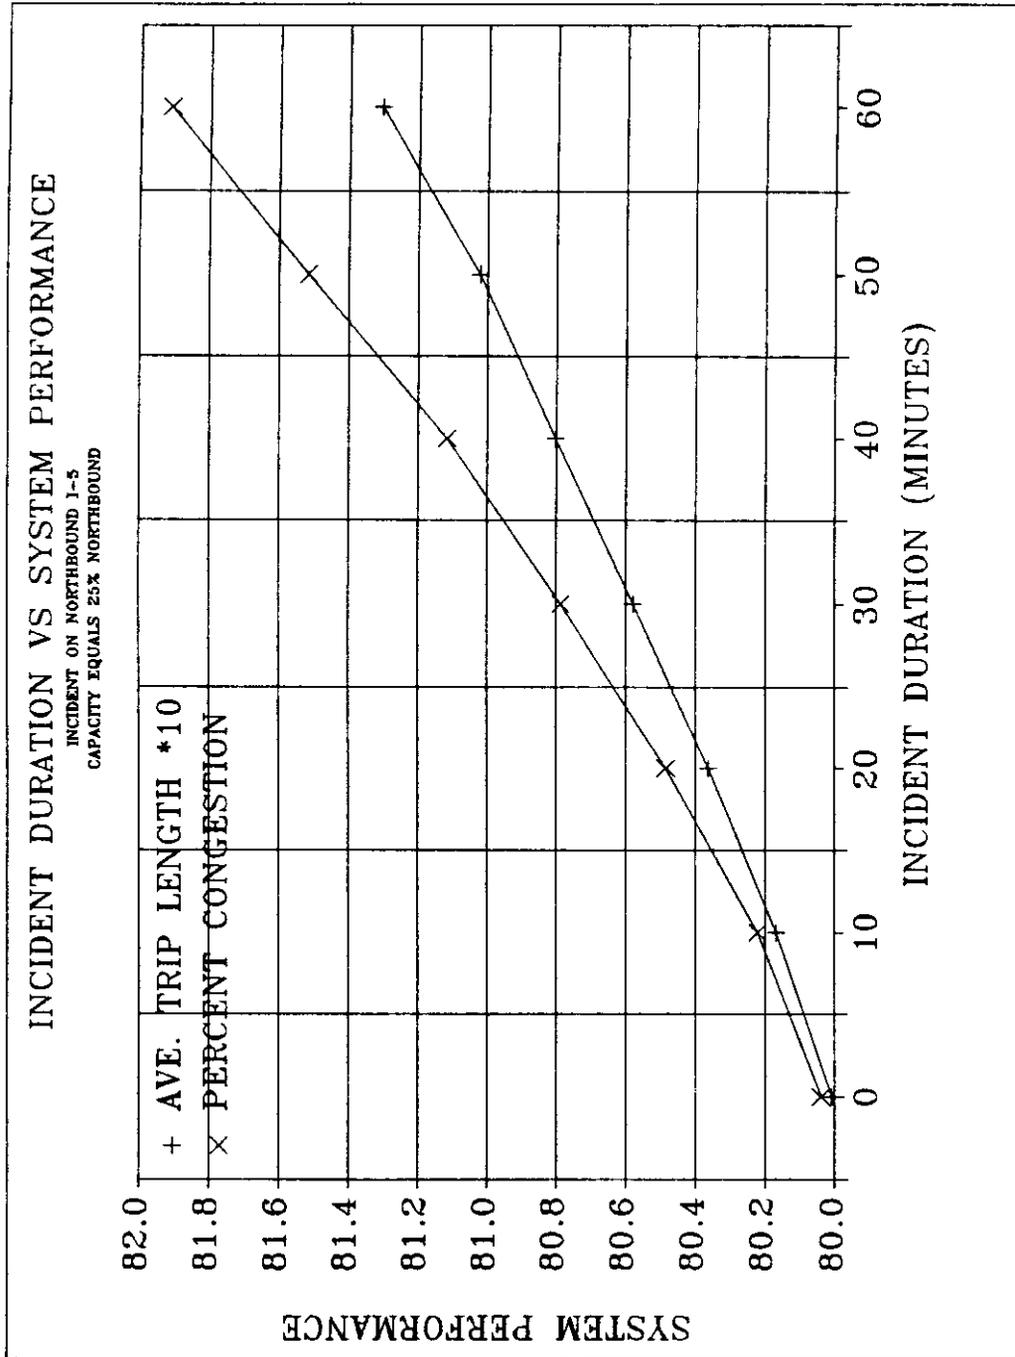


Figure 3.9 The Impacts of Incident Duration on Congestion and Average Trip Length

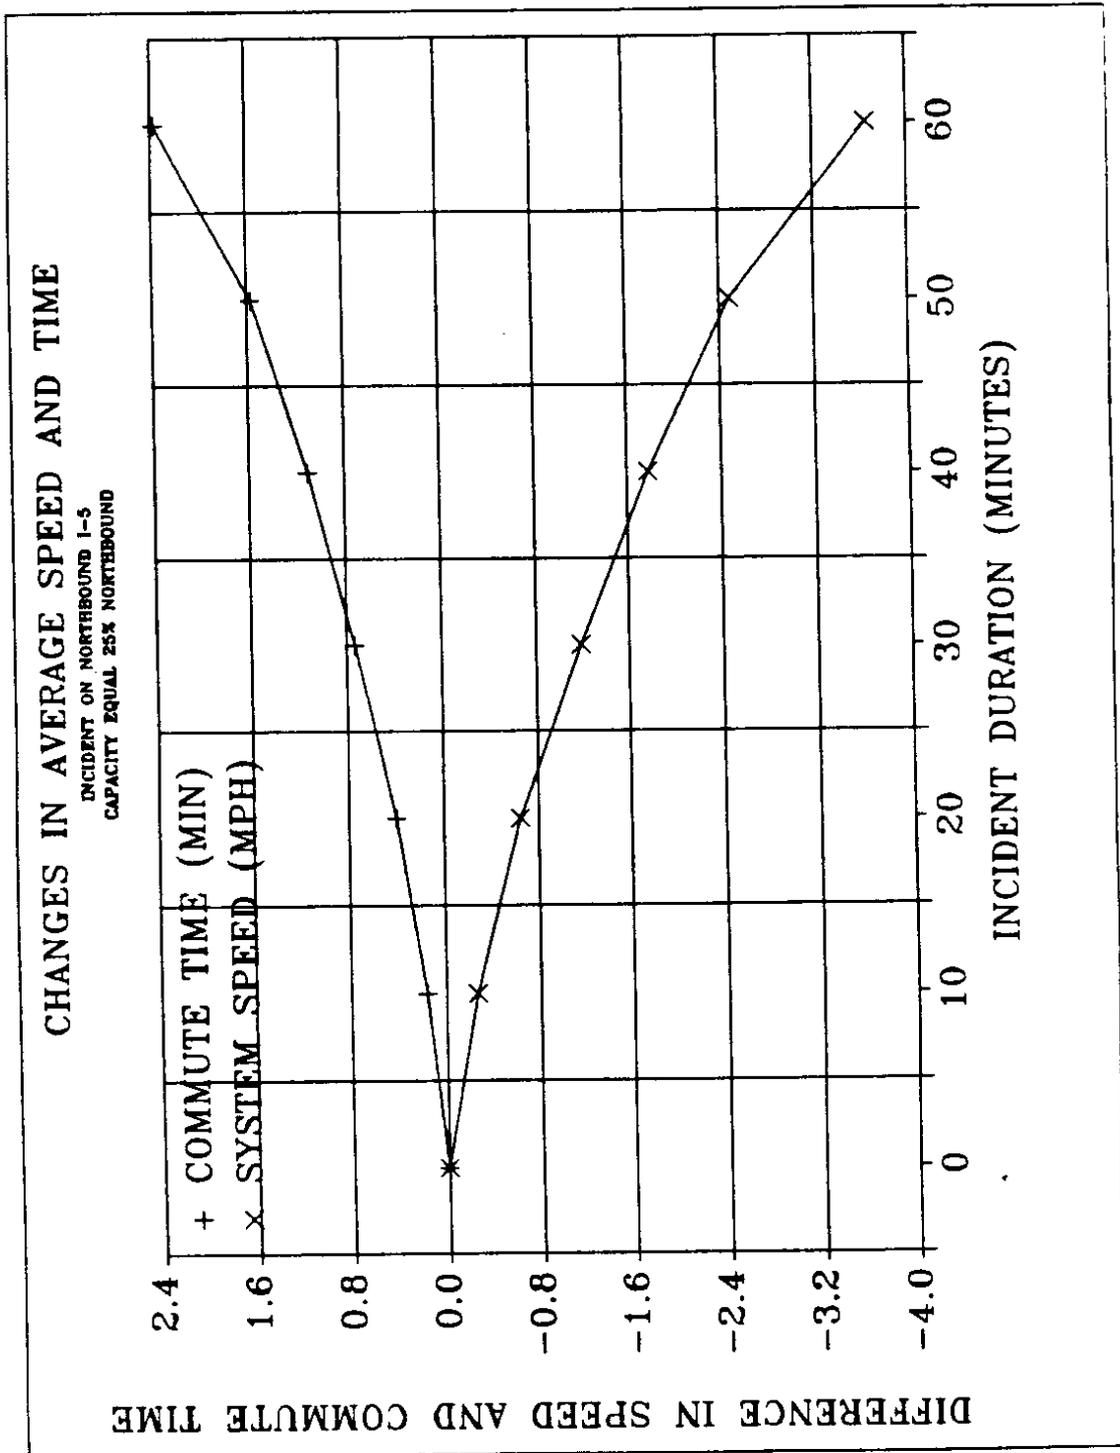


Figure 3.10 The Impacts of Incident Duration as Compared to the Base Run

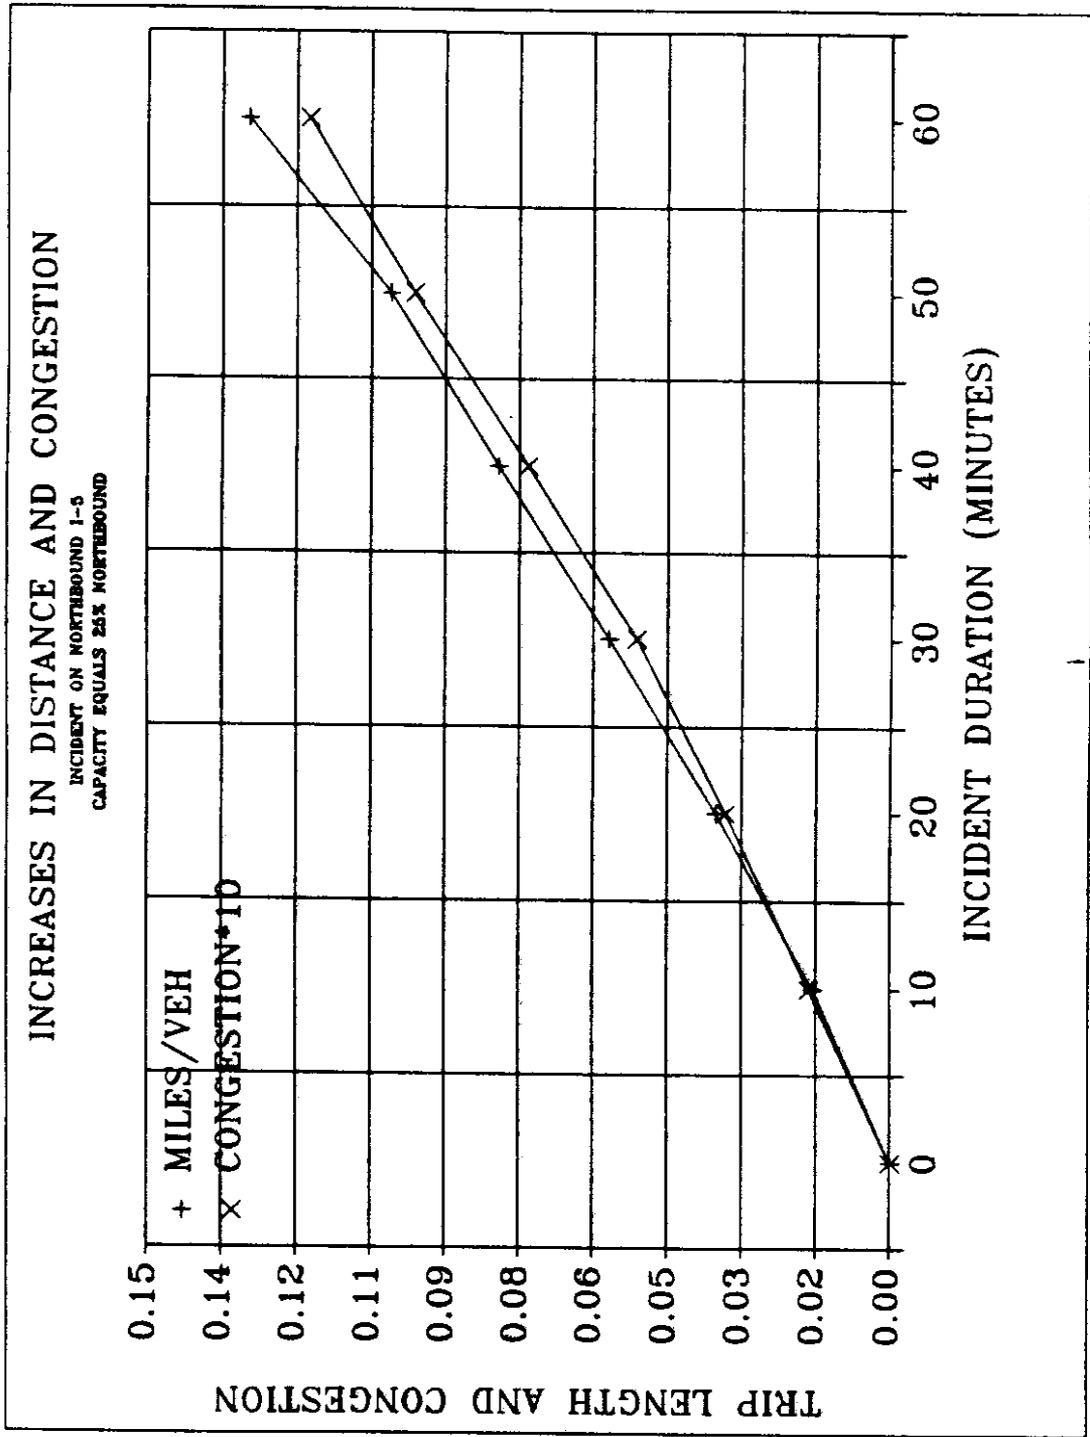


Figure 3.11 The Impacts of Incident Duration as Compared to the Base Run

maximum queue length that occurred with a 60-minute incident was 2.80 miles, a distance that would have backed traffic into downtown Seattle.

### **Simulation 3: Visual Interference**

#### **Incident Description**

Traffic incidents often cause capacity reductions in other links that are within sight of the incident. Such an effect is the result of drivers slowing down to take a good look at the accident. These drivers (also referred to by traffic reporters as gapers, rubberneckers, swivelheads, and dipsticks) tend to slow down the flow of traffic and reduce the capacity of a fully functional link. To simulate the effects of this gaper phenomenon, a reasonable percentage of capacity reduction on a link that traveled in the opposite direction of an incident was coded.

The primary incident used for this simulation was the same incident used in simulation 1. The capacity reduction caused by visual interference was placed in the westbound lanes of SR-520 on the Evergreen Point floating bridge, and the resulting capacity was reduced to 80 percent of the original value.

#### **Results From Simulation 3**

The effects on the system from both the capacity reductions (the primary incident and the visual interference) are shown in Figures 3.12, 3.13, 3.14, and 3.15. With an incident duration of 60 minutes and a capacity reduction due to visual interference for the same length of time, the system speed was reduced by 1.40 miles per hour (a 5.3 percent greater reduction than the incident without the visual interference); the average commute time increased by 0.86 minutes (6.26 percent greater); the average trip length increased by 0.06 miles (about equal); and the congestion ratio increased by 0.012 (20 percent greater). Table 3.7 lists the increase in total vehicle-hours (relative to the non-visually impacted incident presented in simulation 1) with respect to the length of incident duration.

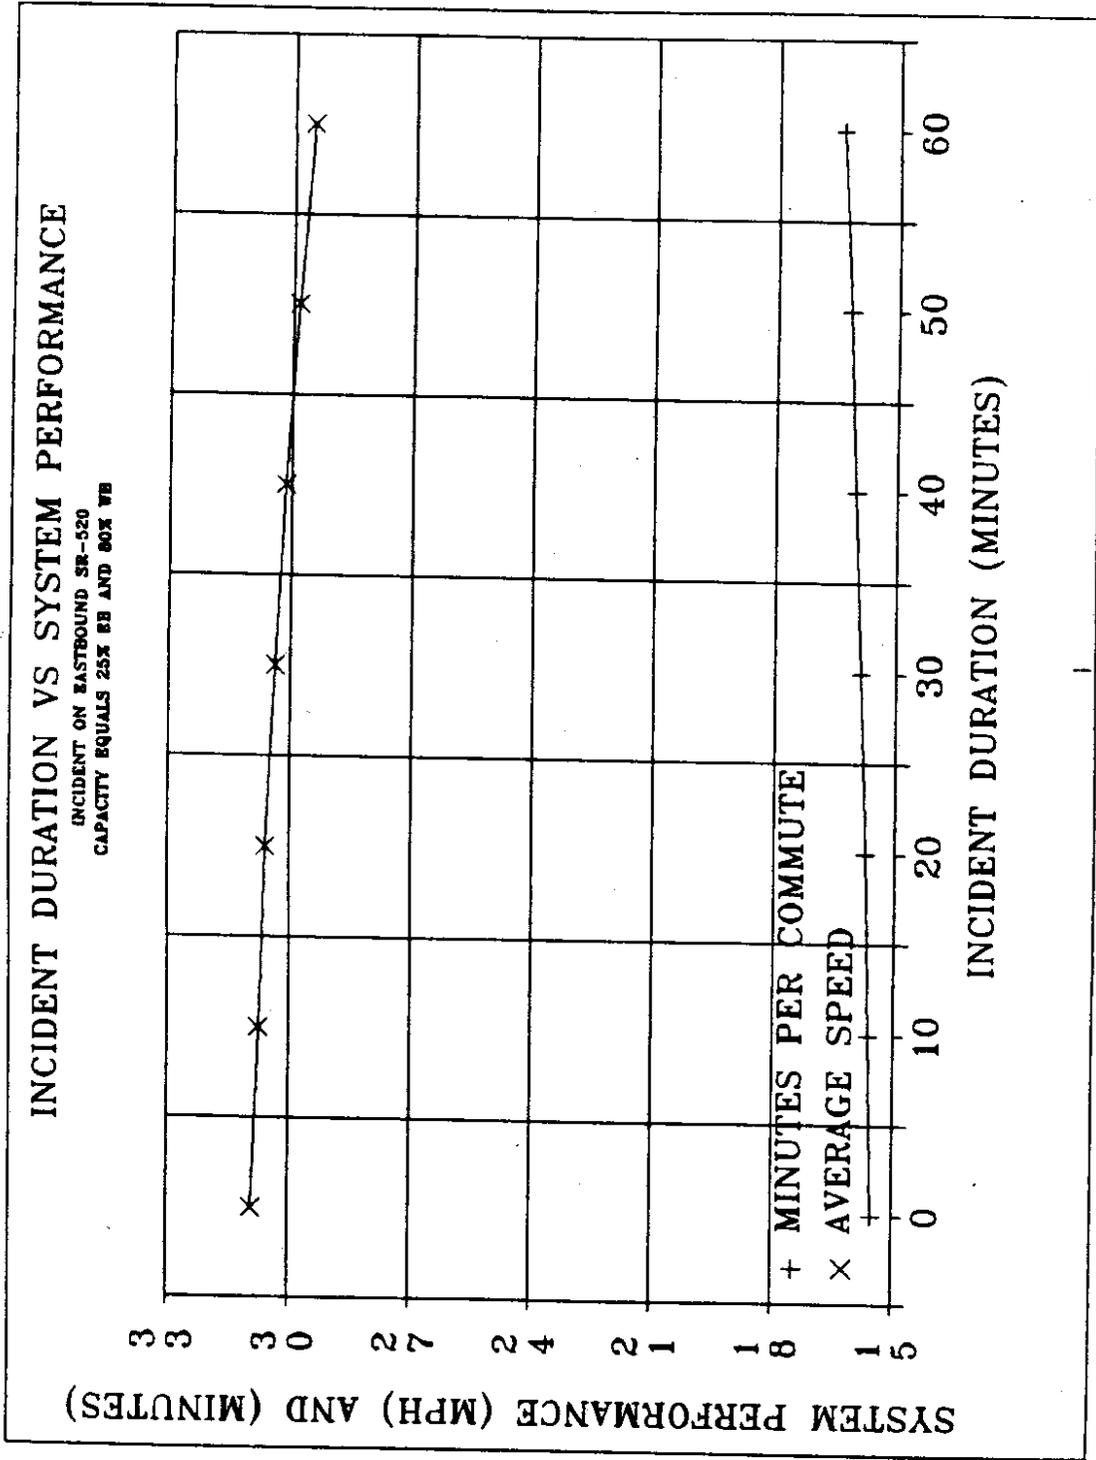


Figure 3.12 The Impacts of Incident Duration on System Speed and Average Commute Time

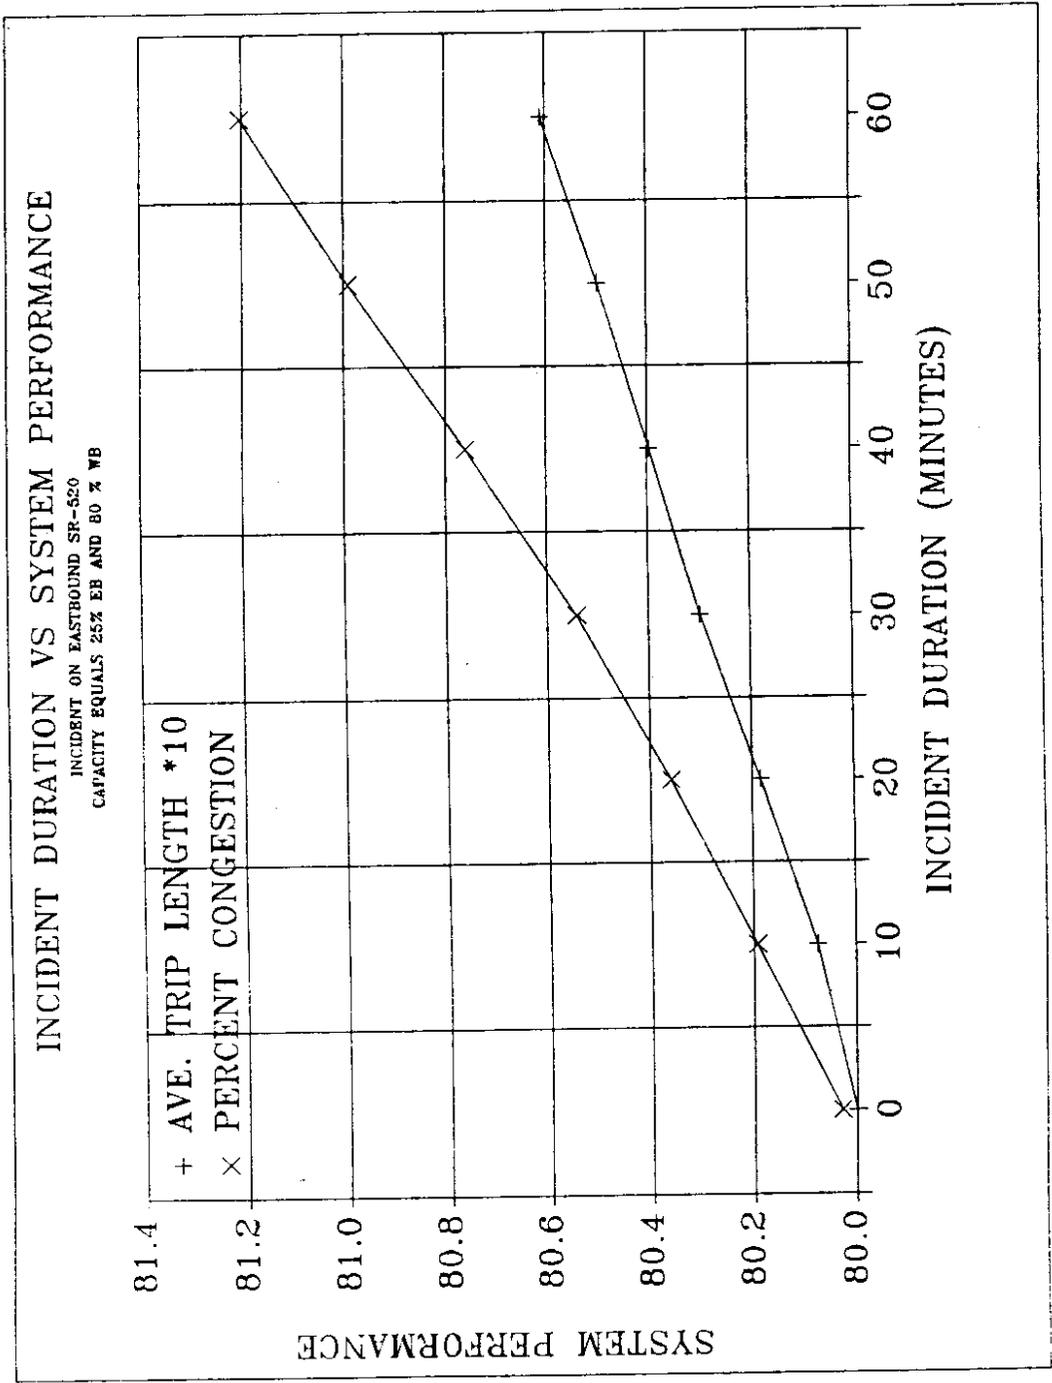


Figure 3.13 The Impacts of Incident Duration on Congestion and Average Trip Length.

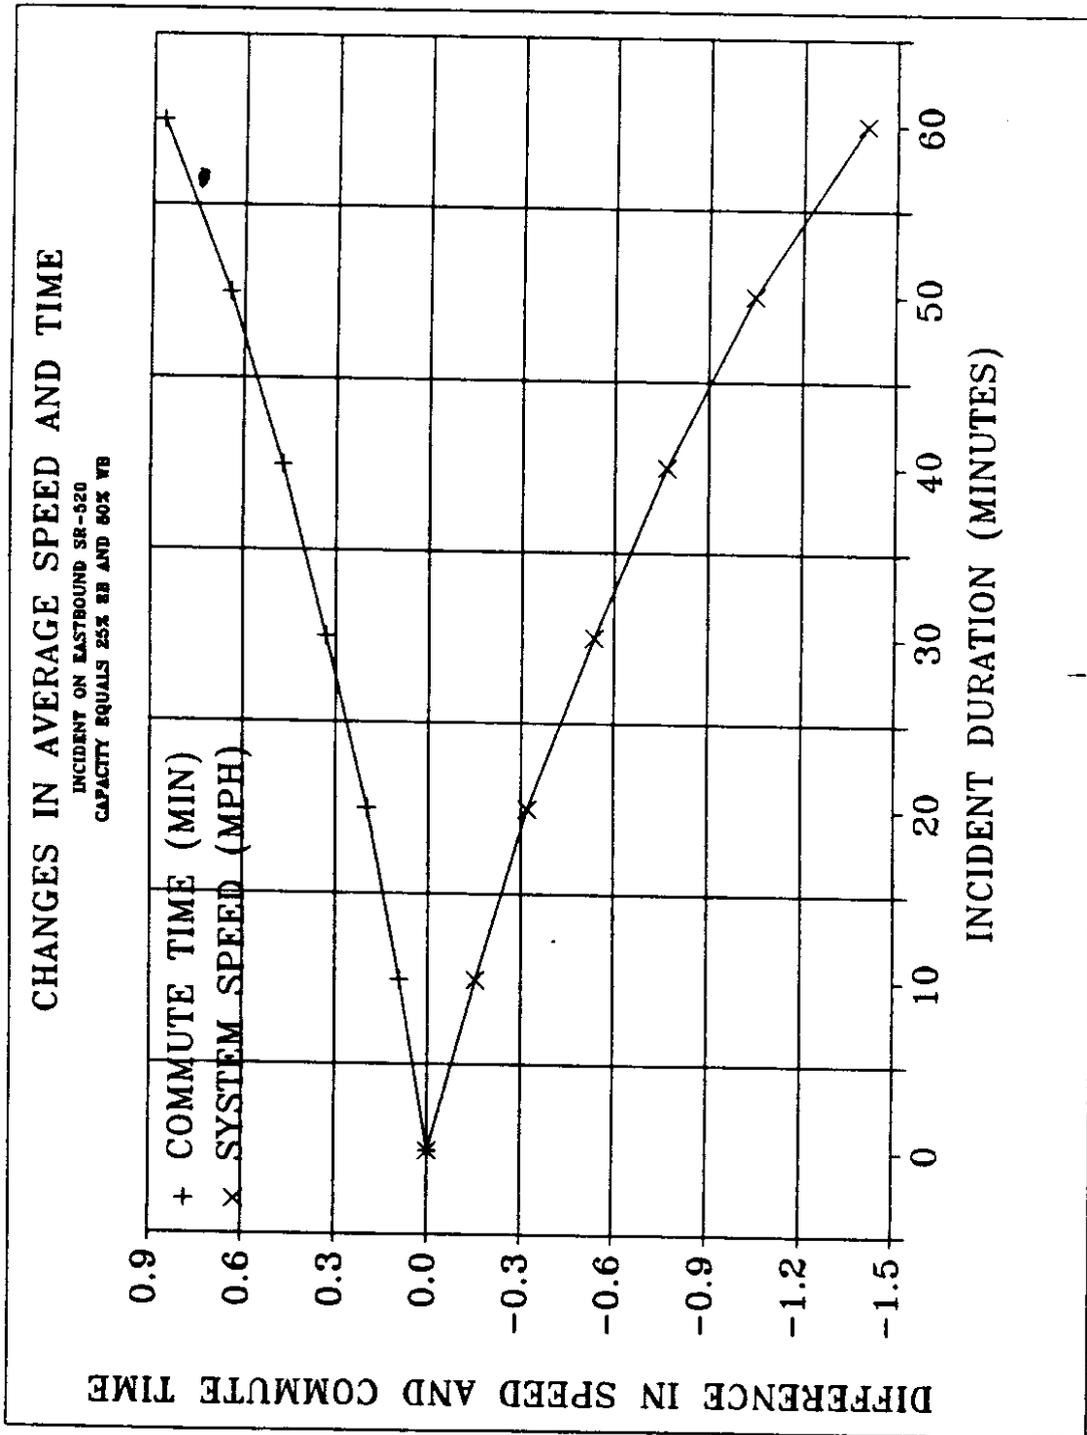


Figure 3.14 The Impacts of Incident Duration as Compared to the Base Run

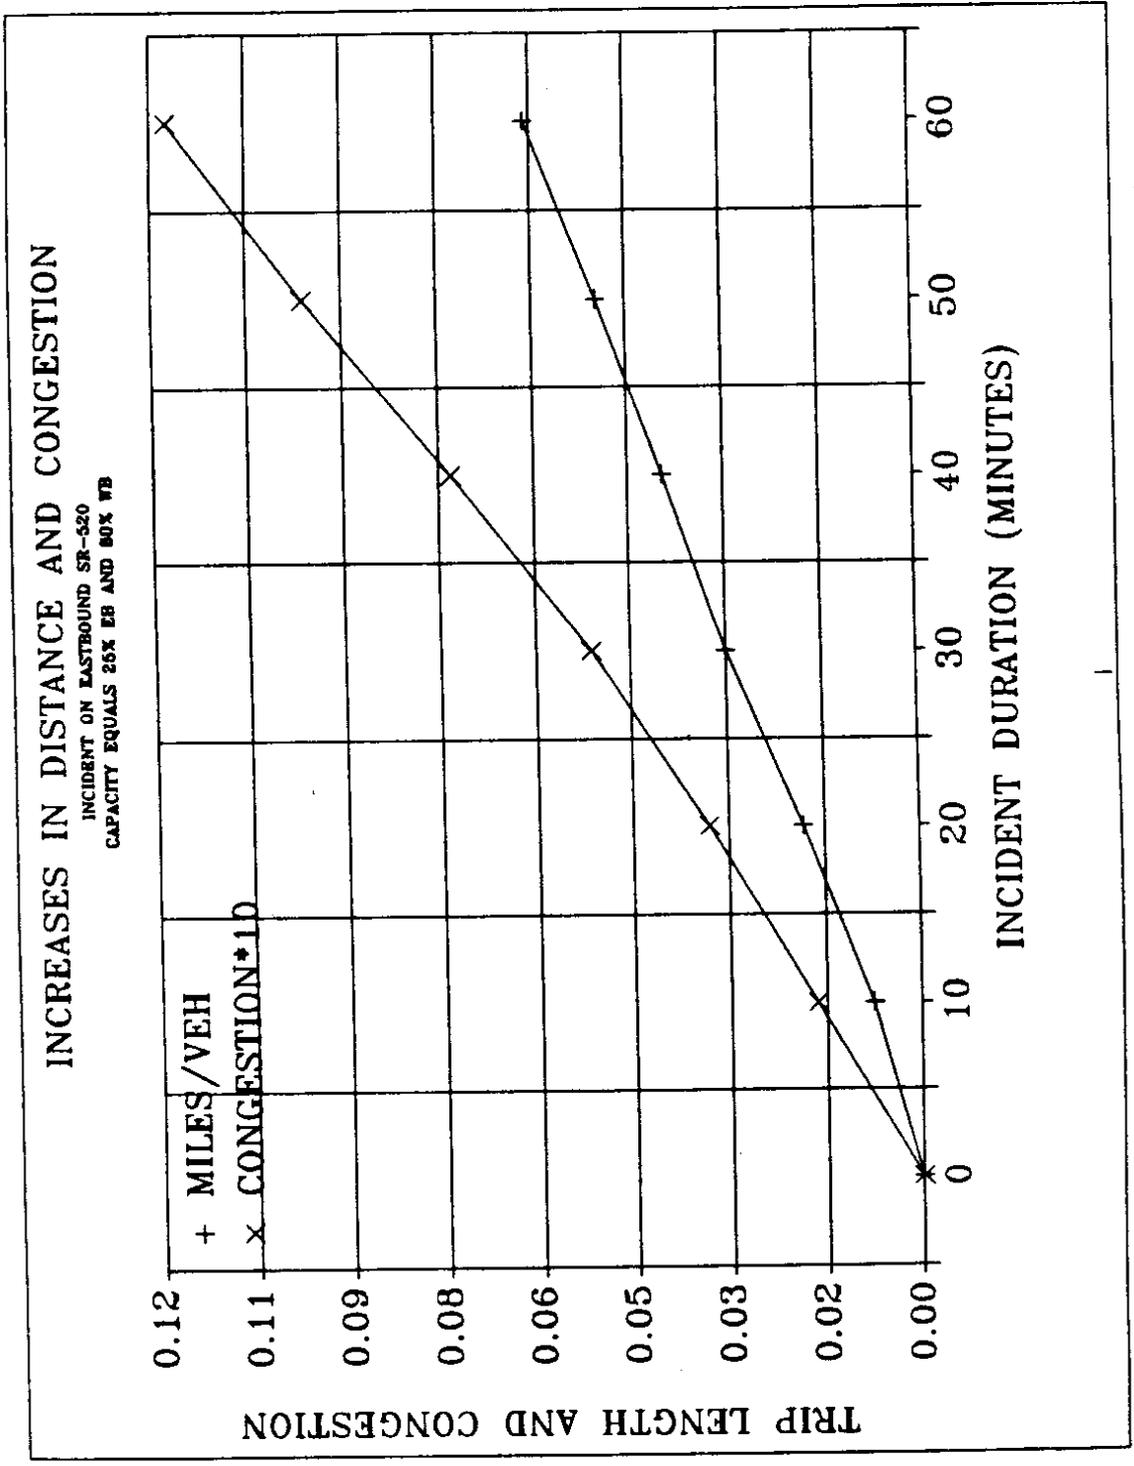


Figure 3.15 The Impacts of Incident Duration as Compared to the Base Run

**TABLE 3.7 INCREASE IN VEHICLE-HOURS RESULTING SOLELY FROM THE GAPERS PHENOMENA WITH AN INCIDENT ON EASTBOUND STATE ROUTE 520 NEAR EVERGREEN POINT FLOATING BRIDGE AND THE GAPER EFFECT IN THE OPPOSITE LANES OF TRAVEL**

| Incident Duration | Vehicle Hours |
|-------------------|---------------|
| Base Case         | 0             |
| 10 min.           | 131           |
| 20 min.           | 165           |
| 30 min.           | 289           |
| 40 min.           | 316           |
| 50 min.           | 330           |
| 60 min.           | 337           |

**TABLE 3.8 QUEUES ON RESTRICTED LINK 783: EVERGREEN POINT FLOATING BRIDGE, WESTBOUND STATE ROUTE 520**

| Incident Duration | Vehicles in Queue | Equivalent Distance |
|-------------------|-------------------|---------------------|
| Base Case         | 62                | 0.18 mi.            |
| 10 min.           | 95                | 0.27 mi.            |
| 20 min.           | 152               | 0.43 mi.            |
| 30 min.           | 211               | 0.60 mi.            |
| 40 min.           | 273               | 0.78 mi.            |
| 50 min.           | 326               | 0.93 mi.            |
| 60 min.           | 373               | 1.06 mi.            |

**TABLE 3.9 LOCATION DESCRIPTIONS OF ZONES USED IN INCIDENT LOCATION ANALYSIS**

|         |  |
|---------|--|
| ZONE 1: | SR-520: From the interchange of SR-520 and I-5 to the west end of Evergreen Point Floating bridge. |
| ZONE 2: | SR-520: From the west end of Evergreen Point Floating bridge to 84th Avenue.                       |
| ZONE 3: | I-5: From Spokane Street to Dearborn Avenue.   |
| ZONE 4: | I-5: From Dearborn Avenue to Newton Street.  |
| ZONE 5: | I-5: From Newton Street to Ravenna.  |
| ZONE 6: | I-5: From Ravenna to NE 205th Street.  |

The queues that resulted from the visual interference on westbound SR-520 are listed in Table 3.8. The maximum queue length that occurred with a 60-minute visual interference was 1.06 miles.

### **IMPACT OF INCIDENT LOCATION ON SYSTEM PERFORMANCE**

The location of an incident has a significant effect on the performance of the transportation system, a fact that was readily seen in the three previous simulations. The extent of the impact is primarily influenced by the volume of traffic that must contend (by avoidance or by traveling slowly through a queue) with the incident. To determine a relationship between the location of an incident and the degradation of system performance, simulated incidents were introduced on various links in the modeled network, and the resulting performance measures were compared with each other.

#### **Incident Descriptions**

Two freeways were selected to test the severity of impact on system performance due to incident location: Interstate 5 and State Route 520. State Route 520 was divided into two zones that spanned the distance from the interchange of I-5 and SR-520 to 84th Avenue. Interstate 5 was divided into four zones; these zones extended from Spokane Street (south of the Seattle CBD) to NE 205th Street (the north King County line). The general vicinity of these zones are shown in Figure 3.16, and the extents of each zone are listed in Table 3.9. These zones corresponded to the data analysis zones discussed in Volume II of this project report.

Two incidents were simulated for each zone, and the incidents were introduced to links of opposing direction. Thus, for example, Zone 1 had two separate simulations: one simulation placed an incident on the westbound lanes of SR-520 and the other placed an incident on eastbound lanes. Furthermore, all incidents were assumed to begin at 4:30 p.m. and had the same operating characteristics. For the first 20 minutes of simulation, the incidents reduced the operating capacity of the effected link by 75 percent. For the next

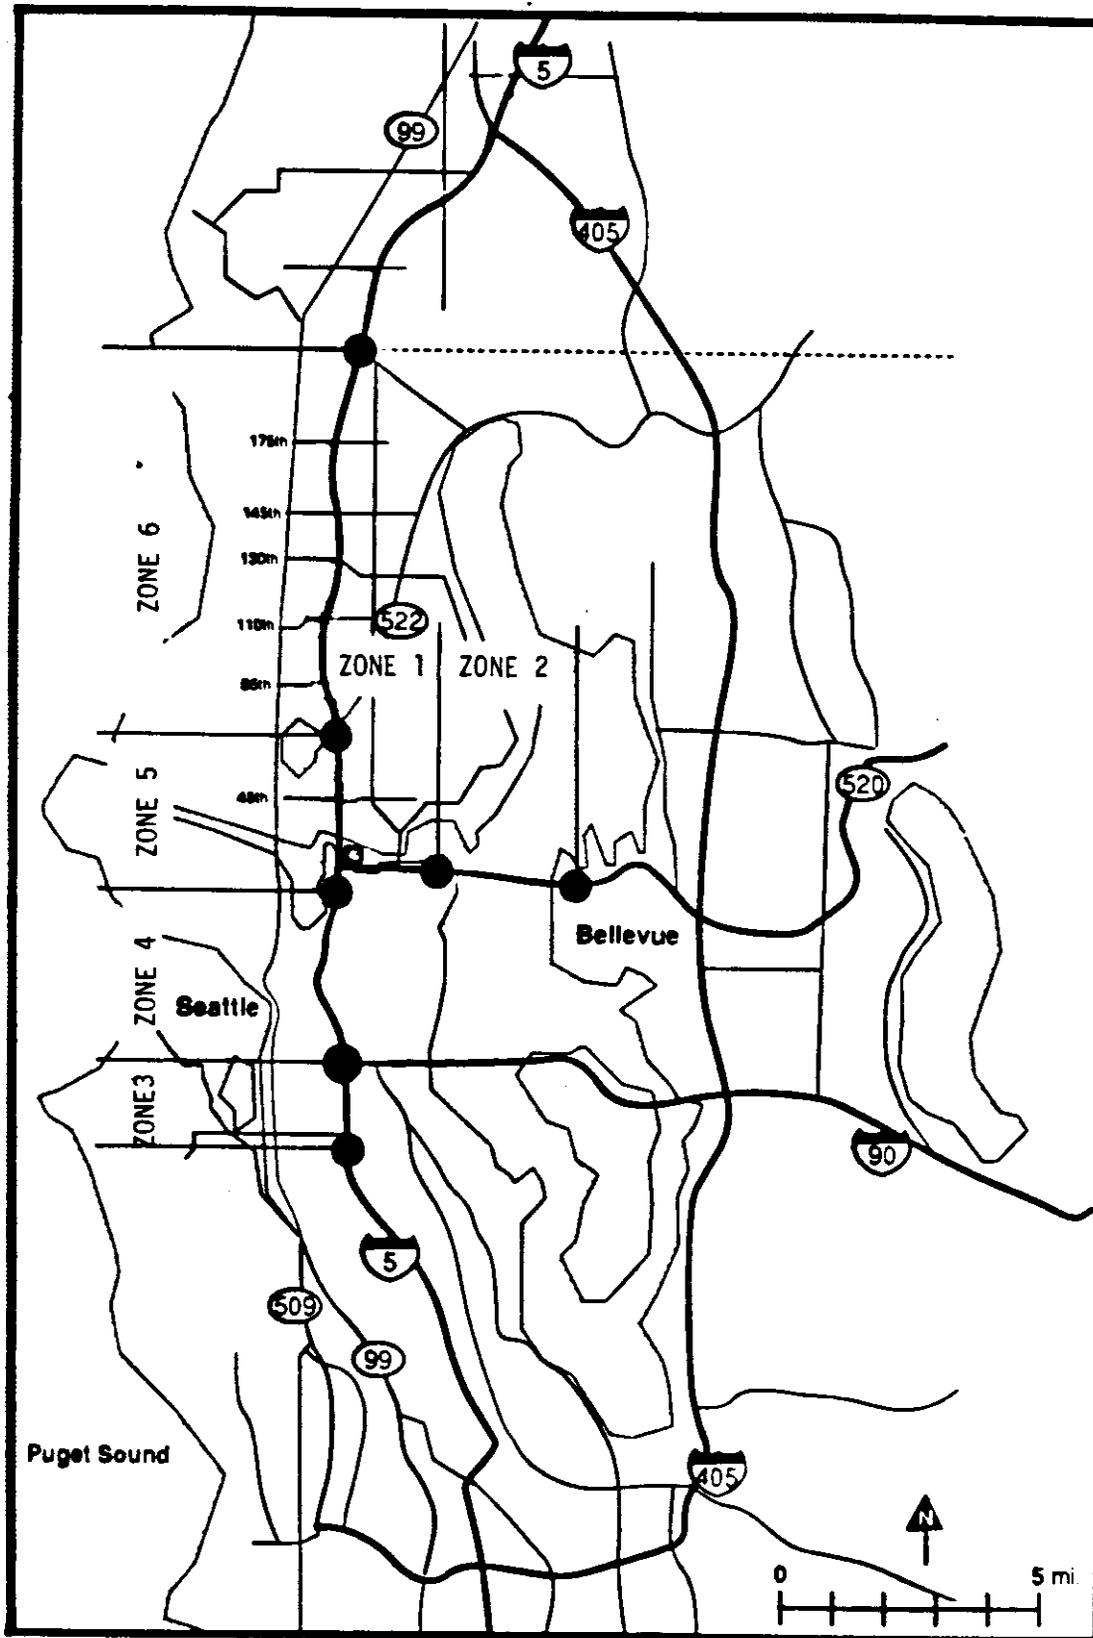


Figure 3.16 Incident Zone Locations

40 minutes, the incident was partially removed, resulting in an operating capacity that was 25 percent less than its original capacity. For the remainder of the simulation period, the link capacity was restored to its full capability. For the purposes of this test, the presence of an incident was assumed not to affect the lanes of travel in the opposite direction, an absence of the gaper phenomenon.

### **Simulation Results**

Total travel time, or vehicle-hours, was used to measure the severity of impact caused by the incidents; these measures are shown in Figure 3.17. This figure shows that all the zones had a considerable impact on system performance. However, Zones 3 and 4 in the northbound direction dramatically influenced the system. Zone 4 (northbound I-5 between Dearborn and Newton), in particular, increased the total travel in excess of 18,000 vehicle-hours, a delay that reduced the system speed from 31 miles per hour down to nearly 26 miles per hour (see Figure 3.18). Although this reduction in system performance was relatively large, it was most probably due to the fact that the transportation system in this area has few diversionary routes. Thus, all motorists in this sector of the network are forced remain in their normal travel pattern and patiently wait until the queue dissipates.

Incidents located within Zones 1 and 2 added fewer than 2,000 vehicle-hours to the total travel time of system, an effect that was considerably less than the northbound lanes of Zones 3 or 4. This lack of influence on system performance was due to the ability of drivers to use alternative routes, such as I-90, and due to the smaller volume of traffic incurred on SR-520.

Zones 5 and 6 showed significant influence in one direction and considerably less influence in the other. An incident in the northbound direction of travel caused serious effects because of the volumes of commuters traveling away from the Seattle CBD on their homeward commute. The lack of significance of an incident in the southbound direction of travel reflected the absence of drivers traveling in the opposite commute.

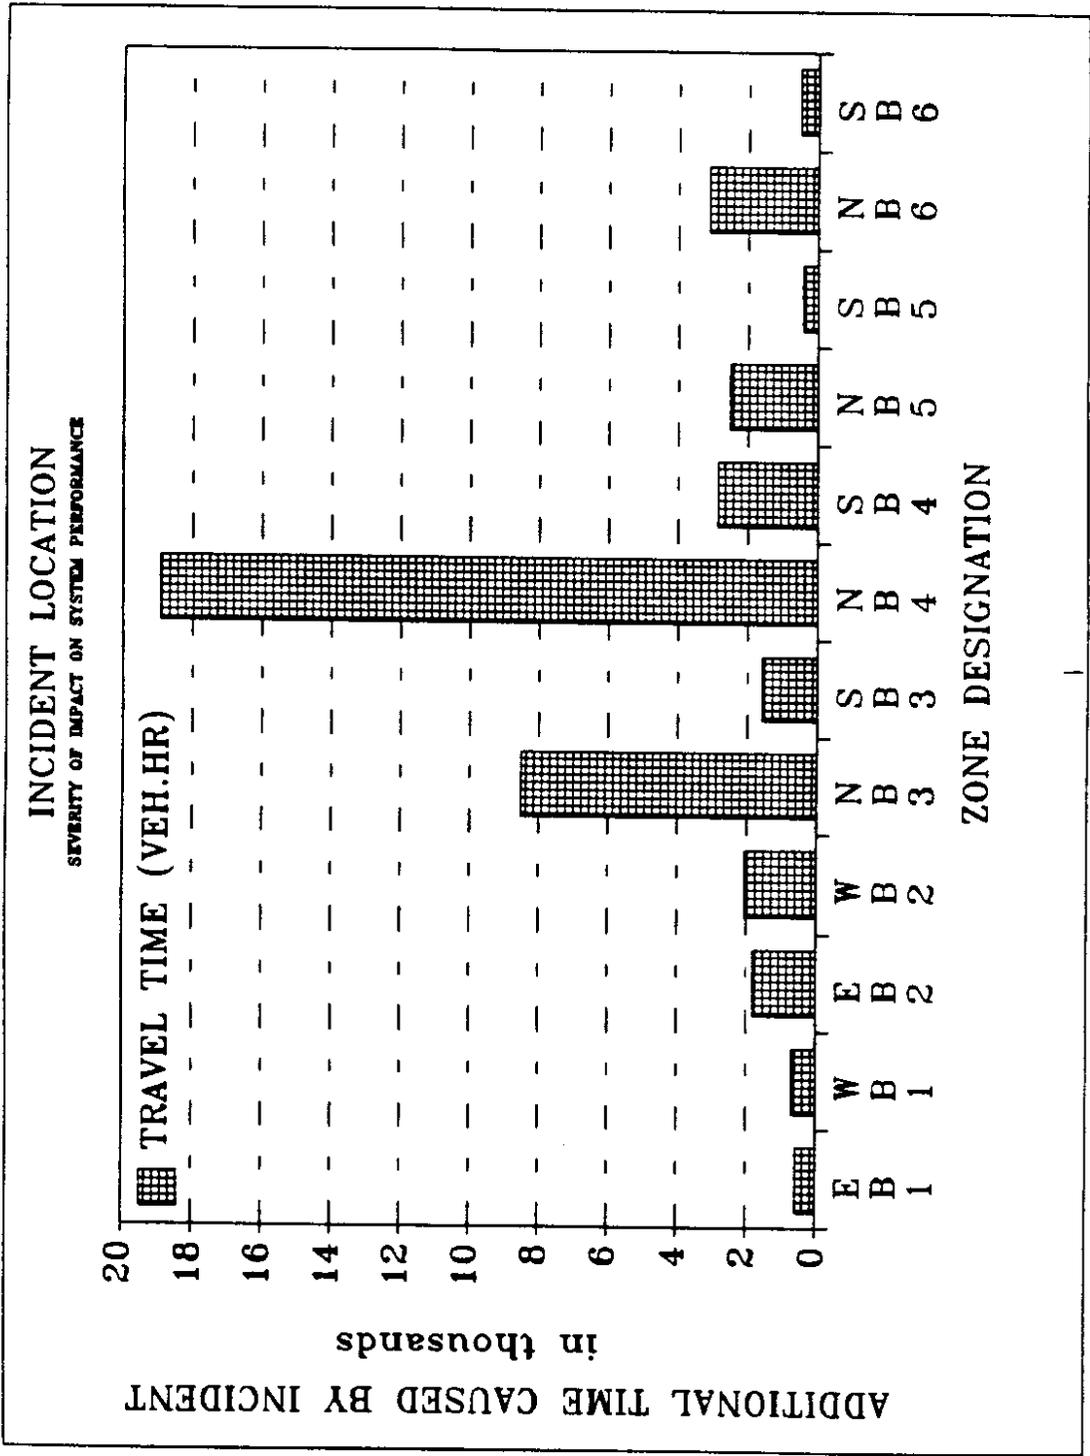


Figure 3.17 Impact of Incident Location on Total Travel Time

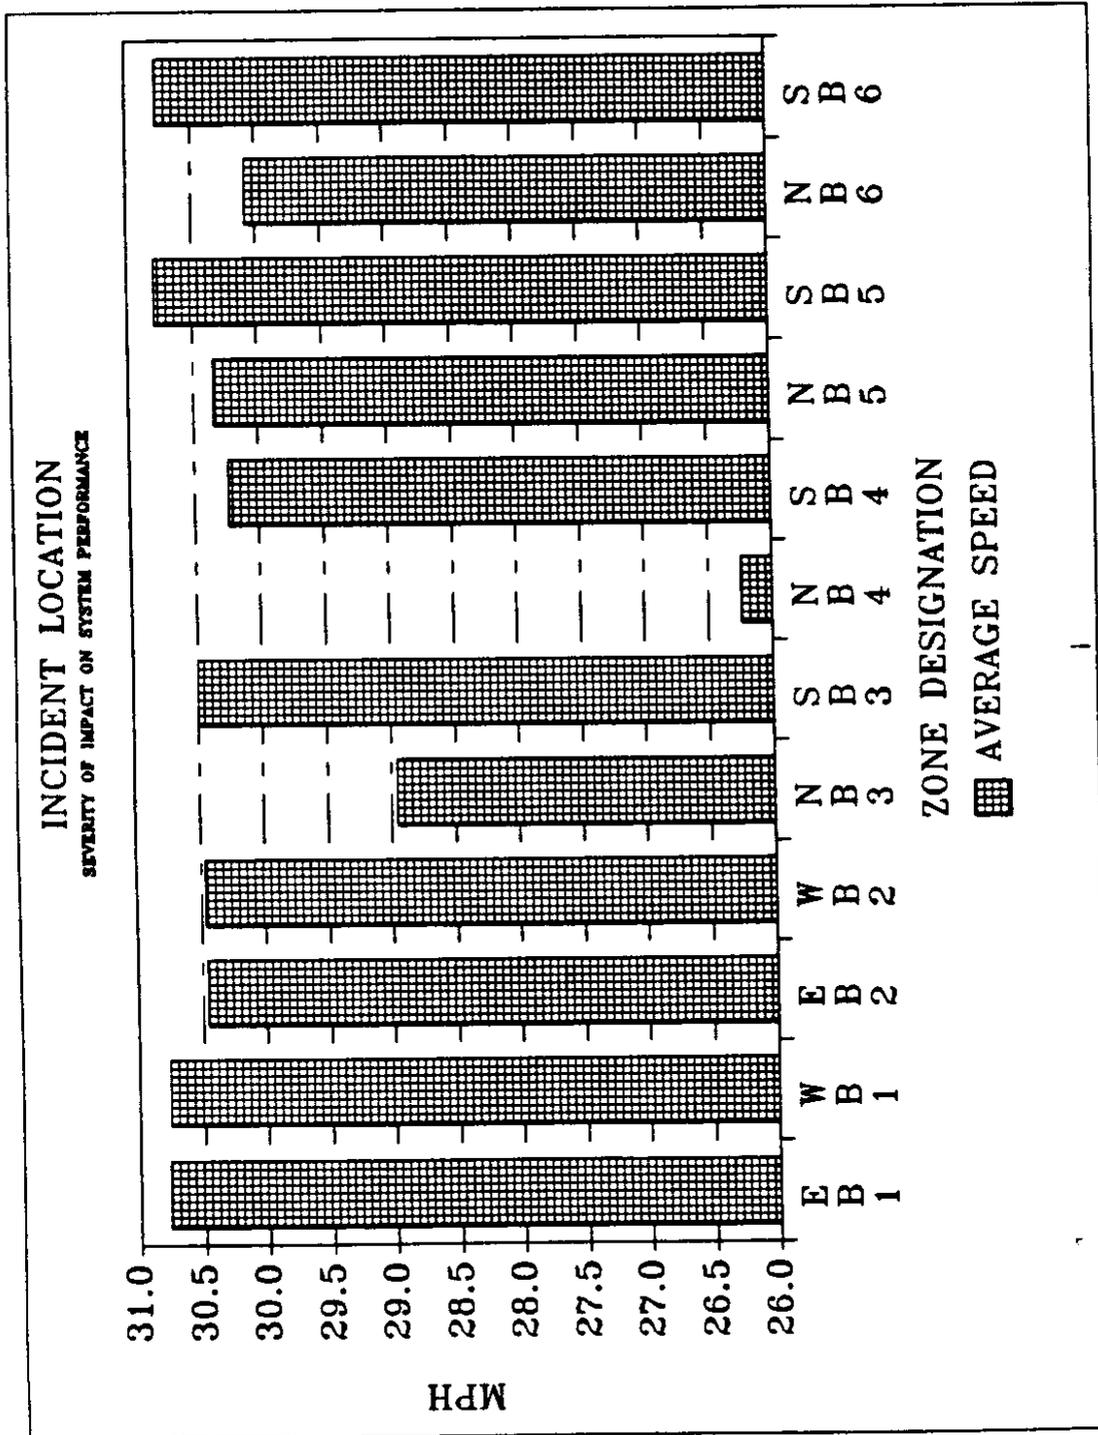


Figure 3.18 Impact of Incident Location on System Speed

## **SUMMARY**

XXEXQ offers a user equilibrium solution to traffic assignment, as well as a variety of inputs that may be used to better describe the effects of traffic incidents and the behavior of the traveling public. Such inputs include the capacity reduction, location, and duration of a traffic incident, and the proportion of informed drivers. If reasonable estimates for the inputs are obtainable, then XXEXQ will provide acceptable results in terms of system performance and queues on individual links.

## **CHAPTER 4**

### **RECOMMENDATIONS: MODEL CRITIQUE**

A number of problems have been identified with the operation of XXEXQ. To resolve these problems, the following improvements to XXEXQ are recommended.

#### **IMPROVE THE SPEED OF OPERATION**

For XXEXQ to be effective at the analysis level, it will have to perform simulations much more quickly. Currently, XXEXQ requires 6-1/2 hours of execution time, or nearly one work day, on a personal computer to complete one simulation. Since XXEXQ is coded in Fortran and compiled into executable code, large savings in execution time may be gained by coding the program in other computer languages such as assembler.

#### **PROVIDE ERROR DIAGNOSTICS**

During the initial stages of coding and simulation, many mistakes can be unknowingly entered into the three data files, NW.DAT, OD.DAT, and CN.DAT. The mistakes that cause XXEXQ to abort are usually entry errors that cause data to be placed in the wrong format. If the engineer's mistakes remain undetected, XXEXQ does not diagnose the errors, so the engineer must meticulously search through the data files to discover the error. Much time could be saved if simple tests were automatically conducted on the data files.

#### **PROVIDE CALIBRATION FILES**

Currently, XXEXQ does not compare the simulated results with the measured ground counts; this process is left entirely to the user. Therefore, the engineer spends many hours performing simple tasks such as retrieving information from OT.OUT and comparing it to the calibration counts, tasks that the computer could do much faster. If XXEXQ had a fourth input file, a file that listed the link number and its corresponding

ground count, and automatically compared the simulation results with this file, then the time required for the calibration procedure would be greatly reduced.

### **ELIMINATE DUMMY LINK AND DESTINATION CODING**

As described in Chapter 2, XXEXQ requires three access links to be coded between a zone centroid and a node: one from the origin to the node, one from the node to the destination, and the third from the destination to the node. Since the third access link is required whenever the first occurs, XXEXQ should internally code this link and eliminate the need for the user to do so.

XXEXQ's requirement for an origin and a destination for each zone often confuses the person unfamiliar with XXEXQ. This action also should be performed internally.

**APPENDIX A**  
**REVIEW OF EXISTING MODELS**

## APPENDIX A

### REVIEW OF EXISTING MODELS

#### **INTRODUCTION AND CRITERIA**

To analyze the effects of incidents on traffic, the appropriate model is necessary. This chapter looks at the available models, analyzing each one with several criteria significant to model use. These criteria are year designed, scope, predictability, simulation function, type of facility covered, input requirements, outputs, and other available model features. A description of these criteria follows.

#### **Year Designed**

The year a model was designed can tell the user about the model because of the interests of particular decades, as well as the modeling capabilities available at that time.

#### **Scope**

Macroscopic models examine the characteristics of the stream of traffic as a whole. Microscopic models treat each vehicle as a separate unit. Microscopic models are generally very accurate in their description of the process being simulated, but they require considerably more input data, programming, computer time, and level of detail.

#### **Predictability**

Deterministic models produce a completely predictable outcome for a given sequence of events. Stochastic models produce sequences of events that are not completely predictable but that depend on events that happen during the course of the process.

#### **Simulation vs. Function**

Simulation models reproduce the behavior of the traffic under the given conditions and accumulate the results. Optimization models also reproduce the behavior of the traffic

under the given conditions, but in addition they use an objective function or performance measure to determine the best solution by altering the system design.

### **Types of Facility Covered**

Some models look at arterials only, some freeways only, and some look at both.

### **Methodology**

Different models use different methodologies to analyze traffic and assign trips. Some are better able to change route choice, departure time, or mode, because of congestion. All models alter route choice on the basis of congestion, but few allow for changes in mode and departure time.

### **Input Requirements**

Inputs can be categorized by the effort required to collect the data needed. Inputs include turning movements, signals, and the level of requirements for geometrics and operation. Operation involves factors such as flow, volume/capacity ratio( $v/c$ ), time slices, and speed.

### **Outputs**

The data output define whether the model produces what the modeler ultimately desires. The outputs demonstrate the ability of the model to analyze queues, emissions, and bus networks.

The difference between time scan models, which update the model at a constant time interval (e.g., seconds), and event scan models, which update the model at event changes, was also considered. However, all the models analyzed were time scan models, so this factor was not specifically noted. Another important note is that microcomputers are commonly used in modeling. Because of the dated information available on the models, the researchers were not able to ascertain whether some older models had been adapted to

microcomputers. Since most were known to have been adapted, unless the test notes otherwise, the reader may assume that all the models are designed for microcomputers.

## **MODELS SELECTED**

The choice of which models to analyze was based on the capabilities and general purposes of the available models. For example, many models cannot model freeway traffic, and others were designed for signal network timing. Models with such characteristics were not analyzed because they did not satisfy the need to model the effects of incidents on freeway and major arterial traffic.

Table A.1 summarizes the criteria that were previously mentioned for each analyzed model. A more in-depth description of each model follows.

## **CORFLO**

### **Model Development and Description**

CORFLO is an integrated set of macroscopic models that simulates the flow of vehicles on networks containing freeways and arterials. The CORFLO program, which runs on a mainframe computer, was developed as a separate unit to be adapted into the Integrated Traffic Data System (ITDS) being developed for the FHWA. The CORFLO model is part of the larger family of TRAF models (TRAF (1988)), which consists of the Macroscopic Arterial Simulation Models (NETFLO Levels I and II), the Macroscopic Freeway Simulation Model (FREFLO), and the Equilibrium Traffic Assignment Model (TRAFFIC), which assigns traffic according to user equilibrium. The necessary input processor and model integration programs are also included in the stand alone CORFLO model. Although the component simulation models in CORFLO are based on deterministic models, a stochastic feature has been added in the form of a random seed number.

### **Model Input and Output**

The data required for input to CORFLO are read from card images that include link information consisting of upstream and downstream nodes; the link lengths; number of

Table A.1. Comparison of Existing Traffic Models

|  | CORFLO    | CORQ<br>CORCON             | FREQ             | INTRAS                       | MACK          | RFLO       | SCOT                    | TMODEL2   | XXE           | XXEXQ                  | SIMX               |
|--|-----------|----------------------------|------------------|------------------------------|---------------|------------|-------------------------|-----------|---------------|------------------------|--------------------|
| Year Designed  | Ongoing   | late '60s                  | late '60s        | late '70s                    | late '60s     | new        | late '60s               | mid-'80s  | early '80s    | late '80s              | late '80s          |
| Macroscopic/<br>Microscopic  | macro     | macro                      | macro            | micro                        | macro         | macro      | macro/<br>micro         | macro     | macro         | macro                  | macro              |
| Deterministic/<br>Stochastic   | det/stoch | det                        | det              | stoch                        | det           | det        | det                     | det       | det           | det                    | stoch              |
| Simulate/Optimize  | sim       | sim                        | opt              | sim                          | sim           | sim        | sim                     | sim       | sim           | sim                    | sim                |
| Arterial/Freeway   | art/frwy  | frwy                       | art/frwy         | frwy                         | frwy          | art/frwy   | art/frwy                | art/frwy  | art/frwy      | art/frwy               | art/frwy           |
| Methodology  | user eq   | min. indiv.<br>trav. costs | user's<br>choice | car fol-<br>lowing<br>theory | fluid<br>flow | fluid flow | fluid flow<br>min. cost | incr/iter | user eq.      | sequential<br>user eq. | utility<br>max.    |
| Changes  | route     | route                      | route            | route                        | route         | route      | route                   | route     | route<br>mode | route                  | route/dep.<br>time |
| Inputs   | yes       | yes                        | no               | yes                          | no            | no         | yes                     | no        | no            | no                     | no                 |
| Turning  | yes       | no                         | no               | yes                          | no            | no         | yes                     | no        | no            | no                     | no                 |
| Signals  | complex   | simple                     | simple           | complex                      | interm.       | interm.    | complex                 | complex   | simple        | simple                 | simple             |
| Geometrics<br>(requirement —<br>simple,<br>intermediate,<br>complex) | complex   | simple                     | simple           | complex                      | interm.       | interm.    | complex                 | complex   | simple        | simple                 | simple             |
| Operation (require-<br>ment — simple,<br>intermediate,<br>complex)   | complex   | interm.                    | interm.          | complex                      | interm.       | complex    | complex                 | interm.   | simple        | simple                 | simple             |
| Outputs  | no        | yes                        | yes              | no                           | yes           | implied    | yes                     | yes       | implied       | yes                    | yes                |
| Queues   | no        | no                         | yes              | yes                          | yes           | no         | yes                     | no        | no            | no                     | no                 |
| Emissions  | yes       | no                         | yes              | yes                          | no            | no         | no                      | no        | no            | no                     | no                 |
| Bus  | yes       | no                         | yes              | yes                          | no            | no         | no                      | no        | no            | no                     | no                 |

lanes; grades; flow characteristics; volumes; traffic assignments, including an origin-destination (O-D) trip table; turning movements; nodes that receive the traffic; arterial turn pockets; channelization codes; pedestrian codes; number of special use lanes; and freeway link nominal capacities.

The user can specify the model's output statistics at various intervals during the simulation and at the end of the simulation. The statistics for each link are vehicle miles traveled, vehicle trips made, vehicle minutes moving, vehicle minutes delayed, minutes per mile, time spent per vehicle separate from delay, total volume per hour, average speed, person miles, trips, and time spent on a FREFLO link.

### **Model Strengths and Weaknesses**

As pointed out by Rickman (1988), the strength of CORFLO is that it is an integrated model that can simulate traffic on a network that has both arterials and freeways. The main weakness of CORFLO is the input detail required to make CORFLO usable for planners and engineers. The detail is often costly and beyond the scope of most projects.

## **CORQ-CORCON**

### **Model Development and Description**

Between 1968 and 1975, Yager (1975) developed the CORQ model to simulate time-varying traffic demands in a 500 block freeway corridor. Working with the ideas of the CORQ model, Allen and Easa (1978) developed CORCON (the freeway-CORridor assignment and CONtrol model). CORCON is essentially the same as CORQ, with an added feature that simplifies network representation by allowing more than one directional roadway to have the same upstream and downstream nodes. Both CORQ and CORCON are macroscopic, deterministic models that assume homogeneous total system demand for the modeled time period. The simulation period is divided into small time slices, generally less than 15 minutes, so that the demand between an origin and a destination can be considered constant for the time slice. The demand during the simulation period is thus

allowed to vary in time. The demand in each time slice and the queued demand of the previous time slice are assigned to the network by the principle of minimized individual travel cost (time).

### **Model Input and Output**

The input data required for both CORQ and CORCON include capacities, volume counts, queue sizes, travel times as a function of flow, network turn prohibitions, and origin-destination information on users who could or should be affected by controls. Outputs are the predictions of the link flows, queues, and the travel time for the entire freeway corridor.

### **Model Strengths and Weaknesses**

Several of CORQ and CORCON's weaknesses are their intensive data input requirements, their limitations to freeways only, and their limitations on network size. The main strength of the models is their ability to allow critical points in the network to receive more detail.

## **FREQ FAMILY**

### **Model Development and Description**

FREQ, one of the most widely used models in the U.S., was originally developed by the University of California at Berkeley in 1968 (Roden (1980)). FREQ is a macroscopic, freeway optimization model that uses a deterministic method of simulation. Since its creation, FREQ has been refined several times to the present FREQ-10 version, an interactive input processor that is menu driven and available for microcomputers. The latest version can model 26 subsections of freeway while allowing 24 time slices. FREQ is used primarily to evaluate priority-entry and normal-entry control on a freeway by predicting a time stream of impacts and travel responses, but it can also evaluate design improvements with or without freeway-entry control.

For each analysis, FREQ looks by time slice at each freeway entry point. One step in the analysis determines whether a ramp queue exists, develops, or dissipates, considers the propagation of shock waves, and calculates the appropriate delays. Another FREQ analysis calculates volume using the input demands, origin-destinations, and any existing queues, allowing queues to form on the freeways if capacity is exceeded. FREQ also computes weaving analysis, confined to on-off ramp maneuvers and capacity reductions, using the method in the Highway Capacity Manual. On the basis of the flow characteristics, it determines travel time related impacts from the Highway Capacity Manual.

### **Model Input and Output**

Input to FREQ is read from card images and includes subsection and ramp characteristics, an origin-destination table or traffic counts for each time slice, and passenger volume data. Subsection information includes the length, number of lanes, lane width, capacity, truck factor, grade, length of grade, and design speed. Ramp characteristics include the location of on-ramps and off-ramps, special ramps, and ramp metering limits and/or capacities. Other specifications that can be input are metering plans, queue length limits, requests for congestion optimization, metering over-control protection, as well as ramp control parameters, emissions, and fuel consumption.

The output for FREQ depends on the input option control but always includes the input design features and values for simulation before control for each time slice. For each time slice, the output includes an origin-destination table, freeway travel time table, freeway performance table for each section, including queues, v/c ratios, speed, emissions, fuel consumption, mainline delay, and ramp delay. The freeway summary table gives the averaged subsection values just mentioned for each time slice. Similar outputs are provided, depending on options such as ramp metering control and optimization.

### **Model Strengths and Weaknesses**

The strengths of FREQ come from its continued refinement to allow it to compete as a model, its ability to optimize, and the moderate requirements of input for both

geometrics and operations. The main weakness of the model for this study is its design as a freeway entry and exit model.

## **INTRAS**

### **Model Development and Description**

INTRAS (INtegrated TRAffic Simulation) was developed in 1977 by Leiberman and Associates for use in studying freeway incident detection and control strategies (Wicks and Leiberman (1977), Wicks and Andrews (1980), and Wicks and Leiberman (1977)). INTRAS is a stochastic model that simulates the movement of each vehicle with the NETSIM car-following and lane-changing algorithms; therefore, it can examine both traffic control and geometric alternatives in most any situation. INTRAS is based on knowledge of freeway operations and surveillance systems. It incorporates detailed traffic simulation logic, which allows the user to simulate an incident at any location on a freeway link, blocking one or more lanes or confined to the shoulder, and for any length of time.

### **Input and Output**

INTRAS input includes geometric data to describe each link length, the number of lanes, lane channelization, type of link (mainline, ramp, arterial), grade radius of curvature (for freeway links), percentage of superelevation, and pavement type. Operational data are also required and include entry-link flow rates, turning percentages at intersections, discharge headways, lost time, free-flow speeds, and the percentage of vehicles in five vehicle categories. Control data are also required, such as the type of control at intersections, actual signal timing, ramp-control operation, location and type of detectors present, and descriptions of any incident occurring during the simulation.

INTRAS output includes measures of effectiveness such as vehicle-miles, vehicle-minutes, volume, density, speed, delay per vehicle, and lane changes for specified time intervals and at the end of each simulation subinterval on both a link-specific and network-wide basis. INTRAS also includes the ability to graphically detail the trajectories of

vehicles, as well as a statistical analysis module that can compare the measures of effectiveness from different simulations.

### **Model Strengths and Weaknesses**

INTRAS's main strength is that it is a microscopic model; therefore, it analyzes the traffic very precisely. However, this strength also leads to its weakness, its requirement for very detailed input. Another weakness is that it is only applicable to freeway sections.

## **MACK Family**

### **Model Development and Description**

The MACK model was introduced in the late 1960s by Payne and Associates and has been refined to include in its family MACK I, MACK II, MACK III, FREFLO, and TRAFLO (now CORFLO). These are all deterministic, macroscopic freeway simulation models that consist of conservation equations and corresponding dynamic speed-density equations.

MACK I produces results that exhibit entirely dynamic responses to freeway traffic flow and that simulates a response to blocking incidents. However, it doesn't distinguish flow by lanes. MACK II, which follows MACK I and is similar to INTRAS, introduces an equilibrium speed-density relationship and a structural change in the dynamic speed relationship. Payne (1979) shows that FREFLO, which follows MACK II, provides input data diagnostics, standard measures of travel and travel time, fuel consumption estimates, and emission estimates; it also represents incidents, time-of-day control periods, surveillance systems, traffic-responsive metering schemes, and on-ramps. FREFLO was previously seen as a part of CORFLO.

### **Model Inputs and Outputs**

The input data FREFLO requires are number and length of lanes in each section; on-ramp, off-ramp, and upstream locations and volumes by time slice; nominal section capacities; initial densities and speeds of each section; and an origin-destination model.

FREFLO output includes diagnostics, simulation, travel time, queue waiting time, diverted volume, fuel consumption, and emissions.

### **Model Strengths and Weaknesses**

The strengths of the MACK models are their ability to simulate incidents, surveillance systems, entry control, and emissions. Their weaknesses come from their limitations to freeway simulation on mainframe computers.

## **RFLO**

### **Model Development and Description**

RFLO is a new IBM PC compatible traffic simulation program by Paul Ross (1988). Ross's theory is that traffic can be described as a compressible fluid that satisfies the equation "volume = speed \* density." On the other hand, traffic queues are incompressible, implying that "start-up" waves travel with infinite speed. (However, a modification has been added to RFLO to give reasonable, finite speeds of propagation for start-up waves.) Traffic speed "relaxes" to a "desired" speed, which is a function of the roadway geometric conditions but does not depend upon traffic density. RFLO is also deterministic, with traffic density, speed, and volume representing long-term average traffic behavior. Because RFLO is macroscopic, stop signs, opposed left turns, and weaving cannot be directly represented and must be worked around. RFLO's size limitations are a total network length of  $1000 * DX$ , where  $DX$  is the integration space step length (the initially supplied value is 0.1 mi); 99 links; 400 ramps no closer together than the integration step sizes; and a simulation duration of  $32,000 * TM$ , where  $TM$  is the integration time step length (the initially supplied value is 0.0005 hr).

### **Model Input and Output**

The input file is prepared with a text editor. Each line of the file is a command to RFLO. RFLO simulates traffic by integrating certain partial differential equations; therefore, it must be given traffic density, speed, and volume everywhere on the link at the

start of the simulation, and the traffic density, speed, and volume at the upstream end of the link must be provided throughout the simulation at designated times. The links defined may be any length, but they must contain traffic traveling in one direction only. On-ramps and off-ramps are created through the designation of a location, "absolute" on-flow, and "relative" off-flow.

RFLO output contains an echo of the input; a "picture" of the entire network before the first simulation pass and a list of every link in the network; average speed and average delay at the end of the simulation and at any time upon demand; a detailed history at the network mileposts specified in the REPORT command; and simplified graphic displays of the traffic density, speed, and volume in the network as functions of time and location.

#### **Model Strengths and Weaknesses**

The strength of RFLO appears to be its newness as a model. However, this newness is also probably the cause for its weaknesses. Weaknesses appear to be limits in network size, traffic flow theory, and somewhat complex inputs.

### **SCOT**

#### **Model Development and Description**

In the late 1960s, Leiberman and some associates began work on a model to simulate traffic patterns within an integrated freeway corridor (Hallenbeck (1988)). This work developed into what is known today as the SCOT family of models. The SCOT (Simulation of COrridor Traffic) model is a combination of DAFT (Dynamic Analysis of Freeway Traffic) and NETSIM (UTCS-1). Its sister, SCOT-Q, is a faster version of SCOT.

DAFT simulates platoons of traffic along a network of freeways using fluid-flow equations. It moves freeway platoons according to a prespecified, speed-density relation. It moves ramp and arterial platoons according to a specified free-flow speed and delays them according to volume and the ratio of green time to cycle time. Minimum cost paths, which

are calculated frequently in the model, dictate the turning movement at nodes, producing a dynamic assignment of traffic as a by-product of the simulation. NETSIM simulates individual vehicles applied to signalized, at-grade intersections, where conflicts are common. The macroscopic modeling is included with microscopic modeling to decrease costs and storage requirements, while producing similar results.

### **Model Inputs and Outputs**

The information SCOT needs is grouped into four categories. Geometric data involves street or freeway section configurations, grades, ramp and turning lane details, number and width of travel and parking lanes, and locations of internal traffic generators. Traffic demand contains data such as volumes and character of traffic, freeway speed-densities, network periphery flow rates, traffic mixes, intersection turning movements and pedestrian activity, free-flow speeds, and queue discharge rates. Control strategy parameters include traffic signal timings and synchronizations, parking restrictions and lane use policies, and traffic-actuated logic. Bus service data includes bus routes, station locations and capacity, service frequency, and mean station dwell times.

Output contains both a local and systemwide statistical view of the state of traffic on each street and intersection during the simulation period. For each street, this view entails locations and durations of queue extensions into intersections, instances of cycle failure, current number of vehicles, number of stops made, average speed, average delay per vehicle, and mean occupancy. For the whole network, this view specifically entails vehicle-miles, vehicle-minutes, and delay and travel time per vehicle-mile. Bus statistics are also compiled from the input data.

### **Model Strengths and Weaknesses**

The strengths of the SCOT models are their ability to amalgamate macroscopic and microscopic analysis, as well as their more detailed output. As seen before, though, detailed output also can easily mean detailed input, as in this case. Complex input is one of the models' weaknesses.

## **SIMX**

### **Model Development and Description**

SIMX is a dynamic microscopic traffic equilibrium model that has been under continuing development in recent years (see Abu-Eisheh and Mannering (1987), Hamed and Mannering (1989) and Mannering, Abu-Eisheh, and Arnadottir (1989)). SIMX is based on a joint discrete/continuous econometric model of commuters' route choices (discrete) and departure times (continuous). The selection of route and departure time is based on a compensatory utility maximization model. Traffic assignment is performed with a dynamic algorithm that searches for market-clearing equilibrium route flows. Travel times are computed using bureau of public roads (BPR) performance functions and queueing models (see Mannering, Abu-Eisheh, and Arnadottir (1989)). To date, SIMX has been used only on very small networks, and extensions to large networks may not be feasible since the existence and uniqueness of a traffic assignment solution has only been proven for a single origin-destination pair. Model calibration, to existing ground counts, is required before forecasting.

### **Model Input and Output**

Required inputs include a representative sample of commuters with work start times, preferred work arrival times, vehicle fuel efficiency, household income, number of vehicle passengers, traffic signal timings and link capacities, lengths, and free flow speeds. Outputs include time-varying traffic flows and total implicit commuter costs, which are derived from commuter welfare and compensating variations (see Mannering, Abu-Eisheh, and Arnadottir (1989)).

### **Model Strengths and Weaknesses**

SIMX is the only known model that provides a theoretically consistent method of accounting for both route and departure time changes in response to time-varying events such as incidents. Unfortunately, it is extremely complex and shows little promise of ever

being extended beyond the most simplistic of networks. Also, in its present form, it does not allow mode changes.

## **TMODEL2**

### **Model Development and Description**

TMODEL2, as described in "TMODEL2: The Tool for Transportation Planning User's Manual" (1988), simulates present conditions and analyzes the impact of future and alternative transportation demands and systems for an entire area or a specific development. The model is fairly new and uses macroscopic information to perform deterministic evaluations. TMODEL2 is said to use several innovative approaches to traditional network analysis. For example, it dynamically models intersections, with variations to model partial stop sign control, all-way stop sign control, or signal control. It also loads origins and destinations to the network with a centrally located node in each zone, thereby eliminating the need for centroid connectors, and it has easy menu-driven editing options. TMODEL2 uses a gravity model distribution and the user's choice of either incremental or iterative assignment.

### **Model Input and Output**

TMODEL2 has both a screen graphic editor and line editor for much of the information input and output. For data not input into the model, TMODEL2 uses default values when parameters are not specified. The number of options that can be input to define various characteristics, and designate outputs desired seems almost unlimited, but the minimum required information for the model to work defines the nodes, links, and travel/land use characteristics. Definition of nodes includes a number and coordinates (x,y). Definition of links includes to/from nodes, one- or two-way direction of traffic, number of lanes, capacity, length, speed, and volume. Definition of travel/land use characteristics includes zone terminal time, number of single family dwelling units, number of multiple family dwelling units, number of retail employees, number of non-retail employees, and

the intrazonal time. From the travel/land use characteristics, the program computes a deterministic origin-destination table. After the input has been completed, the trip generation phase must be completed, followed by trip distribution and assignment.

The desired output is also designated by menu driven commands and is often easily understood, since it is presented as an overlay to the underlying network in the graphic display. However, only one or two variables are observable at a time because of the overlay method.

### **Model Strengths and Weaknesses**

The strengths of TMODEL2 are its innovative methods of analysis, as noted above, and good graphics package. However, the simplistic methods of distribution and assignment point to weaknesses that are important in incident analysis.

## **XXE**

### **Model Development and Description**

XXE, as introduced by Abu-Eisheh and Mannering (1986), is a methodological simulation model that forecasts the traffic-related impacts of a wide range of transportation-facility-related improvements. XXE was developed in the early 1980s in response to the high expense of the data collection and computational costs of many of the complex models developed in the late 1960s and early 1970s. The deterministic, macroscopic microcomputer package uses some of the most advanced transportation analysis techniques in its traffic, travel demand forecasting, and mode split modules. The traffic module includes a standard user equilibrium traffic assignment algorithm and uses the Bureau of Public Roads (BPR) function in defining link performance. The method of successive averages is used to assign origin-destination flows to different routes and arrive at a unique system, steady-state equilibrium. The travel demand forecasting module includes trip generation components, which assume a nonlinear regression form, and trip distribution components, which assume a multinomial logit form. Before forecasts are made, model

calibration is necessary to ensure that the model replicates the present pattern as closely as possible. XXE also does not allow for departure time changes or mode changes in the time scanning periods.

### **Model Inputs and Outputs**

Inputs needed include an origin-destination matrix; traffic counts; capacity, which can either be calculated with HCM methods or obtained from local agencies; the free flow speed, length, width, signal phasing, and cycle lengths for each link; and changes in zonal household demographics, zonal employment, and the highway network. Output results include link flow forecasts and their respective v/c ratios, overall network performance, turning movement forecasts, and other traffic flows of interest.

### **Model Strengths and Weaknesses**

The strengths of XXE come from the advanced transportation analysis techniques it uses, and its fairly simple input requirements. XXE's primary weakness is its assumption of steady-state conditions and the fact that it does not allow for the detailed level of output that only a microscopic model can provide.

## **XXEXQ**

### **Model Development and Description**

Early versions of XXEXQ were developed by Hamed and Mannering (1989), and the model has been vigorously improved since then. XXEXQ uses the same theoretical approach as XXE and, in point of fact, the two programs share much of the same computer code. However, XXEXQ relaxes the steady-state assumptions of XXE by sequentially allocating traffic over time. This time-varying traffic allocation makes XXEXQ particularly well suited to the study of time-varying events such as incidents. To sequentially assign traffic over time, during a time-varying event, XXEXQ requires the user to specify the proportion of travelers with full information about the event (i.e., in the case of an incident, the proportion of travelers aware of the capacity reduction). It assumes that the remainder

of the travelers have no information about the event. XXEXQ then performs two user equilibrium assignments for each time period (time periods are usually 10 minutes long) by first assigning uninformed travelers and then fully informed travelers. It assumes the fully informed travelers are aware of all time-varying system characteristics (e.g., capacity changes), the route choices of uninformed travelers, and the network queues remaining from the preceding time period. XXEXQ is not typically linked to XXE's travel demand forecasting module, although there is no limitation to doing so. Before running XXEXQ, an XXE calibration is necessary to ensure replication of existing traffic counts. As with XXE, XXEXQ does not allow for departure time or mode changes.

#### **Model Strengths and Weaknesses**

Inputs include an origin-destination matrix, traffic counts, link capacities, lengths, and free-flow speeds, proportion of travelers with information, proportion of origin-destination matrix to be assigned in each time period, and time-varying changes in capacity. Outputs include link flows by time period, link queue lengths by time period, total system travel time and vehicle miles of travel, and average system congestion.

#### **Model Strengths and Weaknesses**

XXEXQ's time-varying structure makes it very well suited to the study of incidents. It shares the relatively simple input requirements of XXE and provides most of the relevant information needed to assess the traffic related impacts of incidents. XXEXQ has the same primary weaknesses as XXE (i.e., it is macroscopic, with no provision for departure time changes).

### **CONCLUSION**

Each model has been designed for a specific purpose, which has determined the necessary results. Therefore, each model's suitability for the needs of modeling incidents must be assessed. One of the first limitations in modeling is the model's size capability.

Both CORQ-CORCON and RFLO are limited by size to modeling smaller areas; therefore, their use in modeling incidents is constrained.

Another important characteristic is adaptability to application purpose. The purpose in this case is to model incidents on major travel ways, including both arterials and freeways. Other models such as CORQ, CORCON, INTRAS, and MACK are limited to freeway sections only, another key disadvantage.

The level of input required can also have distinct disadvantages. CORFLO, CORQ, CORCON, INTRAS, SCOT, and TMODEL2 have labor intensive demands for input.

The methodology behind the model is also very important. A model that uses a simplistic method of achieving results is much less desirable than a model that uses advanced methods. An example of a simplistic model is TMODEL2, which uses gravity model distribution and either incremental or iterative assignment. Another questionable characteristic is "fluid flow," which describes traffic as a compressible fluid. Models that do this are MACK, RFLO, and SCOT. When the methodology is not simplistic enough to adapt to large networks, such as with SIMX, usability is again limited.

XXE and its incident-assessing sister, XXEXQ, have a host of limitations, as previously discussed. Although they are far from perfect, the researchers felt that they most easily provide the best compromise between theory, input requirements, and output. XXEXQ is specifically designed for incident evaluation and is readily adaptable to account for new finding and methodological improvements.

## **REFERENCES**

- Abu-Eisheh, Sameer A., and Mannering, Fred L., "Traffic Forecasting for Small- to Medium-Sized Urban Areas," *ITE Journal*, October 1986.
- Abu-Eisheh, Sameer A., and Mannering, Fred L., "Discrete/Continuous Analysis of Commuters' Route and Departure Time Choices," *Transportation Research Record* 1138, 1987.
- Allen, Brian L., and Easa, Said M., "Application of Freeway-Corridor Assignment and Control Model," *Transportation Research Record* 682, 1978.
- Federal Highway Administration, "TRAF User's Guide," FHWA-RD-88, March 1988.
- Hallenbeck, Mark E., and Chien, Lin, "Freeway Management Working Paper, Current Development of Traffic Models," Washington State Transportation Center, Seattle, Washington, May 1988.
- Hamed, Mohammad, and Mannering, Fred L., "Time-Varying Conditions and Their Effect on Dynamic Traffic Assignment Models, 1989.
- Mannering, Fred L., Abu-Eisheh, Sameer A., and Arnadottir, Audor T., "Dynamic Traffic Equilibrium with Discrete/Continuous Econometric Models," Working paper, University of Washington, 1989.
- Metro Transportation Group, Inc., "TMODEL2: The Tool for Transportation Planning User's Manual," 1988.
- Rickman, Toby D., "Evaluation of the CORFLO Model Applied to Urban Freeway Reconstruction," Unpublished master's thesis, University of Washington, 1989.
- Roden, D.B., Okitsu, W., and May, A.D., "FREQ7PE — A Freeway Corridor Simulation Model," June 1980.
- Ross, Paul, "RFLO User Manual," Traffic Systems Division, HSR-10-FHWA, Draft, September 1988.
- Wicks, D.A., and Andrews, B.J., "Development and Testing of INTRAS, A Microscopic Freeway Simulation Model: Volume 2, User's Manual," FHWA/RD-80/107, October 1980.
- Wicks, D.A., and Leiberman, E.B., "Development and Testing of INTRAS, A Microscopic Freeway Simulation Model: Volume 1, Progress Design, Parameter Calibration, and Freeway Dynamics Component Development," FHWA, 1977.
- Wicks, D.A., and Leiberman, E.B., "Development and Testing of INTRAS, A Microscopic Freeway Simulation Model: Volume 3, Validation and Applications," FHWA, 1977.
- Yager, Sam, "CORQ — A Model for Predicting Flows and Queues in a Road Corridor," *Transportation Research Record* 533, 1975.



**APPENDIX B**  
**METHODOLOGY**

## APPENDIX B

### METHODOLOGY

The user-equilibrium traffic assignment problem is concerned with finding the link flows for a transportation network, through the interaction between supply and demand. Demand is represented by the origin-destination matrix; supply is represented by the physical characteristics of the network and the links' performance functions. User-equilibrium uses a link selection criterion of minimizing the individual's travel time. This appendix discusses how this problem, with all its assumptions and constraints, is stated mathematically, and how equilibrium flows can be computed.

Initially, the appendix demonstrates how user-equilibrium can be applied graphically to find the flow pattern for a small network. The degree of complexity for solving larger networks graphically leads to a mathematical transformation of the problem. This approach involves the formulation of a mathematical program, the solution of which should be unique and should satisfy the user-equilibrium definition and assumptions. As the mathematical program is identified, the appendix illustrates an algorithm that searches for the solution. Before discussing this type of multivariate optimization (i.e., one involved in solving for many variables, such as the flows on all the links in the transportation problem), one-dimensional optimization is reviewed because it is used in solving the multivariate problem. Then the appendix presents the user-equilibrium traffic assignment algorithm and discusses briefly the modeling package used.

#### NOTATION

Before proceeding into the core of this appendix, the reader must understand the following notation:

- A = The set of consecutively numbered links
- N = The set of consecutively numbered nodes
- R = The set of origin zonal centroids from which trips are generated

- S = The set of destination zonal centroids of the zones at which trips are terminated
- q = The vector representing the origin-destination matrix
- q<sub>rs</sub> = The element in the origin-destination matrix representing the zonal demand between origin r and destination s
- K<sub>rs</sub> = The set of paths connecting the O-D pair r-s
- v<sub>k</sub><sup>rs</sup> = The flow on path k connecting the O-D pair r-s
- t<sub>k</sub><sup>rs</sup> = The travel time on path k connecting the O-D pair r-s
- v<sub>a</sub> = The flow on link a
- t<sub>a</sub> = The travel time on link a, which is expressed as a function of the flow on that link, so that t<sub>a</sub> = f(v<sub>a</sub>) represents the link performance functions

With the above notation, the following variables can be related, and then the obtained relationships can be satisfied by the math program:

- The travel time on a given path is the sum of travel times on the links composing this path, or mathematically:

$$t_k^{rs} = \sum_a t_a \cdot \delta_{a,k}^{rs}, \forall k \in K_{rs}, \forall r \in R, \forall s \in S$$

where  $\delta_{a,k}^{rs} = 1$  if link a is on path k connecting the O-D pair, r-s  
 $= 0$  otherwise

- The link flow is the sum of the flows on all the paths going through this link, or mathematically:

$$v_a = \sum_r \sum_s \sum_k v_k^{rs} \cdot \delta_{a,k}^{rs}, \forall a \in A$$

## **THE GRAPHICAL SOLUTION OF USER-EQUILIBRIUM**

To illustrate the user-equilibrium assignment technique, a simplified example for a small network is solved graphically here. The results of the example lead to the derivation of a mathematical formulation for the user-equilibrium problem to deal with larger, real-life networks. The basis of the example is drawn from Kanafani (1983) and Morlok (1978).

Suppose the network is the simple network shown in Figure B.1(a). Two nodes, A and B, are connected by two routes, 1 and 2. A link performance function for each,  $t_1 = f(v_1)$  and  $t_2 = f(v_2)$ , represents the effect of flow interacting with the physical characteristics of the link, to produce a related travel time. The functions are illustrated in Figure B.1(b) and are assumed to increase monotonically. Suppose that the demand from  $A \rightarrow B$  ( $q_{AB}$ ) is constant. To solve the user-equilibrium flows  $v_1$  and  $v_2$ , the demand should be distributed between the routes so that the travel times,  $t_1$  and  $t_2$ , are the same for each. The graphical solution requires modifying the position of the link performance functions relative to each other, as illustrated in Figure B.1(c). Then on the horizontal axis,  $v_1$  is measured from left to right and  $v_2$  is measured from right to left, and the corresponding link performance function is fixed to equal the total demand,  $q_{AB}$ . At any point on the horizontal axis, there are two values of flows,  $v_1$  and  $v_2$ , the sum of which is the total demand,  $q_{AB}$ .

Since no travelers can improve their travel times or reduce their costs by unilaterally switching routes, and since all used paths connecting a given O-D pair should have the same travel time, there is, therefore, only the point  $(v_1, v_2)^*$  that satisfies the equilibrium conditions. At this point, the value of the two link performance functions,  $f(v_1)$  and  $f(v_2)$ , are equal, and the resulting flow pattern causes equilibrium in the network. At any other point, such as  $(v_1, v_2)$ , the cost on one of the two routes (here route 2) is higher than that on the other route (route 1), which influences some users to switch to the lower travel time route, route 1. In terms of  $f(v_2) > f(v_1)$ , additional users continue to switch routes,

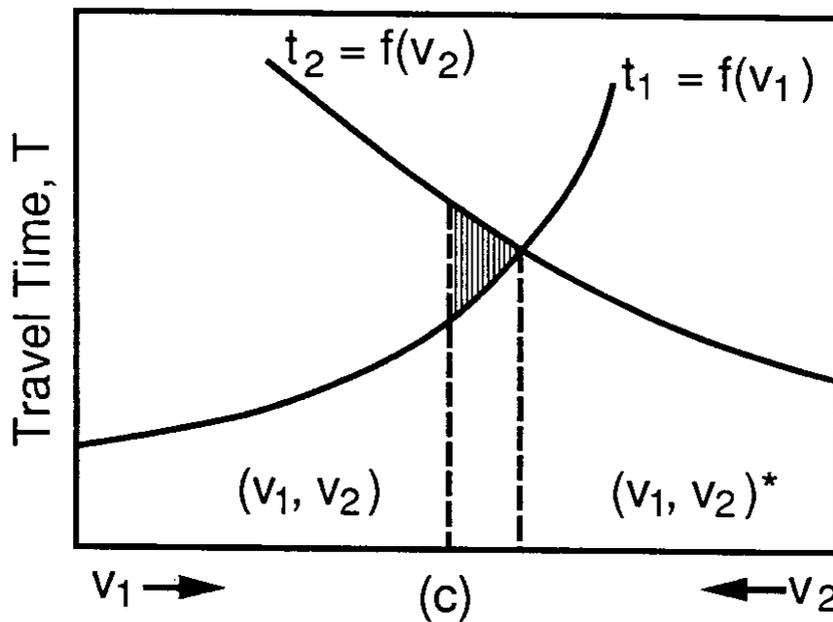
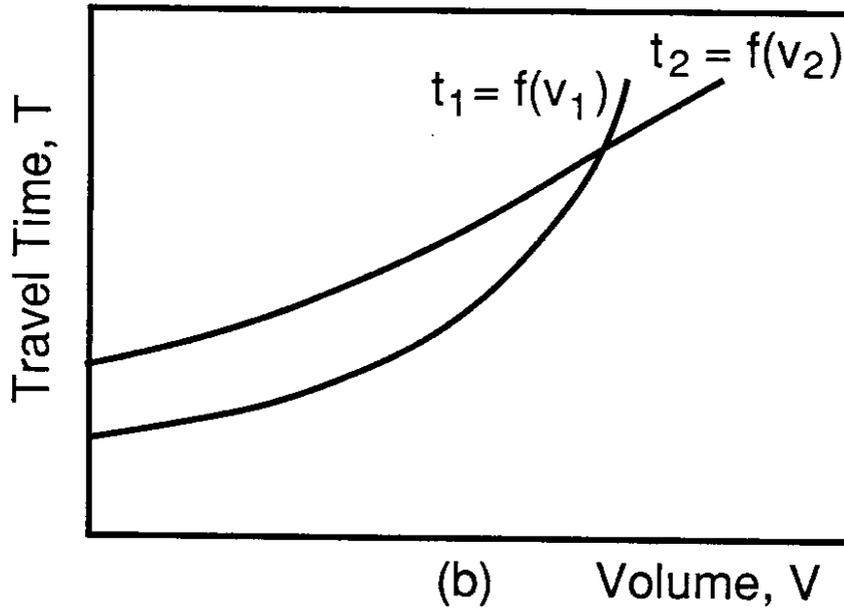
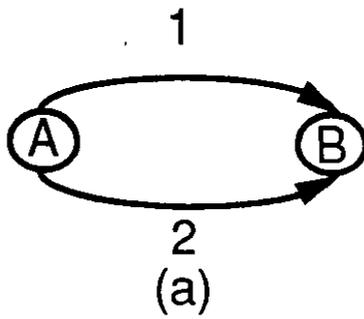


Figure B.1 Graphical solution of user-equilibrium assignment.  
 (a) Network structure,  
 (b) Link performance functions,  
 (c) Equilibrium assignment.

until the assignment reaches the point  $(v_1, v_2)^*$ . At this point, any additional switching of routes by any user of either route results in an increase of travel cost. Therefore, at  $(v_1, v_2)^*$  the travel time on both routes is equal. No user has any motive to switch routes, and the equilibrium state occurs. At this point the area under both curves,  $f(v_1)$  and  $f(v_2)$ , is minimized. At any other assignment point, such as  $(v_1, v_2)$ , the area under the link performance functions equals that for  $(v_1, v_2)^*$  in addition to the shaded area (see Figure B.1(c)). Under strictly monotonically increasing link performance functions, this area is always positive. Thus the integral of the curves is minimal when summed at equilibrium. This can be stated mathematically and generalized for any number of links in a network.

### MATHEMATICAL REPRESENTATION OF USER-EQUILIBRIUM

The above result can be expressed mathematically to solve for equilibrium flows on the links of the network as follows:

$$\text{minimize } z(v) = \text{minimize } \sum_a \int_0^{v_a} f(w)dw \quad (\text{B.1})$$

where  $z(v)$  is the objective function, which calculates the areas under the links performance functions by summing their integrals. The objective function is used as a mean to find a set of  $v$  values that form the equilibrium solution through the minimization process.

The user-equilibrium link flows can be obtained by solving the mathematical program, subjected to the following constraints:

$$\sum_k v_k^{rs} = q_{rs}, \quad \forall r,s \quad (\text{B.2})$$

$$v_k^{rs} > 0, \quad \forall k,r,s \quad (\text{B.3})$$

and satisfying that

$$v_a = \sum_r \sum_s \sum_k v_k^{rs} \cdot \delta_{a,k}^{rs}, \quad \forall a \quad (\text{B.4})$$

This set of constraints is referred to as Beckmann's transformation (Beckmann et al., 1956). It transforms the definitions and restrictions to mathematical expressions. Although this transformation was delineated in 1956, the algorithms used to solve it were not developed until the late 1960s and early 1970s.

This transformation refers to the following concepts and restrictions:

- Equation B.2 represents the flow conservation constraint, so that the sum of the flows from any O-D pair on all the paths should equal the demand or travel rate for that O-D pair. This implies that every  $q_{rs}$ , or the whole origin-destination matrix, should be assigned to the network.
- Equation B.3 shows the non-negativity condition of the flows, without which the solution of the algorithm may contain negative values, which are meaningless.
- The last equation B.4 implies the role of the network structure in the program. It shows that flow on a link is expressed in terms of all path flows going through that link. The definition for  $\delta_{a,k}^{rs}$  remains the same. A similar relationship for travel time is used in the algorithm implicitly to check for the minimum travel times among different paths connecting the various O-D pairs. This check is conducted by summing the travel times on all the links composing a given path, for all the paths connecting every origin-destination pair. This check is expressed mathematically as:

$$t_k^{rs} = \sum_a t_a \cdot \delta_{a,k}^{rs} \quad (B.5)$$

Two assumptions should be satisfied to apply this program. The first is that the travel time on a given link is only a function of the flow on that link, and not of any other link. This assumption can be written mathematically as:

$$\frac{\partial f(v_a)}{\partial v_b} = 0 \quad (B.6)$$

The other assumption is that the link performance functions are positive and increasing functions, which can be expressed mathematically as:

$$\frac{\partial f(v_a)}{\partial v_a} > 0 \quad (\text{B.7})$$

## **THE EQUIVALENCY AND UNIQUENESS CONDITIONS**

To use the results of the mathematical program illustrated above in Equations B.1 through B.4, and to consider the link flows obtained as the equilibrium flows, two conditions should be satisfied: equivalency and uniqueness (Beckmann et al., 1956).

### **The Equivalency Condition**

The first proof requires that the solution of the transformed program, represented by the Equations B.1 through B.4, gives equilibrium link flows and satisfies the equilibrium conditions. Such flows are assigned to equate the travel times on the used paths, and they should be less than or equal to any travel time on non-used paths between any O-D pair in the network.

The solution of a mathematical program should satisfy its first order conditions at any local minimum or stationary point of the program. This criterion is satisfied in the problem if the derivative of the objective function with respect to the flow on a particular path equals the travel time on that path (Sheffi, 1984). In addition, all the constraints of the program should hold at the point that minimizes the objective function.

The proof given by Sheffi satisfies this condition. Therefore, the flow values resulting from the solution of the program, represented by the Equations B.1 through B.4, are those satisfying the user-equilibrium conditions, and the solution of the program is a user-equilibrium traffic assignment.

### **The Uniqueness Condition**

The second condition that should be satisfied is uniqueness, meaning that the minimization program has only one solution, which is the equilibrium flow pattern.

The uniqueness condition will be satisfied if objective function  $z(\mathbf{v})^1$  is proven to be strictly convex near the solution flow pattern, the stationary point, or the vector of  $v$ 's ( $\mathbf{v}^*$ ), and convex elsewhere. The link performance constraints provided by Equations B.6 and B.7 should be satisfied, as well. This constraint satisfaction is known mathematically as the second order condition, and it is proved by finding the second derivative of the objective function with respect to the flows and proving that the resulting matrix of derivatives is positive.

Sheffi's proof satisfies this condition and, therefore, the program representing the user equilibrium has a unique minimum. This means that there is only one solution that minimizes the program described by the Equations B.1 through B.4

Satisfying both the conditions of equivalency and uniqueness results in only one flow pattern that minimizes the program described in the Equations B.1 through B.4, and this flow pattern is a user-equilibrium flow pattern. Therefore, the solution of this mathematical program is, in fact, the solution of the user-equilibrium problem.

## **THE OPTIMIZATION PROCESS**

Although the problem considered here is a multivariate optimization problem because the solution involves a set of  $v$ 's, i.e., flows on all the links of the network that optimize the objective function, the one-dimensional minimization will be discussed first. A discussion of minimizing a non-linear function of a single variable,  $v$ , is presented here because such minimization is usually part of the algorithms designed for solving multivariate minimization problems. The multivariate minimization technique utilized is the convex combinations method.

---

$^1z(\mathbf{v})$  denotes the objective function of the vector of flows, where **the bold lettering** refers to the vector notation.

## One-Dimensional Minimization

One method of solving non-linear, one-dimensional optimization problems is the so-called “bisection method,” an interval reduction technique. It involves an iterative procedure that examines a series of ever-decreasing intervals, each of which includes the minimum point. The bisection method, also called a Bolzano search, has been shown to converge quickly to the solution point when functions are optimized over a closed interval  $[a,b]$  (Sheffi, 1984). The interval  $[a,b]$ , which is also called feasible range, is divided into two intervals in each iteration, and that which contains the minimum point remains while the other is discarded. The procedure is repeated until a small enough interval is obtained that an approximate solution,  $v^*$ , can be estimated.

The function  $z(v)$  is assumed to be continuous and uniquely defined everywhere in the interval. This assumption implies that there is a finite minimum of  $z(v)$  for some  $v$  in the interval  $[a,b]$ . Also,  $z(v)$  is assumed to be ditonic, so that it has a unique minimum in the interval  $[a,b]$  (see Figure B.2).

The bisection method, which is a line search (or interval reduction) technique, utilizes the geometrical interpretation of the derivative. A ditonic function is monotonic on each side of the minimum point  $v^*$ . The derivative of  $z(v)$ ,  $dz(v)/dv$ , is positive to the right of  $v^*$  (i.e.  $v < v^*$ ). For a given interval  $[a^n, b^n]$ <sup>2</sup> the derivative is computed for the middle point  $(a^n + b^n)/2$ , which may be denoted as  $v^n$ . Then if  $dz(v^n)/dv < 0$ , then  $v^* > v^n$ ; interval  $[a^n, v^n]$  and the next interval will be  $[v^n, b^n]$ . If  $dz(v^n)/dv > 0$ , then  $v^* < v^n$ , and the interval  $[v^n, b^n]$  is discarded, the next iteration will be based on the interval  $[a^n, v^n]$ . In every iteration, the interval obtained is checked against a convergence criterion, until this criterion is met. Therefore, the last interval  $[a^n, b^n]$  contains the minimum value of the

---

<sup>2</sup><sub>n</sub> here refers to the number of iterations.

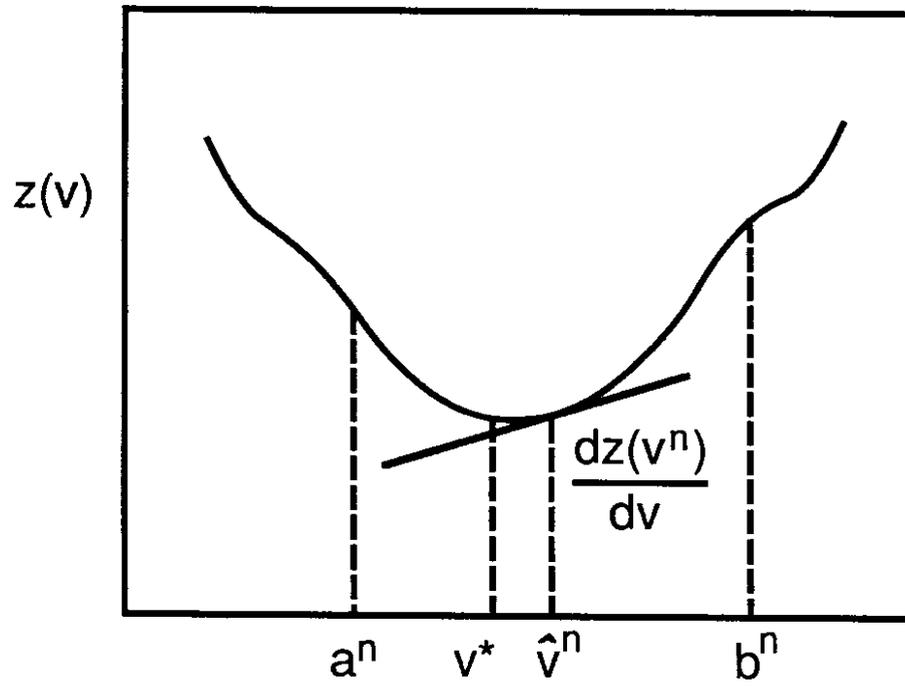


Figure B.2 The graphical representation of the bisection method

objective function  $z(v)$ , and the corresponding  $v$  value is approximated to be the middle point of the interval. Figure B.3 represents a flow chart of this algorithm.

### **The Convex Combinations Method**

Frank and Wolfe (1956) originally suggested a multivariate minimization algorithm to solve the equilibrium problem. The algorithm is an iterative process used in the solution of many programs to search for equilibrium flows for transportation networks.

The algorithm should at first have a specific feasible solution,  $v^n$ , which may be a reasonable guess for a possible flow pattern, such as an all-or-nothing flow pattern. Two things should be sought here: the first is the descent direction, and the other is the move size. The descent direction is the best direction leading towards the minimum value of  $z(v)$  and satisfying all the constraints previously discussed (Equations B.2 through B.4), given a specific point on the objective function  $z(v)$ . The move size determines how much movement to the next point on the function  $z(v)$  is necessary on the descent direction specified.

To find the descent direction, the algorithm searches over the entire feasible region for an auxiliary feasible solution  $y^n = (y_1^n, y_2^n, \dots, y_I^n)$ , where  $I$  is the number of links and  $n$  is the iteration number. The direction for  $v^n$  to  $y^n$  provides the maximum possible drop (or approach) towards the minimum value of  $z(v)$  by finding the descent direction that is denoted as  $d^n = v^n - y^n$ . This requires linear approximation of the objective function at every iteration, the solution of which,  $y^n$ , specifies the direction of search on the basis of the current solution point,  $v^n$ . This approximation simplifies the problem, because minimizing a linearized function subjected to a linear set of constraints has its solution at the boundary, or more specifically, at a corner of the feasible region.

Once the descent direction is known, the next step is to find the move size. The new solution point,  $v^{n+1}$ , lies somewhere between  $v^n$  and  $y^n$ , and its exact location is

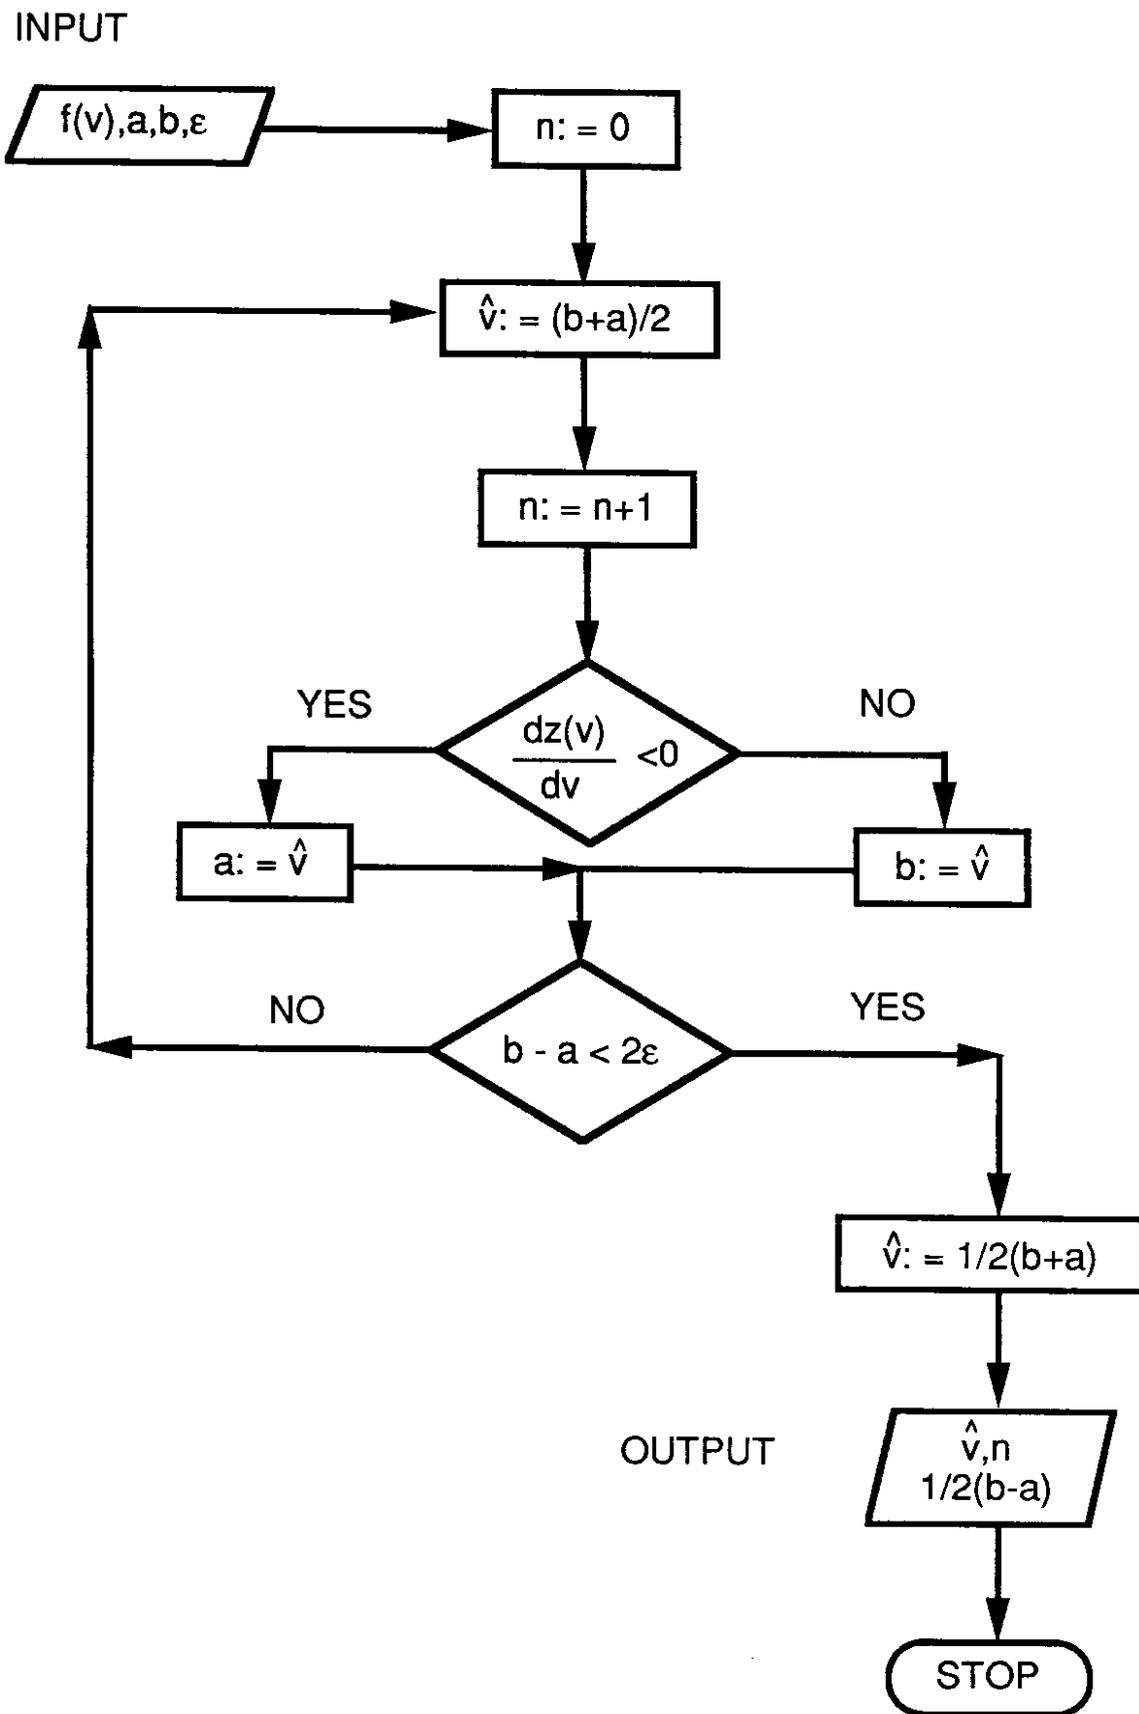


Figure B.3 A flow chart representing the bisection method

Source: Sheffi, Y., Urban Transportation Networks, 1984, p.86

determined when the move size is found. If  $\alpha$  refers to a weighting factor to locate  $v^{n+1}$  between  $v^n$  and  $y^n$ ,  $v^{n+1}$  can be written as:

$$v^{n+1} = (1 - \alpha_n) v^n + \alpha_n y^n \quad , 0 \leq \alpha \leq 1 \quad (\text{B.8a})$$

$$v^{n+1} = v^n + \alpha (y^n - v^n) \quad (\text{B.8b})$$

$$v^{n+1} = v^n + \alpha d^n \quad (\text{B.8c})$$

The optimal solution for finding the move size,  $\alpha$ , can be performed by any interval reduction technique, such as the bisection method, since the search is in a closed interval.

Finally a convergence criterion test is conducted at each iteration to check the difference in the objective function between the two points,  $v^n$  and  $y^n$ . The whole procedure is repeated until the convergence criterion is met or after a specific number of iterations.

The convex combinations algorithm is summarized in the flow chart represented in Figure B.4.

### Applying the Convex Combinations Method to Solve for User-Equilibrium

The application of the above described convex combinations algorithm has proved to be suitable and efficient in solving for the equivalent user-equilibrium program described in Equations B.1 through B.4. It is guaranteed to converge to the equilibrium solution. The suitability of this algorithm is demonstrated also by the ease and efficiency with which the descent direction can be found. This involves solving a linear program, which is an approximation of the objective function. This linear program has a special structure in the case of user-equilibrium program, which simplifies its solution (Sheffi, 1984). It was derived to be:

$$\text{minimize } z_1(y) = \sum_a t_a^n \cdot y_a \quad (\text{B.9})$$

subjected to:

$$\sum_{rs} \sum_k g_k^{rs} = q_{rs} \quad , \forall r, s \quad (\text{B.10})$$

$$g_k^{rs} \geq 0 \quad , \forall k, r, s \quad (\text{B.11})$$

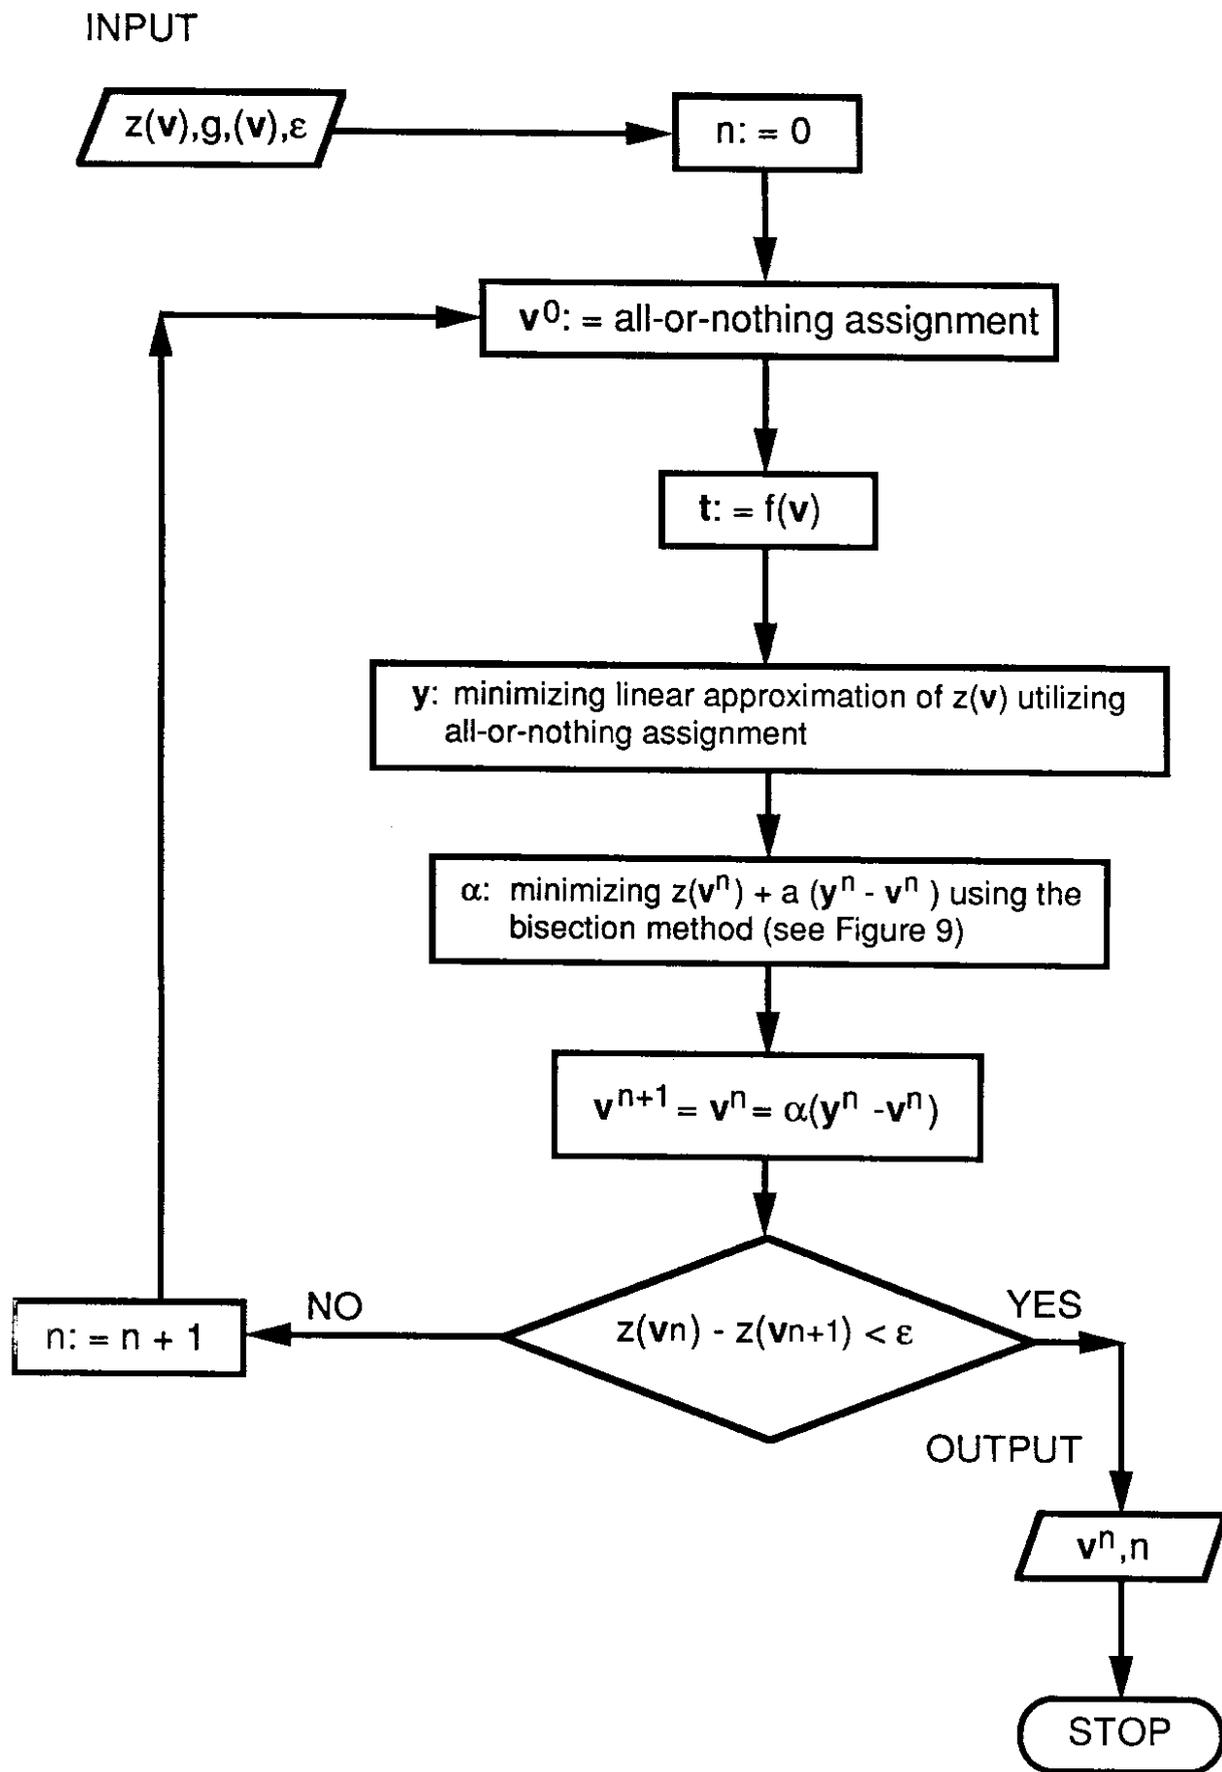


Figure B.4 A flow chart representing the convex combinations method

where  $z_1(\mathbf{y})$  = the linear approximation of the objective function  $z(\mathbf{y})$   
 $g_b^{rs}$  = the auxiliary flow on path  $k$  connecting origin-destination pair  $r$ - $s$   
 $y_a$  = the auxiliary flow on link  $a$ , which can be found from the relationship:

$$y_a^n = \sum_{rs} \sum_k g_k^{rs} \cdot \delta_{a,s}^{rs}, \forall a$$

from which  $y^n$  is specified, used to determine the descent direction.

Equation B.9 minimizes the total travel time over the network with fixed travel times (not flow dependent). Thus, it suggests the use of of an all-or-nothing assignment. The shortest paths between all the origins and all the destinations should be determined and used as a basis for assigning the traffic for the corresponding origin-destination pair. Therefore, the program represented by Equations B.9 through B.11 is an all-or-nothing assignment that is solved at each iteration to find  $y^n$ , the auxiliary link flows at that iteration.

The line search for the optimal move size,  $\alpha$ , can be determined by applying the bisection method to the one-dimensional minimization problem. The derivative can easily be calculated through the procedure to find the optimum  $\alpha$  that gives the best move size in the descent direction determined above.

In summary, for each iteration, with the current  $v^n$ , the computer should find a set of auxiliary link flows,  $y^n$ , that define the descent direction towards the next set of flows,  $v^{n+1}$ , and finally towards the minimum value of the objective function,  $z(v)$ . The move size towards the next point in the objective function,  $v^{n+1}$ , is governed by the optimal value of  $\alpha$  at each iteration, which can be considered a weighting factor to determine  $v^{n+1}$  between  $v^n$  and  $y^n$ . The best method of determining when to stop the iterations is based on the obtained flows or travel times. The criterion in the used program compares the average

value (over all the links) of the relative change in flow with the previous iteration to a predetermined value, say  $\epsilon$

$$\text{i.e., check } \frac{\sum_{rs} \frac{v_a^{n+1} - v_a^n}{v_a^{n+1}}}{I} \leq \epsilon \quad (\text{B.12})$$

where:  $I$  = the total number of links.

The optimization process may be stopped after a specific number of iterations have been performed. Tests on networks have demonstrated that five to six iterations will bring the solution adequately close to convergence for most situations.

The steps of the algorithm can be summarized as follows:

- Step 0: Initialization: Perform an all-or-nothing assignment that yields  $\{v_a^1\}^3$ ,  $\forall a$
- Step 1: Updating: Set  $t_a = f(v_a^n)$ ,  $\forall a$
- Step 2: Direction Finding: Perform an all-or-nothing assignment based on  $t_a^n$  that yields a set of auxiliary flows  $\{y_a^n\}$
- Step 3: Line Search: Find  $\alpha_n$  that solves

$$\text{minimize } \sum_a \int_0^{v_a^n + \alpha(y_a^n - v_a^n)} f(w) dw, \quad 0 \leq \alpha \leq 1$$

- Step 4: Move: Set  $v_a^{n+1} = v_a^n + \alpha(y_a^n - v_a^n)$ ,  $\forall a$
- Step 5: Convergence test: Check the convergence criterion

$$\text{i.e., check } \frac{\sum_{rs} \frac{v_a^{n+1} - v_a^n}{v_a^{n+1}}}{I} \leq \epsilon \quad (\text{B.12})$$

<sup>3</sup>The notation  $\{ \}$  used here refers to the set of  $v_a$ 's.

if met, stop. The current solution  $\{v_a^{n+1}\}$ , is the set of equilibrium link flows. Otherwise, set  $n: n+1$  and go to Step 1.

## **OVERVIEW OF XXEXQ**

Several programs have been developed to simulate user-equilibrium on highway networks using the methodological procedures discussed above. The selection of the most appropriate program is a trade-off between realistic results and computational costs. The XXEXQ program has provisions for achieving network equilibrium with a number of proven algorithms that afford considerable flexibility in terms of computational cost and forecasting accuracy. XXEXQ was originally developed at the Massachusetts Institute of Technology, and subsequent modifications of this package have been undertaken at the Pennsylvania State University and the University of Washington (Abu-Eisheh and Mannering (1986), Hamed and Mannering (1989)), to consistently produce reasonable and defensible results. The program is presented in Appendix C.

The methodological requirements (the inputs) are discussed and presented in Chapter 2. XXEXQ consists of a main program, four subroutines, and two functions. The main program processes the input requirements by preparing them for use in the associated subroutines and functions, and performs the user equilibrium assignment. XXEXQ subroutines and functions are presented below.

### **The Subroutines**

The subroutines utilized include the following:

1. The first subroutine performs the all-or-nothing assignment. It requires finding the shortest paths from all the origins to all the destinations. It performs the initial assignment and finds the descent direction.

2. The second subroutine is the bisection technique, which calculates the optimum value of  $\alpha$  to determine the location of the next point on the objective function.
3. The third subroutine finds the shortest time paths from all the origins to all the destinations in the network. It is used as the input from the subroutine that loads the network through an all-or-nothing assignment.
4. The last subroutine, the fourth, prepares the final results after a specific number of iterations have been performed or after the convergence criterion has been met. This subroutine presents the equilibrium flows on the links of the network. It also calculates some measures for the level of service on the links and for the network as a whole.

### **The Functions**

The functions utilized include the following:

1. The first two functions calculate the cost function of every link, depending on the ratio of the volume/capacity, and on the shape of the link performance function (see below for additional detail). The results are used in the all-or-nothing assignment.
2. The third function calculates the integral of the cost function for all the links in order to find the value of the objective function for the resulting flow pattern at each iteration.

### **CHARACTERISTICS OF XXEXQ**

The following sections discuss specific elements of XXEXQ and their underlying assumptions. XXEXQ has the ability to divide a two-hour simulation period into any number of time periods, to account for the effects of queues, to account for the benefits of driver information, and to restrict the capacities of one or more links.

Users can specify the number of time periods they wish to simulate. The length of each time period is determined by dividing the total simulation duration (120 minutes) by the number of time periods. For example, if 10-minute time periods are desired, then 12 periods are required, since  $120/12 = 10$  minutes per period.

The ability to divide the simulation into smaller time periods allows modelers to mark the progress of queue buildup or dissipation and to specify capacity restrictions of varying lengths (e.g., used to describe an incident).

### **Link Performance Functions**

XXEXQ uses the Bureau of Public Roads function, a function that considers both the speed limit and the practical capacity of the link, to describe the performance of individual links. The form of the function appears as follows:

$$T = T_0[1 + a(V/C)^b] \quad (\text{B.13})$$

where:

- T = the travel time for the assigned volume
- $T_0$  = the travel time at zero flow
- V = the assigned link volume
- C = the capacity of the link
- a,b = model parameters that vary with respect to the capacity and speed limit of the link

The parameters (a and b) vary with speed and capacity, and are shown in Table B.1.

### **Capacity Restriction**

Often throughout a day, restrictions of capacity occur on various links in a random manner. These restrictions may be caused by incidents (accidents and disablements), weather, bridge openings, and other uncontrollable or controllable events. These restrictions have profound effects on the performance of transportation systems and cause significant alterations in travel patterns.

**TABLE B.1. MODEL PARAMETERS OF THE BUREAU OF PUBLIC ROADS PERFORMANCES FUNCTIONS FOR DIFFERENT LINK CHARACTERISTICS**

| Speed Limit (mph) | Practical Capacity (vehicle per hour) | Model Parameters |        |
|-------------------|---------------------------------------|------------------|--------|
|                   |                                       | a                | b      |
| 0 - 30            | 0 - 240                               | 0.7312           | 3.6596 |
| 0 - 30            | 249 - 499                             | 0.6128           | 3.5038 |
| 0 - 30            | 500 - 749                             | 0.8774           | 4.4613 |
| 0 - 30            | 750 - 999                             | 0.6846           | 5.1644 |
| 0 - 30            | 1000+                                 | 1.1465           | 4.4239 |
| 31 - 40           | 250 - 499                             | 0.6190           | 3.6544 |
| 31 - 40           | 500 - 749                             | 0.6662           | 4.9432 |
| 31 - 40           | 750 - 999                             | 0.6222           | 5.1409 |
| 31 - 40           | 1000+                                 | 1.0300           | 5.5226 |
| 41 - 50           | 500 - 749                             | 0.6609           | 5.0906 |
| 41 - 50           | 750 - 999                             | 0.5423           | 5.7894 |
| 41 - 50           | 1000+                                 | 1.0091           | 6.5856 |
| 50+               | 500 - 749                             | 0.8776           | 4.9287 |
| 50+               | 750 - 999                             | 0.7699           | 5.3443 |
| 50+               | 1000+                                 | 1.1491           | 6.8677 |

XXEXQ allows the modeler to simulate such restrictions by specifying the link and its reduced capacity. This information is specified for each time period and in this way, capacity restrictions may be simulated for varying lengths of time.

**Traffic Intensity Ratio**

Since it is unreasonable to assume that traffic flows at a constant rate throughout the peak periods in a day, XXEXQ allows the modeler to specify a traffic intensity ratio for varying traffic flows across time periods. For example, a time period with a traffic intensity ratio of 1.0 implies a traffic demand that is equal to the mean of the 2-hour simulation average; whereas a traffic intensity ratio of 1.2 implies a traffic demand that is 20 percent higher than the 2-hour average.

**Queue Response**

Although the standard user equilibrium approach to traffic assignment (as previously detailed) is superior to the incremental and iterative approaches, it does not

consider the effects of queues that develop on links within the network. By breaking down the simulation period into smaller time intervals, XXEXQ allows the user to check the development of queues on links and to use this information to more precisely estimate traffic assignment in future time periods.

XXEXQ defines a queue as the number of vehicles in excess of capacity on any particular link. If, for example, 180 vehicles travel on a link in a ten-minute period and the link has a capacity of 160 vehicles, then the queue is 20 vehicles. This newly derived queue is then inserted into the link performance function of the next time period. Consider the following link performance function:

$$T = T_0[1 + a(V+Q/C)]^b \quad (\text{B.14})$$

where:

- T = time to traverse link
- T<sub>0</sub> = free flow time
- V = volume assigned to link
- C = capacity of link
- Q = queue of vehicles derived from previous time period
- a,b = performance constants derived from BPR function curves

When a queue develops from a previous time period, the value of that queue is placed in the above function and increases the time to traverse the link. In this way, the effect of queues is reflected in link performance, and the smart driver (a driver who becomes aware of the queue through traffic information sources) will consider this changed condition during route choice.

### **Information Response**

XXEXQ also differentiates between drivers who have information about existing traffic conditions and those who do not. This characteristic was added to reflect the route choice decision process some drivers would undergo when they received information about the system through the radio, TV, or other sources.

To account for the differences in route choice between uninformed and informed drivers, XXEXQ makes two assumptions: (1) uninformed drivers assume that the entire network is operating without queues or capacity restrictions, and (2) informed drivers know about queues and capacity restrictions on all links throughout the transportation system. The actual traffic assignment is performed by two separate user equilibrium solutions per time period.

The first user equilibrium solution assigns routes to all the uninformed drivers. It assumes that 100 percent of the demand is using the network while it computes the user equilibrium route choice. The link performance function appears as:

$$T = T_0[1 + a(V/C)]^b \quad (B.15)$$

In this form, the link performance function in this form maintains the first assumption: uninformed drivers have no knowledge of queues or capacity restrictions. After the traffic assignment has been completed, the volumes on all links are multiplied by the percentage of uninformed drivers, a product that removes the informed drivers from the system.

The second user equilibrium solution computes a traffic assignment for the informed drivers by using a modified link performance function that satisfies the second assumption of perfect knowledge:

$$T = T_0[1 + a\{(V_i + V_u + Q)/(C \cdot R_1)\}]^b \quad (B.16)$$

where:

$V_i$  = volume of informed drivers

$V_u$  = volume of uninformed drivers previously computed

$Q$  = queue from previous time period

$R_1$  = capacity restriction ratio of link in existing time period (i.e.,  $R_1=1.0$  implies no capacity reduction,  $R_1=0.5$  implies capacity reduced to one-half of original capacity)

With the variables  $V_u$ ,  $Q$ , and  $R_1$  substituted into the link performance function, the informed drivers are given all system knowledge pertaining to the route choice of

uninformed drivers, the queues that developed in the previous time period, and the capacity restrictions on all links in this existing time period.

## **REFERENCES**

- Abu-Eisheh, Sameer A., and Mannering, Fred L., "Traffic Forecasting for Small- to Medium-Sized Urban Areas," *ITE Journal*, October 1986.
- Beckman, M., McGuire, C., and Winsten, C., "Studies in the Economics of Transportation," New Haven, Connecticut: Yale University Press, 1956.
- Frank, M., and Wolfe, P. "An Algorithm for Quadratic Programming." *Naval Research Logistics Quarterly*, 1956.
- Hamed, Mohammad, and Mannering, Fred L., "Time-Varying Conditions and Their Effect on Dynamic Traffic Assignment Models," 1989.
- Kanafani, A., "Transportation Demand Analysis," New York: McGraw-Hill, 1983.
- Morlok, E.K., *Introduction to Transportation Engineering and Planning*, New York: McGraw-Hill, 1978.
- Sheffi, Y., *Urban Transportation Networks: Equilibrium Analysis with Mathematical Programming*, New York: Prentice-Hall, 1984.

**APPENDIX C**  
**FORTRAN LISTING OF XXEXQ**

## APPENDIX C

### FORTRAN LISTING OF XXEXQ

```
COMMON /TORD/TX,IPRO,AX2
COMMON /ARCDT/ TOO,L,C,V,FL,COST,CI,FLX,FOP1,QUE
COMMON /ODDT/ TOD,AMT
COMMON /FST/FS,A,FSX,ORD,JS,CS
COMMON /ODL/ ODLK
COMMON /DMPDT/ NDMP
COMMON /ALBET/ ALP,BET,ALP1,TYP
COMMON /IPT/IY1,IY2,IY3,IY4,IY5,IY7,IY8,INFO,INFOF,INFOX
COMMON /IRTX/IRT,IPRD,IRIN
INTEGER TOO(1071),TOD(6500),FS(1071),ODLK(81),TYP(1071),INFOX(12)
1,FSX(1071),ORD(1071),TX(1071),ORS(6500),IRT(1071),IRIN(1071)
REAL*8 DS,DS1
REAL L(1071),C(1071),V(1071),FL(1071),COST(1071),AMT(6500),
1TITL(20),ALP(18),BET(18),ALP1(18),A(1071,5),CS(12,1071),
2CI(1071),PAV(12),SP(81,81),SP1(81,81),NFL(1071)
3,FLX(1071),AMTR(6500),QUE(12,1071)
OPEN (UNIT=10,FILE='NW.DAT',STATUS='UNKNOWN')
OPEN (UNIT=16,FILE='OD.DAT',STATUS='UNKNOWN')
OPEN (UNIT=17,FILE='CN.DAT',STATUS='UNKNOWN')
OPEN (UNIT=9,FILE='OT.OUT',STATUS='UNKNOWN')
READ(17,171) IY1,IY2,IY3,IY4,IY5,IY7,IY8,IPRO,NREST,
1IPRD,AX2
171 FORMAT(6I5,F8.5,3I3,I4,1X,F4.2)
DO 9005 JK=1,IPRD
READ(17,9004) PAV(JK),INFOX(JK)
9004 FORMAT(F4.2,I4)
9005 CONTINUE
NARC=IY1
NCENT=IY2
NNOD=IY3
ALP(1)=.731
ALP(2)=.613
ALP(3)=.877
ALP(4)=.69
ALP(5)=1.15
ALP(6)=.62
ALP(7)=.67
ALP(8)=.62
ALP(9)=1.03
ALP(10)=.66
ALP(11)=.54
ALP(12)=1.
ALP(13)=.88
ALP(14)=.77
ALP(15)=1.15
BET(1)=3.66
BET(2)=3.5
BET(3)=4.46
BET(4)=5.16
BET(5)=4.42
```

```

BET(6)=3.65
BET(7)=4.94
BET(8)=5.14
BET(9)=5.52
BET(10)=5.09
BET(11)=5.79
BET(12)=6.59
BET(13)=4.93
BET(14)=5.34
BET(15)=6.87
ALP1(1)=.157
ALP1(2)=.136
ALP1(3)=.161
ALP1(4)=.111
ALP1(5)=.212
ALP1(6)=.133
ALP1(7)=.112
ALP1(8)=.101
ALP1(9)=.158
ALP1(10)=.109
ALP1(11)=.08
ALP1(12)=.133
ALP1(13)=.148
ALP1(14)=.121
ALP1(15)=.146
NOD=1Y5
DO 29 I=1,NOD
  READ(16,107) ORS(I),TOD(I),AMTR(I)
107 FORMAT(14,13,F5.0)
  TOD(I)=TOD(I)+1Y2
29 CONTINUE
  DO 9007 IDY=1,NARC
    DO 9007 IDY=1,IPRD
      QUE(IDY,IDX)=0.0
9007 CS(IDY,IDX)=1.0
      WRITE(9,1)
1  FORMAT(T20,'USER EQUILIBRIUM ASSIGNMENT')
      NDMP=1Y8
      DO 9000 JS=1,IPRD
        DO 9000 INFO=1,2
          FOP1=FLOAT(INFOX(JS))/100.
          INFOP1=INFOX(JS)
          INFOP=100-INFOP1
          IF(INFO.EQ.2.AND.INFOX(JS).GT.99) GO TO 9000
          PRINT*,'TIME PRD=',JS,' INFO GRP=',INFO
          DO 5583 I=1,NOD
            IF(INFO.EQ.1) AMT(I)=AMTR(I)
            IF(INFO.EQ.2) AMT(I)=AMTR(I)*(1.-FOP1)
5583 CONTINUE
            IF(INFO.NE.1) GO TO 9167
            DO 9168 I=1,IY1
9168 FLX(I)=1.
9167 CONTINUE
            IF(JS.GT.1.OR.INFO.GT.1) GO TO 9001
            DO 9221 I=1,NARC

```

```

      READ(10,135) FSX(I),TOO(I),L(I),CI(I),V(I),(A(I,J),J=1,5),IRIN(I)
135  FORMAT(2I4,F5.2,F5.0,F3.0,5A4,37X,11)
9221 CONTINUE
      DO 9002 JT=1,NREST
      DO 9002 JU=1,IPRD
      READ(10,9003) JN,CKS
9003  FORMAT(I4,1X,F8.6)
      CS(JU,JN)=CKS
9002 CONTINUE
9001 DO 21 I=1,NARC
      IF(CS(JS,I).LT.0.1) CS(JS,I)=0.1
      C(I)=CI(I)
      IF(INFO.EQ.2) C(I)=CI(I)*CS(JS,I)
      IF(C(I).LT.1) C(I)=1.0
      IF(V(I).LE.30) GO TO 733
      IF(V(I).LE.40) GO TO 734
      IF(V(I).LE.50) GO TO 735
      IF(C(I).LT.750) TYP(I)=13
      IF(C(I).GE.750.AND.C(I).LT.1000) TYP(I)=14
      IF(C(I).GE.1000) TYP(I)=15
      GO TO 21
733  IF(C(I).LT.250) TYP(I)=1
      IF(C(I).GE.250.AND.C(I).LT.500) TYP(I)=2
      IF(C(I).GE.500.AND.C(I).LT.750) TYP(I)=3
      IF(C(I).GE.750.AND.C(I).LT.1000) TYP(I)=4
      IF(C(I).GE.1000) TYP(I)=5
      GO TO 21
734  IF(C(I).LT.500) TYP(I)=6
      IF(C(I).GE.500.AND.C(I).LT.750) TYP(I)=7
      IF(C(I).GE.750.AND.C(I).LT.1000) TYP(I)=8
      IF(C(I).GE.1000) TYP(I)=9
      GO TO 21
735  IF(C(I).LT.750) TYP(I)=10
      IF(C(I).GE.750.AND.C(I).LT.1000) TYP(I)=11
      IF(C(I).GE.1000) TYP(I)=12
21  CONTINUE
      IF(JS.GT.1.OR.INFO.GT.1) GO TO 9015
      IF(IPRO.EQ.1) GO TO 9072
      IBB=0
      DO 9021 I=1,NARC
      IF(FSX(I).LT.IY7.OR.TOO(I).LT.IY7) GO TO 9021
      IBB=IBB+1
      IRT(IBB)=I
9021 CONTINUE
9072 KX=1
      KA=FSX(1)
      DO 93 I=1,NARC
      IF(FSX(I).NE.KA) GO TO 94
      ORD(I)=KX
      GO TO 93
94  KX=KX+1
      KA=FSX(I)
      ORD(I)=KX
93  CONTINUE
      DO 80 I=1,NARC

```

```

TX(I)=TOO(I)
DO 80 J=1,NARC
IF(FSX(J).NE.TOO(I)) GO TO 80
TOO(I)=ORD(J)
80 CONTINUE
KS=1
FS(1)=1
DO 91 I=1,NARC
IF(ORD(I).EQ.KS) GO TO 91
KS=ORD(I)
FS(KS)=I
91 CONTINUE
KZ=ORD(NARC)+1
FS(KZ)=IY1+1
KS=1
ODLK(1)=1
DO 81 I=1,NOD
IF(ORS(I).EQ.KS) GO TO 81
KS=ORS(I)
ODLK(KS)=I
81 CONTINUE
ODLK(ORS(NOD)+1)=IY5+1
WRITE(9,7) NOD
7 FORMAT( ' NO. OF OD PAIRS =',I6)
EPS=FY1
WRITE(9,9) EPS
9 FORMAT(/' CONVERGENCE CRITERION =',E13.5)
9015 DO 9016 I=1,IY5
9016 AMT(I)=AMT(I)*PAV(JS)
DO 27 I=1,IY2
DO 27 J=1,IY2
SP(I,J)=0.
27 SP1(I,J)=0.
CALL AON(FL,NARC,NNOD,NOD,NCENT,SP)
K=1
ITER=0
FOBJ=0
DO 70 I=1,NARC
A1=ALP1(TYP(I))
B1=BET(TYP(I))
IF(JS.EQ.1) FOBJ=FOBJ+FINT(L(I),C(I),V(I),FL(I),FLX(I),
1A1,B1,FOP1,INFO,QUE(JS-1,I))
IF(JS.GT.1) FOBJ=FOBJ+FINT(L(I),C(I),V(I),FL(I),FLX(I),
1A1,B1,FOP1,INFO,QUE(JS,I))
70 CONTINUE
CONV=2.*EPS
DO 61 I=1,NCENT
DO 62 J=1,NCENT
SP1(I,J)=SP(I,J)
62 CONTINUE
61 CONTINUE
IRID=0
10 CALL DUMP(ITER,CONV,FOBJ,CONV1,IRID)
K=K+1
IF(IRID.EQ.1) GO TO 9000

```

```

IF(K.GT.NDMP) GO TO 9000
IF(CONV.LE.EPS) IRID=1
IF(IRID.EQ.1) GO TO 10
ITER=ITER+1
CALL AON(NFL,NARC,NNOD,MOD,NCENT,SP)
CALL BISECT(NFL,NARC,NNOD)
CONV=0.
FOBJ=0.
DO 20 N=1,NARC
A1=ALP1(TYP(N))
B1=BET(TYP(N))
IF(JS.EQ.1) FOBJ=FOBJ+FINT(L(N),C(N),V(N),NFL(N),FLX(N),
1A1,B1,FOP1,INFO,QUE(JS-1,N))
IF(JS.GT.1) FOBJ=FOBJ+FINT(L(N),C(N),V(N),NFL(N),FLX(N),
1A1,B1,FOP1,INFO,QUE(JS,N))
XN=ABS(NFL(N)-FL(N))
IF(XN.EQ.0) GO TO 20
D=NFL(N)
IF(D.EQ.0.) D=FL(N)
CONV=CONV+XN/D
FL(N)=NFL(N)
20 CONTINUE
CONV=CONV/FLOAT(NARC)
GO TO 10
9000 CONTINUE
STOP
END
C
C
C
SUBROUTINE AON(NFL,NARC,NNOD,MOD,NCENT,SP1)
COMMON /ARCDT/ TOO,L,C,V,FL,COST,CI,FLX,FOP1,QUE
COMMON /ODDT/ TOD,AMT
COMMON /FST/FS,A,FSX,ORD,JS,CS
COMMON /ODL/ ODLK
COMMON /ALBET/ ALP,BET,ALP1,TYP
COMMON /IPT/IY1,IY2,IY3,IY4,IY5,IY7,IY8,INFO,INFOP
REAL L(1071),C(1071),V(1071),FL(1071),COST(1071),AMT(6500),
1NFL(1071),SP(1071),SP1(81,81),ALP(18),BET(18),ALP1(18),A(1071,5)
2,FLX(1071),CI(1071),QUE(12,1071)
INTEGER TOO(1071),TOD(6500),FS(1071),ODLK(81),PRED(1071),TYP(1071)
1,FSX(1071),ORD(1071)
DO 10 N=1,NARC
A1=ALP(TYP(N))
B1=BET(TYP(N))
NFL(N)=0
IF(JS.EQ.1) COST(N)=COSTFN(L(N),C(N),V(N),FL(N),FLX(N),A1,B1,FOP1
1,INFO,QUE(JS,N))
IF(JS.GT.1) COST(N)=COSTFN(L(N),C(N),V(N),FL(N),FLX(N),A1,B1,FOP1
1,INFO,QUE(JS-1,N))
10 CONTINUE
DO 20 I=1,NCENT
I1=ODLK(I)
I2=ODLK(I+1)-1
IF(I1.GT.I2) GO TO 20

```

```

      CALL SHPATH(I,PRED,SP,NARC,NNOD)
      DO 30 K=I1,I2
      J=TOO(K)
      J73=J-NCENT
      SP1(I,J73)=SP(J)
60  J1=PRED(J)
      IF(J1.EQ.0) GO TO 30
      N1=FS(J1)
      N2=FS(J1+1)-1
      DO 40 N=N1,N2
      IF(TOO(N).EQ.J) GO TO 50
40  CONTINUE
50  NFL(N)=NFL(N)+AMT(K)
      J=J1
      GO TO 60
30  CONTINUE
20  CONTINUE
      RETURN
      END
C
C
C
      SUBROUTINE BISECT(NFL,NARC,NNOD)
      COMMON /ARCDT/ TOO,L,C,V,FL,COST,CI,FLX,FOP1,QUE
      COMMON /FST/FS,A,FSX,ORD,JS,CS
      COMMON /ALBET/ ALP,BET,ALP1,TYP
      COMMON /IPT/IY1,IY2,IY3,IY4,IY5,IY7,IY8,INFO,INFOP
      REAL L(1071),C(1071),V(1071),FL(1071),COST(1071),NFL(1071),ALP(18)
      1,BET(18),ALP1(18),A(1071,5),CI(1071),FLX(1071),QUE(12,1071)
      INTEGER TOO(1071),FS(1071),TYP(1071),FSX(1071),ORD(1071)
      AMN=0.
      AMX=1.
10  AMD=(AMX+AMN)/2.
      IF((AMX-AMN).LE.0.0005) GO TO 20
      D=0.
      DO 30 N=1,NARC
      X=FL(N)+AMD*(NFL(N)-FL(N))
      A1=ALP(TYP(N))
      B1=BET(TYP(N))
      IF(JS.EQ.1) CST=COSTFN(L(N),C(N),V(N),X,FLX(N),A1,B1,FOP1
      1,INFO,QUE(JS,N))
      IF(JS.GT.1) CST=COSTFN(L(N),C(N),V(N),X,FLX(N),A1,B1,FOP1
      1,INFO,QUE(JS-1,N))
30  D=D+CST*(NFL(N)-FL(N))
      IF(D.GT.0.) AMX=AMD
      IF(D.LE.0.) AMN=AMD
      GO TO 10
20  DO 40 N=1,NARC
40  NFL(N)=FL(N)+AMD*(NFL(N)-FL(N))
      RETURN
      END
C
C
C
      FUNCTION COSTFN(D,C,V,FL,FLX1,A,B,FOP1,INFO,Q)

```

```

COSTFN=D/V
IF(C.GT.0.AND.INFO.EQ.1) COSTFN=COSTFN*(1.+A*((FL+FLX1*FOP1)/C)
1**B)
IF(C.GT.0.AND.INFO.EQ.2) COSTFN=COSTFN*(1.+A*((FL+FLX1*FOP1+Q)/C)
1**B)
RETURN
END

C
C
FUNCTION COSTFN1(D,C,V,FL,A,B,Q)
COSTFN1=D/V
IF(C.GT.0.) COSTFN1=COSTFN1*(1.+A*((FL+Q)/C)**B)
RETURN
END

C
C
C
FUNCTION FINT(D,C,V,FL,FLX1,A,B,FOP1,INFO,Q)
FINT=(D/V)*(FL+FLX1*FOP1)
IF(INFO.EQ.2) FINT=(D/V)*(FL+FLX1*FOP1+Q)
IF(C.GT.0.AND.INFO.EQ.1) FINT=FINT*(1.+A*((FL+FLX1*FOP1)/C)**B)
IF(C.GT.0.AND.INFO.EQ.2) FINT=FINT*(1.+A*((FL+FLX1*FOP1+Q)/C)**B)
RETURN
END

C
C
C
SUBROUTINE SHPATH(R,PRED,SP,NARC,NNOD)
C
C THIS SUBROUTINE COMPUTES SHORTEST PATHS FROM R TO ALL OTHER NODES.
C PRED(I) CONTAINS PREDECESSOR OF NODE I, SP(I) CONTAINS LENGTH OF
C PATH TO NODE I.
C
COMMON /ARCDT/ TOO,L,C,V,FL,COST,CI,FLX,FOP1,QUE
COMMON /FST/FS,A,FSX,ORD,JS,CS
REAL L(1071),C(1071),V(1071),FL(1071),COST(1071),SP(1071),
1CI(1071),FLX(1071),A(1071,5),QUE(12,1071)
INTEGER TOO(1071),FS(1071),PRED(1071),CL(1071),R,FSX(1071)
1,ORD(1071)
DO 10 I=1,NNOD
SP(I)=1.E20
PRED(I)=0
10 CL(I)=0
SP(R)=0
CL(R)=NNOD+1
I=R
NT=R
20 IA=FS(I+1)-1
S=SP(I)
IA1=FS(I)
IF(IA1.GT.IA) GO TO 30
DO 40 IR=IA1,IA
K=TOO(IR)
SD=S+COST(IR)
IF(SD.GE.SP(K)) GO TO 40

```

```

    PRED(K)=I
    SP(K)=SD
    IF(CL(K)) 50,60,40
60 CL(NT)=K
    NT=K
    CL(K)=NNOD+1
    GO TO 40
50 CL(K)=CL(I)
    CL(I)=K
40 CONTINUE
30 ICL=CL(I)
    CL(I)=-1
    I=ICL
    IF(I.LE.NNOD) GO TO 20
    RETURN
    END
C
C
C
    SUBROUTINE DUMP(ITER,CONV,FOBJ,CONV1,IRID)
    COMMON /TORD/ TX,IPRO,AX2
    COMMON /ARCDT/ TOO,L,C,V,FL,COST,CI,FLX,FOP1,QUE
    COMMON /FST/FS,A,FSX,ORD,JS,CS
    COMMON /ALBET/ ALP,BET,ALP1,TYP
    COMMON /IPT/ IY1,IY2,IY3,IY4,IY5,IY7,IY8,INFO,INFOP,INFOX
    COMMON /IRTX/IRT,IPRD,IRIN
    REAL L(1071),C(1071),V(1071),FL(1071),COST(1071),MFL(1071)
    1,ALP(18),BET(18),ALP1(18),VCR(1071),CAP(1071),A(1071,5),LX(1071)
    2,CS(12,1071),RFL(12,1071),RCP(12,1071),BEI(1071)
    3,CI(1071),FLX(1071),VX(1071),QUE(12,1071)
    INTEGER TOO(1071),FS(1071),TYP(1071),VC1(1071),VC2(1071),FSX(1071)
    1,ORD(1071),TX(1071),IRT(1071),IRIN(1071),INFOX(12),IFTO(1071)
    IF(IRID.EQ.1) GO TO 53
    IF(ITER.NE.(IY8-1)) RETURN
53 K=0
    IF(INFO.NE.1) GO TO 9162
    DO 9161 I=1,IY1
9161 FLX(I)=FL(I)
9162 IY6=2*(IY2)+1
    IK6=IY6
    IF(IPRO.EQ.1) IK6=1
    DO 10 I=IK6,IY3
    J1=FS(I)
    J2=FS(I+1)-1
    IF(J1.GT.J2) GO TO 10
    DO 20 J=J1,J2
    IF(TOO(J).LT.IK6) GO TO 20
    K=K+1
    IFTO(K)=J
    LX(K)=L(J)
    VX(K)=V(J)
    MFL(K)=FL(J)
    VCR(K)=FL(J)/C(J)
    CAP(K)=CI(J)*CS(JS,J)
    IZA=0

```

```

98 IZA=IZA+1
   IF(IZA.GT.(IY1+1)) GO TO 99
   IF(ORD(IZA).EQ.1) GO TO 99
   GO TO 98
99 VC1(K)=FSX(IZA)
   VC2(K)=TX(J)
20 CONTINUE
10 CONTINUE
   IF(INFO.EQ.2) GO TO 9011
   DO 9010 I=1,K
9010 BEI(I)=NFL(I)
   IF(INFO.EQ.1.AND.INFOP.LT.1) GO TO 9011
   RETURN
9011 IF(JS.EQ.1) SLXG=0
   IF(JS.EQ.1) STXG=0
   P=FLOAT(INFOP)/100.
   DO 9012 I=1,K
   S=BEI(I)*(1-P)
   S1=NFL(I)
   IF(INFOX(JS).GT.99) S1=0.
   RFL(JS,I)=S+S1
   RCP(JS,I)=CAP(I)
   SLXG=SLXG+LX(I)*RFL(JS,I)/(FLOAT(IPRD)/2.)
   A1=ALP(TYP(IFTO(I)))
   B1=BET(TYP(IFTO(I)))
   QUE(JS,IFTO(I))=0
   CITY=AX2*CAP(I)
   IF(JS.EQ.1) CST=COSTFN1(LX(I),CITY,VX(I),RFL(JS,I),A1,B1,
1QUE(JS,IFTO(I)))
   IF(JS.GT.1) CST=COSTFN1(LX(I),CITY,VX(I),RFL(JS,I),A1,B1,
1QUE(JS-1,IFTO(I)))
   STXG=STXG+CST*RFL(JS,I)/(FLOAT(IPRD)/2.)
   IF(RFL(JS,I).LE.RCP(JS,I).AND.QUE(JS-1,IFTO(I)).EQ.0) GO TO 9012
   QUE(JS,IFTO(I))=QUE(JS-1,IFTO(I))+(RFL(JS,I)-RCP(JS,I))/
1(FLOAT(IPRD)/2.)
   IF(QUE(JS,IFTO(I)).LT.0) QUE(JS,IFTO(I))=0.0
   IF(QUE(JS-1,IFTO(I)).LE.0) QUE(JS-1,IFTO(I))=0
   GO TO 9012
9013 QUE(JS,IFTO(I))=(RFL(JS,I)-RCP(JS,I))/(FLOAT(IPRD)/2.)
9012 CONTINUE
   IF(JS.EQ.IPRD) GO TO 9014
   RETURN
9014 SXC=0
   ZBID=0
   DO 9042 I=1,K
   IF(IPRO.EQ.1) IRT(I)=I
   DO 2714 JX1=1,IPRD
   IF(JX1.EQ.1) VC=RFL(JX1,1)/RCP(JX1,1)
   IF(JX1.GT.1) VC=(RFL(JX1,1)+QUE(JX1-1,IFTO(1)))/RCP(JX1,1)
   IF(VC.LT.5.) SXC=SXC+VC
   ZBID=ZBID+1.
   IF(VC.GE.5.) SXC=SXC+5.
2714 CONTINUE
   IF(IRIN(IRT(1)).NE.1) GO TO 9043
   WRITE(9,9015) IRT(1),(A(IRT(1),J),J=1,5),VC1(1),VC2(1)

```

```

9015 FORMAT(//,1X,'LINK NUMBER =',15,5X,5A4,/,1X,'ORIG NODE =',15,
1/,1X,'DEST NODE =',15)
WRITE(9,7117)
7117 FORMAT(//,10X,'IN FLOW',15X,'CON RATIO',4X,'VEH IN QUE')
WRITE(9,3095)
3095 FORMAT(1X,'PERIOD',3X,'DEMAND ',3X,'CAPACITY',3X,'(DMND PROJ)',
13X,'(DMND PROJ)')
WRITE(9,3096)
3096 FORMAT(1X,'-----',3X,'-----',3X,'-----',4X,'-----',
12X,'-----')
9043 DO 9042 JX=1,IPRD
IF(IRIN(IRT(I)).NE.1) GO TO 9042
ISA=IFIX(RFL(JX,I))
ISB=IFIX(RCP(JX,I))
IF(JX.EQ.1) VC=RFL(JX,I)/RCP(JX,I)
IF(JX.GT.1) VC=(RFL(JX,I)+QUE(JX-1,IFTO(I)))/RCP(JX,I)
IF(VC.GT.50.) VC=0.0
IQQ=IFIX(QUE(JX,IFTO(I))+.5)
IP=JX*120/FLOAT(IPRD)
WRITE(9,3097) IP,ISA,ISB,VC,IQQ
3097 FORMAT(1X,I6,4X,I5,5X,I5,8X,F5.2,8X,I4)
9042 CONTINUE
WRITE(9,2)
2 FORMAT(//,'*****')
1*****')
SXC=SXC/ZBID
WRITE(9,9020) STXG,SXC,SLXG
9020 FORMAT(/' TOTAL TRAVEL TIME (VEH-HRS) =',F13.0,/,
1' AVG. CONGESTION RATIO =',F13.6,/,
3' VEHICLE MILES TRAVELED =',F13.0)
RETURN
END

```

**APPENDIX D**

**NW.DAT AS USED FOR THE CENTRAL PUGET SOUND REGION**

## APPENDIX D

### NW.DAT AS USED FOR THE CENTRAL PUGET SOUND REGION

|    |     |      |      |    |                          |
|----|-----|------|------|----|--------------------------|
| 1  | 163 | 3.5  | 1000 | 25 | ACCESS ZONE 1 TO I-5     |
| 2  | 163 | 12.0 | 1000 | 25 | ACCESS ZONE 2 TO I5      |
| 2  | 260 | 7.1  | 1000 | 25 | ACCESS ZONE 2 TO SR 522  |
| 3  | 218 | 1.3  | 1000 | 25 | ACCESS ZONE 3 TO SR 99   |
| 4  | 164 | 1.6  | 1000 | 25 | ACCESS ZONE 4 TO I5      |
| 4  | 218 | 2.4  | 1000 | 25 | ACCESS ZONE 4 TO SR99    |
| 5  | 164 | 2.4  | 1000 | 25 | ACCESS ZONE 5 TO I5      |
| 5  | 283 | 3.2  | 1000 | 25 | ACCESS ZONE 5 TO SR527   |
| 6  | 165 | 2.8  | 1000 | 25 | ACCESS ZONE 6 TO I5      |
| 6  | 283 | 1.3  | 1000 | 25 | ACCESS ZONE 6 TO SR527   |
| 7  | 196 | 3.0  | 1000 | 25 | ACCESS ZONE 7 TO I405    |
| 7  | 260 | 4.4  | 1000 | 25 | ACCESS ZONE 7 TO SR 522  |
| 8  | 166 | 1.5  | 1000 | 25 | ACCESS ZONE 8 TO SR 5    |
| 8  | 196 | 2.4  | 1000 | 25 | ACCESS ZONE 8 TO I405    |
| 8  | 283 | 1.6  | 1000 | 25 | ACCESS ZONE 8 TO SR527   |
| 9  | 167 | 1.4  | 1000 | 25 | ACCESS ZONE 9 TO I5      |
| 9  | 168 | 1.0  | 1000 | 25 | ACCESS ZONE 9 TO I5      |
| 9  | 219 | 0.3  | 1000 | 25 | ACCESS ZONE 9 TO SR99    |
| 10 | 165 | 1.3  | 1000 | 25 | ACCESS ZONE 10 TO I5     |
| 10 | 167 | 1.0  | 1000 | 25 | ACCESS ZONE 10 TO I5     |
| 11 | 219 | 1.6  | 1000 | 25 | ACCESS ZONE 11 TO SR99   |
| 12 | 220 | 1.3  | 1000 | 25 | ACCESS ZONE 12 TO SR99   |
| 13 | 169 | 0.8  | 1000 | 25 | ACCESS ZONE 13 TO I5     |
| 13 | 170 | 0.5  | 1000 | 25 | ACCESS ZONE 13 TO I5     |
| 13 | 171 | 1.0  | 1000 | 25 | ACCESS ZONE 13 TO I5     |
| 14 | 168 | 2.2  | 1000 | 25 | ACCESS ZONE 14 TO I5     |
| 14 | 171 | 3.3  | 1000 | 25 | ACCESS ZONE 14 TO I5     |
| 14 | 196 | 1.7  | 1000 | 25 | ACCESS ZONE 14 TO I405   |
| 15 | 196 | 2.2  | 1000 | 25 | ACCESS ZONE 15 TO I405   |
| 15 | 197 | 1.9  | 1000 | 25 | ACCESS ZONE 15 TO I405   |
| 15 | 260 | 1.0  | 1000 | 25 | ACCESS ZONE 15 TO SR522  |
| 16 | 172 | 0.8  | 1000 | 25 | ACCESS ZONE 16 TO I5     |
| 16 | 221 | 0.6  | 1000 | 25 | ACCESS ZONE 16 TO SR99   |
| 16 | 222 | 0.8  | 1000 | 25 | ACCESS ZONE 16 TO SR99   |
| 17 | 171 | 1.6  | 1000 | 25 | ACCESS ZONE 17 TO I5     |
| 17 | 172 | 1.3  | 1000 | 25 | ACCESS ZONE 17 TO I5     |
| 17 | 173 | 1.9  | 1000 | 25 | ACCESS ZONE 17 TO I5     |
| 17 | 264 | 1.3  | 1000 | 25 | ACCESS ZONE 17 TO SR522  |
| 18 | 199 | 2.1  | 1000 | 25 | ACCESS ZONE 18 TO I405   |
| 18 | 263 | 0.9  | 1000 | 25 | ACCESS ZONE 18 TO SR522  |
| 19 | 197 | 0.2  | 1000 | 25 | ACCESS ZONE 19 TO I405   |
| 19 | 198 | 0.5  | 1000 | 25 | ACCESS ZONE 19 TO I405   |
| 19 | 262 | 0.7  | 1000 | 25 | ACCESS ZONE 19 TO SR522  |
| 20 | 260 | 2.8  | 1000 | 25 | ACCESS ZONE 20 TO SR522  |
| 20 | 261 | 2.1  | 1000 | 25 | ACCESS ZONE 20 TO SR 522 |
| 21 | 199 | 0.8  | 1000 | 25 | ACCESS ZONE 21 TO I405   |
| 21 | 200 | 1.7  | 1000 | 25 | ACCESS ZONE 21 TO I405   |
| 22 | 200 | 1.6  | 1000 | 25 | ACCESS ZONE 22 TO I405   |
| 22 | 286 | 0.6  | 1000 | 25 | ACCESS ZONE 22 TO SR908  |
| 23 | 223 | 1.3  | 1000 | 25 | ACCESS ZONE 23 TO SR99   |

|    |     |      |      |    |                               |
|----|-----|------|------|----|-------------------------------|
| 23 | 224 | 0.7  | 1000 | 25 | ACCESS ZONE 23 TO SR99        |
| 23 | 225 | 1.4  | 1000 | 25 | ACCESS ZONE 23 TO SR99        |
| 24 | 175 | 0.3  | 1700 | 25 | NORTHGATE TO SB5:GNW          |
| 24 | 176 | 1.2  | 1000 | 25 | GREEN TO NB5:85TH             |
| 24 | 290 | 1.4  | 1500 | 25 | 85 TO SB5:GREENWOOD           |
| 24 | 314 | 99.0 | 1    | 1  | OFFRAP                        |
| 25 | 173 | 1.9  | 1000 | 25 | ACCESS ZONE 25 TO I5          |
| 25 | 174 | 1.4  | 1000 | 25 | ACCESS ZONE 25 TO I5          |
| 25 | 265 | 0.6  | 1000 | 25 | ACCESS ZONE 25 TO SR522       |
| 26 | 176 | 0.7  | 1000 | 25 | WEDGE TO NB5:85TH             |
| 26 | 177 | 99.0 | 1    | 1  | OFFRAP                        |
| 26 | 265 | 1.6  | 1000 | 25 | ACCESS ZONE 26 TO SR522       |
| 26 | 290 | 2.2  | 1500 | 25 | 85 TO SB5:WEDGEWOOD           |
| 26 | 291 | 2.0  | 1500 | 25 | LAKE CITY TO SB5              |
| 26 | 293 | 2.2  | 1500 | 25 | RAVENNA TO SB5:WEDGE          |
| 26 | 315 | 99.0 | 1    | 1  | OFFRAP                        |
| 27 | 201 | 0.5  | 1000 | 25 | ACCESS ZONE 27 TO I405        |
| 27 | 202 | 0.2  | 1000 | 25 | ACCESS ZONE 27 TO I405        |
| 28 | 201 | 1.6  | 1000 | 25 | ACCESS ZONE 28 TO I405        |
| 29 | 250 | 5.8  | 1000 | 25 | ACCESS ZONE 29 TO SR520       |
| 30 | 226 | 1.3  | 1000 | 25 | ACCESS ZONE 30 TO SR99        |
| 30 | 227 | 1.4  | 1000 | 25 | ACCESS ZONE 30 TO SR99        |
| 30 | 228 | 2.2  | 1000 | 25 | ACCESS ZONE 30 TO SR99        |
| 31 | 178 | 99.0 | 1    | 1  | OFFRAP                        |
| 31 | 179 | 1.0  | 1000 | 25 | WALLING TO NB5:50TH           |
| 31 | 180 | 1.0  | 1500 | 25 | WALLING TO NB5:45TH           |
| 31 | 227 | 0.7  | 1500 | 25 | WALLINGFORD TO SR99           |
| 31 | 292 | 1.2  | 750  | 25 | 50 TO SB5:WALLINFORD          |
| 31 | 294 | 0.5  | 1500 | 25 | 45TH TO SB5:WALLINGFORD       |
| 31 | 316 | 99.0 | 1    | 1  | OFFRAP                        |
| 31 | 334 | 0.3  | 1000 | 25 | ACCESS:WALLINGFORD TO 45TH    |
| 32 | 178 | 99.0 | 1    | 1  | OFFRAP                        |
| 32 | 179 | 1.9  | 1000 | 25 | UDIST TO NB5:50TH             |
| 32 | 180 | 1.9  | 1000 | 25 | UDIST TO NB5:45TH             |
| 32 | 244 | 3.0  | 1000 | 25 | U-DIST TO MONTLAKE ON SR520   |
| 32 | 292 | 1.0  | 750  | 25 | 50 TO SB5:UDIST               |
| 32 | 293 | 1.4  | 1500 | 25 | RAVENNA TO SB5:UDIST          |
| 32 | 294 | 1.0  | 1500 | 25 | 45TH TO SB5: UDIST            |
| 32 | 316 | 99.0 | 1    | 1  | OFFRAP                        |
| 33 | 181 | 0.5  | 1000 | 25 | ACCESS 233 TO NB 5 AT ROANOKE |
| 33 | 182 | 99.0 | 1    | 1  | OFFRAP                        |
| 33 | 244 | 0.6  | 1000 | 25 | ACCESS ZONE 33 TO SR520       |
| 33 | 295 | 99.0 | 1    | 1  | OFFRAP                        |
| 33 | 297 | 0.5  | 1500 | 25 | BOYLSTON TO SB5               |
| 34 | 245 | 0.4  | 1000 | 25 | ACCESS ZONE 34 TO SR520       |
| 34 | 246 | 0.7  | 1000 | 25 | ACCESS ZONE 34 RO SR520       |
| 34 | 247 | 1.3  | 1000 | 25 | ACCESS ZONE 34 TO SR520       |
| 35 | 248 | 0.7  | 1000 | 25 | ACCESS ZONE 35 TO SR520       |
| 35 | 249 | 2.0  | 1000 | 25 | ACCESS ZONE 35 TO SR520       |
| 36 | 228 | 2.2  | 1000 | 25 | ACCESS ZONE 36 TO SR99        |
| 36 | 229 | 3.3  | 1000 | 25 | ACCESS ZONE 36 TO SR99        |
| 37 | 228 | 1.0  | 1000 | 25 | ACCESS ZONE 37 TO SR99        |
| 37 | 229 | 1.6  | 1000 | 25 | ACCESS ZONE 37 TO SR99        |
| 38 | 183 | 1.0  | 1000 | 20 | PILL HILL TO NB5:OLI          |
| 38 | 306 | 99.0 | 1    | 1  | OFFRAP                        |

38 309 1.0 1000 20 PILL HILL TO NB5 ML  
38 311 99.0 1 1 OFFRAP  
38 312 99.0 1 1 OFFRAP  
39 204 0.5 1000 25 ACCESS ZONE 39 TO I405  
39 247 1.5 1000 25 ACCESS ZONE 39 TO SR520  
39 288 0.2 1000 25 ACCESS ZONE 39 TO SR908  
40 204 1.1 1000 25 ACCESS ZONE 40 TO I405  
41 204 1.6 1000 25 ACCESS ZONE 41 TO I405  
41 205 0.8 1000 25 ACCESS ZONE 41 TO I405  
42 204 2.7 1000 25 ACCESS ZONE 42 TO I405  
42 248 1.3 1000 25 ACCESS ZONE 42 TO SR520  
42 257 1.8 1000 25 ACCESS ZONE 42 TO I90  
43 204 1.7 1000 25 ACCESS ZONE 43 TO I405  
43 256 1.0 1000 25 ACCESS ZONE 43 TO I90  
44 207 1.3 1000 25 ACCESS ZONE 44 TO I405  
44 257 0.8 1000 25 ACCESS ZONE 44 TO I90  
45 208 2.2 1000 25 ACCESS ZONE 45 TO I405  
45 209 1.6 1000 25 ACCESS ZONE 45 TO I405  
45 210 2.1 1000 25 ACCESS ZONE 45 TO I405  
46 253 1.9 1000 25 ACCESS ZONE 46 TO I90  
46 254 1.0 1000 25 ACCESS ZONE 46 TO I90  
46 255 0.8 1000 25 ACCESS ZONE 46 TO I90  
47 183 0.5 1000 20 ZONE 47 TO NB5 ML:MR  
47 229 0.3 1000 15 ACCESS ZONE 47 TO SR99  
47 298 99.0 1 1 OFFRAP  
47 299 0.3 1500 25 MERCER TO SB5  
47 300 0.4 1500 25 DENNY TO SB5  
47 317 0.5 1500 20 ZONE 47 TO NB5 EX:MR  
47 318 0.5 1000 20 ZONE 47 TO NB5 EX:ST  
48 300 0.3 1500 25 DENNY TO SB5  
48 301 99.0 1 1 OFFRAP  
48 302 99.0 1 1 OFFRAP  
48 307 0.3 1000 20 DWNTN TO NB5 ML:UNIV  
48 308 0.4 1000 20 DWNTN TO NB5 ML:CHER  
48 309 99.0 1 1 OFFRAP  
48 311 99.0 1 1 OFFRAP  
48 312 99.0 1 1 OFFRAP  
48 319 0.3 1000 20 DWNTN TO NB5 EX:PIKE  
48 320 0.3 1000 20 DWNTN TO NB5 EX:CHER  
48 328 0.2 1000 15 ACCESS ZONE 48 TO SR99  
48 335 0.5 1500 25 ACC TO I5 FROM JAMES  
49 185 1.7 1000 25 ACCESS KINGDOME TO JCT I5 & WSFRWY  
49 309 99.0 1 1 OFFRAP  
49 311 99.0 1 1 OFFRAP  
49 312 99.0 1 1 OFFRAP  
49 321 1.5 1000 25 ACCESS KINGDOME TO WSFRWY  
49 327 0.3 1000 25 ACCESS KINGDOME TO SR99 @ 1ST AVE  
49 336 99.0 1 1 ONRAP  
50 185 1.0 1500 25 MT BAKER TO I5  
50 251 1.3 1000 25 ACCESS ZONE 50 TO I90  
50 266 0.5 1000 25 ACCESS ZONE 50 TO SR900  
51 185 1.0 1000 25 ACCESS INDUSTRY TO JCT I5 & WSFRWY  
51 230 0.6 500 25 ACCESS ZONE 51 TO WSF  
51 321 1.0 1500 25 INDUSTRY TO WSFRWY  
51 336 99.0 1 1 OFFRAP

52 289 1.0 1000 25 ACCESS ZONE 52 TO WSF  
53 232 1.3 1000 25 ACCESS ZONE 53 TO SR99  
53 239 1.4 1000 25 ACCESS ZONE 53 TO SR509  
54 186 0.5 1000 25 ACCESS ZONE 54 TO I5  
54 231 0.8 1000 25 ACCESS ZONE 54 TO SR509  
55 266 2.6 1000 25 ACCESS ZONE 55 TO SR900  
55 267 2.3 1000 25 ACCESS ZONE 55 TO SR900  
56 217 1.1 1000 25 ACCESS ZONE 56 TO SR509  
56 240 2.2 1000 25 ACCESS ZONE 56 TO SR509  
56 241 1.2 1000 25 ACCESS ZONE 56 TO SR509  
57 215 2.0 1000 25 ACCESS ZONE 57 TO SR99  
57 233 2.1 1000 25 ACCESS ZONE 57 TO SR99  
57 234 0.8 1000 25 ACCESS ZONE 57 TO SR99  
57 241 1.0 1000 25 ACCESS ZONE 57 TO SR509  
58 188 1.3 1000 25 ACCESS ZONE 58 TO I5  
58 268 1.7 1000 25 ACCESS ZONE 58 TO SR900  
58 269 1.6 1000 25 ACCESS ZONE 58 TO SR900  
59 211 1.2 1000 25 ACCESS ZONE 59 TO I405  
59 213 0.8 1000 25 ACCESS ZONE 59 TO I405  
59 268 0.8 1000 25 ACCESS ZONE 59 TO SR900  
60 210 1.1 1000 25 ACCESS ZONE 60 TO I405  
60 211 0.2 1000 25 ACCESS ZONE 60 TO I405  
60 212 0.7 1000 25 ACCESS ZONE 60 TO I405  
61 270 0.5 1000 25 ACCESS ZONE 61 TO SR900  
62 213 3.2 1000 25 ACCESS ZONE 62 TO I405  
62 270 2.4 1000 25 ACCESS ZONE 62 TO SR900  
63 250 6.3 1000 25 ACCESS ZONE 63 TO SR520  
63 259 2.7 2000 25 ACCESS ZONE 63 TO I90  
64 271 7.1 1000 25 ACCESS ZONE 64 TO SR900  
64 279 2.7 1000 25 ACCESS ZONE 64 TO SR18  
65 214 1.9 1000 25 ACCESS ZONE 65 TO I405  
66 214 0.5 1000 25 ACCESS ZONE 66 TO I405  
67 213 4.0 1000 25 ACCESS ZONE 67 TO I405  
67 276 3.3 1000 25 ACCESS ZONE 67 TO I405  
68 235 0.7 1000 25 ACCESS ZONE 68 TO SR99  
68 236 1.0 1000 25 ACCESS ZONE 68 TO SR99  
68 243 2.5 1000 25 ACCESS ZONE 68 TO SR99  
69 190 1.6 1000 25 ACCESS ZONE 69 TO I5  
69 191 1.3 1000 25 ACCESS ZONE 69 TO I5  
69 192 2.1 1000 25 ACCESS ZONE 69 TO I5  
69 272 1.9 1000 25 ACCESS ZONE 69 TO SR167  
70 276 2.4 1000 25 ACCESS ZONE 70 TO SR515  
70 277 2.2 1000 25 ACCESS ZONE 70 TO SR515  
71 193 0.9 1000 25 ACCESS ZONE 71 TO I405  
71 236 3.2 1000 25 ACCESS ZONE 71 TO SR99  
71 237 1.0 1000 25 ACCESS ZONE 71 TO SR99  
72 272 1.6 1000 25 ACCESS ZONE 72 TO SR167  
72 273 1.0 1000 25 ACCESS ZONE 72 TO SR167  
72 277 1.6 1000 25 ACCESS ZONE 72 TO SR515  
72 278 1.2 1000 25 ACCESS ZONE 72 TO SR515  
73 280 3.2 1000 25 ACCESS ZONE 73 TO SR18  
73 281 2.1 1000 25 ACCESS ZONE 73 TO SR18  
74 280 3.0 1000 25 ACCESS ZONE 74 TO SR516  
74 282 2.3 1000 25 ACCESS ZONE 74 TO SR516  
75 237 3.5 1000 25 ACCESS ZONE 75 TO SR99

|     |     |      |      |     |                         |
|-----|-----|------|------|-----|-------------------------|
| 75  | 238 | 2.1  | 1000 | 25  | ACCESS ZONE 75 TO SR99  |
| 76  | 194 | 0.7  | 1000 | 25  | ACCESS ZONE 76 TO I5    |
| 76  | 237 | 1.5  | 1000 | 25  | ACCESS ZONE 76 TO SR99  |
| 77  | 194 | 1.3  | 1000 | 25  | ACCESS ZONE 77 TO I5    |
| 77  | 275 | 1.1  | 1000 | 25  | ACCESS ZONE 77 TO SR167 |
| 78  | 274 | 0.8  | 1000 | 25  | ACCESS ZONE 78 TO SR167 |
| 78  | 275 | 2.0  | 1000 | 25  | ACCESS ZONE 78 TO SR167 |
| 79  | 275 | 1.7  | 1000 | 25  | ACCESS ZONE 70 TO SR167 |
| 79  | 281 | 3.0  | 1000 | 25  | ACCESS ZONE 79 TO SR18  |
| 80  | 195 | 10.0 | 1000 | 25  | ACCESS ZONE 80 TO I5    |
| 80  | 238 | 10.0 | 1000 | 25  | ACCESS ZONE 80 TO SR99  |
| 81  | 275 | 7.9  | 1000 | 25  | ACCESS ZONE 81 TO SR18  |
| 81  | 281 | 6.3  | 1000 | 25  | ACCESS ZONE 81 TO SR18  |
| 82  | 163 | 99.0 |      | 1 1 | DUMMY                   |
| 83  | 163 | 99.0 |      | 1 1 | DUMMY                   |
| 83  | 260 | 99.0 |      | 1 1 | DUMMY                   |
| 84  | 218 | 99.0 |      | 1 1 | DUMMY                   |
| 85  | 164 | 99.0 |      | 1 1 | DUMMY                   |
| 85  | 218 | 99.0 |      | 1 1 | DUMMY                   |
| 86  | 164 | 99.0 |      | 1 1 | DUMMY                   |
| 86  | 283 | 99.0 |      | 1 1 | DUMMY                   |
| 87  | 165 | 99.0 |      | 1 1 | DUMMY                   |
| 87  | 283 | 99.0 |      | 1 1 | DUMMY                   |
| 88  | 196 | 99.0 |      | 1 1 | DUMMY                   |
| 88  | 260 | 99.0 |      | 1 1 | DUMMY                   |
| 89  | 166 | 99.0 |      | 1 1 | DUMMY                   |
| 89  | 196 | 99.0 |      | 1 1 | DUMMY                   |
| 89  | 283 | 99.0 |      | 1 1 | DUMMY                   |
| 90  | 167 | 99.0 |      | 1 1 | DUMMY Z9                |
| 90  | 168 | 99.0 |      | 1 1 | DUMMY Z9                |
| 90  | 219 | 99.0 |      | 1 1 | DUMMY Z9                |
| 91  | 165 | 99.0 |      | 1 1 | DUMMY Z10               |
| 91  | 167 | 99.0 |      | 1 1 | DUMMY Z10               |
| 92  | 219 | 99.0 |      | 1 1 | DUMMY Z11               |
| 93  | 220 | 99.0 |      | 1 1 | DUMMY Z12               |
| 94  | 169 | 99.0 |      | 1 1 | DUMMY Z13               |
| 94  | 170 | 99.0 |      | 1 1 | DUMMY Z13               |
| 94  | 171 | 99.0 |      | 1 1 | DUMMY Z13               |
| 95  | 168 | 99.0 |      | 1 1 | DUMMY Z14               |
| 95  | 171 | 99.0 |      | 1 1 | DUMMY Z14               |
| 95  | 196 | 99.0 |      | 1 1 | DUMMY Z14               |
| 96  | 196 | 99.0 |      | 1 1 | DUMMY Z15               |
| 96  | 197 | 99.0 |      | 1 1 | DUMMY Z15               |
| 96  | 260 | 99.0 |      | 1 1 | DUMMY Z15               |
| 97  | 172 | 99.0 |      | 1 1 | DUMMY Z16               |
| 97  | 221 | 99.0 |      | 1 1 | DUMMY Z16               |
| 97  | 222 | 99.0 |      | 1 1 | DUMMY Z16               |
| 98  | 171 | 99.0 |      | 1 1 | DUMMY Z17               |
| 98  | 172 | 99.0 |      | 1 1 | DUMMY Z17               |
| 98  | 173 | 99.0 |      | 1 1 | DUMMY Z17               |
| 98  | 264 | 99.0 |      | 1 1 | DUMMY Z17               |
| 99  | 199 | 99.0 |      | 1 1 | DUMMY Z18               |
| 99  | 263 | 99.0 |      | 1 1 | DUMMY Z18               |
| 100 | 197 | 99.0 |      | 1 1 | DUMMY Z19               |
| 100 | 198 | 99.0 |      | 1 1 | DUMMY Z19               |

|     |     |      |   |   |       |     |
|-----|-----|------|---|---|-------|-----|
| 100 | 262 | 99.0 | 1 | 1 | DUMMY | Z19 |
| 101 | 260 | 99.0 | 1 | 1 | DUMMY | Z20 |
| 101 | 261 | 99.0 | 1 | 1 | DUMMY | Z20 |
| 102 | 199 | 99.0 | 1 | 1 | DUMMY | Z21 |
| 102 | 200 | 99.0 | 1 | 1 | DUMMY | Z21 |
| 103 | 200 | 99.0 | 1 | 1 | DUMMY | Z22 |
| 103 | 286 | 99.0 | 1 | 1 | DUMMY | Z22 |
| 104 | 223 | 99.0 | 1 | 1 | DUMMY | Z23 |
| 104 | 224 | 99.0 | 1 | 1 | DUMMY | Z23 |
| 104 | 225 | 99.0 | 1 | 1 | DUMMY | Z23 |
| 105 | 175 | 99.0 | 1 | 1 | DUMMY |     |
| 105 | 176 | 99.0 | 1 | 1 | DUMMY |     |
| 105 | 290 | 99.0 | 1 | 1 | DUMMY |     |
| 105 | 314 | 99.0 | 1 | 1 | DUMMY |     |
| 106 | 173 | 99.0 | 1 | 1 | DUMMY | Z25 |
| 106 | 174 | 99.0 | 1 | 1 | DUMMY | Z25 |
| 106 | 265 | 99.0 | 1 | 1 | DUMMY | Z25 |
| 107 | 176 | 99.0 | 1 | 1 | DUMMY |     |
| 107 | 177 | 99.0 | 1 | 1 | DUMMY |     |
| 107 | 265 | 99.0 | 1 | 1 | DUMMY | Z26 |
| 107 | 290 | 99.0 | 1 | 1 | DUMMY |     |
| 107 | 291 | 99.0 | 1 | 1 | DUMMY |     |
| 107 | 293 | 99.0 | 1 | 1 | DUMMY |     |
| 107 | 315 | 99.0 | 1 | 1 | DUMMY |     |
| 108 | 201 | 99.0 | 1 | 1 | DUMMY | Z27 |
| 108 | 202 | 99.0 | 1 | 1 | DUMMY | Z27 |
| 109 | 201 | 99.0 | 1 | 1 | DUMMY | Z28 |
| 110 | 250 | 99.0 | 1 | 1 | DUMMY | Z29 |
| 111 | 226 | 99.0 | 1 | 1 | DUMMY | Z30 |
| 111 | 227 | 99.0 | 1 | 1 | DUMMY | Z30 |
| 111 | 228 | 99.0 | 1 | 1 | DUMMY | Z30 |
| 112 | 178 | 99.0 | 1 | 1 | DUMMY |     |
| 112 | 179 | 99.0 | 1 | 1 | DUMMY |     |
| 112 | 180 | 99.0 | 1 | 1 | DUMMY |     |
| 112 | 227 | 99.0 | 1 | 1 | DUMMY |     |
| 112 | 292 | 99.0 | 1 | 1 | DUMMY |     |
| 112 | 294 | 99.0 | 1 | 1 | DUMMY |     |
| 112 | 316 | 99.0 | 1 | 1 | DUMMY |     |
| 112 | 334 | 99.0 | 1 | 1 | DUMMY |     |
| 113 | 178 | 99.0 | 1 | 1 | DUMMY |     |
| 113 | 179 | 99.0 | 1 | 1 | DUMMY |     |
| 113 | 180 | 99.0 | 1 | 1 | DUMMY |     |
| 113 | 244 | 99.0 | 1 | 1 | DUMMY |     |
| 113 | 292 | 99.0 | 1 | 1 | DUMMY |     |
| 113 | 293 | 99.0 | 1 | 1 | DUMMY |     |
| 113 | 294 | 99.0 | 1 | 1 | DUMMY |     |
| 113 | 316 | 99.0 | 1 | 1 | DUMMY |     |
| 114 | 181 | 99.0 | 1 | 1 | DUMMY |     |
| 114 | 182 | 99.0 | 1 | 1 | DUMMY |     |
| 114 | 244 | 99.0 | 1 | 1 | DUMMY | Z33 |
| 114 | 295 | 99.0 | 1 | 1 | DUMMY |     |
| 114 | 297 | 99.0 | 1 | 1 | DUMMY |     |
| 115 | 245 | 99.0 | 1 | 1 | DUMMY | Z34 |
| 115 | 246 | 99.0 | 1 | 1 | DUMMY | Z34 |
| 115 | 247 | 99.0 | 1 | 1 | DUMMY | Z34 |

|     |     |      |   |   |       |     |
|-----|-----|------|---|---|-------|-----|
| 116 | 248 | 99.0 | 1 | 1 | DUMMY | Z35 |
| 116 | 249 | 99.0 | 1 | 1 | DUMMY | Z35 |
| 117 | 228 | 99.0 | 1 | 1 | DUMMY | Z36 |
| 117 | 229 | 99.0 | 1 | 1 | DUMMY | Z36 |
| 118 | 228 | 99.0 | 1 | 1 | DUMMY | Z37 |
| 118 | 229 | 99.0 | 1 | 1 | DUMMY | Z37 |
| 119 | 183 | 99.0 | 1 | 1 | DUMMY |     |
| 119 | 306 | 99.0 | 1 | 1 | DUMMY |     |
| 119 | 309 | 99.0 | 1 | 1 | DUMMY |     |
| 119 | 311 | 99.0 | 1 | 1 | DUMMY |     |
| 119 | 312 | 99.0 | 1 | 1 | DUMMY |     |
| 120 | 204 | 99.0 | 1 | 1 | DUMMY | Z39 |
| 120 | 247 | 99.0 | 1 | 1 | DUMMY | Z39 |
| 120 | 288 | 99.0 | 1 | 1 | DUMMY | Z39 |
| 121 | 204 | 99.0 | 1 | 1 | DUMMY | Z40 |
| 122 | 204 | 99.0 | 1 | 1 | DUMMY | Z41 |
| 122 | 205 | 99.0 | 1 | 1 | DUMMY | Z41 |
| 123 | 204 | 99.0 | 1 | 1 | DUMMY | Z42 |
| 123 | 248 | 99.0 | 1 | 1 | DUMMY | Z42 |
| 123 | 257 | 99.0 | 1 | 1 | DUMMY | Z42 |
| 124 | 204 | 99.0 | 1 | 1 | DUMMY | Z43 |
| 124 | 256 | 99.0 | 1 | 1 | DUMMY | Z43 |
| 125 | 207 | 99.0 | 1 | 1 | DUMMY | Z44 |
| 125 | 257 | 99.0 | 1 | 1 | DUMMY | Z44 |
| 126 | 208 | 99.0 | 1 | 1 | DUMMY | Z45 |
| 126 | 209 | 99.0 | 1 | 1 | DUMMY | Z45 |
| 126 | 210 | 99.0 | 1 | 1 | DUMMY | Z45 |
| 127 | 253 | 99.0 | 1 | 1 | DUMMY | Z46 |
| 127 | 254 | 99.0 | 1 | 1 | DUMMY | Z46 |
| 127 | 255 | 99.0 | 1 | 1 | DUMMY | Z46 |
| 128 | 183 | 99.0 | 1 | 1 | DUMMY |     |
| 128 | 229 | 99.0 | 1 | 1 | DUMMY |     |
| 128 | 298 | 99.0 | 1 | 1 | DUMMY |     |
| 128 | 299 | 99.0 | 1 | 1 | DUMMY |     |
| 128 | 300 | 99.0 | 1 | 1 | DUMMY |     |
| 128 | 317 | 99.0 | 1 | 1 | DUMMY |     |
| 128 | 318 | 99.0 | 1 | 1 | DUMMY |     |
| 129 | 300 | 99.0 | 1 | 1 | DUMMY |     |
| 129 | 301 | 99.0 | 1 | 1 | DUMMY |     |
| 129 | 302 | 99.0 | 1 | 1 | DUMMY |     |
| 129 | 307 | 99.0 | 1 | 1 | DUMMY |     |
| 129 | 308 | 99.0 | 1 | 1 | DUMMY |     |
| 129 | 309 | 99.0 | 1 | 1 | DUMMY |     |
| 129 | 311 | 99.0 | 1 | 1 | DUMMY |     |
| 129 | 312 | 99.0 | 1 | 1 | DUMMY |     |
| 129 | 319 | 99.0 | 1 | 1 | DUMMY |     |
| 129 | 320 | 99.0 | 1 | 1 | DUMMY |     |
| 129 | 328 | 99.0 | 1 | 1 | DUMMY |     |
| 129 | 335 | 99.0 | 1 | 1 | DUMMY |     |
| 130 | 185 | 99.0 | 1 | 1 | DUMMY |     |
| 130 | 309 | 99.0 | 1 | 1 | DUMMY |     |
| 130 | 311 | 99.0 | 1 | 1 | DUMMY |     |
| 130 | 312 | 99.0 | 1 | 1 | DUMMY |     |
| 130 | 321 | 99.0 | 1 | 1 | DUMMY |     |
| 130 | 327 | 99.0 | 1 | 1 | DUMMY |     |

|     |     |      |   |   |           |
|-----|-----|------|---|---|-----------|
| 130 | 336 | 99.0 | 1 | 1 | DUMMY     |
| 131 | 185 | 99.0 | 1 | 1 | DUMMY     |
| 131 | 251 | 99.0 | 1 | 1 | DUMMY 250 |
| 131 | 266 | 99.0 | 1 | 1 | DUMMY 250 |
| 132 | 185 | 99.0 | 1 | 1 | DUMMY     |
| 132 | 230 | 99.0 | 1 | 1 | DUMMY 251 |
| 132 | 321 | 99.0 | 1 | 1 | DUMMY     |
| 132 | 336 | 99.0 | 1 | 1 | DUMMY     |
| 133 | 289 | 99.0 | 1 | 1 | DUMMY 252 |
| 134 | 232 | 99.0 | 1 | 1 | DUMMY 253 |
| 134 | 239 | 99.0 | 1 | 1 | DUMMY 253 |
| 135 | 186 | 99.0 | 1 | 1 | DUMMY 254 |
| 135 | 231 | 99.0 | 1 | 1 | DUMMY 254 |
| 136 | 266 | 99.0 | 1 | 1 | DUMMY 255 |
| 136 | 267 | 99.0 | 1 | 1 | DUMMY 255 |
| 137 | 217 | 99.0 | 1 | 1 | DUMMY 256 |
| 137 | 240 | 99.0 | 1 | 1 | DUMMY 256 |
| 137 | 241 | 99.0 | 1 | 1 | DUMMY 256 |
| 138 | 215 | 99.0 | 1 | 1 | DUMMY 257 |
| 138 | 233 | 99.0 | 1 | 1 | DUMMY 257 |
| 138 | 234 | 99.0 | 1 | 1 | DUMMY 257 |
| 138 | 241 | 99.0 | 1 | 1 | DUMMY 257 |
| 139 | 188 | 99.0 | 1 | 1 | DUMMY 258 |
| 139 | 268 | 99.0 | 1 | 1 | DUMMY 258 |
| 139 | 269 | 99.0 | 1 | 1 | DUMMY 258 |
| 140 | 211 | 99.0 | 1 | 1 | DUMMY 259 |
| 140 | 213 | 99.0 | 1 | 1 | DUMMY 259 |
| 140 | 268 | 99.0 | 1 | 1 | DUMMY 259 |
| 141 | 210 | 99.0 | 1 | 1 | DUMMY 260 |
| 141 | 211 | 99.0 | 1 | 1 | DUMMY 260 |
| 141 | 212 | 99.0 | 1 | 1 | DUMMY 260 |
| 142 | 270 | 99.0 | 1 | 1 | DUMMY 261 |
| 143 | 213 | 99.0 | 1 | 1 | DUMMY 262 |
| 143 | 270 | 99.0 | 1 | 1 | DUMMY 262 |
| 144 | 250 | 99.0 | 1 | 1 | DUMMY 263 |
| 144 | 259 | 99.0 | 1 | 1 | DUMMY 263 |
| 145 | 271 | 99.0 | 1 | 1 | DUMMY 264 |
| 145 | 279 | 99.0 | 1 | 1 | DUMMY 264 |
| 146 | 214 | 99.0 | 1 | 1 | DUMMY 265 |
| 147 | 214 | 99.0 | 1 | 1 | DUMMY 266 |
| 148 | 213 | 99.0 | 1 | 1 | DUMMY 267 |
| 148 | 276 | 99.0 | 1 | 1 | DUMMY 267 |
| 149 | 235 | 99.0 | 1 | 1 | DUMMY 268 |
| 149 | 236 | 99.0 | 1 | 1 | DUMMY 268 |
| 149 | 243 | 99.0 | 1 | 1 | DUMMY 268 |
| 150 | 190 | 99.0 | 1 | 1 | DUMMY 269 |
| 150 | 191 | 99.0 | 1 | 1 | DUMMY 269 |
| 150 | 192 | 99.0 | 1 | 1 | DUMMY 269 |
| 150 | 272 | 99.0 | 1 | 1 | DUMMY 269 |
| 151 | 276 | 99.0 | 1 | 1 | DUMMY 270 |
| 151 | 277 | 99.0 | 1 | 1 | DUMMY 270 |
| 152 | 193 | 99.0 | 1 | 1 | DUMMY 271 |
| 152 | 236 | 99.0 | 1 | 1 | DUMMY 271 |
| 152 | 237 | 99.0 | 1 | 1 | DUMMY 271 |
| 153 | 272 | 99.0 | 1 | 1 | DUMMY 272 |

|     |     |      |      |    |        |               |
|-----|-----|------|------|----|--------|---------------|
| 153 | 273 | 99.0 | 1    | 1  | DUMMY  | Z72           |
| 153 | 277 | 99.0 | 1    | 1  | DUMMY  | Z72           |
| 153 | 278 | 99.0 | 1    | 1  | DUMMY  | Z72           |
| 154 | 280 | 99.0 | 1    | 1  | DUMMY  | Z73           |
| 154 | 281 | 99.0 | 1    | 1  | DUMMY  | Z73           |
| 155 | 280 | 99.0 | 1    | 1  | DUMMY  | Z74           |
| 155 | 282 | 99.0 | 1    | 1  | DUMMY  | Z74           |
| 156 | 237 | 99.0 | 1    | 1  | DUMMY  | Z75           |
| 156 | 238 | 99.0 | 1    | 1  | DUMMY  | Z75           |
| 157 | 194 | 99.0 | 1    | 1  | DUMMY  | Z76           |
| 157 | 237 | 99.0 | 1    | 1  | DUMMY  | Z76           |
| 158 | 194 | 99.0 | 1    | 1  | DUMMY  | Z77           |
| 158 | 275 | 99.0 | 1    | 1  | DUMMY  | Z77           |
| 159 | 274 | 99.0 | 1    | 1  | DUMMY  | Z78           |
| 159 | 275 | 99.0 | 1    | 1  | DUMMY  | Z78           |
| 160 | 275 | 99.0 | 1    | 1  | DUMMY  | Z79           |
| 160 | 281 | 99.0 | 1    | 1  | DUMMY  | Z79           |
| 161 | 195 | 99.0 | 1    | 1  | DUMMY  | Z80           |
| 161 | 238 | 99.0 | 1    | 1  | DUMMY  | Z80           |
| 162 | 275 | 99.0 | 1    | 1  | DUMMY  | Z81           |
| 162 | 281 | 99.0 | 1    | 1  | DUMMY  | Z81           |
| 163 | 82  | 3.5  | 1000 | 25 | ACCESS | Z1 5          |
| 163 | 83  | 12.0 | 1000 | 25 | ACCESS | Z2 5          |
| 163 | 164 | 2.8  | 4650 | 55 | SB5:   | 526 TO 128th  |
| 164 | 85  | 1.6  | 1000 | 25 | ACCESS | Z4 5          |
| 164 | 86  | 2.4  | 1000 | 25 | ACCESS | Z5 5          |
| 164 | 163 | 2.8  | 4650 | 55 | NB5:   | 128t TO 526   |
| 164 | 165 | 2.5  | 4650 | 55 | SB5:   | 128t TO 164th |
| 165 | 87  | 2.8  | 1000 | 25 | ACCESS | Z6 5          |
| 165 | 91  | 1.3  | 1000 | 25 | ACCESS | Z10 5         |
| 165 | 164 | 2.5  | 4650 | 55 | NB5:   | 164t TO 128th |
| 165 | 166 | 1.3  | 6200 | 55 | SB5:   | 164t TO 405   |
| 166 | 89  | 1.5  | 1000 | 25 | ACCESS | SR5 TO ZONE 8 |
| 166 | 165 | 1.3  | 6200 | 55 | NB5:   | 405 TO 164th  |
| 166 | 167 | 1.1  | 6000 | 55 | SB5:   | 405 TO 196th  |
| 166 | 196 | 3.5  | 3100 | 55 | SB405: | 5 TO 527      |
| 166 | 218 | 2.7  | 2000 | 55 | NB525: | 405 TO 99     |
| 167 | 90  | 1.4  | 1000 | 25 | ACCESS | Z9 5          |
| 167 | 91  | 1.0  | 1000 | 25 | ACCESS | Z10 5         |
| 167 | 166 | 1.1  | 6000 | 55 | NB5:   | 196t TO 405   |
| 167 | 168 | 0.8  | 6000 | 55 | SB5:   | 196t TO 44th  |
| 168 | 90  | 1.0  | 1000 | 25 | ACCESS | Z9 5          |
| 168 | 95  | 2.2  | 1000 | 25 | ACCESS | Z14 5         |
| 168 | 167 | 0.8  | 6000 | 55 | NB5:   | 44th TO 196th |
| 168 | 169 | 1.4  | 6000 | 55 | SB5:   | 44th TO 220th |
| 168 | 219 | 1.6  | 1000 | 25 | 524    | 5 TO 99       |
| 169 | 94  | 0.8  | 1000 | 25 | ACCESS | Z13 5         |
| 169 | 168 | 1.4  | 6000 | 55 | NB5:   | 220t TO 44th  |
| 169 | 170 | 1.0  | 6000 | 55 | SB5:   | 220t TO 236th |
| 170 | 94  | 0.5  | 1000 | 25 | ACCESS | Z13 5         |
| 170 | 169 | 1.0  | 6000 | 55 | NB5:   | 236t TO 220th |
| 170 | 171 | 0.5  | 6000 | 55 | SB5:   | 236t TO 205th |
| 171 | 94  | 1.0  | 1000 | 25 | ACCESS | Z13 5         |
| 171 | 95  | 3.3  | 1000 | 25 | ACCESS | Z14 5         |
| 171 | 98  | 1.6  | 1000 | 25 | ACCESS | Z17 5         |

171 170 0.5 6000 55 NB5: 205t TO 236th  
171 172 1.6 6000 55 SB5: 205t TO 175th  
171 220 1.8 1000 25 W104 5 TO 99  
171 264 2.6 1550 30 E104 5 TO 522  
172 97 0.8 1000 25 ACCESS 216 5  
172 98 1.3 1000 25 ACCESS 217 5  
172 171 1.6 8000 55 NB5: 175t TO 205th  
172 173 1.6 6000 55 SB5: 175t TO 145th  
172 332 0.8 1000 25 WB 175TH: ML5 TO SR99  
173 98 1.9 1000 25 ACCESS 217 5  
173 106 1.9 1000 25 ACCESS 225 5  
173 172 1.6 8000 55 NB5: 145t TO 175th  
173 174 0.8 8000 55 SB5: 145t TO 125th  
173 331 1.5 1500 25 EB 145TH:ML5 TO SR522  
173 333 1.0 1000 25 WB 145TH:ML5 TO SR99  
174 106 1.4 1000 25 ACCESS 225 5  
174 173 0.8 8000 55 NB5: 125t TO 145th  
174 175 1.4 8000 55 SB5: 125t TO NORTHGGATE  
175 105 0.5 1500 25 SB5: TO NORTHGATE:GREENWOOD  
175 174 1.4 8000 55 NB5::NORTHGATE TO 130TH  
175 224 0.7 700 25 WB 175TH:ML5 TO SR99  
175 290 1.1 8000 55 NORTHGATE TO 85TH ML5 SB  
175 330 1.5 1000 25 EB NORTHGATE WAY:ML5 TO SR522  
176 105 1.2 1000 25 NB5: TO GREEN:85TH  
176 107 2.7 1000 25 NB5: TO WEDGE:85TH  
176 175 1.6 8000 55 85TH TO NORTHGATE ML5 NB  
176 290 0.1 1500 25 WB 85TH:NB5: TO SB5:  
177 107 2.5 1000 25 NB5: TO WEDGE:LAKE CI  
177 176 0.7 8000 55 LAKE CITY OFF TO 85TH ML5 NB  
177 329 0.6 1100 45 NB 522:NB 15 TO JCT EX RAMP  
178 112 1.2 1000 25 NB5: TO WALLING:RAVEN  
178 113 2.2 1000 25 NB5: TO UDIST:RAVENNA  
178 177 0.5 8000 55 RAVENNA OFF TO LAKE CITY OFF ML5 NB  
179 112 99.0 1 1 ONRAP  
179 113 99.0 1 1 ONRAP  
179 178 0.410000 55 50TH ON TO RAVENNA OFF ML5 NB  
180 112 1.0 1500 25 NB5: TO WALLING:45TH  
180 113 1.9 1000 25 NB5: TO UDIST:45TH  
180 179 0.3 8000 55 N45TH TO 50TH ON ML5 NB  
180 294 0.1 1500 25 N45TH: NB5 TO SB5  
181 114 99.0 1 1 ONRAMP ONLY  
181 180 1.4 8000 55 SR520 TO 45TH ML5 NB  
181 325 0.2 1700 30 NB5: TO EB520  
182 114 1.2 1500 25 NB5: ML TO ROANOKE  
182 181 0.5 8000 55 ROANOKE TO SR520 ML5 NB  
183 119 99.0 1 1 ONRAP  
183 128 0.5 1000 20 NB5: ML TO ZONE 47:MR  
183 182 1.0 8000 55 MERCER TO ROANOKE ML5 NB  
184 251 0.3 1800 40 RAMP: NB5: TO EB90  
184 310 1.2 6000 55 JCT NBCD TO JCT NBEX ML5 NB  
184 313 0.6 2000 55 JCT NBCD TO JCT WB90 CD5 NB  
185 130 1.7 1000 25 ACCESS JCT I5 & WSFRWY TO KINGDOME  
185 131 1.0 1500 25 I5 TO MT BAKER  
185 132 1.0 2000 25 ACCESS JCT I5 & WSFRWY TO INDUSTRY  
185 184 1.1 8000 55 WEST SEATTLE FRWY TO JCT NBCD ML5 NB

185 186 1.7 8000 55 SB5: WSF TO MICHIGAN  
185 321 0.5 4000 40 JCT I5 TO 4TH MLWS WB  
186 135 0.5 1000 25 ACCESS Z54 5  
186 185 1.7 8000 55 NB5: MICH TO WSF  
186 187 3.3 8000 55 SB5: MICH TO BOEING ACCESS  
187 186 3.3 8000 55 NB5: BOEING ACCESS TO MICHIGAN  
187 188 2.1 8000 55 SB5: BOEING ACCESS TO 599  
187 267 0.2 1500 35 I5 TO ML KING  
188 139 1.3 1000 25 ACCESS Z58 5  
188 187 2.1 8000 55 NB5: 599 TO BOEING ACCESS  
188 189 1.512000 55 SB5: 599 TO 405  
188 234 1.7 3100 25 NB5: 99 5 TO 99  
189 188 1.510000 55 NB5: 405 TO 599  
189 190 2.2 8000 55 SB5: 405 TO 188TH  
189 214 2.3 3000 55 N405 5 TO 167  
189 215 1.3 5000 55 E518 5 TO 99  
190 150 1.6 1000 25 ACCESS Z69 5  
190 189 2.2 8000 55 NB5: 188T TO 405  
190 191 1.1 8000 55 SB5: 188T TO MILITARY  
190 235 1.1 2000 25 W188TH 5 TO 99  
191 150 1.3 1000 25 ACCESS Z69 5  
191 190 1.1 8000 55 NB5: MILI TO 188TH  
191 192 2.0 8000 55 SB5: MILI TO 516  
192 150 2.1 1000 25 ACCESS Z69 5  
192 191 2.0 8000 55 NB5: 516 TO MILITARY  
192 193 2.4 8000 55 SB5: 516 TO 272ND  
192 273 2.6 3100 25 E516 5 TO 167  
193 152 0.9 1000 25 ACCESS Z71 405  
193 192 2.4 8000 55 NB5: 272N TO 516  
193 194 3.0 8000 55 SB5: 272N TO 320TH  
194 157 0.7 1000 25 ACCESS Z76 5  
194 158 1.3 1000 25 ACCESS Z77 5  
194 193 3.0 8000 55 NB5: 320T TO 272ND  
194 195 1.9 8000 55 SB5: 320T TO 18  
195 161 10.0 1000 25 ACCESS Z80 5  
195 194 1.9 8000 55 NB5: 18 TO 320TH  
195 238 2.9 3100 55 S18 5 TO 99  
195 275 2.9 3100 55 N18 5 TO 167  
196 88 3.0 1000 25 ACCESS Z7 405  
196 89 2.4 1000 25 ACCESS Z8 405  
196 95 1.7 1000 25 ACCESS Z14 405  
196 96 2.2 1000 25 ACCESS Z15 405  
196 166 3.5 3100 55 N405 527 TO 5  
196 197 2.3 3100 55 S405 527 TO BEARDSLEE  
196 283 4.0 1550 25 N527 405 TO 164TH  
197 96 1.9 1000 25 ACCESS Z15 405  
197 100 0.2 1000 25 ACCESS Z19 405  
197 196 2.3 3100 55 N405 BEAR TO 527  
197 198 0.9 3100 55 S405 BEAR TO 522  
198 100 0.5 1000 25 ACCESS Z19 405  
198 197 0.9 3100 55 N405 522 TO BEARDSLEE  
198 199 0.9 6000 55 S405 522 TO 160TH  
198 261 1.0 3100 25 N522 405 TO 202  
198 262 1.3 3100 35 S522 405 TO 527  
199 99 2.1 1000 25 ACCESS Z18 405

199 102 0.8 1000 25 ACCESS Z21 405  
 199 198 0.9 6000 55 N405 160T TO 522  
 199 200 2.3 6000 55 S405 160T TO 124TH  
 200 102 1.7 1000 25 ACCESS Z21 405  
 200 103 1.6 1000 25 ACCESS Z22 405  
 200 199 2.3 6000 55 N405 124T TO 160TH  
 200 201 2.2 6000 55 S405 124T TO 908  
 201 108 0.5 1000 25 ACCESS Z27 405  
 201 109 1.6 1000 25 ACCESS Z28 405  
 201 200 2.2 6000 55 N405 908 TO 124TH  
 201 202 0.7 6000 55 S405 908 TO 70TH  
 201 284 2.5 3100 25 S908 405 TO WILLOWS RD  
 201 287 1.1 3100 25 W908 405 TO LK WA BL  
 202 108 0.2 1000 25 ACCESS Z27 405  
 202 201 0.7 6000 55 N405 70TH TO 908  
 202 203 2.6 6000 55 S405 70TH TO 520  
 203 202 2.6 6000 55 N405 520 TO 70TH  
 203 204 1.0 8000 55 S405 520 TO 8TH  
 203 247 1.0 4000 55 W520 405 TO LK WA BL  
 203 248 2.2 4000 55 E520 405 TO 148TH  
 204 120 0.5 1000 25 ACCESS Z39 405  
 204 121 1.1 1000 25 ACCESS Z40 405  
 204 122 1.6 1000 25 ACCESS Z41 405  
 204 123 2.7 1000 25 ACCESS Z42 405  
 204 124 1.7 1000 25 ACCESS Z43 405  
 204 203 1.0 8000 55 N405 8TH TO 520  
 204 205 1.7 6000 55 S405 8TH TO 132ND  
 205 122 0.8 1000 25 ACCESS Z41 405  
 205 204 1.7 6000 55 N405 132N TO 8TH  
 205 206 1.0 6000 55 S405 132N TO 90  
 206 205 1.0 6000 55 N405 90 TO 132ND  
 206 207 0.9 6000 55 S405 90 TO COAL CRK  
 206 256 0.9 6000 55 W90 405 TO BELL WY  
 206 257 1.510000 55 E90 405 TO 148TH  
 207 125 1.3 1000 25 ACCESS Z44 405  
 207 206 0.9 6000 55 N405 COAL CRK TO 90  
 207 208 0.9 5000 55 S405 COAL CK TO LK WA BL  
 208 126 2.2 1000 25 ACCESS Z45 405  
 208 207 0.9 5000 55 N405 LK WA BLVD- COAL CK  
 208 209 1.8 5000 55 S405 LK WA BLVD- 44TH  
 209 126 1.6 1000 25 ACCESS Z45 405  
 209 208 1.8 5000 55 N405 44TH TO LK WA BL  
 209 210 1.0 5000 55 S405 44TH TO 30TH  
 210 126 2.1 1000 25 ACCESS Z45 405  
 210 141 1.1 1000 25 ACCESS Z60 405  
 210 209 1.0 5000 55 N405 30TH TO 44TH  
 210 211 1.1 5000 55 S405 30TH TO 900  
 211 140 1.2 1000 25 ACCESS Z59 405  
 211 141 0.2 1000 25 ACCESS Z60 405  
 211 210 1.1 5000 55 N405 900 TO 30TH  
 211 212 0.9 5000 55 S405 900 TO SUNSET BL  
 211 270 1.8 5000 55 E900 405 TO 138TH  
 212 141 0.7 1000 25 ACCESS Z60 405  
 212 211 0.9 5000 55 N405 SUNS BL TO 900  
 212 213 0.5 5000 55 S405 SUNS BL TO 169

213 140 0.8 1000 25 ACCESS Z59 405  
 213 143 3.2 1000 25 ACCESS Z62 405  
 213 148 4.0 1000 25 ACCESS Z67 405  
 213 212 0.5 5000 55 N405 169 TO SUNSET BL  
 213 214 1.7 4000 55 S405 169 TO 167  
 213 269 0.3 4000 25 W900 405 TO 515  
 213 279 8.7 4000 25 S169 405 TO 18  
 214 146 1.9 1000 25  
 214 147 0.5 1000 25 ACCESS Z66 405  
 214 189 2.3 4000 55 S405 167 TO 5  
 214 213 1.7 4000 55 N405 167 TO 169  
 214 268 0.9 1500 35 N167 405 TO 900  
 214 272 5.0 4000 55 S167 405 TO 84TH  
 215 138 2.0 1000 25 ACCESS Z57 99  
 215 189 1.3 4000 55 E518 99 TO 5  
 215 216 1.9 4000 55 W518 99 TO DESMOINES WY  
 215 234 2.7 4000 25 N99 518 TO 599  
 215 235 2.1 4000 25 S99 518 TO 188TH  
 216 215 1.9 4000 55 E518 DESMOINES WY TO 99  
 216 217 0.6 2000 35 W518 DESMOINES WY TO 508  
 217 137 1.1 1000 25 ACCESS Z56 509  
 217 216 0.6 4000 55 E518 508 TO DESMOINES WY  
 217 241 1.3 4000 55 N509 518 TO 128TH  
 217 242 0.8 4000 55 518 TO 160TH  
 218 84 1.3 1000 25 ACCESS Z3 99  
 218 85 2.4 1000 25 ACCESS Z4 99  
 218 166 2.7 2000 55 S525 99 TO 405  
 218 219 3.8 2500 30 S99 525 TO 524  
 219 90 0.3 1000 25 ACCESS Z9 99  
 219 92 1.6 1000 25 ACCESS Z11 99  
 219 168 1.6 1000 25 524 99 TO 5  
 219 218 3.8 2500 30 N99 524 TO 525  
 219 220 3.2 2500 30 S99 524 TO 104  
 220 93 1.3 1000 25 ACCESS Z12 99  
 220 171 1.8 1000 25 E104 99 TO 5  
 220 219 3.2 2500 30 N99 104 TO 524  
 220 221 1.1 2500 30 S99 104 TO RICHMOND BCH  
 221 97 0.6 1000 25 ACCESS Z16 99  
 221 220 1.1 2500 30 N99 RICH BCH TO 104  
 221 332 0.5 2500 30 SB SR99:185TH TO 175TH  
 222 97 0.8 1000 25 ACCESS Z16 99  
 222 332 0.8 2500 30 NB SR99:WESTMINSTER TO 175TH  
 222 333 0.7 2500 30 SB SR99:WESTMINSTER TO 145TH  
 223 104 1.3 1000 25 ACCESS Z23 99  
 223 224 1.5 2500 30 S99 130T TO HOLMAN RD  
 223 333 0.7 2500 30 NB SR99:130TH TO 145TH  
 224 104 0.7 1000 25 ACCESS Z23 99  
 224 175 0.7 1000 25 EB 175TH:SR99 TO ML5  
 224 223 1.5 2500 30 N99 HOLM RD TO 130TH  
 224 225 0.8 1800 30 S99 HOLM RD TO 85TH  
 225 104 1.4 1000 25 ACCESS Z23 99  
 225 224 0.8 2500 30 N99 85TH TO HOLMAN RD  
 225 226 0.6 2500 30 S99 85TH TO GREEN LK  
 225 290 0.7 1000 25 WB 85TH:SR99 TO SB5:  
 226 111 1.3 1000 25 ACCESS Z30 99

226 225 0.6 2500 30 N99 GREEN LK TO 85TH  
 226 227 1.4 3600 45 S99 GREEN LK TO 45TH  
 227 111 1.4 1000 25 ACCESS Z30 99  
 227 112 0.7 1500 25 SR99 TO WALLINGFORD  
 227 226 1.4 5400 45 N99 45TH TO GREEN LK  
 227 228 1.3 3600 45 S99 GREEN LAKE TO BRIDGEWY  
 227 334 0.7 1500 25 SR99 TO 45TH  
 228 111 2.2 1000 25 ACCESS Z30 99  
 228 117 2.2 1000 25 ACCESS Z36 99  
 228 118 1.0 1000 25 ACCESS Z37 99  
 228 227 1.3 5400 45 N99 BRID WY TO GREEN LK  
 228 229 2.1 5400 45 S99 BRID WY TO BATTERY  
 229 117 3.3 1000 25 ACCESS Z36 99  
 229 118 1.6 1000 25 ACCESS Z37 99  
 229 128 0.3 1000 15 ACCESS SR99 TO ZONE 47  
 229 228 2.1 5400 45 N99 BATT TOBRIDGE WY  
 229 328 0.6 6000 50 SB SR99:BATTERY TO DWNTWN  
 230 132 0.6 1000 25 ACCESS Z51 WSF  
 230 231 1.7 2600 30 S99 WSF TO EMW  
 230 327 1.7 6000 50 NB SR99: WSFRWY TO 1ST AVE  
 231 135 0.8 1000 25 ACCESS Z54509  
 231 230 1.7 2600 30 N99 EMW TO WSF  
 231 232 1.1 2600 30 S99 EMW TO MWS  
 232 134 1.3 1000 25 ACCESS Z53 99  
 232 231 1.1 2600 30 N99 MWS TO EMW  
 232 233 1.3 3100 25 S99 509 TO DESMOINES WY  
 232 239 0.3 4000 55 S509 MWS TO CLOVERDALE  
 233 138 2.1 1000 25 ACCESS Z57 99  
 233 232 1.3 3100 25 N99 DESMOINES WY  
 233 234 1.7 3100 25 S99 DESMOINES WY  
 234 138 0.8 1000 25 ACCESS Z57 99  
 234 188 1.7 3100 25 S599 99 TO 5  
 234 215 2.7 3100 25 S99 599 TO 518  
 234 233 1.7 3100 25 N99 599 TO DESMOINES  
 235 149 0.7 1000 25 ACCESS Z68 99  
 235 190 1.0 2500 35 E188TH 99 TO 5  
 235 215 2.1 2000 25 N99 188T TO 518  
 235 236 2.8 2000 25 S99 188T TO 516  
 235 243 1.0 2000 25 W188TH 99 TO 508  
 236 149 1.0 1000 25 ACCESS Z68 99  
 236 152 3.2 1000 25 ACCESS Z71 99  
 236 235 2.8 2000 25 N99 516 TO 188TH  
 236 237 4.1 2000 25 S99 516 TO 509  
 237 152 1.0 1000 25 ACCESS Z71 99  
 237 156 3.5 1000 25 ACCESS Z75 99  
 237 157 1.5 1000 25 ACCESS Z76 99  
 237 236 4.1 2000 25 N99 509 TO 516  
 237 238 3.2 3100 25 S99 509 TO 18  
 238 156 2.1 1000 25 ACCESS Z75 99  
 238 161 10.0 1000 25 ACCESS Z80 99  
 238 195 2.9 3100 55 N18 99 TO 5  
 238 237 3.2 3100 25 N99 18 TO 509  
 239 134 1.4 1000 25 ACCESS Z53 509  
 239 232 0.3 4000 55 N509 CLOV TO MWS  
 239 240 1.6 4000 55 S509 CLOV TO GLENDALE

240 137 2.2 1000 25 ACCESS Z56 509  
 240 239 1.6 4000 55 N509 GLEN TO CLOVERDALE  
 240 241 1.0 4000 55 S509 GLEN TO 128TH  
 241 137 1.2 1000 25 ACCESS Z56 509  
 241 138 1.0 1000 25 ACCESS Z57 509  
 241 217 1.3 4000 55 S509 128T TO 518  
 241 240 1.0 4000 55 N509 128T TO GLENDALE  
 242 217 0.8 4000 55 160TH TO 518  
 242 243 2.1 4000 55 160TH TO DESMOINES WY  
 243 149 2.5 1000 25 ACCESS Z68 509  
 243 235 1.0 2500 35 E188TH 508 TO 99  
 243 242 2.1 4000 55 DESMOINES WY TO 160TH  
 244 113 3.0 700 25 MONTLAKE TO U-DIST FROM SR520  
 244 114 0.6 1000 25 ACCESS Z33 520  
 244 245 3.7 3600 55 E520 MONT TO 84TH  
 244 326 0.6 4000 55 WB520 TO 15 RAMP  
 245 115 0.4 1000 25 ACCESS Z34 520  
 245 244 3.7 4000 55 W520 84TH TO MONTLAKE  
 245 246 0.7 4000 55 E520 84TH TO 92ND  
 246 115 0.7 1000 25 ACCESS Z3 4520  
 246 245 0.7 4000 55 W520 92ND TO 84TH  
 246 247 0.7 4000 55 E520 92ND TO LAKE WASH BLVD  
 247 115 1.3 1000 25 ACCESS Z34 520  
 247 120 1.5 1000 25 ACCESS Z39 520  
 247 203 1.0 4000 55 E520 LAKE WASH BLVD TO 405  
 247 246 0.7 4000 55 W520 LAKE WASH BLVD TO 92ND  
 247 287 2.5 3100 25 N908 520 TO CENTRA WY  
 247 288 1.0 3100 25 SBELL WY 520 TO 8TH  
 248 116 0.7 1000 25 ACCESS Z35 520  
 248 123 1.3 1000 25 ACCESS Z42 520  
 248 203 2.2 4000 55 W520 148T TO 405  
 248 249 2.7 4000 55 E520 148T TO 908  
 249 116 2.0 1000 25 ACCESS Z3 5520  
 249 248 2.7 4000 55 W520 908 TO 148TH  
 249 250 1.0 4000 25 E920 908 TO 202  
 249 284 0.7 1550 25 N908 520 TO WILLOWS RD  
 250 110 5.8 1000 25 ACCESS Z29 520  
 250 144 16.3 1000 25 ACCESS Z63 520  
 250 249 1.0 4000 25 W920 202 TO 908  
 250 285 0.8 3100 25 N202 520 TO 164TH  
 251 131 1.3 1000 25 ACCESS Z50 90  
 251 252 1.0 4800 55 RAINIER TO LAKE WASH BLVD  
 251 266 1.1 1500 35 E900 90 TO M.L. KING Jr. WAY  
 251 313 0.3 1800 40 RAMP: WB90 TO NB5:  
 251 337 0.3 1800 40 RAMP: WB90 TO SB5:  
 252 251 1.0 1670 55 LAKE WASH BLVD TO RAINIER  
 252 253 2.5 5400 55 E90 LAKE WASH BLVD TO W MERCER  
 253 127 1.9 1000 25 ACCESS Z46 90  
 253 252 2.5 1670 55 W90 W MERCER TO LAKE WASH BLVD  
 253 254 0.9 6680 55 E90 W MERCER TO ICW  
 254 127 1.0 1000 25 ACCESS Z46 90  
 254 253 0.9 2000 55 W90 ICW TO W MERCER  
 254 255 1.2 6680 55 E90 ICW TO E MERCER  
 255 127 0.8 1000 25 ACCESS Z46 90  
 255 254 1.2 3100 55 W90 E MERCER TO ICW

255 256 0.7 6680 55 E90 E MERCER TO BELL WY  
256 124 1.0 1000 25 ACCESS 243 90  
256 206 0.9 8000 55 E90 BELL WY TO 405  
256 255 0.7 6000 55 W90 BELL WY TO E MERCER  
256 288 2.7 3100 25 NBELL WY 90 TO 8TH  
257 123 1.8 1000 25 ACCESS 190 TO ZONE 42  
257 125 0.8 1000 25 ACCESS 244 90  
257 206 1.5 8000 55 W90 148T TO 405  
257 258 2.3 8000 55 E90 148T TO 901  
258 257 2.3 8000 55 W90 901 TO 148TH  
258 259 2.1 8000 55 E90 901 TO 900  
259 144 2.7 2000 25 ACCESS 263 90  
259 258 2.1 8000 55 W90 900 TO 901  
259 271 0.5 3100 55 W900 90 TONEWPORT WY  
260 83 7.1 1000 25 ACCESS Z2 522  
260 88 4.4 1000 25 ACCESS Z7 522  
260 96 1.0 1000 25 ACCESS Z15 522  
260 101 2.8 1000 25 ACCESS Z20 522  
260 261 2.0 3100 55 S522 9 TO 202  
261 101 2.1 1000 25 ACCESS Z20 522  
261 198 1.0 3100 55 S522 202 TO 405  
261 260 2.0 3100 55 N522 202 TO 9  
261 285 6.9 1550 25 S202 522 TO REDMOND WY  
262 100 0.7 1000 25 ACCESS Z19 522  
262 198 1.3 2500 35 N522 527 TO 405  
262 263 2.6 2500 35 S522 527 TO 68TH  
263 99 0.9 1000 25 ACCESS Z18 522  
263 262 2.6 2500 35 N522 68TH TO 527  
263 264 1.4 2500 35 S522 68TH TO 104  
264 98 1.3 1000 25 ACCESS Z17 522  
264 171 2.6 1550 30 W104 522 TO 5  
264 263 1.4 2500 35 N522 104 TO 68TH  
264 331 1.6 2000 35 SB 522:SR104 TO 145TH  
265 106 0.6 1000 25 ACCESS Z25522  
265 107 1.6 1000 25 ACCESS Z26522  
265 330 0.7 2000 35 SB 522:SR513 TO NORTHGATE WAY  
265 331 1.0 2000 35 NB 522:SR513TO 145TH  
266 131 0.5 1000 25 ACCESS 250 900  
266 136 2.6 1000 25 ACCESS 255 900  
266 251 1.1 1500 35 W900 M.L. KING Jr. WAY TO90  
266 267 4.9 1500 35 E900 M.L. KING Jr. WAY TO 5  
266 268 8.5 1500 35 S167 M.L. KING Jr. WAY TO 900  
267 136 2.3 1000 25 ACCESS 255 900  
267 187 0.2 1500 35 ML KING TO 15  
267 266 4.9 1500 35 W900 5 TO M.L. KING Jr. WAY  
267 268 3.9 1500 35 E900 5 TO 167  
268 139 1.7 1000 25 ACCESS 258 900  
268 140 0.8 1000 25 ACCESS 259 900  
268 214 0.9 1500 35 S167 900 TO 405  
268 266 8.5 1500 35 N167 900 TO M.L. KING Jr. WAY  
268 267 3.9 1500 35 W900 167 TO 5  
268 269 0.6 1000 25 E900 167 TO 515  
269 139 1.6 1000 25 ACCESS 258 900  
269 213 0.5 3100 25 E900 515 TO 405  
269 268 0.6 1000 25 W900 515 TO 167

269 276 2.6 3100 25 S515 900 TO 176TH  
270 142 0.5 1000 25 ACCESS 261 900  
270 143 2.4 1000 25 ACCESS 262 900  
270 211 1.8 3100 55 W900 138T TO 405  
270 271 6.8 1550 55 E900 138T TONEWPORTWY  
271 145 7.1 1000 25 ACCESS 264 900  
271 259 0.5 3100 55 E900 NEMP WY TO 90  
271 270 6.8 1550 55 W900 NEMP WY TO 138TH  
272 150 1.9 1000 25 ACCESS 269 167  
272 153 1.6 1000 25 ACCESS 272 167  
272 214 5.0 3100 55 N167 84TH TO 405  
272 273 1.7 3100 55 S167 84TH TO 84TH  
273 153 1.0 1000 25 ACCESS 272 167  
273 192 2.6 3100 25 W516 167 TO 5  
273 272 1.7 3100 55 N167 516 TO 84TH  
273 274 4.1 3100 55 S167 516 TO 277TH  
273 278 2.7 3100 25 E516 167 TO 515  
274 159 0.8 1000 25 ACCESS 278 167  
274 273 4.1 3100 55 N167 277T TO 516  
274 275 1.4 3100 55 S167 277T TO 18  
275 158 1.1 1000 25 ACCESS 277 167  
275 159 2.0 1000 25 ACCESS 278 167  
275 160 1.7 1000 25 ACCESS 279 167  
275 162 7.9 1000 25 ACCESS 281 18  
275 195 2.9 3100 55 S18 167 TO 5  
275 274 1.4 3100 55 N167 18 TO 277TH  
275 281 3.3 3100 55 N18 167 TO AUB/BLK DIAMOND  
276 148 3.3 1000 25 ACCESS 267 405  
276 151 2.4 1000 25 ACCESS 270 515  
276 269 2.6 3100 25 N515 176T TO 900  
276 277 4.1 1550 25 S515 276T TO 240TH  
277 151 2.2 1000 25 ACCESS 270 515  
277 153 1.6 1000 25 ACCESS 272 515  
277 276 4.1 1550 25 N515 240T TO 276TH  
277 278 1.0 1550 25 S515 240T TO 516  
278 153 1.2 1000 25 ACCESS 272 515  
278 273 2.7 3100 25 W516 515 TO 167  
278 277 1.0 1550 25 N515 516 TO 240TH  
278 280 4.1 1550 25 E516 515 TO 18  
279 145 2.7 1000 25 ACCESS 264 18  
279 213 8.7 1550 25 N169 18 TO 405  
279 280 5.4 1550 55 S18 169 TO 516  
279 282 3.8 1550 25 S169 18 TO 516  
280 154 3.2 1000 25 ACCESS 273 18  
280 155 3.0 1000 25 ACCESS 274 516  
280 278 4.1 1550 25 W516 18 TO 515  
280 279 5.4 1550 55 N18 516 TO 169  
280 281 5.2 1550 55 S18 516 TOAUB/BLK DIAMOND  
280 282 4.8 1550 25 E516 18 TO 169  
281 154 2.1 1000 25 ACCESS 273 18  
281 160 3.0 1000 25 ACCESS 279 18  
281 162 6.3 1000 25 ACCESS 281 18  
281 275 3.3 3100 55 S18 AUB/DIAMOND TO 167  
281 280 5.2 1550 55 N18 AUB/DIAMOND TO 516  
282 155 2.3 1000 25 ACCESS 274 516

282 279 3.8 1550 25 N169 516 TO 18  
282 280 4.8 1550 25 W516 169 TO 18  
283 86 3.2 1000 25 ACCESS Z5 527  
283 87 1.3 1000 25 ACCESS Z6 527  
283 89 1.6 1000 25 ACCESS Z8 527  
283 196 4.0 1550 25 S527 164T TO 405  
284 201 2.5 3100 25 N908 WILL RD TO 405  
284 249 0.7 1550 25 S908 WILL RD TO 520  
284 285 0.6 3100 25 S908  
285 250 0.8 3100 25 S202 164T TO 520  
285 261 6.9 1550 25 N202 REDM WY TO 522  
285 284 0.6 3100 25 N908  
286 103 0.6 1000 25 ACCESS Z22 908  
286 287 1.9 1550 25 S MARKET 116 TO CENTRAL  
287 201 1.1 3100 25 E908 LAKE WASH BLVD TO 405  
287 247 2.5 3100 25 S908 CENT WY TO 520  
287 286 1.9 1550 25 NMARKETCENT TO 116TH  
288 120 0.2 1000 25 ACCESS Z39 908  
288 247 1.7 3100 25 NBELLWY 8TH TO 520  
288 256 2.7 3100 25 SBELLWY 8TH TO 90  
289 133 1.0 1000 25 ACCESS ZONE 52 TO WSF  
289 323 1.8 4000 45 WEST SEATTLE TO SR99 OFF MLWS EB  
290 105 1.4 1500 25 SB5: TO 85:GREENWOOD  
290 107 2.2 1500 25 SB5: TO 85:WEDGEWOOD  
290 176 0.1 3000 25 EB 85TH:SB5: TO NB5:  
290 225 0.7 1000 25 EB 85TH:SB5: TO SR99  
290 265 4.0 1800 40 SB5: TO LAKE CITY  
290 291 1.2 8000 55 85TH TO 70TH AND LAKE CITY WAY ML5 SB  
291 107 2.0 1500 25 SB5: TO LAKE CITY  
291 292 0.6 8000 55 70TH TO 50TH ML5 SB  
292 112 1.2 750 25 SB5: TO 50:WALLINGFOR  
292 113 1.0 750 25 SB5: TO 50:UDIST  
292 293 0.1 8000 55 50TH TO RAVENNA ON ML5 SB  
292 334 1.3 1500 25 SB5: TO 45TH  
293 107 99.0 1 1 ONRAP  
293 113 99.0 1 1 ONRAP  
293 294 0.7 8000 55 RAVENNA ON TO 45TH ON ML5 SB  
294 112 99.0 1 1 ONRAP  
294 113 99.0 1 1 ONRAP  
294 180 0.1 1500 25 N45TH:SB5: TO NB5:  
294 295 0.9 8000 55 45TH ON TO ROANOKE OFF ML5 SB  
295 114 0.5 1500 25 ROANOKE TO SB5:  
295 296 0.5 8000 55 ROANOKE OFF TO SR520 ML5 SB  
296 297 0.310000 55 SR520 TO BOYLSTON ON ML5 SB  
296 325 0.2 1700 35 SB5: TO EB520  
297 114 99.0 1 1 ONRAP  
297 298 0.410000 55 BOYLSTON ON TO MERCER OFF ML5 SB  
298 128 0.3 1500 25 SB5: TO MERCER  
298 299 0.5 8000 55 MERCER OFF TO MERCER ON/STEWART OFF ML5  
299 128 0.3 1500 25 SB5: TO STEWART  
299 300 0.5 8000 55 MERCER ON/STEWART OFF TO DENNY ON ML5 SB  
300 128 99.0 1 1 ONRAP  
300 129 99.0 1 1 ONRAP  
300 301 0.310000 55 DENNY ON TO UNION OFF ML5 SB  
301 129 0.0 1500 25 SB5: TO UNION

301 302 0.1 8000 55 UNION OFF TO JAMES/MADISON OFF ML5 SB  
302 129 0.5 1500 25 SB5: TO JAMES  
302 303 0.2 6000 55 JAMES/MADISON OFF TO JCT SB CD ML5 SB  
303 304 0.2 4000 55 JCT SB CD TO JCT SB EX ML5 SB  
303 335 0.4 4000 55 JCT SB CD TO JAMES/MADISON ON CD5 SB  
304 305 1.2 6000 55 JCT SB EX TO JCT SB CD ML5 SB  
305 185 1.1 8000 55 JCT SB CD TO WEST SEATTLE FRWY ML5 SB  
306 119 1.0 1000 20 NB5: TO PILL HILL:OLI  
306 183 0.4 8000 55 OLIVE OFF TO OLIVE ON AND MERCER ML5 NB  
307 129 99.0 1 1 ONRAP  
307 306 0.1 8000 55 UNIVERSITY TO OLIVE OFF ML5 NB  
308 129 99.0 1 1 ONRAP  
308 307 0.3 8000 55 JCT NB CD TO UNIVERSITY ML5 NB  
309 119 99.0 1 1 ONRAP  
309 129 1.3 1000 20 NB5: ML TO DWNTN:SENE  
309 130 0.4 1000 20 NB5: TO KINGDOME  
309 308 0.2 4000 55 SENECA TO JCT END NB CD ML5 NB  
310 309 0.2 6000 55 JCT NB EX TO SENECA ML5 NB  
310 320 0.3 2000 55 JCT NB EX TO CHERRY ON ESB5: NB  
311 119 1.0 1000 20 NB CD TO PILL HILL:M  
311 129 0.4 1000 20 NB5: CD TO DWNTN:MAD  
311 130 0.6 500 15 NB5: CD TO KINGDOME  
311 308 0.1 2000 55 MADISON OFF TO JCT NB CD CD5 NB  
312 119 1.0 1000 20 NB CD TO PILL HILL:J  
312 129 0.5 1000 20 NB5: CD TO DWNTN:JAM  
312 130 0.5 500 15 NB5: CD TO KINGDOME  
312 311 0.1 6000 55 JAMES OFF TO MADISON OFF CD5 NB  
313 312 0.7 6000 55 JCT WB90 TO JAMES OFF CD5 NB  
314 105 0.4 1000 25 NB5: EX TO GREEN:NGAT  
314 175 0.5 2500 55 NORTHGATE OFF TO JCT ML5 EX5 NB 1 HOV  
315 107 2.5 1000 25 NB EX TO WEDGE:LAKEC  
315 314 1.8 4500 55 LAKECITY OFF TO NORTHGATE OFF EX5 NB 1 HOV  
315 329 0.6 1200 45 NB 522:NB EX TO JCT EX RAMP  
316 112 1.0 1500 25 NB5: EX TO 42ND  
316 113 2.0 1000 25 NB5: EX TO UDISTRICT  
316 315 2.0 6000 55 42ND OFF TO LAKE CITY OFF EX5 NB  
317 128 99.0 1 1 ONRAP  
317 316 1.4 8000 55 MERCER ON TO 42ND OFF EX5 NB  
318 128 99.0 1 1 ONRAP  
318 317 0.4 8000 55 STEWART ON TO MERCER ON EX5 NB  
319 129 99.0 1 1 ONRAP  
319 318 0.5 6000 55 PIKE ON TO STEWART ON EX5 NB  
320 129 99.0 1 1 ONRAP  
320 319 0.6 4000 55 CHERRY ON TO PIKE ON EX5 NB  
321 130 1.5 1000 25 ACCESSWSFRWY TO KINGDOME  
321 132 1.0 1500 25 WSFRWY TO INDUSTRY  
321 185 0.5 4000 40 4TH AVE TO JCT 15 MLWS EB  
321 322 0.9 4000 45 4TH AVE TO SR99 ON MLWS WB  
322 289 1.8 4000 45 SR99 ON TO WEST SEATTLE MLWS WB  
323 230 0.3 1000 25 RAMP TO SR99 WSFRWY EB  
323 321 0.9 4000 45 SR99 OFF TO 4TH AVE MLWS EB  
324 230 0.1 5000 45 WS OFF TO WSON SR99 SB  
324 322 0.3 1500 35 RAMP TO WSFRWY WB SR99 SB  
325 244 0.6 3600 55 EB520 TO 15 RAMPS  
326 181 0.2 1300 40 WB520 RAMPS TO NB5:

