

Flex Pass Installation Instructions

Good To Go!
Flex Pass

Your Flex Pass kit should contain:



Flex Pass




Plastic clip



2 dual-lock
fastener strips

- 1 Snap your Flex Pass into the plastic clip.

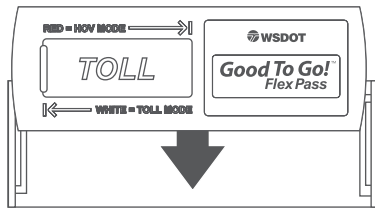


- 2 Flip it over so the switch is facing down.




- 3 Peel off the backing on one side of the fastener strips and apply to the plastic clip. The fastener strip may partially overlap the red/white switch window.




- 4 Clean and dry the inside of your windshield with rubbing alcohol or glass cleaner.

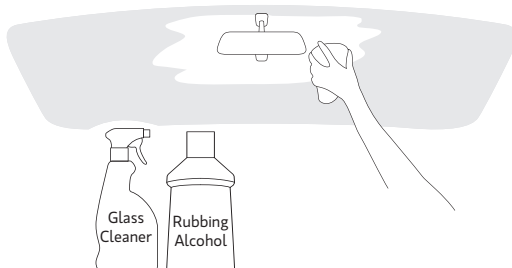

- 5 Position your pass on the inside front windshield no more than 6" below the roofline of the vehicle and at least 2" below the rearview mirror or any metalized sun strips or visor tints, without obstructing the driver's view. If your windshield is metalized throughout, contact customer service at 1-866-936-8246.

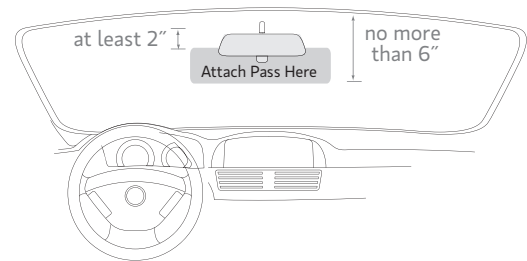

- 6 Mount the plastic clip to the inside windshield by peeling the backing off the fastener strips and attaching the clip to the windshield.

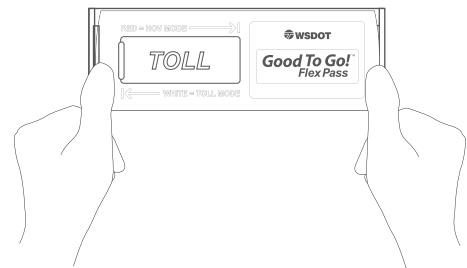

- ⚠ Important:** Your Flex Pass may not function properly if moved between vehicles and should not be moved once mounted. If you need to move it, please contact us at 1-866-936-8246.

Your Flex Pass works on all toll facilities in Washington State.

Questions? Visit GoodToGo.com or call the Customer Service Center at 1-866-936-8246.