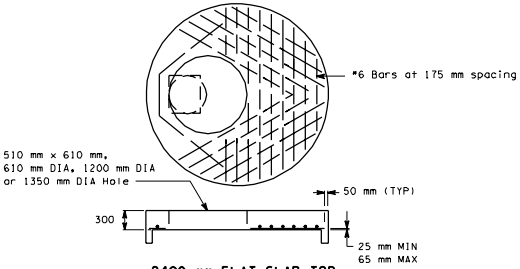

2400 mm FLAT SLAB TOP

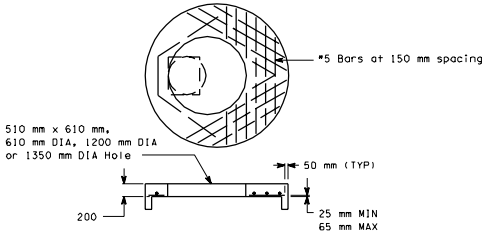

1800 mm FLAT SLAB TOP

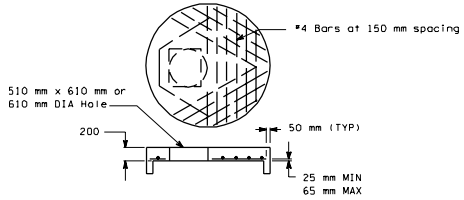

1200 mm 1350 mm 1500 mm
FLAT SLAB TOP



TYPICAL ORIENTATION

FOR ACCESS AND STEPS

NOTES

1. As an acceptable alternate to rebar, wire mesh having a minimum area of 0.25 square mm per mm may be used for adjustment sections.



PREFABRICATED LADDER

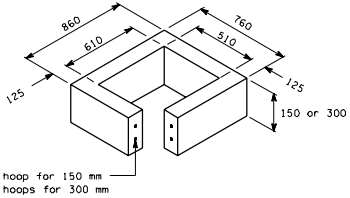

RECTANGULAR ADJUSTMENT SECTION



STEP

ALL DIMENSIONS ARE IN MILLIMETERS
UNLESS OTHERWISE NOTED

MISCELLANEOUS DETAILS FOR MANHOLES AND CATCH BASINS



CIRCULAR ADJUSTMENT SECTION



ECCENTRIC CONE SECTION