# PCCP INTERSECTIONS DESIGN AND CONSTRUCTION IN WASHINGTON STATE



# **June 2003**

By:

Jeff S. Uhlmeyer, PE Pavement Design Engineer Environmental and Engineering Programs - Materials Laboratory



	L REPORT STANDARD				
1. REPORT NO.	2. GOVERNMENT ACCESSION NO.	3. RECIPIENT'S CATALOG NO.			
WA-RD 503.2					
4. TITLE AND SUBTITLE		5. REPORT DATE			
PCCP Intersections Design and Cons	struction in Washington	June 2003			
State		6. PERFORMING ORGANIZATION CODE			
7. AUTHOR(S)		8. PERFORMING ORGANIZATION REPORT NO.			
Jeff S. Uhlmeyer					
9. PERFORMING ORGANIZATION NAME AND ADDRESS		10. WORK UNIT NO.			
Washington State Transportation Cer		11. CONTRACT OR GRANT NO.			
University of Washington, Box 3548 University District Building; 1107 N		The Confidence of Grant Proc.			
ı	E 43111 Street, Suite 333				
Seattle, Washington 98105-4631  12. SPONSORING AGENCY NAME AND ADDRESS		13. TYPE OF REPORT AND PERIOD COVERED			
Research Office		Final report (Revised 2003)			
Washington State Department of Tra Transportation Building, MS 47370	nsportation				
Olympia, Washington 98504-7370		14. SPONSORING AGENCY CODE			
Keith Anderson, Project Manager, 36	60-709-5405				
15. SUPPLEMENTARY NOTES		1			
16. ABSTRACT					
The primary objective of this study v	vas to summarize information	on related to the use of portland cement			
1		Washington State. PCCP construction			
	•	y since 1994 has the Washington State			
Department of Transportation (WSD					
		cted on state highways, and more will			
be built in the future. PCCP intersec					
occur with asphalt-surfaced roadways. This report includes lessons learned about PCCP intersection construction costs, life cycle costs, traffic control/staging, design and construction considerations, and					
quality control issues.					
17. KEY WORDS	18. DISTRIBUTION	STATEMENT			

Concrete intersections, urban intersections, concrete pavement, concrete construction, pavement rutting, traffic control, fast track paving, accelerated construction, life cycle cost analysis

(LCCA)

18. DISTRIBUTION STATEMENT

No restrictions. This document is available to the public through the National Technical Information Service, Springfield, VA 22616

Service, Springfield, VA 22616

19. SECURITY CLASSIF. (of this report)

20. SECURITY CLASSIF. (of this page)

21. NO. OF PAGES

22. PRICE

None

None

## **DISCLAIMER**

The contents of this report reflect the views of the author, who is responsible for the facts and the accuracy of the data presented herein. The contents do not necessarily reflect the official views of the Washington State Department of Transportation. This report does not constitute a standard, specification, or regulation.

#### **ACKNOWLEDGMENTS**

Special thanks are extended to the many individuals who made this effort possible. Review comments were provided by Chris Courtney, Larry Eik, Gion Gibson, John Morris, Linda Pierce, Andy Schenk, Virgil Schmidt, and Nadarajah "Siva" Sivaneswaran of WSDOT; Robert Segehtti and Steve Wittstock of ACME Materials and Construction; Joe Mahoney of the University of Washington; Barry Greene of Spokane County Public Works, and Tom Nelson, Jim Powell, and Jim Tobin of the Northwest Chapter of the American Concrete Pavement Association. Thanks also to WSDOT Office engineers Paul Jensen, Rick Jordan, and Michelle Plaggerman, who supplied contract data to make cost and contract comparisons possible. Thanks to Mark Allen, Jerry Franklin, Roger Herrmann, and Mike Pea of the Eastern Region and Moe Davari, Jim Munro, Jeff Peters, and Alex Sanguino of the South Central Region for sharing their experiences during the design and construction of PCCP intersections. Thanks to Chuck Kinne, Jim Lovejoy, and Kim Willoughby, who provided service at the WSDOT Materials Lab while this report was being written. Finally, thanks to Mark Bozanich from Photogrammetry for cartography work, Jay Terry from IT Support for scanning photos, and Amy O'Brien from the Washington State Transportation Center (TRAC) for editing this report.

## TABLE OF CONTENTS

OBJECTIVE	1
INTRODUCTION	3
WSDOT EXPERIENCE	11
CONSTRUCTION COSTS	21
LIFE CYCLE COST ANALYSES	31
LIFE CYCLE COST ANALYSIS WITHOUT USER DELAY COSTS	
TRAFFIC CONTROL/STAGING	39
COMPLETE CLOSURES  PARTIAL CLOSURES  CONSTRUCTION UNDER TRAFFIC  COMPLETE CLOSURES DURING LIMITED TIME PERIODS  CONSTRUCTION STAGING  Staging – Construction Under Traffic  Staging – Partial Closure with Detours  Staging – Combination of Complete Closure and Construction Under Traffic  STAGING PLANS	
DESIGN CONSIDERATIONS	
PCCP CONSTRUCTION LIMITS	57
JOINTING DETAILS – (PCCP JOINTING PLAN)	
CONSTRUCTION AND CONTRACTION JOINT TERMINOLOGY	
Construction Joints - Transverse	
Construction Joints - Longitudinal	
Contraction Joints - Transverse	
Contraction Joints - Longitudinal	
PLACEMENT OF DOWEL BARS AND TIE BARS AT PCCP INTERSECTIONS	
Intersections with Heavy Cross Traffic - Both Directions	
Intersections with Heavy Cross Traffic - One Direction	
Intersection Approach and Leave Legs	
Improperly Placed Dowel and Tie Bars	
PAVEMENT SECTIONS	
PAVEMENT PROFILE	
PCCP MATERIALS	
CONSTRUCTION TIME	
CONCRETE TO ASPHALT TRANSITIONS	
CHANNELIZATION - JOINTING.	
TRAFFIC DETECTION SYSTEMS	
COORDINATION WITH LOCAL AGENCIES AND UTILITY COMPANIES	
CONSTRUCTION CONSIDERATIONS	
REMOVING OR PLANNING THE EXISTING PAVEMENT	
PREPARING THE GRADE	
SETTING FORMS	
PLACING IN-PLACE PAVEMENT FIXTURES.	
Boxouts	

Telescoping Manholes or Valves	11 <del>6</del>
Placing Dowel and Tie Bars	
OTHER DETAILS – PRIOR TO PLACING PCCP	
Placing a Bond Breaker Between the PCCP and Existing Concrete	
Referencing Transverse (doweled) and Longitudinal (tied) Joint Locations	
Preplanning Skewed Joints	
FINISHING THE CONCRETE	
TEXTURING THE SURFACE	
CURING THE CONCRETE	
SAWCUTTING THE PAVEMENT	
SEALING SAWED CONTRACTION JOINTS	139
PLACING ASPHALT CONCRETE ADJACENT TO NEW PCCP	
OPENING TO TRAFFIC	143
QUALITY CONTROL	145
TESTING FREQUENCY	145
ACCEPTANCE OF PORTLAND CEMENT CONCRETE PAVEMENT	146
USE OF MATURITY METER	148
RECOMMENDATIONS AND CONCLUSIONS	149
CONSTRUCTION COSTS	149
LIFE CYCLE COST ANALYSIS	
TRAFFIC MANAGEMENT	
DESIGN CONSIDERATIONS	
CONSTRUCTION CONSIDERATIONS	
REFERENCES	
APPENDIX A – PROJECT COSTS	
APPENDIX B – LIFE CYCLE COST ANALYSIS	B-1
APPENDIX C - USER DELAY TIME SUMMARY AND CALCULATIONS	C-1
APPENDIX D - USER DELAY COST CALCULATIONS	<b>D-</b> 1
APPENDIX E – SAMPLE CONSTRUCTION STAGING	E-1
APPENDIX F – TRAFFIC CONTROL RESTRICTIONS AND STAGING REQUIREMENTS	F-1
APPENDIX G – JOINTING DETAILS	G-1
APPENDIX H - SAMPLE JOINTING PLANS	H-1
APPENDIX I – SPECIAL PROVISON FOR INTERSECTION CONSTRUCTION	I-1
APPENDIX J - SPECIAL PROVISION FOR TRAFFIC DETECTION	J-1

## LIST OF FIGURES

<u>FIGU</u>	<u>RE</u> <u>PAGE</u>
	Vicinity Map2
1.	Traffic staging scenario-construction by lane
2.	Traffic staging scenario-construction by quadrant50
3.	Equal extension of concrete across the leave and approach legs of a PCCP intersection
4.	Construction joint71
5.	Longitudinal construction join placed between adjacent lanes72
6.	Transverse contraction joint
7.	Longitudinal contraction joint placed between adjacent lanes75
8.	Dowel bar placement used where heavy traffic crosses in both directions77
9.	Dowel bar placement used where heavy traffic crosses in one direction79
10.	Tie bar and dowel placement for approach legs80
11.	Cross slopes through a typical PCCP intersection87
12.	Comparison of compressive and flexural strength gain for a Type III mix with 705 pounds per cubic yard used on PCCP intersection projects90
13.	Comparison of compressive and flexural strength gain for a Type I-II mix with 565 pounds per cubic yard used on WSDOT paving projects91
14.	Asphalt to concrete transition96
15.	Manhole riser with ribs around the perimeter110
16.	Example of a manhole boxout with intersection jointing111
17.	Example of an inlet adjacent to a transverse joint111
18.	Square boxout112
19.	Round boxout112
20.	Square boxout
21.	Cracking that will typically occur when boxouts are placed near a transverse joint leaving small rectangular shapes113
22.	Placement of a utility boxout adjacent to a transverse joint113
23.	Manhole requiring only an isolation joint115
24.	Inlet requiring only an isolation joint115
25.	Telescoping manhole showing the base flange

## LIST OF TABLES

<u>Table</u>		<u>Page</u>
1.	Locations of PCCP intersections built by WSDOT	6
2.	Average daily traffic and associated ESALs for WSDOT's intersections	
3.	Initial ACP and PCCP construction costs and future ACP inlay costs	
4.	PCCP and ACP initial construction intersection costs per square yard	23
5.	Cement concrete pavement unit bid prices	
6.	Crushed surfacing base course unit bid prices	
7.	Roadway excavation unit bid prices	
8.	Asphalt concrete pavement unit bid prices	
9.	Summary of average unit bid prices for major bid items	
10.	Total costs for traffic control items	
11.	Traffic control items expressed as a percentage of contract subtotal	29
12.	Estimated traffic control labor versus actual control labor experienced on PCCP intersection contracts	
13.	Comparison of 40-year annualized costs without user delay costs for reconstructing with PCCP or ACP	
14.	Comparison of 40-year annualized costs without user costs for reconstructing with PCCP or inlaying the existing pavement with 2.4-inch thickness of ACP	
15.	Present worth of delay costs for reconstructing with PCCP or reconstructing with ACP	35
16.	Present worth of delay costs for reconstructing with PCCP or inlaying	
4.5	the existing pavement structure with ACP	36
17.	Comparison of 40-year annualized costs, including user delay costs for reconstructing with PCCP or ACP	37
18.	Comparison of 40-year annualized costs, including user delay costs for reconstructing with PCCP or inlaying the existing pavement structure with 2.4 inches of ACP	37
19.	Summary of staging used and number of days of concrete pours required.	
20.	Pavement sections with associated ESALs used on WSDOT PCCP pavements	
21.	Summary of days needed to construct PCCP intersections	
22.	Summary of construction dates for excavation and concrete pour and the contract period.	
23.	Detection systems used on PCCP intersections	
24.	Placement methods for WSDOT PCCP intersections	
2 <del>4</del> . 25.	Summary of required testing at a 2,500 square yard test frequency	14/
43.	for the SR 291, Francis Avenue with Maple and Ash Streets	146
26.	Summary of required testing at a 500-cubic-yard test frequency for	170
20.	the SR 291, Francis Avenue with Maple and Ash Streets	147

## LIST OF PHOTOS

<u>Photo</u>		<u>Page</u>
1.	Rutting experienced by heavy truck volumes in Spokane near I-90	
	at the Broadway Avenue and Thierman Street intersection	3
2.	Severe rutting on SR 395 at 27th Avenue in Kennewick	
3.	Rutting in Western Washington at Portland Avenue and Puyallup	
	Avenue in Tacoma	4
4.	Asphalt rutting at Tacoma Mall Boulevard and 48th Street in Tacoma	5
5.	Severe rutting where asphalt was rotomilled between lanes to lessen ruts	
	on SR 395 at the West Kennewick Avenue intersection in Kennewick	5
6.	Asphalt approach leg on SR 395 at 27th Avenue in Kennewick	7
7.	Reconstructed PCCP approach let on SR 395 at 27th Avenue in Kennewick	7
8.	SR 27, Pines Road and Broadway Avenue reconstructed PCCP intersection	8
9.	Southbound PCCP approach leg on SR 27, Pines road and Broadway	
	Avenue in Spokane	8
10.	SR 2, Division Street and Francis Avenue PCCP intersection	9
11.	SR 2, Division Street and Francis Avenue PCCP intersection in Spokane	14
12.	SR 291, Francis Avenue with Maple and Ash streets in Spokane	15
13.	SR 27, Pines Road and Broadway Avenue in Spokane	16
14.	SR 2, Division Street and Third Avenue in Spokane	
15.	SR 395 and West Kennewick Avenue in Kennewick, Washington	18
16.	SR 395 with West Kennewick Avenue and Clearwater Avenue in	
	Kennewick, Washington	19
17.	Completed PCCP intersection at SR 90, Broadway Avenue and	
	Thierman Street	
18.	Complete closure on SR 2, Division Street at Third Avenue	41
19.	Construction of the approaches while under traffic on SR 395 at the	
• 0	SR 395 and West Kennewick Avenue intersection	43
20.	Reconstructed approaches on SR 395 at the SR 395 and West	4.4
21	Kennewick Avenue intersection prior to the weekend closure	44
21.	Reconstruction of the SR 395 and West Kennewick Avenue in	4.4
22	Kennewick, Washington.	44
22.	Partial closure scenario for reconstruction of SR 27, Pines Road and	15
22	Broadway Avenue intersection	
23.	Broadway Avenue and Thierman Street construction under traffic	40
24.	Reconstruction with PCCP of Francis Avenue with Maple and Ash Street under traffic	10
25.	SR 2, Division Street and Francis Avenue construction staging	
25. 26.	Construction of the northbound lanes on SR 2, Division Street and	40
20.	Francis Avenue	53
27.	SR 291, Francis Avenue with Maple and Ash streets staging	
28.	Cracking that will result when PCCP slabs are geometrically incorrect	
29.	Jointing to eliminate cracking from irregularly shaped areas	
30.	Cracking that results with rectangular slabs	
	6	


31.	Correct jointing to eliminate cracking for rectangular areas	61
32.	Cracking that resulted from an irregularly shaped panel	
33.	Irregularly shaped slab that has been jointed to reduce crack potential	62
34.	Crack developed when joints were not aligned with channelization	
35.	Alignment of joints with channelization to eliminate cracking	
36.	Corner cracking that occurs with joints intersecting at acute angles	64
37.	Joint intersection at a concrete bridge approach	64
38.	Incorrectly jointed manhole boxout	
39.	Correct placement of a utility boxout to intersect joints	65
40.	Cracking at a manhole due to poor joint planning	66
41.	Skewed joint which would eliminate cracking	
42.	Cracking at a manhole due to poor joint planning	67
43.	Jointing a manhole to eliminate cracking	67
44.	Placement of joints to prevent cracking for an intersection with	
	multiple manholes	64
45.	Proper alignment of a catch basin with a transverse joint	69
46.	Sympathy crack that extended across five lanes of roadway	69
47.	Sympathy crack resulting from a transverse joint intersecting a	
	panel at mid length	70
48.	Jointing across an adjacent panel to reduce a sympathy crack	70
49.	Construction joint placed at the end of paving	71
50.	Tie bars placed to straddle the transverse contraction joint and avoid	
	conflict with doweled transverse joints	
51.	Dowel bars placed on transverse joints	74
52.	Longitudinal construction joints with exposed tie bars and longitudinal	
	contraction joints placed in tie bar baskets prior to concrete placement	
53.	Alignment of dowel bars for the intersection area with heavy cross traffic	78
54.	Dowel bars placed on adjacent joints for areas of heavy cross traffic	78
55.	Alignment of dowel bars for areas with cross traffic	
56.	Placement of dowel and tie bar cages before the PCCP pour	81
57.	Placement of a tie bar at a joint location	82
58.	Tie bar placed over a dowel bar at a transverse joint	82
59.	Dowel bars used for a construction joint are placed too close to the	
	existing concrete	
60.	Dowel and tie bars should not extend into the boxout area	
61.	Illustration of the profile and cross slope for the direction of lighter traffic	88
62.	Bump at the transition of ACP with PCCP	95
63.	Transverse joints across the PCCP panels and channelization are aligned	97
64.	Jointing concrete channelization across a transverse joint	97
65.	Placement of preformed induction loops prior to placing concrete on	
	SR 395 at the SR 395 and Yelm Street intersection	
66.	Utility work and resulting AC patch at a PCCP intersection	
67.	Utility trenches cut in PCCP pavement at an intersection	101
68.	Roadway excavation on SR 2, Division Street and Francis Avenue	
	intersection	105

69.	Planning bituminous pavement as a method of asphalt removal	105
70.	Ensuring density for underlying surfacing before PCCP placement	106
71.	Excessive settlement in the crushed stone or subgrade, causing cracking in PCCP	
72.	Setting forms on SR 395 and Yelm Street intersection	
73.	Placing forms to match preplanned joints	
74.	Boxout with a rounded perimeter	
75.	Jointing to eliminate corner cracking	
76.	Jointing to eliminate corner cracking	
77.	Valves placed in concrete	
78.	Placement of concrete dropped vertically on dowel bars	
79.	Dowel bar baskets placed directly behind the concrete truck	
80.	Lightweight roofing paper placed between existing curbing and the new concrete	
81.	Lightweight roofing paper placed between the existing curbing and new PCCP	
82.	Excess concrete on the face of curbing that should be removed before PCCP placement	
83.	Excess concrete on the face of curbing has been removed	
84.	Reference marks for dowel bar baskets before a concrete pour on	
	SR 395 and Yelm Street intersection	123
85.	Cracking that could be avoided with skewing joints	
86.	Skewed joint to a manhole along a longitudinal joint	
87.	Skewed joints to a utility boxout	
88.	Manhole placed in the approximate center of the PCCP panel	125
89.	Valves placed closer than 12 inches from a joint may crack to the joint	
90.	Valves placed in PCCP pavement	126
91.	Vibratory screed	128
92.	Roller screed used for a continuous pour on SR 2, Division Street and Francis Avenue	129
93.	Roller screed used around a radius return area on SR 291, Francis	
	Avenue with Maple and Ash streets	129
94.	Paving machine used for a continuous pour area on SR 90,	
	Broadway Avenue and Thierman Street	130
95.	Placement of concrete before a paving machine	
96.	Use of a Whiteman Screed on the SR 395 and Yelm Street intersection	131
97.	Roller on the Whiteman Screed rides on fixed forms or existing concrete	132
98.	Back of the Whiteman Screed riding on fixed forms	132
99.	Finishing concrete behind the Whiteman Screed on SR 395 and West Kennewick Avenue intersection	134
100.	Concrete edge finished without a half-inch radius edger, spalling results	135
101.	Concrete edge finished with a half-inch radius edger	
102.	Placing tine marks in the PCCP following finishing	136
103.	Spraying curing compound on SR 395 and Yelm Street intersection	137
104.	Sawcutting newly placed concrete	139

105.	Joint sealing sawed contraction joints on SR 395 and Yelm Street	
	intersection	140
106.	Sealant correctly recessed in a sawed contraction joint	141
107.	Concrete placed in the excavated area adjacent to the PCCP and	
	existing ACP surfacing	142
108.	Commercial maturity meter	143
109.	Placement of probes that will be attached to the maturity meter	143
110.	Maturity meter attached to probes within newly placed PCCP	144
	J 1	

### **OBJECTIVE**

The primary objective of this study is to summarize information related to the use of portland cement concrete pavement (PCCP) for urban intersection construction in Washington State. PCCP construction has been used in Washington State since the early 1900s, but only since 1994 has the Washington State Department of Transportation (WSDOT) begun reconstructing a selection of urban intersections with PCCP. Statewide, fifteen PCCP intersections have been constructed, partially or completely, on state highways, and more will be built in the future. PCCP intersections eliminate the significant rutting problems that sometimes occur with asphalt-surfaced roadways. Interest by WSDOT, local agencies, other states, and contractors has been substantial, and valuable lessons have been learned in the design and construction of these intersections. This report includes lessons learned, PCCP intersection costs, life cycle costs, traffic control/staging, design and construction considerations, and quality control issues. Recommendations and conclusions, based on WSDOT's experience, are included.

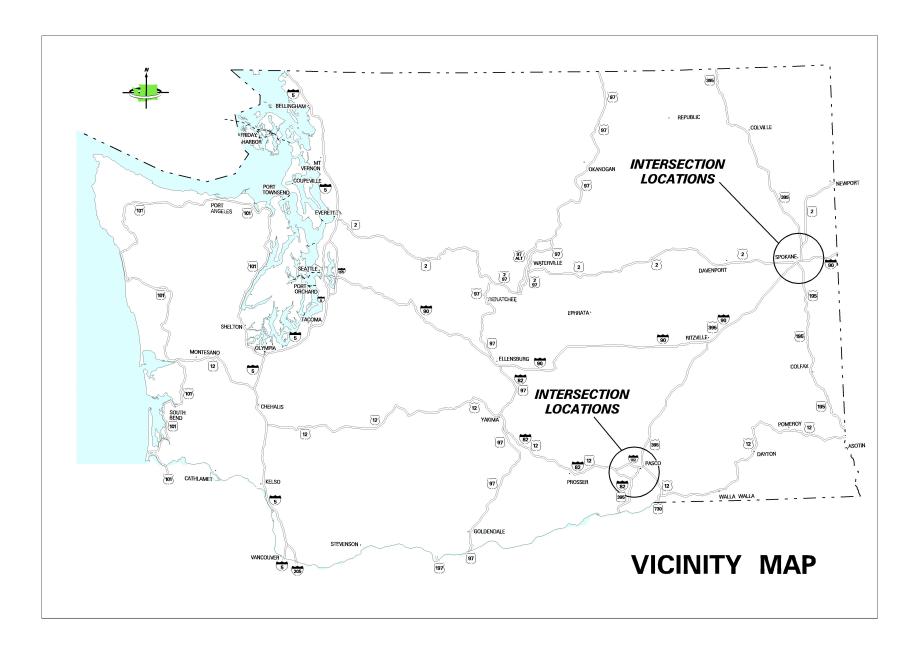

#### **INTRODUCTION**

In 1994, WSDOT began replacing selected flexible pavement intersections with PCCP. These originally built asphalt concrete pavement (ACP) intersections were severely rutted and distressed by loads from slow moving vehicles and warm temperatures. Statewide, rut depths of 2 inches or more occasionally occurred. Rehabilitation to restore the intersection to an acceptable level sometimes recurred at intervals of eight years or less. In some cases ruts as deep as 4 inches or greater occurred within two years of paving, and immediate rehabilitation was necessary.

Photos 1 through 5 show intersection rutting experienced east and west of the Cascade Mountains in Washington State.



Photo 1. Rutting experienced by heavy truck volumes in Spokane near I-90 at the Broadway Avenue and Thierman Street Intersection.



Photo 2. Severe rutting on SR 395 at 27<sup>th</sup> Avenue in Kennewick.



Photo 3. Rutting in Western Washington at Portland Avenue and Puyallup Avenue in Tacoma.

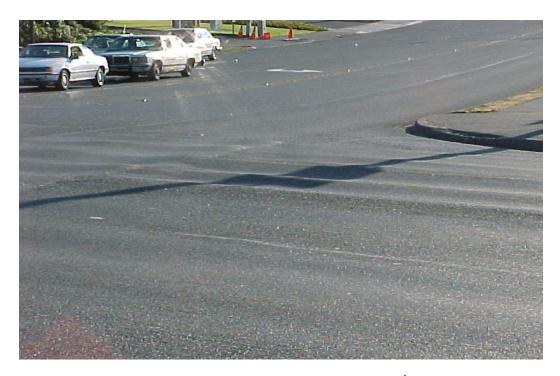


Photo 4. Asphalt rutting at Tacoma Mall Boulevard and 48<sup>th</sup> Street in Tacoma.



Photo 5. Severe rutting where asphalt was rotomilled between lanes to lessen ruts on SR 395 at the West Kennewick Avenue intersection in Kennewick.

Though WSDOT has considerable experience with cement concrete pavements, a unique feature was the replacement of existing flexible pavement with rigid pavement at intersections on urban arterials. Within WSDOT, the Eastern and South Central regions have been proactive in rehabilitating urban intersections with PCCP. Table 1 lists the fifteen intersection locations where PCCP has been used on WSDOT highways as of October 2000. Photos 6 and 7 show the rutted ACP and reconstructed PCCP intersection on SR 395 at 27<sup>th</sup> Avenue in Kennewick. Photos 8 to 10 show additional views of reconstructed intersections in Eastern Washington.

Table 1. Locations of PCCP Intersections built by WSDOT.

SR	Intersection	Region	Year Constructed
27	Pines Road and Sprague Avenue	Eastern	1994
90	Broadway Avenue and Thierman Street	Eastern	1996
90	Sprague Avenue and Fancher Street <sup>2</sup>	Eastern	1997
97	Dolar Way Intersection <sup>1</sup>	South Central	1997
2	Division Street and Francis Avenue	Eastern	1997
291	Francis Avenue with Maple and Ash Streets	Eastern	1997
27	Pines Road and Broadway Avenue	Eastern	1998
395	SR 395 and 7 <sup>th</sup> , 10th, 19 <sup>th</sup> and 27 <sup>th</sup> Avenues	South Central	1998
2	Division Street and Third Avenue <sup>2</sup>	Eastern	1998
395	SR 395 and Yelm Street, Clearwater and West Kennewick Avenues	South Central	2000

Partial reconstruction, replaced two approach legs only.

<sup>&</sup>lt;sup>2</sup> Partial reconstruction, replaced one approach leg only.



Photo 6. Asphalt approach leg on SR 395 at 27<sup>th</sup> Avenue in Kennewick.

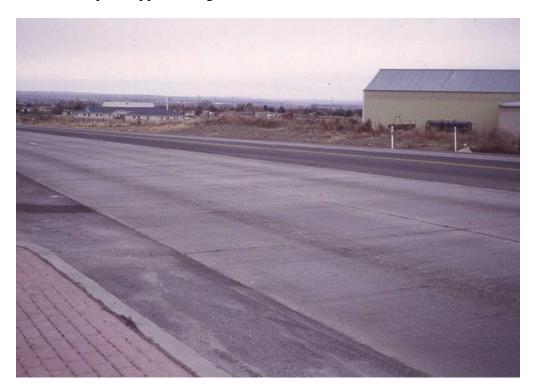


Photo 7. Reconstructed PCCP approach leg on SR 395 at  $27^{\rm th}$  Avenue in Kennewick.



Photo 8. SR 27, Pines Road and Broadway Avenue reconstructed PCCP intersection.



Photo 9. Southbound PCCP approach leg on SR 27, Pines Road and Broadway Avenue in Spokane.



Photo 10. SR 2, Division Street and Francis Avenue PCCP intersection.

An advantage with PCCP is the 40-year design life the PCCP provides with minimal or no rehabilitation required. The construction user costs and disruption to traffic that are necessary with future ACP overlays during its 40-year design life are eliminated when PCCP is used. The major disadvantage with PCCP intersections is the initial construction cost. However, a life cycle cost analysis of PCCP intersections versus ACP reconstruction and future inlays shows that PCCP intersection construction competes with and can be less expensive than rebuilding with ACP. A life cycle cost analysis for PCCP intersections versus ACP options will be discussed in a following section.

PCCP Intersections Design and Construction in Washington State

#### WSDOT EXPERIENCE

Several municipalities in the State of Washington, including the City of Spokane, City of Seattle, and Spokane County, have completed successful PCCP intersection projects. The PCCP intersection projects for the City of Spokane and Spokane County were selected primarily to eliminate chronic rutting problems; PCCP intersections within the City of Seattle were a result of its PCCP construction program on many arterials.

Prior to the first PCCP intersection reconstruction, WSDOT had considered PCCP at urban intersections for some time as a solution to eliminate asphalt rutting. However, because budget constraints have often dictated the choice of construction, ACP was often the choice, largely due to its lower initial cost. Life cycle cost analyses between ACP and PCCP reconstruction typically were not done.

An additional reason for not considering PCCP reconstruction was related to constructability and concerns about accommodating high traffic flows through urban intersections. Rehabilitating urban intersections with ACP requires rotomilling and inlaying with ACP to remove wheel rutting. This work can typically be done at night, in a short period, and with minor inconvenience to the public. Rehabilitating intersections with PCCP, on the other hand, involves the complete disruption of the intersection, as construction for specific areas sometimes must be staged over several days. The concern within WSDOT was that the inconvenience to the uses was too great to construct urban intersections with PCCP. One Eastern Region concrete contractor commented that even if a concrete intersection contract were awarded, the construction fears related to traffic control would result in very high unit prices.

Since 1994, however, WSDOT has shown that PCCP intersections are constructible, and the early concerns have been overcome. The Pines Road and Sprague Avenue intersection on SR 27

and the Broadway Avenue and Thierman Street intersection adjacent to SR 90 were selected to be rebuilt with PCCP despite the less expensive ACP rehabilitation to rotomill and inlay with ACP.

Nearly 1,600 heavy trucks use Pines Road daily. Both approach legs on Pines Road were down hill, and 3-inch ruts formed within two years following rehabilitation with ACP. The Broadway Avenue and Thierman Street intersection was reconstructed adjacent to a truck stop where daily truck counts numbered approximately 2,800 on Broadway Avenue. After two years, the ruts in the ACP on Broadway Avenue were 4 to 5 inches deep. Rutting may have been due to a number of factors, including insufficient structural depth and or unstable mix.

The Eastern Region was faced with either more inlay or overlay cycles with ACP at short intervals or reconstructing with PCCP and eliminating rutting potential. Selecting to reconstruct with PCCP provided a valuable learning tool and allowed additional PCCP intersection projects to progress relatively problem free. As will be discussed in this report, reconstructing with PCCP can be cost effective in comparison to ACP alternatives.

Table 2 lists, for comparison purposes, the average daily traffic (ADT), percentage of trucks, and the corresponding 40-year equivalent single axle loads (ESALs) for the seven intersections that will be reviewed in this report. Note that ADT and the percentage of trucks do not necessarily indicate whether an intersection will or will not have an ACP rutting problem. Factors that can affect rutting include the starting and stopping of trucks, roadway grade, climate and mix properties combined with the ADT, truck percentage, and ESALs.

Table 2. Average daily traffic (1997 traffic year) and associated ESALs for WSDOT's intersections.

SR	Intersection	Major Leg		Minor Leg		Major Leg 40 Year
		Average Daily Traffic	Percent Trucks (%)	Average Daily Traffic	Percent Trucks (%)	Equivalent Single Axle Loads (ESALs)
27	Pines Road and Sprague Avenue	24,596	6.5	24,596 <sup>1</sup>	6.5	20,000,000
90	Broadway Avenue and Thierman Street	17,000	17.0	2,500	30.0	30,000,000
2	Division Street and Francis Avenue	36,726	2.6	31,768	2.8	10,000,000
291	Francis Avenue with Maple and Ash Streets	31,768	2.8	15,884	2.0	9,000,000
27	Pines Road and Broadway Avenue	25,608	6.5	12,804	6.5	20,000,000
395	SR 395 and 19 <sup>th</sup> Avenue	13,370	19.0	10,000	5.0	53,000,000
2	Division Street and Third Avenue	12,000	2.8	6,000	2.0	16,000,000

<sup>1</sup> Pines Road and Sprague Avenue carry equivalent traffic volumes.

Photos 11 through 16 show aerial photographs of the following WSDOT PCCP intersections:

- SR 2, Division Street and Francis Avenue
- SR 291, Francis Avenue with Maple and Ash Streets
- SR 27, Pines Road and Broadway Avenue
- SR 2, Division Street and Third Avenue
- SR 395, SR 395 and West Kennewick Avenue
- SR 395, SR 395 with West Kennewick and Clearwater Avenues.

These photos provide a "birds eye" view of the extent of intersection rehabilitation in Washington State.

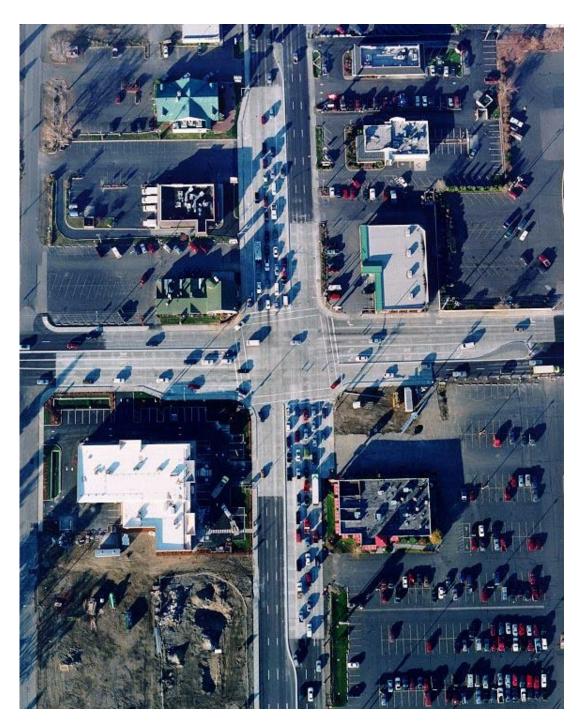


Photo 11. SR 2, Division Street and Francis Avenue PCCP intersection in Spokane (Photo courtesy AirPhoto Spokane, Spokane, Washington).



Photo 12. SR 291, Francis Avenue with Maple and Ash Streets in Spokane (Photo courtesy AirPhoto Spokane, Spokane, Washington)



Photo 13. SR 27, Pines Road and Broadway Avenue in Spokane (Photo courtesy AirPhoto Spokane, Spokane, Washington).

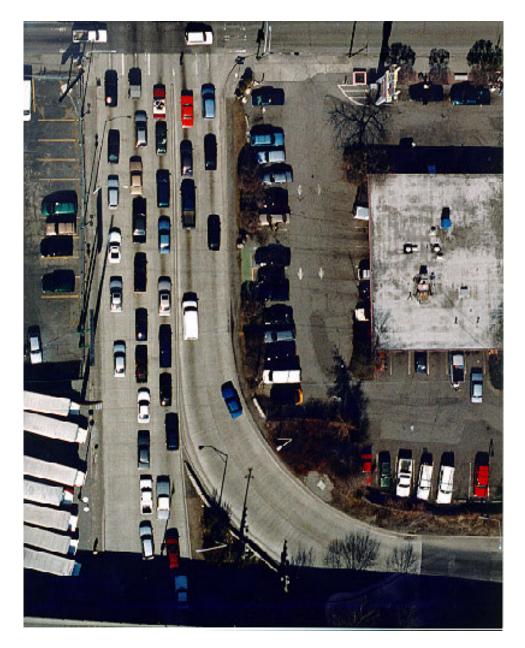


Photo 14. SR 2, Division Street and Third Avenue in Spokane (Photo courtesy AirPhoto Spokane, Spokane, Washington).

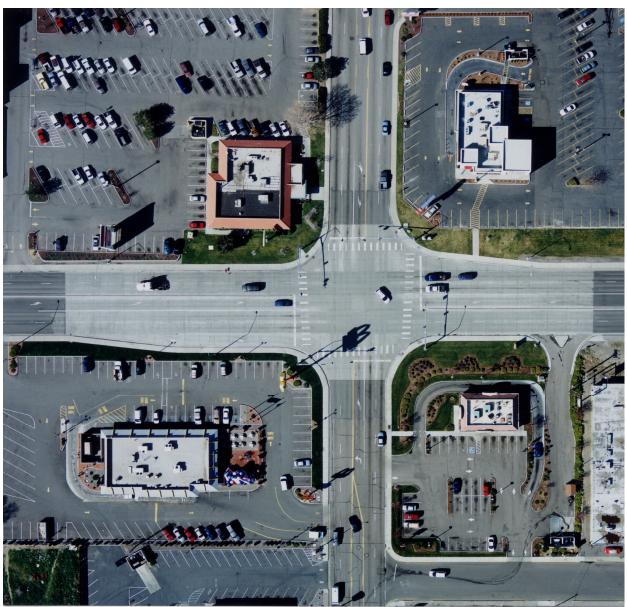


Photo 15. SR 395 and West Kennewick Avenue in Kennewick, Washington.



Photo 16. SR 395 with West Kennewick Avenue and Clearwater Avenue in Kennewick, Washington.

PCCP Intersections Design and Construction in Washington State

#### **CONSTRUCTION COSTS**

To investigate costs for PCCP intersections, one project from the South Central Region and six from the Eastern Region were analyzed. Three of the seven intersections were complete PCCP projects, while four were included on larger ACP resurfacing projects. The complete PCCP intersection projects were simpler to analyze, as all costs on the project were directly tied to the contract. The PCCP intersection costs on the ACP resurfacing projects were developed by isolating pay groups or summarizing construction pay notes. The effect was to establish accurate costs for PCCP reconstruction.

Once the PCCP costs were summarized, calculations were made to estimate the costs of a comparable reconstructed intersection with ACP. The PCCP thickness used to rebuild the intersections ranged from 9 to 12 inches. The comparable flexible AASHTO design ranged from 8.5 to 9.6 inches of ACP over approximately 10 inches of CSBC to meet frost depth design criteria. The total existing pavement structure (ACP and aggregate base) for the PCCP intersections reviewed in this study ranged from 15 to 18 inches thick. The price used for ACP was based on unit bid prices that would be expected for the ACP quantity represented. All other items for the PCCP or ACP reconstruction remained the same.

Finally, cost estimates for future inlays were computed on the basis of a typical 2.4-inch depth, the area for the PCCP reconstruction, and unit bid prices that would be expected for the ACP quantity represented.

A summary of PCCP or asphalt concrete intersection reconstruction costs, as well as future inlay costs, is shown in Table 3. These costs include labor, materials, preliminary and construction engineering, change orders, and taxes. Individual estimates for PCCP or ACP reconstruction or ACP inlays for each intersection can be seen in Appendix A.

Table 3. Initial ACP and PCCP construction costs and future ACP inlay costs.

SR	Year Constructed	Intersection	Initial PCCP Cost (\$)	Initial ACP Cost (\$)	Future Inlay Cost (\$)
27	1994	Pines Rd. and Sprague Ave.	531,300	403,900	72,900
90	1996	Broadway Ave. and Thierman St.	982,200	728,600	95,900
2	1997	Division St. and Francis Ave.	675,100	519,000	151,200
291	1997	Francis St./Maple and Ash St.	466,200	361,800	91,900
27	1998	Pines Rd. and Broadway Ave.	455,500	349,800	89,700
395	1998	SR 395 and 19 <sup>th</sup> Ave. <sup>1</sup>	546,400	441,600	91,900
2	1998	Division St. and Third Ave.	208,500	164,700	27,700

Project included four intersections. Cost estimate is for SR 395 and 19<sup>th</sup> Avenue only.

The initial PCCP intersection costs ranged from \$455,500 to \$982,200, whereas the initial ACP intersection costs ranged from \$349,800 to \$728,600. The Third Avenue and Division Street initial PCCP and ACP construction, and inlay costs were substantially less; however, only the northbound approach leg of this intersection, on Division Street to Third Avenue, was constructed. Since the construction costs for the Division Street and Third Avenue leg do not reflect full intersection reconstruction, the costs were left out of the ranges for the initial PCCP, and ACP construction, or inlay costs listed above.

The spread in the PCCP reconstruction costs resulted primarily from the size and variability in unit bid prices for each intersection. Table 4 shows the size in square yards for each intersection and the cost per square yard for initial PCCP and ACP construction costs. In general, initial PCCP intersection construction ranged from \$66 to \$148 per square yard. ACP

intersection costs ranged from \$51 to \$109 per square yard. The PCCP reconstruction costs were less when intersections were reconstructed as part of a larger resurfacing project.

Table 4. PCCP and ACP initial construction intersection costs per square yard.

SR	Year	Intersection	Quantity	Initial PCCP Const. Cost <sup>1</sup>	Initial ACP Const. Cost <sup>1</sup>
			(yd²)	$(\$/yd^2)$	$(\$/yd^2)$
27	1994	Sprague Ave. and Pines Rd.	4,116	129 <sup>2</sup>	98
90	1996	Broadway Ave. and Thierman St.	6,657	148 <sup>2</sup>	109
2	1997	Division St. and Francis Ave.	10,289	66	51
291	1997	Francis with Maple and Ash St.	6,053	77	60
27	1998	Broadway Ave. and Pines Rd.	5,751	79	61
395	1998	SR 395 and 19 <sup>th</sup> Ave.	6,365	82 <sup>3</sup>	65
2	1998	Division St. and Third Ave.	1,959	106	84

<sup>&</sup>lt;sup>1</sup> Square yard costs include labor, materials, preliminary and construction engineering, and taxes. <sup>2</sup> Intersection constructed as an individual intersection project.

Individual unit bid prices for major items are shown in tables 5 through 8. Table 5 compares cement concrete pavement prices for PCCP thickness of 9, 10, and 12 inches. The concrete for all the intersections required opening to traffic within 24 hours and used approximately 705 pounds of Type III cement per cubic yard. The cement concrete pavement price included both placing and finishing the PCCP. The average bid price for the five projects with a 10-inch section was \$38.83 per square yard. The 12-inch-thick intersection at SR 395 and 19<sup>th</sup> Avenue was slightly higher at \$42.22 per square yard, and the SR 291 intersection at Francis Avenue with Maple and Ash Streets, with a 9-inch section, was less at \$34.28 per square yard.

<sup>&</sup>lt;sup>3</sup> Project included four intersections. Quantity shown is for SR 395 and 19<sup>th</sup> Avenue only.

Table 5. Cement concrete pavement unit bid prices.

SR	Intersection	PCCP Thickness (inch)	Quantity (yd²)	Unit Price (\$)
27	Pines Rd. and Sprague Ave.	10	4,116	43.00
90	Broadway Ave. and Thierman St.	10	6,657	40.00
2	Division St. and Francis Ave.	10	10,289	34.70
291	Francis Ave./ Maple and Ash St.	9	6,053	34.28
27	Pines Rd. and Broadway Ave.	10	5,751	37.63
395	SR 395 and 19 <sup>th</sup> Ave.	12	6,365	42.22
2	Division St. and Third Ave.	10	1,959	41.81

Crushed surfacing base course unit bid prices are shown in Table 6. The crushed surfacing was used during reconstruction to provide the necessary grade or to provide a shim of material for leveling purposes. The existing crushed surfacing was generally in good condition. The average unit bid price was \$16.28 per ton.

Roadway excavation unit bid prices are shown in Table 7. Six of the seven intersections specified roadway excavation in the contract plans. However, the actual removal method for many of the intersections was planning/rotomilling. The average unit bid price of roadway excavation was \$11.40 per cubic yard. On SR 395, at 19<sup>th</sup> Avenue the contract included planning bituminous pavement as a contract item. The unit bid price for planning bituminous pavement on SR 395 was \$2.97 per square yard, which equates to a cubic yard price of \$9.05.

Table 6. Crushed surfacing base course unit bid prices.

SR	Intersection	Quantity (Ton)	Unit Price (\$)
27	Pines Rd. and Sprague Ave.	1,155	16.00
90	Broadway Ave. and Thierman St.	1,189	20.00
2	Division St. and Francis Ave.	2,200	15.42
291	Francis Ave./ Maple and Ash St.	1,306	15.42
27	Pines Rd. and Broadway Ave.	1,480	16.32
395	SR 395 and 19 <sup>th</sup> Ave.	1	1
2	Division St. and Third Ave.	791	14.52

Crushed surfacing base course was not used on this contract.

Table 7. Roadway excavation unit bid prices.

SR	Intersection	Quantity (yd³)	Unit Price (\$)
27	Pines Rd. and Sprague Ave.	2,086	16.00
90	Broadway Ave. and Thierman St.	2,823	10.00
2	Division St. and Francis Ave.	5,382	8.41
291	Francis Ave./ Maple and Ash St.	4,400	8.41
27	Pines Rd. and Broadway Ave.	2,387	11.46
395	SR 395 and 19 <sup>th</sup> Ave.	1	1
2	Division St. and Third Ave.	519	14.14

Roadway excavation was not included on this contract. Rotomilling was specified for removal of the existing asphalt pavement.

ACP pavement unit bid prices for the different classes of asphalt used on the intersections are shown in Table 8. The unit prices for the Sprague Avenue/Pines Road and Broadway Avenue/Thierman Streets intersections were \$80.00 and \$60.00 per ton, respectively. These

prices were high because ACP was a relatively minor item on these projects. Four of the remaining intersections were included on larger resurfacing projects, and the unit bid price reflected project prices for mainline paving ranging from \$27.94 to \$42.09 per ton. The price for the 19<sup>th</sup> Avenue Intersection on SR 395 was \$36.74 because the four intersections included in the contract were combined, for a total of 3,876 tons for the project. The remaining contracts involved inlays from the larger resurfacing projects abutting the reconstructed PCCP intersections.

Table 8. Asphalt concrete pavement unit bid prices.

SR	Intersection	Asphalt Class	Quantity (Ton)	Unit Price (\$)
27	Pines Rd. and Sprague Ave.	Asphalt Conc. Pavement Cl. A	27	80.00
90	Broadway Ave. and Thierman St.	Polymer Modified Asphalt Conc. Pavement Cl. A	477	60.00
2	Division St. and Francis Ave.	Superpave Asphalt Concrete Pavement Cl. 12.5 mm	1	42.09
291	Francis Ave. with Maple and Ash Streets.	Superpave Asphalt Concrete Pavement Cl. 12.5 mm	1	42.09
27	Pines Rd. and Broadway Ave.	Modified Asphalt Conc. Pavement Cl. A	1	27.94
395	SR 395 and 7 <sup>th</sup> , 10 <sup>th</sup> , 19 <sup>th</sup> , and 27 <sup>th</sup> Avenues.	Special Asphalt Conc. Pavement	$3,876^2$	36.74
2	Division St. and Third Ave.	Modified Asphalt Conc. Pavement Cl. A	1	35.92

<sup>&</sup>lt;sup>1</sup>Asphalt used on these contracts were from the larger asphalt surfacing project and was inlayed to abut the concrete intersections.

<sup>&</sup>lt;sup>2</sup> Project included four intersections. Quantity shown is the combined total for four intersections.

Table 9 provides a summary of the average unit bid prices for the major items of cement concrete pavement, crushed surfacing base course, roadway excavation, and ACP pavement. Bid prices for additional items for each intersection can be compared in Appendix A.

Table 9. Summary of average unit bid prices for major bid items.

Bid Item	Unit	Average Unit Bid Price
		(\$)
Cement Concrete Pavement – 10 inch	Square Yard	38.83
Crushed Surfacing Base Course	Ton	16.28
Roadway Excavation	Cubic Yard	11.40
Asphalt Concrete Pavement	Ton	$70.00^{1}$

<sup>&</sup>lt;sup>1</sup> The \$70.00 per ton price reflects the SR 27, Pines Road and Sprague Avenue and SR 90, Broadway Avenue and Thierman Street intersections where the asphalt was not part of a larger resurfacing project.

The final comparison for total contract prices is of major traffic items. Table 10 summarizes traffic control labor, vehicle, and supervisor costs for each of the intersections. The contract totals for Sprague Avenue and Pines Road on SR 27 and Broadway Avenue and Thierman Street near I-90 were obtained from the final contract totals, as these were individual intersection contracts. The contract totals for the 19<sup>th</sup> Avenue intersection on SR 395 were obtained by isolating the pay groups. The remaining contract totals were reconstructed as best as possible from available information such as pay notes and inspectors daily reports.

Table 10. Total costs for traffic control items.

SR	Intersection	Traffic Control Labor (\$)	Traffic Control Vehicle (\$)	Traffic Control Supervisor (\$)	Total for Traffic Items (\$)
27	Pines Rd. and Sprague Ave.	52,304	945	12,300	65,549
90	Broadway Ave. and Thierman St.	76,083	1,935	10,750	88,768
2	Division St. and Francis Ave.	9,680	1,750	9,240	20,670
291	Francis Ave./ Maple and Ash St.	8,250	1,450	7,656	17,356
27	Pines Rd. and Broadway Ave.	8,700	1,500	7,680	17,880
395	SR 395 and 19 <sup>th</sup> Ave.	14,355	800	4,800	19,955
2	Division St. and Third Ave.	5,800	150	1,200	7,150

Table 11 shows the total cost for traffic items as a percentage of the contract subtotal. The range as shown is 4.0 to 16.9 percent. The 11.9 percent for the Broadway Avenue and Thierman Street intersection can be explained because of the extra traffic control labor needed for flaggers at the many entrances to the intersection in combination with the high truck volumes at the Broadway Avenue Truck stop. Upwards of 250 trucks a day entered the truck stop. The high percentage for the Sprague Avenue and Pines Road intersection can be explained by the early learning curve with concrete intersection construction in the Eastern Region. An additional factor was that ACP pavement was constructed as the base material beneath the PCCP, and additional time and exposure to traffic was necessary.

Table 11. Traffic control items expressed as a percentage of contract subtotal.

SR	Intersection	Project Subtotal (\$)	Total for Traffic Items (\$)	Percent of Subtotal (%)
27	Pines Rd. and Sprague Ave.	387,418	65,549	16.9
90	Broadway Ave. and Thierman St.	748,104	88,768	11.9
2	Division St. and Francis Ave.	520,436	20,670	4.0
291	Francis Ave./ Maple and Ash St.	359,734	17,356	4.8
27	Pines Rd. and Broadway Ave.	351,101	17,880	5.1
395	SR 395 and 19 <sup>th</sup> Ave.	422,807	19,955	4.7
2	Division St. and Third Ave.	160,768	7,150	4.4

An example of reducing traffic control costs occurred on the SR 27, Pines Road and Sprague Avenue intersection. The project was originally estimated to require 24-hour traffic control. Both the Eastern Region and the prime contractor, Inland Asphalt of Spokane, Washington, desired to keep traffic impacts to a minimum. As a result, Inland Asphalt scheduled the major portion of the preparation work to be done at night. The traffic item "Labor for Traffic Control" under ran the estimated amount by \$18,000, or 25 percent of the estimated quantity. To control costs, traffic signals were used during the day, and flaggers were used at night.

A comparison between estimated traffic control labor dollars and actual contract dollars for traffic control labor is seen in Table 12. In the three cases where pre-contract estimates were available, the estimated contract total versus the actual contract total was 30 to 53 percent less than the engineer's estimate. Different contractors constructed each of these projects.

Table 12. Estimated traffic control labor versus actual traffic control labor experienced on PCCP intersection contracts.

SR	Intersection	Estimated Traffic Control Labor (\$)	Actual Traffic Control Labor (\$)	Percent Under Estimate (%)
27	Sprague Ave. and Pines Rd.	75,000	52,304	30.3
90	Broadway Ave. and Thierman St.	162,500	76,083	53.2
395	SR 395 and 19 <sup>th</sup> Ave.	29,000	14,355	50.5
395	SR 395 and 7 <sup>th</sup> , 10 <sup>th</sup> , 19 <sup>th</sup> , and 27 <sup>th</sup> Avenues <sup>1</sup>	121,800	63,336	48.0

<sup>&</sup>lt;sup>1</sup> This estimate combined four intersections built on the contract.

## LIFE CYCLE COST ANALYSES

The life cycle cost analyses were performed for each intersection to compare PCCP reconstruction and ACP reconstruction options. In addition, analyses were performed to compare reconstruction with PCCP and rehabilitation using traditional inlays at four-, six-, and eight-year intervals to rehabilitate rutted surfaces. A summary of the analyses performed in this section is shown in Appendix B. Assumptions used in the analyses include the following:

- A 40-year design period was used to compare PCCP reconstruction versus ACP reconstruction or inlay options.
- Four, six, and eight years were used for ACP inlay cycles.
- Analyses were performed with and without user delay costs.
- Analyses reflect total construction costs for PCCP, ACP reconstruction, or ACP inlays (see Appendix A).
- A 4 percent discount rate was used.

# Life Cycle Cost Analysis without User Delay Costs

Tables 13 and 14 show the 40-year annualized cost analysis for the seven selected intersections. User delay costs were not included in the analysis. Table 13 compares PCCP reconstruction with ACP reconstruction followed by ACP inlays at four-, six-, and eight-year cycles. In almost every case the cost of PCCP reconstruction was lower than that of the ACP reconstruction alternative. In only one project was ACP reconstruction cheaper, and then only for an eight-year inlay cycle. Table 14 compares PCCP reconstruction with rehabilitating the existing ACP structure with 2.4-inch ACP inlays at four-, six-, and eight-year cycles.

Table 13. Comparison of 40-year annualized costs without user delay costs for reconstructing with PCCP or ACP. The ACP option includes future inlays of 2.4inch thickness at four-, six-, and eight-year cycles following reconstruction.

SR	Intersection	40 Year Annualized Cost			
		PCCP Rebuild	ACP Rebuild with Inlays at 4 Years	ACP Rebuild with Inlays at 6 Years	ACP Rebuild with Inlays at 8 Years
27	Pines Rd. and Sprague Ave.	26,800	36,800	30,600	27,500
90	Broadway Ave. and Thierman St.	49,600	58,400	50,300	46,200
2	Division St. and Francis Ave.	34,100	60,200	47,500	41,000
291	Francis Ave/Maple and Ash St.	23,600	39,000	31,200	25,000
27	Pines Rd. and Broadway Ave.	23,000	37,900	30,300	26,500
395	SR 395 and 19 <sup>th</sup> Ave.	27,600	43,000	35,200	31,300
2	Division St. and Third Ave.	10,500	14,600	12,200	11,000

Table 14. Comparison of 40-year annualized costs without user costs for reconstructing with PCCP or inlaying the existing pavement with 2.4inch thickness of ACP at four-, six-, and eight-year cycles.

SR	Intersection	40 Year Annualized Costs			
		PCCP Rebuild	Inlays at 4 Years	Inlays at 6 Years	Inlays at 8 Years
27	Pines Rd. and Sprague Ave.	26,800	20,100	13,900	10,800
90	Broadway Ave. and Thierman St.	49,600	26,400	18,300	14,200
2	Division St. and Francis Ave.	34,100	41,700	28,900	22,500
291	Francis Ave./Maple and Ash St.	23,600	25,300	17,600	13,700
27	Pines Road and Broadway Ave.	23,000	24,700	17,100	13,700
395	SR 395 and 19 <sup>th</sup> Ave.	27,600	25,300	17,600	13,700
2	Division St. and Third Ave.	10,500	7,600	5,300	4,100

When PCCP reconstruction is compared to inlaying with AC, Table 14 shows that inlaying at four-, six-, or eight-year cycles will provide the lowest 40-year annualized cost. However, an argument against inlaying only the existing pavement once distress becomes intolerable is the inconvenience to the traveling public. Not only does excessive rutting compromise user safety, users must endure resulting traffic delays caused by rehabilitation or maintenance operations. Sometimes, as WSDOT has experienced, repairs may occur within two years of the inlay.

#### Life Cycle Cost Analysis with User Costs

User delay costs are difficult to apply to life cycle cost analyses for intersections. Currently, WSDOT estimates delay through a construction project by estimating the slow-down per vehicle through a construction zone. The slow-down through a construction zone does not work well for intersection reconstruction, as one approach leg or another is stopped, or there is a large build up in queued vehicles.

WSDOT is currently working toward applying actual user delay as the basis for quantifying user costs, as per the FHWA Technical Bulletin on LCCA [1]. For this study, the user costs were calculated from the actual delay a motorist would experience during construction beyond the delay that would be normally incurred under normal operating conditions.

To quantify user delay costs, the following assumptions were made in the analysis. The assumptions were based on field observations and discussions with project inspectors and region traffic offices.

• Maximum delay times for any motorist during peak traffic hours during construction ranged from 4 to 10 minutes, depending on the intersection (see Appendix C). Occasional delays of 15 to 20 minutes occurred. These isolated delays were not factored into the analysis.

- Construction-caused delay time beyond the normal signal delay was typically 1 to 4 minutes. Delay time due to normal signal operation was not included as delay in the analysis.
- Approximately 30 percent of the normal ADT during construction hours found alternative routes.
- Delay time during non-construction hours was zero (queues outside normal signal operations did not occur).
- Average daily traffic (ADT) and the percentage of trucks were determined from the 1997 Washington State Pavement Management System and verified by the regional traffic offices.
- A 2 percent growth rate was used for estimating future ADT levels.
- Hourly traffic distribution factors for a typical urban arterial were based on the typical distribution factors for an urban arterial reported in the FHWA Technical Bulletin on LCCA [1].
- Delay costs per hour of delay were based on figures provided in the FHWA Technical Bulletin on LCCA [1].
  - Truck delay \$18.50 per hour
  - Auto delay \$11.50 per hour
- The number of construction days, for a given intersection, was determined from contract documents such as the Inspectors Daily Reports and Weekly Statement of Working Days.
- Delay time and user delay costs for PCCP and ACP reconstruction were assumed to be equal (industry sources indicates similar time frames and staging requirements).

The delay time for the construction period was computed by multiplying the ADT by the hourly traffic distribution factors by the construction days by the delay per vehicle. Appendix C provides a summary for total delay time for each intersection with the corresponding calculations for daily delay for PCCP reconstruction and ACP inlay options. The calculations show 24-hour delay times. Truck and auto delay hours for both legs of the intersection are shown.

The present worth for user delay costs over a 40-year period are shown in tables 15 and 16. Table 15 compares the present worth of delay costs for the PCCP reconstruction to ACP reconstruction with future inlay cycles at four, six, and eight years. Table 16 compares the

present worth of delay costs for PCCP reconstruction to future inlays at four-, six-, and eight-year cycles over a 40-year period. The total delay costs (summarized in Appendix D) were calculated by multiplying the appropriate truck or auto delay cost by the total delay time summarized in Appendix C.

Table 15. Present worth of delay costs for reconstructing with PCCP or reconstructing with ACP followed by four-, six-, or eight-year inlay cycles. The present worth is calculated over a 40-year period.

SR	Intersection	Present Worth of Delay Costs			
		PCCP Rebuild	ACP Rebuild with Inlays at 4 Years (\$)	ACP Rebuild with Inlays at 6 Years (\$)	ACP Rebuild with Inlays at 8 Years (\$)
27	Pines Rd. and Sprague Ave.	121,941	169,726	153,178	143,071
90	Broadway Ave. and Thierman St.	95,856	116,201	109,157	104,858
2	Division St. and Francis Ave.	752,156	817,451	794,842	781,029
291	Francis Ave/Maple and Ash St.	185,354	234,865	217,717	207,246
27	Pines Rd. and Broadway Ave.	222,241	259,759	246,782	238,832
395	SR 395 and 19 <sup>th</sup> Ave.	49,454	73,088	64,911	59,902
2	Division St. and Third Ave.	63,942	69,629	67,148	65,946

Table 16. Present worth of delay costs for reconstructing with PCCP or inlaying the existing pavement structure with ACP at four-, six-, or eight-year cycles.

SR	Intersection	Present Worth of Delay Costs			
		PCCP Rebuild (\$)	ACP Inlays at 4 Years (\$)	ACP Inlays at 6 Years (\$)	ACP Inlays at 8 Years (\$)
27	Pines Rd. and Sprague Ave.	121,941	55,462	38,914	28,807
90	Broadway Ave. and Thierman St.	95,856	23,614	16,570	12,271
2	Division St. and Francis Ave.	752,156	75,779	53,170	39,357
291	Francis Ave/Maple and Ash St.	185,354	57,462	40,314	29,843
27	Pines Rd. and Broadway Ave.	222,241	43,545	30,568	22,618
395	SR 395 and 19 <sup>th</sup> Ave.	49,454	27,433	19,256	14,247
2	Division St. and Third Ave.	63,942	6,598	4,616	3,414

Table 17 compares PCCP reconstruction with ACP reconstruction followed by ACP inlays at four-, six-, and eight-year cycles. Again, the cost of PCCP reconstruction was lower than that of ACP reconstruction with future inlay alternatives. Table 18 compares PCCP reconstruction to rehabilitating the existing ACP structure with 2.4-inch inlays at four-, six-, and eight-year cycles. The replacement of traffic loops was not included in the inlay analyses, as it was assumed that the traffic loops were placed beneath the ACP inlay depth. In addition, many regions are heading toward the use of video detection systems, and many traffic loops will be abandoned.

Table 17. Comparison of 40-year annualized costs, including user delay costs for reconstructing with PCCP or ACP. The ACP option includes future inlays at four-, -six-, and eight-year cycles following reconstruction.

SR	Intersection	40 Year Annualized Costs			
		PCCP Rebuild	ACP Rebuild with Inlays at 4 Years	ACP Rebuild with Inlays at 6 Years	ACP Rebuild with Inlays at 8 Years
27	Pines Rd. and Sprague Ave.	33,000	45,400	38,400	34,800
90	Broadway Ave. and Thierman St.	54,500	64,300	55,800	51,500
2	Division St. and Francis Ave.	72,100	100,500	87,600	80,500
291	Francis Ave./Maple and Ash St.	32,900	50,800	42,200	35,500
27	Pines Road and Broadway Ave.	34,200	51,000	42,700	38,500
395	SR 395 and 19 <sup>th</sup> Ave.	30,100	46,700	38,500	34,300
2	Division St. and Third Ave.	13,800	18,100	15,600	14,400

Table 18. Comparison of 40-year annualized costs, including user delay costs for reconstructing with PCCP or inlaying the existing structure with 2.4-inch of ACP at four-, six-, and eight-year cycles.

SR	Intersection	40 Year Annualized Costs			
		PCCP Rebuild	Inlays at 4 Years	Inlays at 6 Years	Inlays at 8 Years
27	Pines Rd. and Sprague Ave.	33,000	22,900	15,900	12,300
90	Broadway Ave. and Thierman St.	54,500	27,600	19,200	14,900
2	Division St. and Francis Ave.	72,100	45,500	31,600	24,500
291	Francis Ave./Maple and Ash St.	32,900	28,200	19,600	15,200
27	Pines Road and Broadway Ave.	34,200	26,900	18,700	14,500
395	SR 395 and 19 <sup>th</sup> Ave.	30,100	26,700	18,500	14,400
2	Division St. and Third Ave.	13,800	8,000	5,500	4,300

PCCP Intersections Design and Construction in Washington State

#### TRAFFIC CONTROL/STAGING

Traffic control and construction staging is typically the primary issue associated with the construction of PCCP intersections. While some delay to the traveling public is unavoidable, the delay has proved to be tolerable, with a maximum delay during peak hours, on occasion, of about 15 to 20 minutes.

An important design element is to obtain input from any party that will be affected by the intersection reconstruction. These parties include, but are not limited to, local governments, fire and police agencies, business owners, and private citizens. An important element to contract administration has been the wide publicity by WSDOT Public Information to local governments, businesses, and to the media, including newspapers and radio.

The importance of communication should be emphasized. For instance, during construction of the Broadway Avenue and Thierman Street intersection (see Photo 17), the communication loop included WSDOT, the contractor, local agencies, law enforcement, fire departments, and affected property owners. An open invitation, initiated by the project engineer, was offered to any party affected by or interested in the construction to attend weekly meetings. Concerns were voiced, at these meetings, regarding the contractor's proposed work for that week. In most cases the contractor was able to accommodate concerns, whether that meant accommodating staging for access to businesses or addressing safety issues. Weekly meetings were of major importance in moving heavy truck traffic to an adjacent truck stop.



Photo 17. Completed PCCP intersection at SR 90, Broadway Avenue and Thierman Street.

The Customer Focus Highway Construction Workshop [2], held in Seattle in January 1999, noted that the traveling public is a lot more tolerant during construction when people are kept informed. With widespread publicity to keep the public informed, WSDOT has noticed upwards of a 30 percent reduction in the ADT for intersection reconstruction projects. The 30 percent reduction represents people who have found alternative routes or have adjusted their schedules to avoid the construction project.

Staging options for PCCP intersection construction includes the following:

- complete closures with detours
- partial closures with detours
- construction under traffic
- complete closures during limited time periods
- combinations of the above.

WSDOT used complete closures, partial closures with detours, construction under traffic and a combination of construction under traffic and complete closures.

#### Complete Closures

The ideal construction situation is to completely close the roadway. Complete closures allow the contractor to remove and replace more of the roadway in a continuous and safe operation. Interaction with traffic is avoided, as complicated work zone lane configurations are eliminated. However, closing a major urban arterial is often not an option, particularly when detours are not available. Another concern that is unpopular is that complete closures restrict access to businesses that are adjacent to the intersection.

A complete closure was used successfully in Spokane to restrict traffic from the east- and westbound off-ramps of I-90 to the northbound approach on Division Street at Third Avenue (see Photo 18). Construction was thoroughly signed and well detoured and limited to five days, which proved to be more than adequate.



Photo 18. Complete closure on SR 2, Division Street at Third Avenue.

The South Central Region used complete closures on SR 395 in Kennewick, where the Clearwater Avenue, West Kennewick Avenue, and Yelm Street intersections were reconstructed. One intersection per weekend was reconstruction during September and October 2000. The contract specified closing each intersection by 7:00 p.m. Thursday evening and opening to traffic by 6:00 a.m. the next Monday morning. Local traffic was detoured to adjacent streets, while state highway traffic was detoured over nearby Interstate Highways.

Before the weekend closures, the South Central Region reconstructed under traffic the approach and leave legs to the intersections (see photos 19 and 20). During the weekend closures, ACME Construction and Materials from Spokane, Washington, removed and replaced the roadway within the intersection square (radius return to radius return) and a portion of each approach or leave legs of the adjoining city streets. Photo 21 shows reconstruction of the SR 395 and West Kennewick Avenue intersection on the Friday of the three-day closure. PCCP placement and curing proceeded well, with the roadway opened well ahead of the 6:00 a.m. Monday morning target. For all three closures, the roadway was opened to traffic by 6:00 p.m. Sunday. Following the closures, WSDOT received very favorable comments from both businesses and residents. Documentation of the West Kennewick Avenue intersection reconstruction is available through the Innovative Pavement Research Foundation [3].

Robert Seghetti, of ACME Materials and Construction, attributed the success of the Kennewick area intersection reconstruction to the following:

- WSDOT held preliminary meetings with the City of Kennewick to discuss construction impacts and City concerns
- businesses were invited to pre-construction meetings
- WSDOT met with contractors to discuss construction feasibility
- the public was kept informed via newspapers, radio, and television news broadcasts

- WSDOT's web page was updated with information
- WSDOT provided flyers to businesses each week
- WSDOT and ACME Materials and Construction partnered with the modifications to the traffic control plan allowing continuous work operations with increased safety for employees
- Clearwater Avenue and West Kennewick Avenue were constructed concurrently, maximizing crew efficiency
- ACME provided a detailed schedule with known milestones
- ACME's aggressive construction schedule was either met or exceeded
- work operations were continuous, some element of construction was always happening
- WSDOT and contractor decision makers were available to resolve issues.



Photo 19. Construction of the approaches while under traffic on SR 395 at the SR 395 and West Kennewick Avenue intersection.



Photo 20. Reconstructed approaches on SR 395 at the SR 395 and West Kennewick Avenue intersection prior to the weekend closure.



Photo 21. Reconstruction of the SR 395 and West Kennewick Avenue in Kennewick, Washington. The first loads of concrete are being placed during the Friday of the three-day closure (photo courtesy of Tri-City Herald).

## Partial Closures

A partial closure was used on the Pines Road and Broadway Avenue Intersection in Spokane. This partial closure was coordinated with Spokane County and permitted since businesses were minimally impacted and detour routes for the minor legs of the intersection were available. Photo 22 shows the partial closure scenario used by ACME Construction and Materials of Spokane, Washington, to construct the Broadway Avenue approaches.



Photo 22. Partial closure scenario for reconstruction of SR 27, Pines Road and Broadway Avenue intersection.

With the partial closure at the Pines Road and Broadway Avenue in effect, left and right turns from Pines Road were eliminated. The Eastern Region reported that traffic flowed better through the intersection than when the intersection was fully functional. When the minor legs of the intersection were reopened and construction continued on Pines Road, turning movements to Broadway Avenue were not restricted. Traffic flow was again severely reduced, causing the Region to consider restricting turning movements during future contracts.

#### Construction Under Traffic

Construction under traffic is more typical in WSDOT's experience because traffic flow must be maintained and detour routes are usually not available. On the Broadway Avenue and Thierman Street project, a variety of means were used to keep traffic moving. The adjacent truck stop and businesses, as well as turning movements to adjacent streets or ramps, had the potential to make traffic flow difficult. Daytime operations utilized a pilot car as shown in Photo 23. The resulting queues were minimal. Directional turning movements were allowed as traffic flowed from the east or west. Flaggers were well positioned where turning movements were allowed.



Photo 23. Broadway Avenue and Thierman Street construction under traffic.

For nighttime operations, utilizing the existing traffic lights in a flashing mode minimized traffic control. Therefore, the costs of "Labor for Traffic Control" were 44 percent lower than budgeted. An equitable adjustment to the contractor was provided, and the state realized a cost savings of \$47,000.

The SR 27, Pines Road and Sprague Avenue intersection was also built under traffic. The state estimated that 24-hour traffic control would be required. However, Inland Asphalt of Spokane, Washington, scheduled the major portion of the preparation work to be done at night. Traffic was controlled by signals during the day, and flaggers were used for the nighttime construction. Traffic disruption was kept to a minimum, which also kept the cost to the state for traffic control at 25 percent below budget.

Photo 24 shows construction on SR 2, Francis Avenue with Maple and Ash Streets, where two lanes of traffic were maintained through the workzone. Traffic problems were minimal for this highway with an ADT of 31,000 vehicles. Photo 25 shows traffic being maintained while intersection construction proceeds on SR 2 Francis Avenue and Division Street.

# Complete Closures During Limited Time Periods

Maintaining traffic to businesses sometimes requires that business approaches be built in stages or during limited time periods. If a business is closed evenings, the entire business access can be closed, and pavement removal and grade preparation may be done during the evening hours. Before the access is reopened, a temporary approach can be placed. During subsequent construction the temporary approach can be removed, and the new PCCP can be placed in stages to keep access open.



Photo 24. Reconstruction with PCCP of Francis Avenue with Maple and Ash Street under traffic.



Photo 25. SR 2, Division Street and Francis Avenue construction staging. Intersection reconstruction was staged to allow for construction under traffic.

# **Construction Staging**

Figures 1 and 2 show variations in construction sequences, as summarized by the American Concrete Paving Association (ACPA) [4], to detour traffic with construction under traffic.

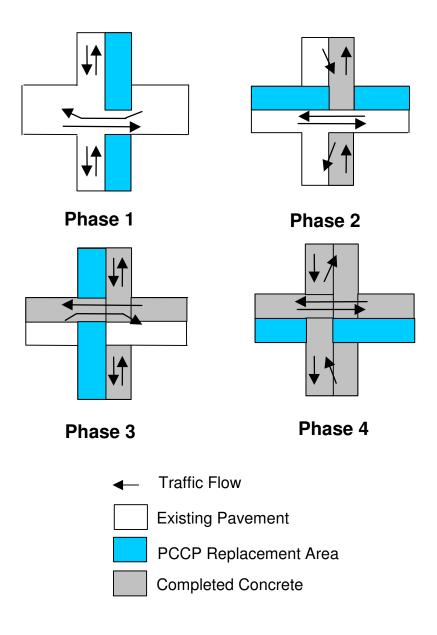


Figure 1. Traffic staging scenario – construction by lane (figure courtesy of American Concrete Paving Association).

The degree to which these recommended staging options are used depends upon the number of lanes and the number of businesses to which access must remain open. WSDOT has used variations of these sequences as each intersection required unique staging requirements.

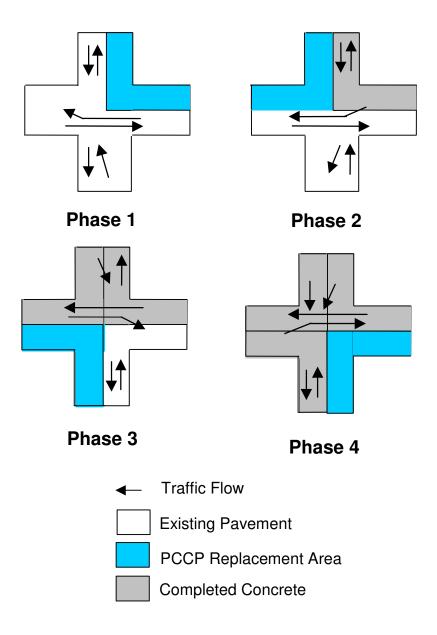


Figure 2. Traffic staging scenario – construction by quadrant (figure courtesy of American Concrete Paving Association).

Table 19 illustrates the number of pour days required to construct each intersection based on the staging used for each project. Projects using partial complete, or a combination of closures reduced the number of pour days required.

Table 19. Summary of staging used and number of days of concrete pours required.

SR	Intersection	Staging	Number of Thru Lanes <sup>1</sup>	Concrete Pours (days)
27	Pines Rd. and Sprague Ave.	Construction Under Traffic	4	5
90	Broadway Ave. and Thierman St.	Construction Under Traffic	4	14
2	Division St. and Francis Ave.	Construction Under Traffic	6	19
291	Francis Avenue/Maple and Ash St.	Construction Under Traffic	4	12
27	Pines Rd. and Broadway Ave.	Partial Closure and Construction Under Traffic	4	9
395	SR 395 and 19 <sup>th</sup> Ave.	Construction Under Traffic	4	6
2	Division St. and Third Ave.	Complete Closure	3	2
395	Yelm Street	Complete Closure and Construction Under Traffic	4	7
395	Clearwater Avenue	Complete Closure and Construction Under Traffic	4	8
395	West Kennewick Avenue	Complete Closure and Construction Under Traffic	4	7

<sup>&</sup>lt;sup>1</sup> Each intersection also has left turn lanes.

## **Staging – Construction Under Traffic**

The staging on SR 27, Pines Road and Sprague Avenue allowed concrete placement in quadrants as shown in Figure 2. This section was five lanes wide, the center being a left-turn lane. The ADT was 26,000.

Following removal of the existing ACP and a portion of the existing surfacing for the entire intersection, the contractor placed an ACP base. Since work was scheduled at night and the preparation work for the PCCP was completed, large areas of PCCP could be placed in a single pour. PCCP placement went smoothly for the five pours, with minimal traffic delays.

SR 2, Division Street and Francis Avenue were more complex. While only six shifts in traffic were necessary, nineteen pours were required to construct this eight-lane section, the two center lanes being left-turn lanes. Specific staging requirements for this section included:

- maintaining traffic flow for 32,000 ADT
- four lanes must remain open along Division Street (two lanes in each direction)
- left turns from Division Street must remain open
- two lanes must remain open along Francis Avenue (one lane in each direction)
- access to businesses, located on all four corners of the intersection, must remain open.

The staging for Division Street and Francis Avenue involved routing southbound traffic on the northbound lanes while the southbound lanes were constructed. Since no more than two lanes were constructed at a time, adjacent pours were necessary to build the eight-lane section. Six pours were needed to complete the southbound lanes on Division Street. Traffic was then routed on the southbound lanes, and construction proceeded in the northbound direction (Photo 26). The construction for the Francis Avenue approaches was similar. The construction staging used for Division Street and Francis Avenue as illustrated by Seghetti [5] is shown in Appendix E.

While construction on Division Street and Francis Avenue initially caused heavy traffic delays, the contractor, ACME Materials and Construction, noted a 20 to 30 percent decrease in traffic volumes after the first week of construction as commuters found alternative routes.

Allowing left turns from Division Street to Francis Avenue caused traffic delays along Division Street. In retrospect, eliminating left turns would have significantly reduced traffic delays. Access for material delivery for construction was not a problem.



Photo 26. Construction of the northbound lanes on SR 2, Division Street and Francis Avenue.

Photo 27 shows a view of the staging used on SR 2, Francis Avenue with Maple and Ash Streets. This intersection was built by staging eastbound traffic onto the westbound lanes. One lane of traffic was maintained in each direction. Left-turn movements were restricted for traffic on Francis Avenue. Once the south half of the intersection was built, traffic was diverted onto the completed PCCP. Construction was then concentrated on the north half of the intersection, and traffic was routed in a similar manner. Twelve separate concrete pours were necessary to complete the intersection.



Photo 27. SR 291, Francis Avenue with Maple and Ash Streets staging.

# **Staging – Partial Closure with Detours**

The original traffic restrictions, provided in the contract documents, required maintaining traffic on all legs of the intersection for the reconstruction of Pines Road and Broadway Avenue. After evaluation of the staging plan submitted by the contractor, WSDOT allowed the closure of Broadway Avenue. The result was that left turn movements on Pines Road were eliminated. Broadway Avenue traffic used alternate routes. The Pines Road traffic signals were set on green for both northbound and southbound traffic. Traffic backups did not occur. The construction staging used for Pines Road and Broadway Avenue is illustrated in Appendix E [5].

#### Staging – Combination of Complete Closure and Construction Under Traffic

The intersections of West Kennewick Avenue and Clearwater Avenue with SR 395 were built concurrently using a combination staging of complete closures and construction under traffic. The ADT for these intersections was 30,000 with 20 percent trucks.

Building these consecutive intersections concurrently allowed WSDOT the ability to shift traffic simultaneously while the left turn lanes, the eastbound approaches, and then the westbound approaches were constructed under traffic. Following the construction of the approaches, each intersection was completely closed, on separate weekends, to reconstruct the intersection square (radius return to radius return). Building the intersections simultaneously allowed the contractor to keep construction moving as pour areas became available rather than building all the approaches at one intersection, moving traffic control, and then repeating the process. The construction staging used for SR 395 and the West Kennewick Avenue intersection is illustrated in Appendix E [5].

### Staging Plans

On the initial PCCP intersection contracts, WSDOT provided staging plans in the contract documents. While providing staging plans is necessary in some instances, WSDOT learned that a more practical approach to traffic control is to specify traffic control restrictions in the contract and let the contractor provide staging plans with approval by WSDOT. Allowing the contractor to submit the staging plans, or to recommend changes to staging plans provided in the contract plans, allows the contractor the ability to utilize the workforce, equipment, and ingenuity in the most efficient manner. Staging plans typically correspond to the PCCP jointing plans that WSDOT includes in the contract.

The traffic control restrictions and staging plan requirements for the SR 2, Division Street, Francis Avenue and SR 395, SR 395 and 19<sup>th</sup> Avenue construction are shown in Appendix F.

PCCP Intersections Design and Construction in Washington State

### **DESIGN CONSIDERATIONS**

The following is an overview of the most common design concerns for PCCP intersections.

These design considerations include the following:

#### PCCP construction limits

- jointing details (PCCP jointing plan)
- construction and contraction joint terminology
- placement of dowel bars and tie bars at PCCP intersections
- pavement section
- pavement profile
- special provisions for cement concrete pavement construction

#### **PCCP** materials

- construction time
- concrete to asphalt transitions
- traffic detection systems
- coordination with local agencies and utility companies.

#### **PCCP Construction Limits**

The limits for reconstruction with PCCP should be determined on the basis of an evaluation of the existing pavement condition. The area of pavement rutting or distress is usually easily identified, and vehicle start and stop areas typically define the area of needed reconstruction. The major arterial approach legs to intersections may require PCCP from 200 to 500 feet back from the crosswalk. The length of the arterial approach legs will depend upon the number, speed, and type of vehicles using the intersection. The approach legs on the minor arterial typically require 50 to 100 feet but may extend farther. The approach and leave legs should extend an equal distance from the intersection (see Figure 3). Equal extension allows more convenience for adjacent ACP rotomilling operations; as opposed to doglegs when approach and leave leg, lengths are different. Also, joint sealing, along the doglegs, during intersection reconstruction

and resealing during future maintenance is avoided. Reconstruction should be limited to the approach and leave legs and intersection area.

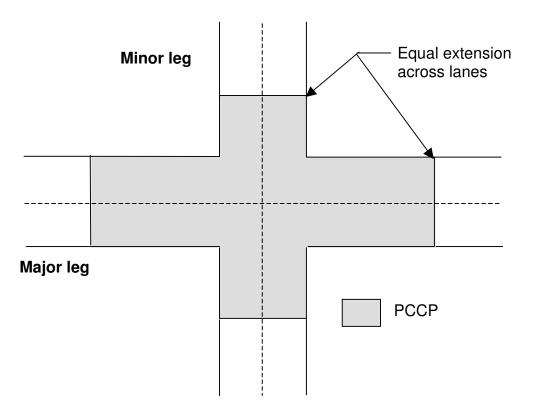


Figure 3. Equal extension of concrete across the leave and approach legs of a PCCP intersection.

### Jointing Details – (PCCP Jointing Plan)

An important lesson learned by WSDOT is that it is critical to thoroughly design the joint layout details. When joint preplanning has not occurred, undesirable cracks have developed in the PCCP. These cracks will affect the PCCP performance and could have been avoided. If joint details are left undecided until the time of construction, visualizing the proper placement of joints is difficult because of construction staging.

WSDOT quickly learned the importance of joint preplanning on the SR 27, Pines Road and Sprague Avenue intersection project. During construction several newly placed PCCP panels experienced cracking, particularly for odd shaped areas. Following construction, the Eastern

Region recommended in its End of Project Report that contract plans include a plan view of the required jointing to ensure proper crack control. In addition, it recommended that more specific requirements for furnishing and installing reinforcing bars be included. Providing a joint layout in the plans would satisfy both recommendations, as these design decisions would then be made ahead of construction. Many agencies lack the experience to make the necessary decisions while the concrete is being placed.

The ACPA stresses that a well considered plan is vital to the success of the intersection. A good jointing plan, as summarized by the ACPA [4], accomplishes the following:

- eases construction by providing clear guidance and facilitates staging
- enables contractors to more accurately bid the project
- ensures that joints pass through fixtures embedded in the pavement such as manholes or drainage outlets.

Designers should prepare an intersection joint layout while developing project plans. In 1996 the ACPA prepared a step-by-step procedure [6] titled "Concrete Information – Intersection Joint Layout." This procedure is summarized in Appendix G. Appendix H provides jointing plans from several of the PCCP intersections built by WSDOT. A typical roadway section and joint details for each plan are provided. Following each jointing plan are the revisions WSDOT would make to provide consistency and clarity on future PCCP intersection projects.

The last section of Appendix H shows a typical jointing plan used by Spokane County on PCCP intersection projects. These plans are very detailed and supply all the necessary information to replace ACP with concrete.

Photos 28 through 48 show the cracking that will develop when joint planning is not considered. Photos showing ways to avoid cracking or improper utility placement are also included.

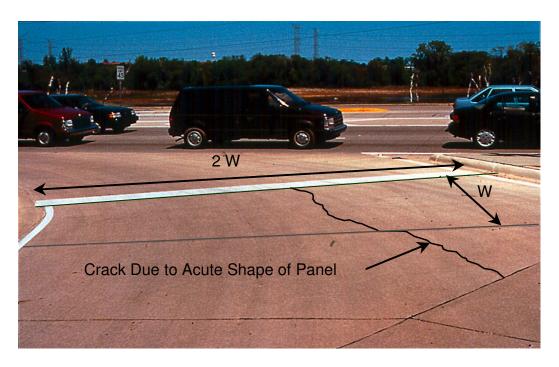


Photo 28. Cracking that will result when PCCP slabs are geometrically incorrect. Large, irregular, or rectangular slabs will crack (Photo courtesy of American Concrete Paving Association).

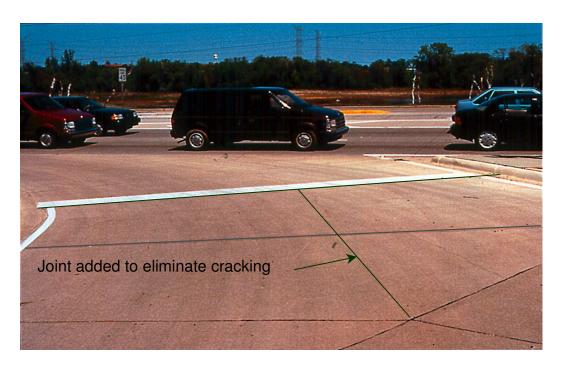


Photo 29. Jointing to eliminate cracking from irregularly shaped areas (Photo courtesy of American Concrete Paving Association).

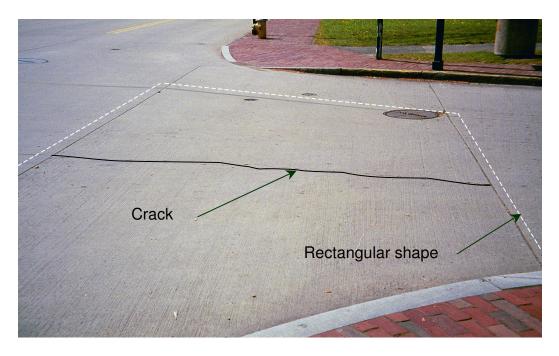


Photo 30. Cracking that results with rectangular slabs (Photo taken in Newport, Rhode Island).

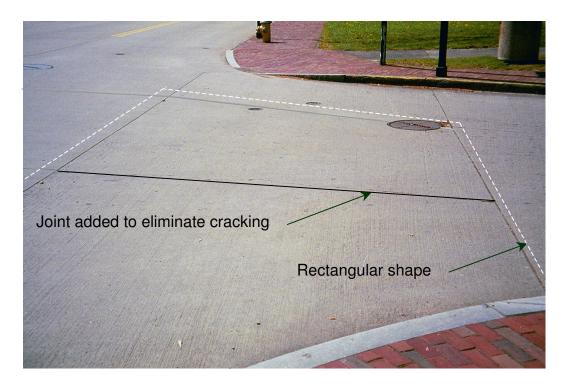


Photo 31. Correct jointing to eliminate cracking for rectangular areas (Photo taken in Newport, Rhode Island).

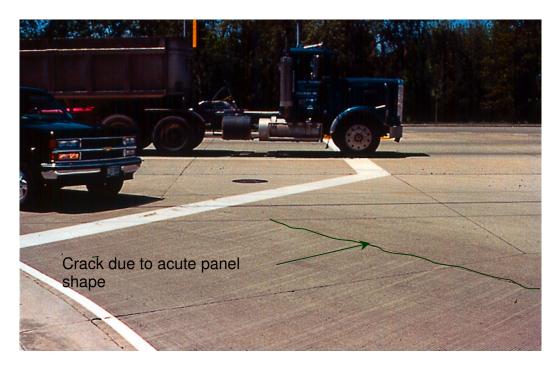


Photo 32. Cracking that resulted from an irregularly shaped panel (Photo courtesy of American Concrete Paving Association).

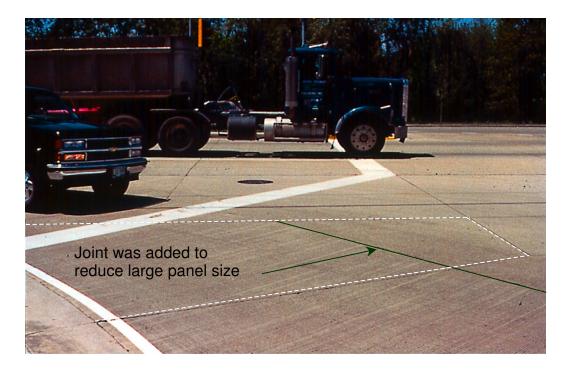


Photo 33. Irregularly shaped slab that has been jointed to reduce crack potential (Photo courtesy of American Concrete Paving Association).

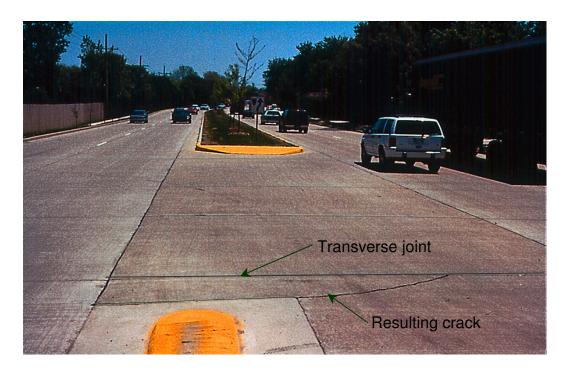


Photo 34. Crack developed when joints were not aligned with channelization. (Photo courtesy of American Concrete Paving Association).



Photo 35. Alignment of joints with channelization to eliminate cracking. (Photo courtesy of American Concrete Paving Association).



Photo 36. Corner cracking that occurs with joints intersecting at acute angles (angles of less than 60 degrees) (SR 90, Broadway Avenue and Thierman Street intersection).



Photo 37. Joint intersection at a concrete bridge approach. Joints do not intersect at acute angles (SR 90, Broadway Avenue and Thierman Street intersection).



Photo 38. Incorrectly jointed manhole boxout (Photo courtesy of American Concrete Paving Association).



Photo 39. Correct placement of a utility boxout to intersect joints (Photo courtesy of American Concrete Paving Association).



Photo 40. Cracking at a manhole due to poor joint planning (Photo courtesy of American Concrete Paving Association).



Photo 41. Skewed jointing which would eliminate cracking (Photo courtesy of American Concrete Paving Association).



Photo 42. Cracking at a manhole due to poor joint planning (Photo taken in Newport, Rhode Island).



Photo 43. Jointing a manhole to eliminate cracking (Photo taken in Newport Rhode Island).



Photo 44. Placement of joints to prevent cracking for an intersection with multiple manholes (Photo courtesy of American Concrete Paving Association).



Photo 45. Proper alignment of a catch basin with a transverse joint. However, the transverse joint was only sawed across one lane for this two-lane pour. A sympathy crack resulted (SR 90, Broadway Avenue and Thierman Street intersection).



Photo 46. Sympathy crack that extended across five lanes of roadway. The initial pour was two lanes wide, and cracking likely occurred because of late sawing (SR 90, Broadway Avenue and Thierman Street intersection).



Photo 47. Sympathy crack resulting from a transverse joint intersecting a panel at mid length (Photo taken in Newport, Rhode Island).




Photo 48. Jointing across an adjacent panel to reduce a sympathy crack (Photo taken in Newport, Rhode Island).

# Construction and Contraction Joint Terminology

Two basic joint types must be considered:

- construction joints (transverse and longitudinal)
- contraction joints (transverse and longitudinal).

The following sections clarify the use for each.

#### **Construction Joints - Transverse**

Construction joints are used where paving is stopped (such as at the end of a workday). Because of the use of transverse header boards to form the terminus of paving, the two slab faces at the joint are relatively smooth. For this reason, little or no aggregate interlock exists, and dowel bars are required as noted in the WSDOT Construction Manual [7] and Standard Plan A-1 [8]. Dowel bar placement for construction joints is shown in Figure 4 and Photo 49. WSDOT

uses 1 ½-inch-diameter dowel bars 18 inches long, spaced at 12-inch centers. Dowel bars should be spaced a minimum of 6 inches from longitudinal construction or contraction joints, as noted in Standard Plan A-1.




Figure 4. Construction joint (longitudinal or transverse).



Photo 49. Construction joint placed at the end of paving (SR 395, Hastings Road to Mile Post 172 PCCP paving project).

### **Construction Joints - Longitudinal**

Longitudinal construction joints are constructed between adjacent lanes that are paved separately. Epoxy coated deformed No. 5 steel bars 32 inches long spaced 36 inches center-to-center are used to "tie" the lanes together. Tie bars should be placed 18 inches from transverse

joints to avoid conflict with doweled transverse joints. Figure 5 shows the use of tie bars as described in WSDOT Standard Plan A-1. Photo 50 shows a longitudinal construction joint.




Figure 5. Longitudinal construction joint placed between adjacent lanes. Note the smooth joint through the concrete section.



Photo 50. Tie bars placed to straddle the transverse contraction joint and avoid conflict with doweled transverse joints (SR 90, Broadway Avenue and Thierman Street intersection).

#### **Contraction Joints - Transverse**

Transverse contraction joints run perpendicular to the pavement centerline and are essential to control cracking from stresses caused by shrinkage, thermal contraction or expansion, and moisture or thermal gradients. Typically these joints are at a right angle to the pavement centerline and edges. Since 1993, WSDOT PCCP paving projects have used dowel bars at transverse contraction joint locations to reduce the potential for joint faulting. Because of construction considerations, skewed joints are not necessary when dowel joints are specified. Skewed joints require complex jointing layouts.

A reasonable joint spacing when dowels are used is 12 feet; however, contraction joint spacings of up to 15 feet can be used. The contraction joint spacings are, in part, based on previous PCCP performance in Washington State, as described in the WSDOT Pavement Guide, Volume 2 [9].

Dowel bar placement for transverse joints is shown in Figure 6 and Photo 51 (the dowel bars are 1 ½ inch diameter by 18 inches long, spaced at 12-inch centers). Dowel bars should be spaced a minimum of 6 inches from longitudinal construction or contraction joints, as noted in Standard Plan A-1.




Figure 6. Transverse contraction joint. Note the crack contributing to aggregate interlock through the concrete section.



Photo 51. Dowel bars placed on transverse joints. Note that tie bars used on the longitudinal joints are spaced away from the dowel bar assembly (Boone and Monroe intersection, City of Spokane, Washington).

### **Contraction Joints - Longitudinal**

Longitudinal contraction joints are sawed between adjacent lanes that are paved together. Epoxy coated deformed No. 5 steel bars 32 inches long, spaced 36 inches center-to-center, are used to "tie" the lanes together. Tie bars should be placed 18 inches from transverse joints to avoid conflict with doweled transverse joints. Figure 7 illustrates the use of tie bars, as described in WSDOT Standard Plan A-1. Photo 52 shows both a longitudinal contraction joint and longitudinal construction joint.




Figure 7. Longitudinal contraction joint placed between adjacent lanes. Note the crack through the concrete section.



Photo 52. Longitudinal construction joints with exposed tie bars are shown on the left. Longitudinal contraction joints placed in tie bar baskets prior to concrete placement are shown on the right (SR 2, Division Street and Francis Avenue intersection).

### Placement of Dowel Bars and Tie Bars at PCCP Intersections

This section details the placement of dowel bars and tie bars within the physical area of the intersection. The areas of the intersection with cross traffic and areas within the approach or leave legs will be addressed.

Placement of dowel and tie bars may vary depending upon the traffic level. Typically, WSDOT has placed dowel bars on the transverse joints in the direction of the heavier traffic. Dowel bars may be placed on transverse joints in the direction of the lighter traffic, depending on

the traffic level. In cases where the lighter traffic is significantly less than the heavier traffic, tie bars used on the transverse joints is sufficient.

The following discussion highlights placement of dowel bars and tie bars for

- heavy cross traffic both directions
- heavy cross traffic in one direction
- intersection approach and leave legs.

Appendix H provides additional details from several intersections built by WSDOT.

### **Intersections with Heavy Cross Traffic - Both Directions**

WSDOT recommends placement of 1 ½-inch-diameter by 18-inch-long dowel bars at all joints with heavy cross traffic, as noted in Figure 8. A spacing of 18 to 24 inches from the edge of a panel to the first dowel bar along either of the joints will avoid dowels being placed too close together. Dowel bars on the other adjacent joint begin 6 inches from the panel edge. Most intersections built by WSDOT have included dowels placed on all joints within the cross traffic area (as illustrated in Figure 8).

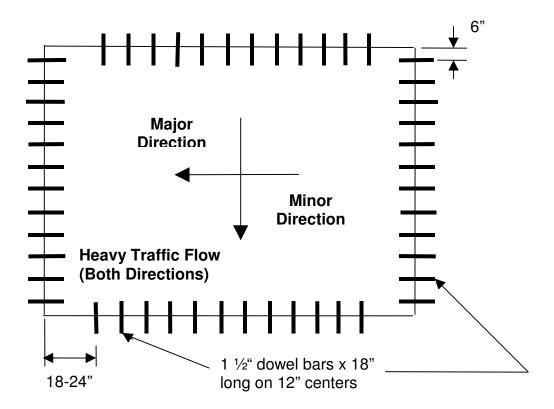


Figure 8. Dowel bar placement used where heavy traffic crosses in both directions.

Photos 53 and 54 show the placement of dowel bars across adjacent joints for areas of heavy cross traffic.



Photo 53. Alignment of dowel bars for the intersection area with heavy cross traffic (SR 2, Division Street and Francis Avenue intersection).

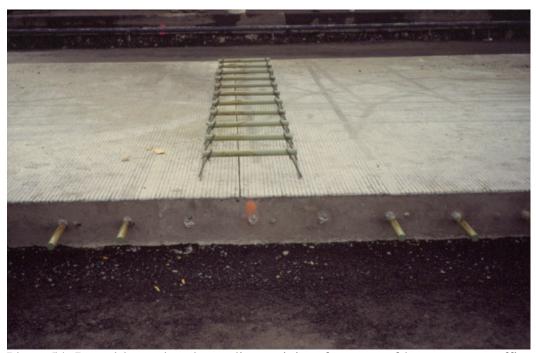


Photo 54. Dowel bars placed on adjacent joints for areas of heavy cross traffic. Note that dowel bars are spaced to avoid conflicting dowels at the panel corners (Boone and Monroe intersection, City of Spokane, Washington).

# **Intersections with Heavy Cross Traffic - One Direction**

Placement of dowel and tie bars on intersections with heavy traffic flow in one direction is shown in Figure 9. In this instance, transverse joints in the direction of the heavy traffic receive 1½-inch by 18-inches-long dowel bars placed on 12-inch centers. No. 5, 32-inches-long tie bars placed on 36-inch centers are placed in transverse joints in the direction of light traffic. Spacing the first tie bar a minimum of 18 inches from the edge of a panel will eliminate conflicts with tie and dowel bars at panel corners. Dowel bars should begin 6 inches from the panel edge.

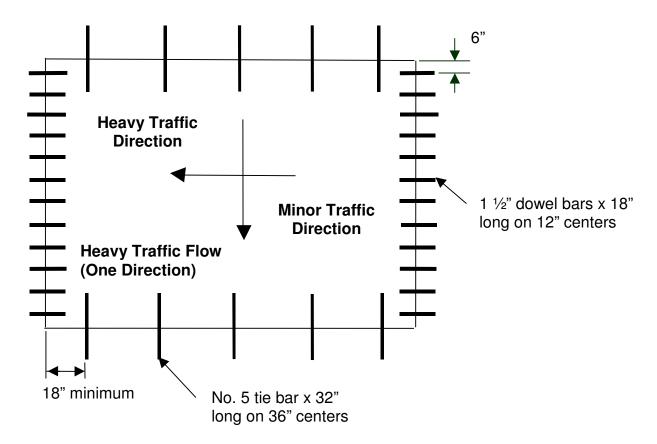


Figure 9. Dowel bar placement used where heavy traffic crosses in one direction.

### **Intersection Approach and Leave Legs**

Placement of dowel bars and tie bars on approach legs is shown in Figure 10. In these instances, No. 5, 32-inch-long tie bars are placed along longitudinal joints on 36-inch centers. 1 ½-inch dowel bars 18 inches long on 12-inch centers are placed on transverse joints.

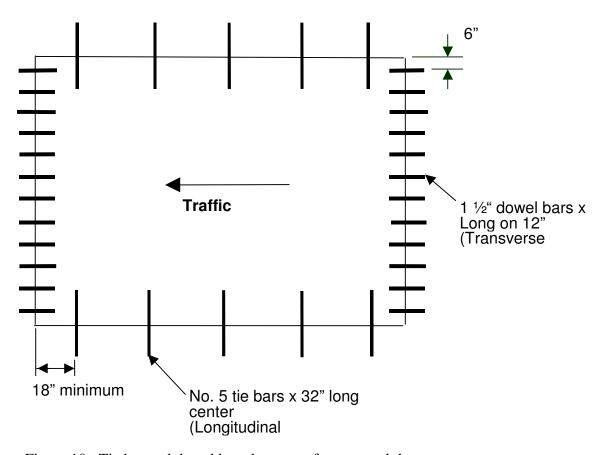


Figure 10. Tie bar and dowel bar placement for approach legs.

Photo 55 shows dowel bars placed in areas of cross traffic and tie bars used on the approach leg of the intersection. Photo 56 shows placement of the dowel and tie bar baskets before the PCCP pour.



Photo 55. Alignment of dowel bars for areas with cross traffic. Tie bars are placed on approach legs (SR 291, Francis Avenue with Maple and Ash Streets intersection).



Photo 56. Placement of dowel and tie bar cages before the PCCP pour. The baskets have not yet been properly aligned (SR 2, Division Street and Francis Avenue intersection).

# **Improperly Placed Dowel and Tie Bars**

Photos 57 to 60 provide examples in which dowel bars or tie bars are improperly placed. The most common problems include placing tie or dowel bars too near or at joints and placing bars that conflict with each other.



Photo 57. Placement of a tie bar at a joint location. Correct placement should be about 18 inches from the joint (SR 195, Mile Post 44.40 to Bridge 195/34 PCCP paving project).



Photo 58. Tie bar placed over a dowel bar at a transverse joint (SR 195, Mile Post 44.40 to Bridge 195/34 PCCP paving project).



Photo 59. Dowel bars used for a construction joint are placed too close to the existing concrete (SR 90, Broadway Avenue and Thierman Street intersection).



Photo 60. Dowel and tie bars should not extend into the boxout area. Boxouts are placed to isolate the utility from differential movement between the utility and the PCCP (SR 2, Division Street and Francis Avenue intersection).

On past concrete intersection projects, WSDOT recommended that dowel and tie bars should not be placed within 2 feet of new signal detection loops. However, recent technology shows that this requirement may not be necessary, as background measurements can account for steel placed near or over induction loops. The manufacturer's recommendations should be followed. While WSDOT does not typically use fiberglass dowel bars for transverse joints, fiberglass dowel bars may be used adjacent to the detection loop if dowel bars are necessary.

### **Pavement Sections**

The PCCP pavement sections for the intersections in this study were designed according to WSDOT policy, as detailed in Volumes 1 and 2 of the WSDOT Pavement Guide [9,10]. The PCCP section, including the base layer, was designed for 40-year ESALs. PCCP thickness ranged from 9 to 12 inches, as shown in Table 20. Subgrade for the intersections consisted of sandy gravels and silty sands. The subgrade resilient modulus for the intersections built by WSDOT ranged from 15,000 to 20,000 psi.

WSDOT has found that intersection reconstruction does not lend itself readily to placement of asphalt concrete base (Class E) beneath the PCCP. A primary reason is that PCCP intersections are often built in incremental pieces. This incremental work requires placement of the asphalt treated surfacing in small and irregular areas. Space is generally limited for paving equipment. Another reason is that the placement of asphalt treated surfacing adds an additional operation, thus slowing construction. These difficulties were experienced on the Pines Road and Sprague Avenue intersection.

Table 20. Pavement sections with associated ESALS used on WSDOT PCCP pavements.

SR	Year Const.	Intersection	PCCP Thickness (inch)	Base Thickness (inch)	Base Type	40 Year ESALs
27	1994	Pines Rd. and Sprague Ave.	10	4	$ATB^2$	20,000,000
90	1996	Broadway Ave. and Thierman St.	10	Existing <sup>1</sup>	Crushed Stone	30,000,000
2	1997	Division St. and Francis Ave.	10	Existing <sup>1</sup>	Crushed Stone	10,000,000
291	1997	Francis Ave./Maple and Ash St.	9	Existing <sup>1</sup>	Crushed Stone	9,000,000
27	1998	Pines Rd. and Broadway Ave.	10	Existing <sup>1</sup>	Crushed Stone	20,000,000
395	1998	SR 395 and 19 <sup>th</sup> Ave.	12	Existing <sup>1</sup>	Crushed Stone	53,000,000
2	1998	Division St. and Third Ave.	10	Existing <sup>1</sup>	Crushed Stone	16,000,000

Existing untreated aggregate surfacing. The existing untreated surfacing ranged from 4.7 to 8 inches in depth.

Placement of the asphalt concrete base on the Pines Road and Sprague Avenue intersection caused WSDOT to evaluate whether the existing crushed stone base (CSBC) need be removed and replaced with asphalt concrete base. Visually, the existing crushed surfacing appeared to be in very good condition.

On the following project, Broadway Avenue to Thierman Street, the asphalt concrete base, as designed in the plans, was changed to allow use of the existing crushed stone base. This occurred following removal of the existing asphalt, which revealed that the existing aggregate base was in sound condition. WSDOT has found that after excavation of the existing ACP, a small shim or addition of crushed stone to level the base surfacing followed by proper compaction is sufficient to prepare the base for placement of PCCP. As a minimum, roadway sections should be designed to meet frost penetration criteria, which can only be established by thorough pavement investigation. Use of the existing base material both facilitates construction and provides a cost savings.

WSDOT does not feel that performance problems will be encountered by using crushed stone base in lieu of asphalt concrete base. PCCP performance in Eastern Washington, where ESAL

<sup>&</sup>lt;sup>2</sup> Asphalt Treated Base (ATB).

levels are relatively low and the subgrades are well drained, has been excellent, as is the case for the intersections reconstructed so far.

#### Pavement Profile

For the most recently constructed intersections, WSDOT has been cautious with profiles in contract plans. WSDOT provided a profile in the Sprague Avenue and Pines Road and Broadway Avenue and Thierman Street intersections but deviated from them because of field adjustments that became necessary. These deviations included matching the profile to the existing curbing and providing a cross-slope crown to match the staging sequences with paving operations. A change order was required on the Broadway Avenue and Thierman Street intersection to provide the contractor with additional compensation because of field changes.

However, with the software available today, there is no reason that profiles cannot be included. The key to a successfully constructed intersection is that sufficient effort is included during project development to ensure that a workable profile can be obtained with the existing conditions. Making the assumption that a profile can be obtained during construction can produce mismatched grades, leading to drainage and notable smoothness problems.

The profiles of the as-constructed intersections have been established to match existing curb grades. Removal of existing pavement adjacent to existing curbing has not been a problem, and generally only small portions of curb and sidewalk are replaced to accommodate road approaches or settled areas.

Cross slope for the direction of heavy travel typically starts at 2 percent at the approach legs and tapers down to 1 percent as the legs approach the radius returns of the intersection. Through the intersection, the cross slope continues at 1 percent and then increases back to 2 percent through the leave leg. The cross slopes for the direction of heavy travel for PCCP intersections are illustrated in Figure 11. WSDOT has built some intersections with a 2 percent slope through the length of the PCCP intersection, however, notable ride problems were detected for cross traffic. A 1 percent or less cross slope is recommended through the intersection.

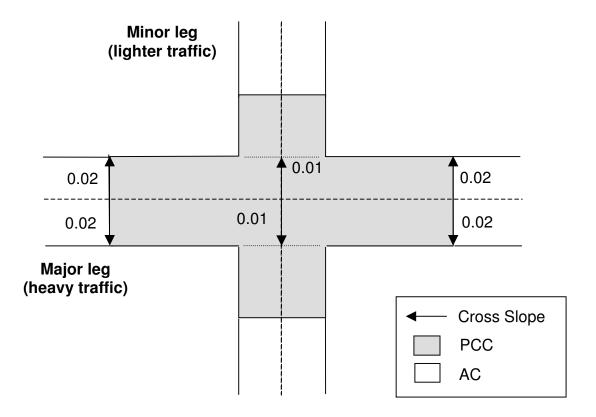


Figure 11. Cross slopes through a typical PCCP Intersection.

The profile and cross slope for the direction of lighter travel or approaches is best illustrated in Photo 61. The profile, in this instance, basically matches the existing roadway profile and ties into the cross slope from the mainline or heavily traveled direction. A match point into the mainline at the curb line or edge of lanes works well.

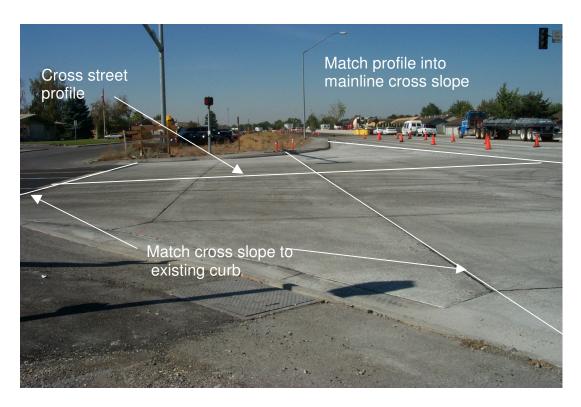


Photo 61. Illustration of the profile and cross slope for the direction of lighter traffic. (SR 395 and Yelm Street Intersection, Kennewick, Washington).

Establishing grades in the field requires surveying the entire intersection and developing the grades before setting the first form. However, WSDOT inspectors have found that achieving a workable grade is not an exact science. Small angle points are necessary where grades intersect or where staging necessitates breaks from separate pours or limitations in paving equipment. In most cases, small angle points within the intersection area will not jeopardize the ride, as traffic speeds are typically lower through intersections. Grades that are established during the design phase will require field adjustments, and slight angle points will be necessary.

# Special Provision

A special provision that highlights the important elements for PCCP intersection construction is included in Appendix I. This special provision was written to complement WSDOT's Year 2000 Standard Specifications for Road, Bridge and Municipal Construction. The special provision in Appendix I is a summary of the special provisions that have been included on past PCCP intersection projects that have resulted in good construction.

#### **PCCP Materials**

In previous special provisions for intersection reconstruction, contract plans included mix proportions for the concrete. Since construction of these intersections, the Standard Specifications for Road, Bridge and Municipal Construction [11] has been revised, and contract plans should not typically provide mix proportions. The 2000 Standard Specifications places the responsibility for the mix design on the contractor, with WSDOT listing the requirements for opening the roadway to traffic. A sample special provision showing the requirement for opening to traffic can be seen in Appendix I. The special provision can be easily modified when early opening to traffic is required.

WSDOT has typically used Type I or II cement for PCCP roadways. Performance has been excellent, with some pavements on Interstate 5 and 90 exceeding the original design ESALs by a substantial amount. WSDOT has been experimenting with fast track mixes that use Type III cement for intersection construction. Fast Track mixes develop strength rapidly and are beneficial when early opening of the pavement is necessary, as is the case with urban intersections. WSDOT has typically required a fast track paving mix when the road must be opened to traffic in 24 to 72 hours.

Figure 12 shows the compressive and flexural strength gains for a PCCP mix [12] with 705 pounds per cubic yard of Type III cement that has been used on several intersections. Typically, a compressive strength of 2,500 psi, as required by the 2000 Standard Specification for opening the roadway to traffic, has been met or exceeded in 12 to 15 hours. For comparison, a PCCP mix [13] using 565 pounds of Type I-II cement is shown in Figure 13. The Type I-II cement provides sufficient strength to open the roadway in 48 to 72 hours. WSDOT estimates that a concrete mix with 705 pounds of Type I-II cement would allow opening to traffic in 24 to 36 hours.

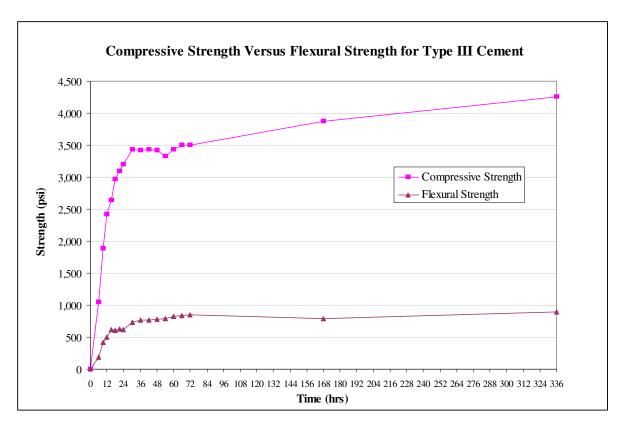


Figure 12. Comparison of compressive and flexural strength gain for a Type III mix with 705 pounds of cement per cubic yard used on PCCP intersection projects (courtesy ACME Construction and Materials, Spokane, Washington).

The intersection contracts to date have all included provision for a PCC 24-hour cure time (to achieve a minimum compressive strength of 2,500 psi). However, in most instances, traffic has not been placed on the roadway within 24 hours following paving. Part of the reason is that staging does not necessarily open a large enough area to move traffic completely to the new pavement. Typically, it has been easier to complete a continuous section of roadway and then move traffic onto the new concrete rather than shifting traffic back and forth through short segments. For the majority of the intersections constructed so far, Type I-II cement would have provided sufficient cure time to allow a compressive strength of 2,500 psi for opening to traffic.

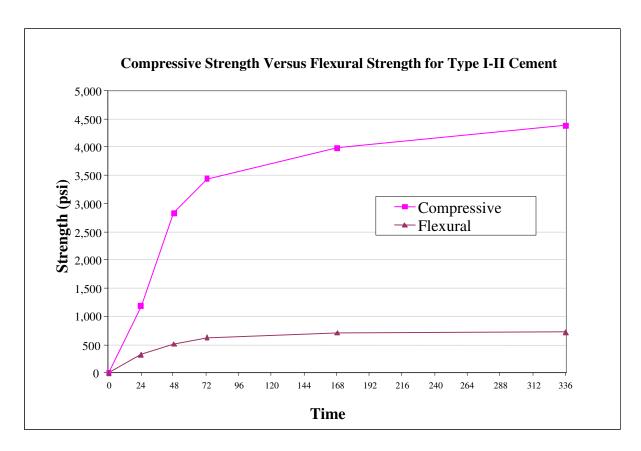


Figure 13. Comparison of compressive and flexural strength gain for a typical Type I-II mix with 565 pounds per cubic yard used on WSDOT paving projects (courtesy ACME Construction and Materials, Spokane, Washington).

WSDOT could save the additional expense of the Type III cement by limiting its use to closure pours or where traffic will be moved onto concrete within 24 hours as specified in contract plans. The cost savings for using 705 pounds of Type I-II cement in lieu of 705 pounds of Type III cement is approximately \$2.11 per cubic yard, or \$0.59 per square yard, for a 10-inch-thick PCCP section (costs are based on \$80 per ton for Type I-II cement and \$86 per ton for Type III cement). The cost savings for using 565 pounds of Type I-II cement in lieu of 705 pounds of Type III cement is approximately \$7.72 per cubic yard, or \$2.13 per square yard, for a 10-inch-thick PCCP section. WSDOT will continue monitoring the performance of Type III mixes for long term-performance.

#### **Construction Time**

The construction times experienced by WSDOT to reconstruct an existing intersection are shown in Table 21. Time requirements on complete intersection projects were easiest to determine, as the contract days required were charged to the contract. A reasonable estimate was made from contract documents for the time required for intersections that were part of larger ACP resurfacing projects. The number of working days allowed by the contract documents and the number of contract days required to construct the intersection are both shown. In some cases the contractor chose to work weekends, which are not reflected under the number of contract days. An estimate of the number of actual days required, which includes any additional work done on weekends, is shown under actual days required.

Table 21 shows that intersection reconstruction for four of the ten intersections took 30 to 40 working days. These four intersections were reconstructed under traffic. By comparison, the intersection on SR 27, Pines Road and Broadway Avenue, required only 16 days. This substantial reduction was due to the partial traffic closure on Broadway Avenue. The Yelm

Street, Clearwater Avenue, and West Kennewick Avenue intersections only took 9, 12, and 13 days, respectively, because of the use of a combination of full closures and construction under traffic. SR 2, Division Street and Third Avenue, under full closure, required three contract days. However, only one approach leg was reconstructed.

Table 21. Summary of days needed to construct PCCP intersections.

SR	Intersection	Working Days Allowed	Contract Days Required	Actual Days Required <sup>3</sup>	Actual Work Period (Intersection Reconstruction)
27	Pines Rd. and Sprague Ave.	30	36	37	August 23, 1994 to November 17, 1994
90	Broadway Ave. and Thierman St.	47	39	42	April 15, 1996 to May 29, 1996
2	Division St. and Francis Ave.	126 <sup>1</sup>	34.5	34.5	September 8, 1997 to October 24, 1997
291	Francis Ave./ Maple and Ash St.	126 <sup>1</sup>	30	30	July 7, 1997 to August 14, 1997
27	Pines Rd. and Broadway Ave.	37 <sup>1</sup>	16	16	May 2, 1998 to June 1, 1998
395	SR 395 and 19 <sup>th</sup> Ave.	$80^{2}$	18	18	September 16, 1998 to November 13, 1998
2	Division St. and Third Ave.	45	3	4	July 28, 1998 to August 3, 1998
395	Yelm Street	85 <sup>1</sup>	7	9	September 11, 2000 to September 19, 2000
395	Clearwater Avenue	85 <sup>1</sup>	10	12	September 20, 2000 to October 3, 2000
395	West Kennewick Avenue	85 <sup>1</sup>	11	13	September 22, 2000 to October 8, 2000

<sup>&</sup>lt;sup>1</sup> Total number of days for the PCCP intersection and larger ACP resurfacing project.

<sup>&</sup>lt;sup>2</sup> This project included four intersections.

<sup>&</sup>lt;sup>3</sup> Actual days required includes additional days used for weekend work but not counted as contract days.

Following construction on SR 2, Division Street and Francis Avenue, the contractor noted that a 25 percent reduction in contract days required would have been realized had they removed the existing ACP from the entire intersection and allowed traffic to run on the existing crushed surfacing. This likely would not have been a problem, since the existing aggregate base and subgrade were excellent. Some maintenance would have been required.

Table 22 is provided to show the time period from the approximate beginning of excavation to the final pour for the PCCP roadway. The impacts to traffic occurred mainly during this period. Once the PCC was placed, the impacts to traffic caused by activities such as joint sealing or striping were minimal. Typically, the roadway excavation and concrete placement period was well within the contract period, which included other work such as extruded curbing, sealing joints, and cleanup.

Table 22. Summary of construction dates for excavation and concrete pour and the contract period.

SR	Intersection	PCCP Excavation and Pour Period	Contract Period (Intersection Reconstruction)
27	Pines Rd. and Sprague Ave.	September 9, 1994 to September 21, 1994	August 23, 1994 to November 17, 1994
90	Broadway Ave. and Thierman St.	April 20, 1996 to May 14, 1996	April 15, 1996 to May 29, 1996
2	Division St. and Francis Ave.	September 12, 1997 to October 22, 1997	September 8, 1997 to October 24, 1997
291	Francis Ave./ Maple and Ash St.	July 18, 1997 to August 14, 1997	July 7, 1997 to August 14, 1997
27	Pines Rd. and Broadway Ave.	May 6, 1996 to May 21, 1996	May 2, 1998 to June 1, 1998
395	SR 395 and 19 <sup>th</sup> Ave.	September 16, 1998 to November 13,1998	August 21, 1998 to April 9, 1999
2	Division St. and Third Ave.	July 28, 1998 to August 3, 1998	July 28, 1998 to August 3, 1998
395	Yelm Street, Clearwater Avenue, and West Kennewick Avenue	September 12, 2000 to October 8, 2000	September 12, 2000 to October 8, 2000

## Concrete to Asphalt Transitions

WSDOT has not experienced a significant problem with bumps at ACP and concrete transitions. However, bumps as seen in Photo 62 can occur. Some reasons include ACP rutting or shoving, or the movement of slabs over crushed stoned caused by impact loading. The bumps in Photo 62 were caused by the downhill plastic flow of AC as it transitioned onto the concrete in the warm temperatures of Eastern Washington.



Photo 62. Bump at the transition of ACP with PCCP (Hamilton Avenue and Foothills Boulevard, City of Spokane, Washington).

WSDOT typically backfills any adjacent excavation at the transition of ACP and concrete structures with ACP and crushed stone to match or exceed the thickness of the concrete. While compaction is difficult to measure for such small areas, WSDOT takes extra efforts to ensure that both the crushed surfacing and the ACP are well compacted. Most projects have also included 1.8- to 2.4-inch overlays to tie the existing ACP with the newly placed PCCP.

Figure 14 demonstrates an impact slab for newly placed pavement recommended by the ACPA [4]. WSDOT has not tried this design but is considering including it on some upcoming intersection work. Additional concrete to asphalt transitions can be found in "Concrete Intersections – A Guide for Design and Construction." [4]




Figure 14. Asphalt to concrete transition (details courtesy of American Concrete Paving Association).

#### Channelization - Jointing

The correct jointing for channelization placed on top of PCCP is shown in photos 63 and 64. Channelization without relief joints will crack at the PCCP transverse locations because of contraction and expansion of the concrete roadway. Traffic islands placed on PCCP should be jointed in a similar manner.

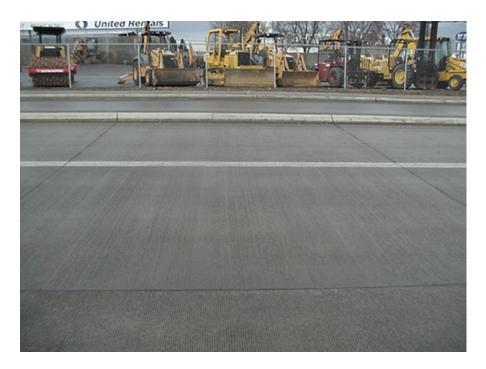


Photo 63. Transverse joints across the PCCP panels and channelization are aligned (SR 90, Sprague Avenue and Fancher Street intersection).



Photo 64. Jointing concrete channelization across a transverse joint (SR 2, Division Street and Francis Avenue intersection).

## Traffic Detection Systems

The traffic detector systems for reconstructed intersections include the following:

- preformed induction loop system
- video detection system

The choice for either technology has been up to the region's traffic office. The Eastern Region has used both but is currently leaning toward preformed induction loops for future PCCP intersection projects. The Eastern Region has experienced better reliability with preformed induction loops, particularly in adverse weather. Table 23 shows which technology has been used for the fifteen PCCP intersections built on WSDOT Highways.

Table 23. Detection systems used on PCCP Intersections.

SR	Intersection	Region	Detector Type
97	Dolar Way Intersection	South Central	Stop Signs
27	Sprague Avenue and Pines Road	Eastern	Preformed Induction Loop
90	Broadway Avenue and Thierman Street	Eastern	Preformed Induction Loop
90	Fancher Road and Sprague Avenue	Eastern	Preformed Induction Loop
2	Division Street and Francis Avenue	Eastern	Video Camera
291	Francis Avenue/Maple and Ash Streets	Eastern	Preformed Induction Loop
27	Broadway Avenue and Pines Road	Eastern	Preformed Induction Loop
395	SR 395 and 7 <sup>th</sup> , 10 <sup>th</sup> , Avenue	South Central	Video Camera
395	SR 395 and 10 <sup>th</sup> , 19 <sup>th</sup> and 27 <sup>th</sup> Avenues	South Central	Video Camera
2	Division Street and Third Avenue	Eastern	Timed Signals
395	SR 395 and Yelm Street, Clearwater Avenue and West Kennewick Avenue	South Central	Preformed Induction Loop

Plan J-8a, along with contract special provisions and contract plans. Round or rectangular induction loops can be used. A sample special provision that could be used for traffic is provided in Appendix J. Vendors with acceptable products are also listed.

Induction loop placement methods are sawed or embedded, or placed underneath the PCCP. The preferred method within the Eastern Region is to place induction loops underneath the PCCP, 3 inches into the crushed stone base. Either sand or crushed stone can be placed over the induction loops. Photo 65 shows the preformed detection loops placed on the crushed stone base at the SR 395 and Yelm Street intersection in Kennewick.



Photo 65. Placement of preformed induction loops prior to placing concrete on SR 395 at the SR 395 and Yelm Street intersection.

On past concrete intersection projects, WSDOT recommended that dowel and tie bars not be placed within 2 feet of new signal detection loops. However, recent technology has shown that

this requirement may not be necessary. The manufacturer's recommendations should always be followed. While WSDOT does not typically use fiberglass dowel bars for transverse joints, fiberglass dowel bars may be used adjacent to the detection loop if dowel bars are necessary.

#### Coordination with Local Agencies and Utility Companies

PCCP intersection reconstruction typically involves some type of utility upgrading before the placement of the concrete. Therefore, involvement with local agencies such as cities and counties and local utility companies should be coordinated as early as possible to facilitate both the planning and construction stages.

Coordination during the planning stage will prevent other agencies or utilities from removing and patching sections of a newly placed PCCP pavement. Photos 66 and 67 show two intersections where coordination was marginal. Coordination also has the benefit of allowing any utility construction to occur during the intersection project. Impacts to traffic occur only once, rather than months before or after the intersection reconstruction.



Photo 66. Utility work and resulting AC patch at a PCCP intersection (Photo taken in Newport, Rhode Island).



Photo 67. Utility trenches cut in PCCP pavement at an intersection (Photo taken in Tacoma, Washington).

PCCP Intersections Design and Construction in Washington State

#### CONSTRUCTION CONSIDERATIONS

Other than the limitations of placing concrete under traffic with constricted working areas, the construction of PCCP intersections is straightforward and follows Section 5-05 of the 2000 Standard Specification for Road, Bridge and Municipal Construction [11], supplemented by the special provision provided in Appendix I. The basic steps involved with PCCP intersection construction include the following:

- removing or planning the existing pavement
- preparing the grade
- setting forms
- placing in-place pavement fixtures (objects that will be placed into the PCCP)
- other considerations prior to placing the PCCP
- placing the concrete
- finishing the concrete
- texturing the concrete
- curing the concrete
- sawcutting the pavement
- sealing sawed contraction joints
- placing asphalt adjacent to the new PCCP
- channelization jointing
- opening to traffic.

#### Removing or Planning the Existing Pavement

The method of removing the existing roadway largely depends on the equipment and experience of the contractor. Two commonly used methods are cold milling and breaking up the

roadway with bulldozers, loaders, or backhoes and then loading the material into dump trucks. If the existing roadway is concrete, contractors sometimes choose to lift sections and transport them off the roadway.

Cold milling has become an excellent method, provided that the urban intersection is large enough to warrant continual operation. A variety of cold milling machines are available. Some cold milling machines can remove up to 6 inches in one pass, while others can remove the entire thickness of existing ACP plus additional crushed stone material. In some instances, the excavation depth can be a foot or greater. Cold milling machines can provide excellent grade control by removing both ACP and crushed stone materials to obtain the desired profile elevation.

On the SR 90, Broadway Avenue to Thierman Street intersection, staging was complex and divided into small removal areas. The contract plans limited the excavation method to the use of a backhoe and dump trucks because of the staging requirements. Weaver Construction Company of La Grande, Oregon, proposed and provided a more efficient operation by using cold milling to excavate the entire roadway in one operation. Construction time and impacts to traffic were reduced. Traffic was run successfully on the existing crushed stone, with little maintenance required.

Factors that influence the removal method include intersection size, work hours allowed, underground utilities, and environmental factors such as noise and dust. Restrictions placed on construction from any or all of these factors will cause the contractor to choose the most productive method for a particular intersection. Construction for WSDOT intersections have included both cold milling and excavation with backhoes, as can be seen in photos 68 and 69.



Photo 68. Roadway Excavation on SR 2, Division Street and Francis Avenue intersection.



Photo 69. Planing bituminous pavement as a method of asphalt removal (SR 395, SR 395 and Yelm Street intersection).

## Preparing the Grade

Preparation of the base and subgrade at an urban intersection requires the same care and construction practices as any newly constructed roadway. Construction practices as noted in the WSDOT Standard Specifications should be utilized to ensure that the underlying support beneath the PCCP will provide a long life roadway. Photo 70 shows compaction control taken at the SR 2, Division Street and Francis Avenue intersection.



Photo 70. Ensuring density for underlying surfacing before PCCP placement (SR 2, Division Street and Francis Avenue intersection).

Following removal of the asphalt, all areas that show failed subgrade or base material should be addressed. Removal and replacement of the distressed material should be done if necessary. The placement of additional crushed stone directly on visibly poor material does not provide the uniform support required by PCCP. The projected 40-year design life will be reduced when a sound subgrade or base is not established.

For newly constructed intersections, crushed stone base is typically placed uniformly on a geotextile laid on the prepared subgrade. WSDOT pavement designs have typically provided 4 to 6 inches of crushed surfacing base course (CSBC). Additional thickness may be necessary to meet frost design criteria. WSDOT does not typically use a thickened PCCP edge design, so grading the crushed stone to allow thickened PCCP edges has not been necessary.

Reconstruction of an existing intersection will typically utilize the existing crushed stone. Additional CSBC may be required as a shim to bring the base layer to the proper grade. Compaction equipment needs to match the size of the intersection. Compaction of the CSBC layer should be a priority, as inadequate compaction will lead to PCCP performance problems.

Special attention should be given to compaction around any utility installation such as sewer, telephone, and power conduits, water lines, and any type of manhole, catch basin, or valve. The lack of compaction at or adjacent to these installations may leave soft spots and lead to excessive settlement of the crushed surfacing layer (see Photo 71). Poor compaction around utility installations will eventually jeopardize the performance of the PCCP intersection.



Photo 71. Excessive settlement in the crushed stone or subgrade, causing cracking in PCCP (Photo taken in Newport, Rhode Island).

Controlled density fill (CDF) materials provide an alternative to crushed stone backfill, as the CDF is flowable around the installations and does not require compaction. CDF is stiff enough (< 100 psi compressive strength) to prevent settlement, yet it is friable enough to allow removal with a backhoe or other type of excavator. CDF should be limited to backfilling below the crushed stone base layer.

Except for the intersection on SR 27, Pines Road and Sprague Avenue, all PCCP intersections built by WSDOT have been placed on crushed stone. As was discussed in Design Considerations, ACP may be used as an alternative, depending upon construction limitations. The placement of curbs and gutters for stormwater drainage systems in urban areas makes permeable bases, such as asphalt treated permeable base (ATPB) impractical. Curbs and gutters with inlets to storm sewer systems will typically address drainage concerns.

#### Setting Forms

PCCP intersections require some type of fixed-form construction to accommodate short paving segments, varying paving widths, and curved paving areas. For uniform sections, and particularly areas with long runs, concrete forms are typically placed to allow 12- to 24-feet (one or two lanes) paving widths as shown in Photo 72. The contractor typically selects form placement to correspond with staging requirements. In addition, placement must correspond to jointing requirements as specified on jointing plans (see Photo 73). As was described under Design Considerations, effort should be made during contract preparation to ensure that any profile calculated during construction is workable and provides the proper drainage.



Photo 72. Setting forms on SR 395, SR 395 and Yelm Street intersection.



Photo 73. Placing forms to match preplanned joints. Note that dowel bar locations are clearly marked before PCCP placement (SR 291, Francis Avenue with Maple and Ash Streets intersection).

## Placing In-Place Pavement Fixtures

Fixtures include items that are placed into the concrete, such as

- boxouts for utilities, such as inlets, catch basins and manholes
- telescoping manholes or valves
- dowel bar baskets and tie bars
- traffic loop inductors.

The ACPA has a good reference [4] that summarizes key points related to placing in-place pavement fixtures. Most of the following comments were taken from that reference.

#### **Boxouts**

Boxouts for inlets and manholes are placed to ensure that cracking does not occur because of the differential movement of the utility and PCCP panel. The need for isolation depends upon the casting design and potential for differential movement. Boxouts with a perimeter isolation joint should be placed for non-telescoping manholes, where ribs or flanges from the utility lie within the PCCP [4] as shown in Figure 15.



Figure 15. Manhole riser with ribs around the perimeter (graphic courtesy Deeter Foundry, Inc., Lincoln, Nebraska).

Figures 16 and 17 show typical boxouts for both a manhole and inlet. Boxout forms should be placed 1.0 foot from the fixture. Dowel bars or tie bars should not extend into the boxout area (see Photo 60). Following the placement of concrete outside of the boxout and removal of the forms, a compressible filler meeting the requirements of ASTM D 1751, D 1752, or D 994, should be placed at full depth around the perimeter of the boxout, thus forming the isolation

joint. The ACPA recommends placing the fixture and boxout forms ½ inch below the finished PCCP elevation to ensure drainage and that no conflicts with the screed from the paving operation will occur. Figures 18 to 20 provide several examples for isolating utilities.




Figure 16. Example of a manhole boxout with intersection jointing (figure courtesy of American Concrete Paving Association).

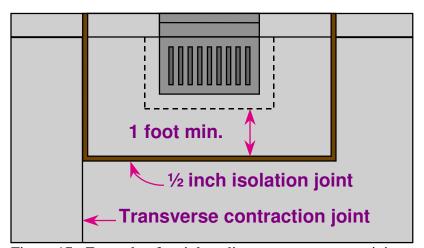


Figure 17. Example of an inlet adjacent to a transverse joint (figure courtesy of American Concrete Paving Association).

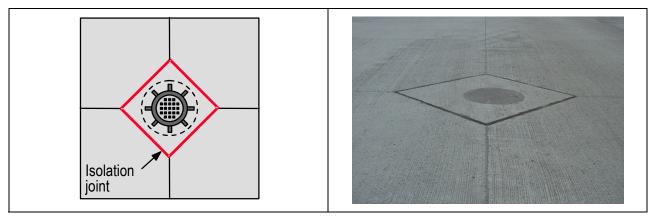


Figure 18. Square boxout (figure courtesy of American Concrete Paving Association. Photo taken at Aero Road and Westbow Road intersection, Spokane County, Washington).



Figure 19. Round boxout (figure and photo courtesy of American Concrete Paving Association).

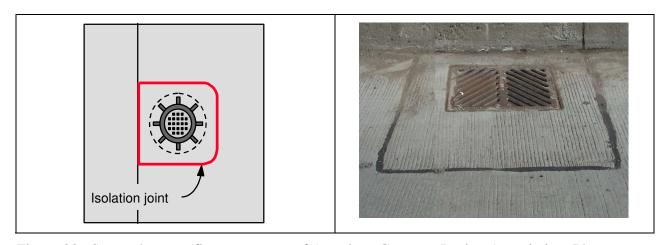


Figure 20. Square boxout (figure courtesy of American Concrete Paving Association. Photo taken at SR 2, Division Street and Francis Avenue intersection).

Corner cracks may occur where the utility boxout is centered along a longitudinal joint between transverse joints, leaving small rectangular shapes prone to cracking (Figure 21). WSDOT has minimized corner cracks by placing at least one transverse joint adjacent to the utility boxout, thus improving the panel geometry (Figure 22). Sometimes fillets (as shown in figure 20) are placed at the corners of boxouts to reduce the possibility of cracks initiating at boxout corners. Rounded boxouts can also be used (see Photo 74). Additional jointing to reduce corner cracks is shown in photos 75 and 76.

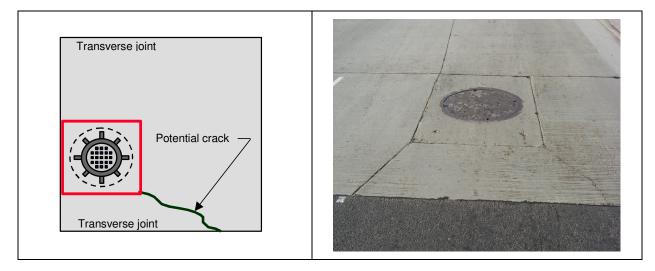


Figure 21. Cracking that will typically occur when boxouts are placed near a transverse joint leaving small rectangular shapes (figure courtesy of American Concrete Paving Association. Photo taken at SR 2, Division and Third Avenue intersection).




Figure 22. Placement of a utility boxout adjacent to a transverse joint.



Photo 74. Boxout with a rounded perimeter (SR 2, Division Street and Francis Avenue intersection).





Photo 75 and 76. Jointing to eliminate corner cracking (photos taken in Newport, Rhode Island).

The ACPA mentions that in some cases, boxing out fixtures may be undesirable. Boxing out fixtures for accelerated construction requires additional time to place the concrete after the roadway gains strength. In some instances the presence of too many utilities makes uniform jointing difficult, and casting the utility into the concrete might be the best solution. However, the risk of undesirable cracking increases when boxouts to isolate the fixtures are not provided. In cases where boxouts are not used, the ACPA reports that some agencies wrap the casting with a pliable expansion joint filler or suitable bond breaker. Examples of utilities placed without

boxouts are shown in figures 23 and 24. Inlets in these cases are typically smooth sided and only require an isolation joint.

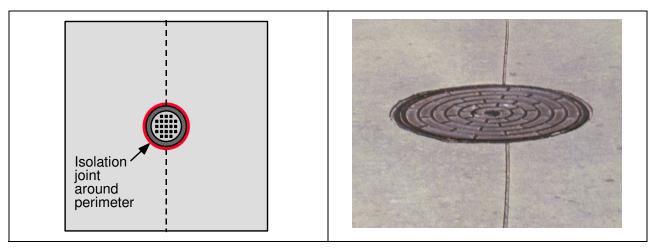


Figure 23. Manhole requiring only an isolation joint (figure courtesy of American Concrete Paving Association. Photo taken in Newport, Rhode Island).

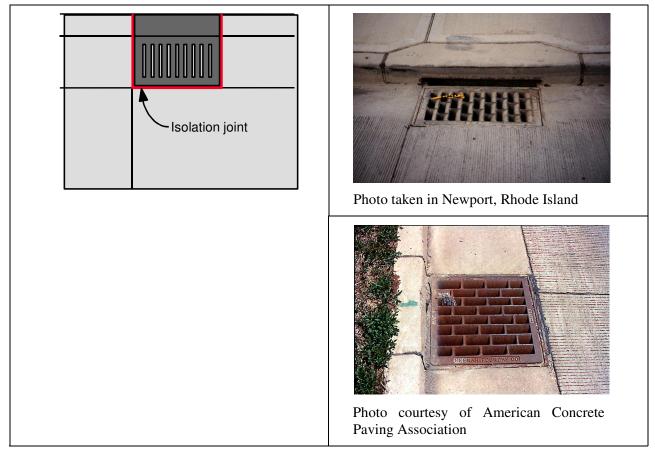


Figure 24. Inlet requiring only an isolation joint (figure courtesy of American Concrete Paving Association).

#### **Telescoping Manholes or Valves**

Telescoping manholes can be cast directly into the roadway without boxouts or isolation joints. Telescoping manholes consist of a frame and a base flange (see Figure 25). The base flange, which is below the level of PCCP, keeps the frame in place during concrete placement. Following paving, the frame section becomes an integral part of the pavement, free to move with the slab itself under loading, heaving, or settlement. These fixtures can be cast integrally with the placement of the PCCP for the intersection. Cast-in-place fixtures such as telescoping manholes (see Figure 25) or valves should be adjusted ½ inch below the finished PCCP grade to avoid conflict with the paving screed or in some cases snowplow operations. Valves can typically be placed in the PCCP without isolation joints (see Photo 77).




Figure 25. Telescoping manhole showing the base flange, frame section, and lid (graphic courtesy of Neenah Foundry Company, Neenah, Wisconsin).



Photo 77. Valves placed in concrete. Isolation joints are not typically required (photo taken in Newport, Rhode Island).

#### **Placing Dowel and Tie Bars**

Dowels and tie bars should be properly aligned, and the baskets should be firmly anchored to the base to prevent movement during concrete placement. Securing dowel and tie bar baskets is important to ensure that the bars do not become misaligned during the concrete placing operation. The FHWA [14] recommends that the dowel baskets be secured with steel stakes with a minimum diameter of 8 mm and embedded to at least 100 mm into stabilized bases, 150 mm in treated permeable bases, and 250 mm for untreated bases or subgrade. A minimum of eight stakes per basket is recommended. Once dowel bars have been placed, a reference mark should be used to note the alignments of the dowel bar or tie bar basket for sawcutting the contraction joints.

The exception to securing the baskets with stakes is when the concrete is placed with chutes over the top of the baskets and the contractor <u>demonstrates</u> that the baskets will not move. Often, concrete trucks back into the pour area, and the baskets have to be placed just ahead of the concrete placement. Securing the baskets down between the back of the truck and the end of the chute (about 10 to 15 feet) becomes very hazardous to the people placing the dowel bars, let alone trying to secure them with spikes (see photos 78 and 79).



Photo 78. Placement of concrete dropped vertically on dowel bars (SR 90, Broadway Avenue and Thierman Street intersection).



Photo 79. Dowel bar baskets placed directly behind the concrete truck (SR 90, Broadway Avenue and Thierman Street intersection).

All dowel and tie bars should be epoxy coated. Furthermore, dowels should be lightly coated with grease or some other substance for their entire length to prevent bonding with the PCCP. In the past, it was common to coat only one-half of each dowel bar, but apparently this practice has resulted in some performance problems. The FHWA [14] notes "... The dowel must be free to slide in the concrete so that the two pavement slabs move independently, thus preventing excessive pavement stresses. Only a thin coating should be used, as a thick coating may result in large voids in the concrete around the dowels."

The placement tolerances for tie bars are within 1 inch of the middle of the concrete slab, within 1 inch of being centered over the joint, and within 1 inch of the vertical and horizontal plane. The placement tolerances for dowel bars are within 1 inch of the middle of the concrete slab and parallel to centerline within ½-inch of the vertical and the horizontal plane. Dowel bar

and tie bar requirements are specified in Section 5-05.3(10) of the WSDOT Standard Specifications [11].

Tie bars for longitudinal construction joints and dowel bars for construction joints are often inserted into holes along the sides of the fixed forms. Otherwise, drill holes are required, and dowel and tie bars must be placed with epoxy resin as noted in Section 5-05.3(10).

#### Other Details - Prior to Placing PCCP

The following section summarizes details that need to be addressed before concrete is placed.

## Placing a Bond Breaker Between the PCCP and Existing Concrete

On the most recently constructed intersections, WSDOT has been placing lightweight roofing paper as a debonding agent between existing concrete surfaces and new concrete to prevent transverse cracking in newly placed PCCP (see photos 80 and 81). Without a debonding agent, freshly placed concrete can become bound to rough surfaces such as existing curbing. Excessive cracking can then develop from the stresses created in the new concrete by expansion and contraction. WSDOT has also used white pigment curing compound as a bond breaker for very smooth surfaces between existing concrete and new PCCP.





Photo 80. Lightweight roofing paper placed between existing curbing and the new concrete (SR 2, Division Street and Francis Avenue intersection).

Photo 81. Lightweight roofing paper placed between the existing curbing and new PCCP (SR 2, Division Street and Francis Avenue intersection).

Excess concrete on the face of the curbing, as shown in Photo 82, should be removed to provide a vertical surface before the placement of a bond breaker. Photo 83 shows a vertical surface where roofing paper or approved debonding agent can be applied.



Photo 82. Excess concrete on the face of curbing that should be removed before PCCP placement (Boone and Monroe intersection, City of Spokane, Washington).



Photo 83. Excess concrete on the face of curbing has been removed. Roofing paper or a debonding agent can now be applied before PCCP placement (Boone and Monroe intersection, City of Spokane, Washington).

#### Referencing Transverse (doweled) and Longitudinal (tied) Joint Locations

Dowel bar and tie bar locations must be clearly referenced before concrete placement. This requirement may seem obvious, but is often overlooked, making the proper location of joints that correspond with dowel bars or tie bars difficult. References that can be easily located after a concrete pour can be made on existing curbing or forms as has been done in Photo 84. If forms are utilized, references should be transferred to the PCCP before form removal.



Photo 84. Reference marks for dowel bar baskets before a concrete pour on SR 395, SR 395 and Yelm Street intersection.

# **Preplanning Skewed Joints**

If a transverse or longitudinal joint is within 4 feet of a manhole or catch basin, the joint should be skewed or adjusted to pass through the center of the utility or boxout. Skewing or adjusting the joint will improve the slab geometry and prevent undesirable cracking, as shown in Photo 85. Examples of skewed joints are illustrated in photos 86 and 87.



Photo 85. Cracking that could be avoided with skewing joints (Photo taken in Newport, Rhode Island).

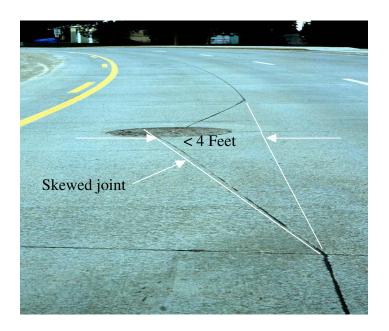


Photo 86. Skewed joint to a manhole along a longitudinal joint. Joints can also be skewed along transverse joints (Farwell Road, Spokane County, Washington).



Photo 87. Skewed joints to a utility boxout (SR 291, Francis Avenue with Maple and Ash Street intersection).

If the utility is located toward the center of the slab (see Photo 88), skewing the joint is not necessary. Typically the jointing plan will detail skewed joints toward utilities, but if not, care should be taken to skew joints when necessary.



Photo 88. Manhole placed in the approximate center of the PCCP panel (Photo taken in Newport, Rhode Island).

WSDOT recommends skewing the joint if the distance between the valve and joint is less than 12 inches. Valves placed closer than 12 inches to a joint may crack, as illustrated in Photo 89. Providing a skewed joint reduces the cracking potential. Photo 90 shows a joint that has been adjusted to pass through a valve.



Photo 89. Valves placed closer than 12 inches from a joint may crack to the joint (Photo taken in Newport, Rhode Island).



Photo 90. Valves placed in PCCP pavement (Photo taken in Newport, Rhode Island).

## Placing the Concrete

Placing the concrete typically requires fixed-form construction, with placement accomplished by vibratory screeds, roller screeds, or bridge deck finishing machines such as a Bidwell or a Whiteman Screed. Table 24 shows the various placement methods used on WSDOT intersections. Each of these placement methods is shown in photos 91 through 95.

Table 24. Placement methods for WSDOT PCCP intersections.

SR	Intersection	Vibratory Screed	Roller Screed	Bridge Deck Machine	Whiteman Screed
27	Pines Rd. and Sprague Ave.	X			
90	Broadway Ave. and Thierman St.	X	X	X	
2	Division St. and Francis Ave.		X		X
291	Francis Ave./ Maple and Ash St.		X	X	
27	Pines Rd. and Broadway Ave.		X		X
395	SR 395 and 7 <sup>th</sup> , 10 <sup>th</sup> , 19 <sup>th</sup> and 27 <sup>th</sup> Avenues		X		X
2	Division St. and Third Ave.				X
395	SR 395 and Yelm Street, Clearwater Avenue and West Kennewick Avenue		X		X

The contractor will likely choose the operation that best suits the size and shape of the concrete pour. Intersection approaches that are long and continuous may warrant use of a paving machine, such as a Bidwell. Bidwells can be used where there is sufficient room and length to warrant the two to three days of set up required for their use; however, most intersections have irregularly shaped areas. Use of vibratory screeds or roller screeds may be more practical.



Photo 91. Vibratory screed (photo courtesy MBW Incorporated).



Photo 92. Roller screed used for a continuous pour on SR 2, Division Street and Francis Avenue.

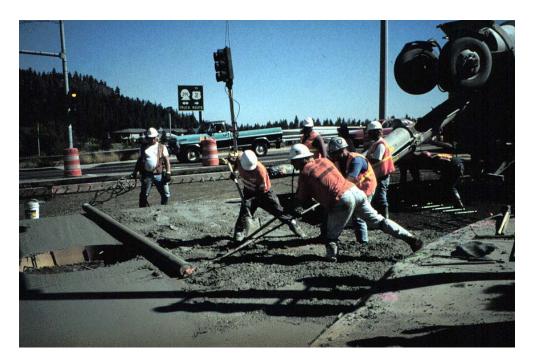


Photo 93. Roller screed used around a radius return area on SR 291, Francis Avenue with Maple and Ash Streets.



Photo 94. Paving machine used for a continuous pour area on SR 90, Broadway Avenue and Thierman Street.



Photo 95. Placement of concrete before a paving machine (SR 90, Broadway Avenue and Thierman Street).

Most recently, WSDOT has seen the use of a new piece of concrete placing equipment called a Whiteman Screed. The Whiteman Screed is a self-powered unit operated by one person that rides on rollers on the fixed forms. This screed is easily maneuverable and can make several passes to screed the concrete. In some instances, the "fixed forms" can exist curbing or even new PCCP.

ACME Materials of Spokane, Washington first used this equipment on the SR 2, Francis Avenue and Division Street, intersection and then again on SR 395 on the 7<sup>th</sup>, 10<sup>th</sup>, 19<sup>th</sup>, and 27<sup>th</sup> Avenue intersections. Use of the Whiteman Screed is shown in photos 96 to 98. The Whiteman screed has increased production and reduced personnel needs in comparison to a roller or vibratory screed. The Whiteman screed has been used to pave 12 to 24 foot widths, however, since it is adjustable, wider widths can be accommodated.



Photo 96. Use of a Whiteman Screed on the SR 395, SR 395 and Yelm Street intersection.



Photo 97. Roller on the Whiteman Screed rides on fixed forms or existing concrete (SR 395, SR 395 and Yelm Street).



Photo 98. Back of the Whiteman Screed riding on fixed forms (SR 395, SR 395 and Yelm Street intersection).

Slipform paving is another means of placing the concrete but the ACPA indicates that intersections constructed with this method are the exception [4]. Slipform paving applications are best applied to new mainline construction.

## Finishing the Concrete

Finishing the freshly placed concrete is mostly done with hand-operated tools to smooth any surface imperfections or make minor grade corrections. Regular straight edging using a 10- to 16-foot straight edge typically provides a reasonable grade. PCCP intersections built so far have not relaxed surface smoothness requirements. However, some relaxation of WSDOT Standard Specification 5-05.3(12) has occurred where adjusting the longitudinal or transverse profile has been necessary to meet fixtures such as manholes or drainage inlets, existing curbs and gutters, and crossroad connections. The intersection designs to date have used the requirement by which no variations greater than 1/8 inch can be present when tested with a 10-foot straightedge parallel to centerline. The requirement for transverse measurements is ½ inch with a 10-foot straightedge. Finishing the concrete on the SR 395 and West Kennewick Avenue intersection is shown in Photo 99.



Photo 99. Finishing concrete behind the Whiteman Screed on SR 395, SR 395 and West Kennewick Avenue intersection.

WSDOT recommends that all edges around fixed forms or curbing be edged with a ½-inchradius edger. Edging prevents the new concrete from spalling around form edges when the forms are removed. Photos 100 and 101 illustrate these differences.



Photo 100. Concrete edge finished without a half-inch radius edger, spalling results (SR 291, Francis Avenue with Maple and Ash Street Intersections).



Photo 101. Concrete edge finished with a half-inch radius edger. Note the absence of spalling (SR 2, Division Street and Francis Avenue intersection).

# Texturing the Surface

Normal texturing requirements, as noted in Standard Specification 5-05.3(11), apply. Photo 102 shows tines being placed on the SR 395, SR 395 and Yelm Street intersection.



Photo 102. Placing tine marks in the PCCP following finishing (SR 395, SR 395 and Yelm Street intersection).

## Curing the Concrete

Curing compound should be applied as soon as the water sheen has left the concrete surface and texturing is complete as specified in WSDOT Standard Specification 5-05.3(13)A. The special provision in Appendix I notes that white pigment curing compound placed at 1½ times the normal rate should be applied. Curing compound should also be applied to vertical edges once the forms have been removed. Spraying curing compound on new concrete is shown in Photo 103.



Photo 103. Spraying curing compound on SR 395, SR 395 and Yelm Street intersection.

Following the placement of curing compound, WSDOT has often required the use of insulating blankets to assure concrete strength gain. However, there are questions regarding their use. Several contracts required the use of insulating blankets (R value of 6) until a minimum compressive strength of 2,500 psi was obtained. On hot days, typically in excess of 90 degrees Fahrenheit, there are fears that hot temperatures and rapid cure will damage the concrete, particularly with Type III cement. A question being considered is whether air temperature limits should be added to the contract special provisions, requiring the use of insulating blankets when air temperatures fall below a certain temperature, but requiring another method when air temperatures are above a certain temperature.

Since most of the contracts for intersections have required a 24-hour mix for opening to traffic, the intent of the insulating blanket special provision has been to ensure that concrete strength would be obtained. However, with the mixes used to date, obtaining strength in 12 to 15

hours has not been a problem, and it appears that blankets have not been needed during hot weather. In some instances, blankets were not in place for several hours, as they were partially or completely removed for sawcutting purposes. Blankets could also be detrimental to concrete properties if, on hot days, the mix cures too rapidly, resulting in shrinkage cracks. ACME Materials and Construction reported the cost of labor to provide blankets on the 7<sup>th</sup>, 10<sup>th</sup>, 19<sup>th</sup> and 27<sup>th</sup> Avenue intersections on SR 395 at \$30,000.

Insulating blankets should be used during cooler weather to retain the heat in the PCCP for hydration. The ACPA [4] supports the use of insulating blankets to insulate fast-track concrete to aid early strength gain in <u>cool</u> weather conditions.

# Sawcutting the Pavement

Recommendations provided in the FHWA Technical Advisory 5040.30 [14] note, "Time of initial sawing, both in the transverse and longitudinal directions, is critical in preventing uncontrolled shrinkage cracking. It is very important that sawing begins as soon as the concrete is strong enough to both support the sawing equipment and to prevent raveling during the sawing operation. This is particularly critical during hot weather. Once sawing begins, it should be a continuous operation and should only be stopped if raveling begins to occur."

The concrete used for PCCP intersections has typically allowed commencement of green sawing within 6 hours of concrete placement. Saw cuts are provided at <u>predetermined</u> locations, as shown in the jointing plan and as referenced on the construction grade, to match dowel and tie bar locations. WSDOT has had good success using the sawcutting depths shown in the Standard Plans [8], which are D/3 for transverse joints and D/4 for longitudinal joints. Photo 104 shows sawcutting on SR 395 at the SR 395 and Yelm Street intersection.



Photo 104. Sawcutting newly placed concrete (SR 395, SR 395 and Yelm Street intersection).

## Sealing Sawed Contraction Joints

Following concrete curing the sawed contraction joints are sealed according to the requirements of Section 5-05.3(8)B of the 2000 Standard Specifications [11] and the Standard Plans [8]. WSDOT has experience with many contracts in which the sealing contractor has overfilled the sawed contraction joints. Underfilling the joints by ½ inch provides the best results, as bumps are eliminated and the joint sealer will not be forced or tracked out of the joint. In addition, a more appealing appearance to the newly placed PCCP is provided. Photo 105 shows joint sealing on the SR 395 and Yelm Street intersection. Photo 106 shows joint sealant placed cleanly inside a sawed contraction joint.



Photo 105. Joint sealing sawed contraction joints on SR 395 and Yelm Street intersection.



Photo 106. Sealant correctly recessed in a sawed contraction joint. Sealant is contained within the sawed joint (SR 395, Hastings Road to Mile Post 172 PCCP paving project).

#### Placing Asphalt Concrete Adjacent to New PCCP

The final step to completing the intersection is to place the ACP adjacent to the concrete approach, leave legs, and at the ends of the PCCP intersection. Construction of the adjacent ACP is straightforward, and little discussion is necessary. Generally, construction of concrete intersections has required 2 to 3 feet of excavation along the adjacent approach or leave legs. On the initial intersections built by WSDOT, the excavated area was replaced with crushed stone and ACP to match the existing surfacing depths. A portion of the ACP was typically placed as part of an inlay that resurfaced all the adjacent ACP.

Recently, WSDOT has experimented with replacing the adjacent excavated areas with controlled density fill (CDF) to the level of the inlay that abuts the PCCP.

While the placement of the CDF significantly eases construction before the placement of asphalt, the long-term effects of doing so are unknown. Many municipalities limit the use of CDF to subsurface work because it is not considered a crushed stone material. The performance of the asphalt above the CDF may be different than that over the existing ACP because of differing material stiffness, particularly when the CDF is used near or in the wheel path.

An alternative to CDF is to place concrete (see photo 107). Concrete offers greater stiffness and the ACP placed on the concrete can be easily rotomilled and inlayed for future rehabilitation cycles. CDF was intended as a fill material, and it is recommended that CDF be limited below the ACP and crushed stone base.



Photo 107. Concrete placed in the excavated area adjacent to the PCCP and existing ACP surfacing.

## Opening to Traffic

WSDOT allows the intersection to be opened to traffic when the PCCP compressive strength is 2,500 psi. The intersections built to date have used cylinders to determine the compressive strength, along with a maturity meter (photos 108 and 109). The 2000 Standard Specifications includes the use of a maturity meter for this determination. However, some have questioned why the maturity method cannot be used in place of acceptance cylinders or beams. This question will be addressed in the Quality Control section. Currently, WSDOT has limited the use of the maturity meter to the determination of the opening to traffic (see Photo 110).



Photo 108. Commercial maturity meter.



Photo 109. Placement of probes that will be attached to the maturity meter.



Photo 110. Maturity meter attached to probes within the newly placed PCCP.

# **QUALITY CONTROL**

## Testing Frequency

There has been some concern with the testing frequency required for concrete placement within PCCP intersections. Previous contracts, placed under the 1998 Standard Specifications, required one set of air content, cement factor, and beams for flexural strength to be performed every 2,500 square yards. Amendments to the 1998 Standard Specifications allow cylinders to be tested for compressive strength when correlated to beams before construction instead of flexural strength. The 2,500-square-yard frequency is more relevant for slip-form paving and side-form construction where miles are being poured a day.

The 2,500-square-yard frequency, as specified in the WSDOT Construction Manual [7], converts to 833 cubic yards of concrete. Within an intersection, only one or two tests would be required for the largest pours, and some days could go without any testing until the required square yards were accumulated. Table 25 portrays a typical intersection placed in Washington State (SR 291, Francis Avenue with Maple and Ash Streets intersection).

For comparison with concrete structures, Section 6-02.3(5) G of the Standard Specifications states that the sampling and testing frequency may decrease to one out of every five truck loads after two successive passing tests. This specification is too tight for placement of concrete at intersections. The intent of the specification relates better to smaller pours on structures where the time between trucks is greater. On some of the intersections, the contractor placed concrete from two or three trucks at a time. Testing every five trucks would require at least two testing crews.

Table 25. Summary of required testing at a 2,500 square yard test frequency for the SR 291, Francis Avenue with Maple and Ash Streets.

Pour Dates	Square Yards	Cumulative Square Yards	Tests Required with 2,500 Yd <sup>2</sup> Frequency <sup>1</sup>
July 18	1,903.0	1,903.0	
July 21	260.7	2,163.7	
July 22	147.9	2,311.6	
July 24	168.0	2,479.6	1
July 28	130.1	2,609.7	
July 29	370.3	2,980.0	
August 5	83.4	3,063.4	
August 6	247.6	3,311.0	
August 11	80.1	3,391.1	
August 13	1,464.0	4,855.1	
August 14	873.1	5,728.2	2
August 15	324.8	6,053.0	3

<sup>&</sup>lt;sup>1</sup>Cumulative number of tests.

The Eastern Region took a sensible approach to the testing. On the SR 2 and SR 291 projects, the project office tested the first two trucks and then calculated random numbers on the next ten trucks to arrive at a testing frequency. By using this method, WSDOT inspectors did not delay placement of the concrete, and inspectors could "catch their breath" between tests. At a minimum, at least one test a day was performed. This approach is similar to the revisions that were made in the 2000 Standard Specifications and are discussed in the following section.

#### Acceptance of Portland Cement Concrete Pavement

The 2000 Standard Specifications provides for acceptance of PCCP based on statistical evaluation for air content and strength per section 1-06.2(2). Each truckload of concrete must have a certificate of compliance in accordance with section 6-02.3(5)B. With regard to testing frequency, the 2000 Standard Specification section 5-05.3(4)A states the following:

For the purpose of acceptance sampling and testing a lot is defined as the total quantity of material to be used that was produced from the same operation. All of the test results obtained from the same material shall be evaluated collectively and shall constitute a lot. The quantity represented by each sample will constitute a sublot. Sampling and testing for statistical acceptance shall be performed on a random basis at the frequency of one sample per sublot. Sublot size shall be determined to the nearest 10 cubic yards to provide not less than three uniform sized sublots with a maximum sublot size of 500 cubic yards.

Interpretation of this specification suggests that infrequent testing could be a problem if acceptance tests are taken every 500 cubic yards. Table 26 shows that only 3 tests would have been required for the intersection on SR 291, Francis Avenue with Maple and Ash Streets. However, since 500 cubic yards is the maximum allowable sublot size, WSDOT recommends a minimum of one test per day. Requiring one test per day increases the statistical analysis, thus reducing any penalty to the contractor should a particular sublot yield poor results.

Table 26. Summary of required testing at a 500- cubic-yard test frequency for the SR 291, Francis Avenue with Maple and Ash Streets.

Pour Date	Square Yards	Cubic Yards	Cumulative Cubic Yards	Cumulative Number of Tests Using 500	Cumulative Number of Tests Using One Test Per Day
				CY Lot Size	Test for Buy
	$(yd^2)$	$(yd^3)$	(yd)		
July 18	1,903.0	475.8	475.8		1
July 21	260.7	65.2	541.0	1	2
July 22	147.9	37.0	578.0		3
July 24	168.0	42.0	620.0		4
July 28	130.1	32.5	652.5		5
July 29	370.3	92.6	745.1		6
August 5	83.4	20.9	766.0		7
August 6	247.6	61.9	827.9		8
August 11	80.1	20.0	847.9	2	9
August 13	1,464.0	366.0	1,213.9		10
August 14	873.1	218.3	1,432.2		11
August 15	324.8	81.2	1,513.4	3	12

## Use of Maturity Meter

Since the 2000 Standard Specifications now includes the use of a maturity meter to determine time of opening to traffic, some have wondered why the maturity method cannot be used in the place of acceptance cylinders or beams. ASTM C 1074 Standard Practice for Estimating Concrete Strength by the Maturity Method [15] states that "This practice can be used to estimate the in-place strength of concrete to allow the start of critical construction activities . . . ." The Design and Control of Concrete Mixtures [16] from the Portland Cement Association states:

The maturity concept is not precise and has some limitations. The concept is useful only in checking the curing of concrete and estimating strength in relation to time and temperature. It presumes that all other factors affecting concrete strength have been properly controlled. Thus, the maturity concept is another method for monitoring temperatures, but it is no substitute for quality control and proper concreting practices.

The biggest drawbacks to the maturity method are the following:

- The method does not take into account the fact that high early temperatures lead to rapid strength gain but reduce the long-term strength of the concrete.
- The accuracy of the estimated strength depends on the determination of the curve, which changes with mix proportion and component changes.

Currently, WSDOT has limited the use of the maturity meter to testing for the opening of traffic.

#### RECOMMENDATIONS AND CONCLUSIONS

WSDOT's experiences with constructing PCCP intersections convinced engineers that design and construction details were important. Resulting random cracking and construction difficulties provided valuable learning experiences. This report has documented these experiences and can be used as guidelines for state and local agencies that are considering full-depth PCCP construction at urban intersections.

Recommendations and conclusions for the use of PCCP at urban intersections follow:

#### **Construction Costs**

Full-depth PCCP reconstruction at urban intersections costs approximately 25 to 30 percent more than full-depth ACP construction. Construction costs have been lower when urban intersection construction has been included as part of larger ACP resurfacing projects. Traffic control costs typically run 4 to 5 percent of the project subtotal when intersection construction is included as part of a larger ACP resurfacing project, and 12 to 17 percent of the project subtotal when intersections are constructed as a separate contract.

#### Life Cycle Cost Analysis

The 40-year annualized costs for intersections with and without user delay costs show that full-depth PCCP intersection reconstruction typically costs less than full-depth ACP reconstruction with future ACP inlays when intersection reconstruction is necessary. When user delay costs are used, this study showed that PCCP reconstruction for six of the seven intersections was 5.5 to 14 percent less than ACP reconstruction. A comparison of the 40-year annualized costs for reconstructed PCCP intersections with and without user delay costs to ACP inlays at four-, six-, and eight-year cycles showed that ACP inlays will always cost less than

reconstructing with PCCP at an urban intersection. However, with ACP inlays, the state or local agency must decide whether inlays meet the expectations of the public. The public's view of rehabilitation of the same section of roadway at four-, six- or eight-year-cycles does not reflect well on the agency, even if the section needs rehabilitation because of the distress present. In addition, the public does not appreciate delays during roadway rehabilitation.

## Traffic Management

WSDOT has experienced faster reconstruction of PCCP intersections when some type of closure has been used. Intersection projects with minimal or no detours have required 30 to 42 days for the PCCP reconstruction. Allowing at least some type of closure (such as closing minor legs) has shortened the number of construction days to 15 to 20. Full closure of the intersection has facilitated the fastest construction period. On one project, three separate intersections were reconstructed during weekend closures. The approach legs were reconstructed on the days preceding the weekend closure, and the intersection square (radius return to radius return) was reconstructed during the weekend closures. The approach legs for the three intersections were reconstructed under traffic. On average, a total of 9 days per intersection were required (three days of which were over the weekend closures).

#### **Design Considerations**

A key element of constructing PCCP intersections is the planning of transverse and longitudinal joints. Often, state and local agencies are not prepared to make on-the-fly jointing decisions once intersection construction is under way. Therefore, joint planning is necessary to prevent distresses such as sympathy cracks, random cracks, and misalignment of joints with manholes and valves. WSDOT strongly recommends the preparation of jointing plans to be included in contract documents.

## **Construction Considerations**

PCCP intersection construction requires the same care and consideration as any other PCCP project. However, PCCP intersections require special jointing considerations, especially around curb radii and utility fixtures. Field adjustments are often needed to avoid random cracking. As mentioned under Design Considerations, the best way to avoid random cracking is to provide PCCP jointing plans in the contract documents. Even with the best of jointing plans, field adjustments will still be needed, and project personnel need to be aware of the options.

PCCP Intersections Design and Construction in Washington State

#### REFERENCES

- 1. Federal Highway Administration, "Life-cycle Cost Analysis in Pavement Design," Pavement Division Interim Technical Bulletin FHWA-SA-98-079, FHWA, Washington D.C., September 1998.
- 2. Customer Focus Highway Construction Workshop, Discussion Comments from the Workshop, January 1999.
- 3. Innovative Pavement Research Foundation, "Accelerated Construction of Urban Intersections with Portland Cement Concrete Pavement," Draft Report, May 2001.
- 4. American Concrete Paving Association, "Concrete Paving Technology Concrete Intersections, A Guide for Design and Construction," Skokie, Illinois, 1997.
- 5. Seghetti, Robert, "Construction Phasing for Concrete Intersections," Power Point Presentation for the Northwest Concrete Pavement Seminar, Coeur d'Alene, Idaho, March 5, 2001.
- 6. American Concrete Paving Association, "Concrete Information, Intersection Joint Layout," Skokie, Illinois, 1996.
- 7. Washington State Department of Transportation, *Construction Manual*, Manual 41-01, Washington State Department of Transportation, Olympia, Washington, 1998.
- 8. Washington State Department of Transportation, *Standard Plans for Road, Bridge, and Municipal Construction*, Manual 21-01, Standard Plan A-1, November 1998.
- 9. Washington State Department of Transportation, WSDOT Pavement Guide, Volume 2, Olympia, Washington, July 1999.
- 10. Washington State Department of Transportation, WSDOT Pavement Guide, Volume 1, Olympia, Washington, July 1999.
- 11. Washington State Department of Transportation, 2000 Standard Specifications for Road, Bridge and Municipal Construction, Manual 41-10, Washington State Department of Transportation, Olympia, Washington, January 2000.

- 12. ACME Construction and Materials, Type III Mix Characterization, Spokane, Washington, July 1998.
- 13. ACME Construction and Materials, Type I-II Mix Characterization, Spokane, Washington, March 2000.
- 14. Federal Highway Administration, "Concrete Pavement Joints," Technical Advisory 5040.30, FHWA, Washington D.C., November 30, 1990.
- 15. American Society for Testing and Materials, 1999 Annual Book of ASTM Standards, Volume 04.02, West Conshohocken, Philadelphia, 1999.
- 16. Portland Cement Association, *Design and Control of Concrete Mixtures*, Skokie, Illinois, 1992.

# APPENDIX A – PROJECT COSTS

Tables A-1 to A-21 show cost estimates for PCCP and ACP initial construction and ACP inlays.

The intersections are presented in the following order:

<u>Tables</u>	<u>Intersection</u>
A-1 to A-3	SR 27, Pines Road and Sprague Avenue
A-4 to A-6	SR 90, Broadway Avenue and Thierman Street
A-7 to A-9	SR 2, Division Street and Francis Avenue
A-10 to A-12	SR 291, Francis Avenue with Maple and Ash Streets
A-13 to A-15	SR 27, Pines Road and Broadway Avenue
A-16 to A-18	SR 2, Division Street and Third Avenue
A-19 to A-21	SR 395, SR 395 and 19 <sup>th</sup> Avenue

Table A-1. SR 27, Pines Road and Sprague Avenue initial PCCP construction cost estimate.

Construction Year:  SR 27  Pines Road and Sprague Avenue  Initial Cost of PCCP Construction  STD. ITEM UNITS UNIT PRICE  PREPARATION  0001 MOBILIZATION (Actual) 0188 REMOVING TEMPORARY PAVEMENT MARKING  GRADING  0310 ROADWAY EXCAVATION INCL. HAUL C.Y. \$16.00 2,086	Table A-1. SR 27, Pines Road and Sprague Avenue initial PCCP construction cost estimate.						
Pines Road and Sprague Avenue  Initial Cost of PCCP Construction  STD. ITEM UNITS UNIT PRICE  PREPARATION  0001 MOBILIZATION (Actual) 0188 REMOVING TEMPORARY PAVEMENT MARKING  GRADING  0310 ROADWAY EXCAVATION INCL. HAUL C.Y. \$16.00 2,086	1994						
Initial Cost of PCCP Construction  STD. ITEM UNITS UNIT PRICE  PREPARATION  0001 MOBILIZATION (Actual) L.S. \$30,000 L.S. 0188 REMOVING TEMPORARY PAVEMENT L.F. \$0.30 0 GRADING  GRADING  0310 ROADWAY EXCAVATION INCL. HAUL C.Y. \$16.00 2,086							
STD. ITEM NO.  PREPARATION  0001 MOBILIZATION (Actual) 0188 REMOVING TEMPORARY PAVEMENT L.F. \$0.30 0MARKING  GRADING  0310 ROADWAY EXCAVATION INCL. HAUL  C.Y. \$16.00 2,086							
PREPARATION  0001 MOBILIZATION (Actual) 0188 REMOVING TEMPORARY PAVEMENT MARKING  GRADING  0310 ROADWAY EXCAVATION INCL. HAUL  C.Y. \$16.00 2,086							
0001 MOBILIZATION (Actual) 0188 REMOVING TEMPORARY PAVEMENT MARKING  GRADING  0310 ROADWAY EXCAVATION INCL. HAUL  C.Y. \$16.00 2,086	' AMOUNT						
0188 REMOVING TEMPORARY PAVEMENT L.F. \$0.30 0 MARKING  GRADING  0310 ROADWAY EXCAVATION INCL. HAUL C.Y. \$16.00 2,086							
0310 ROADWAY EXCAVATION INCL. HAUL C.Y. \$16.00 2,086							
,							
SURFACING	\$33,376.00						
CONTROLLE							
5120 CRUSHED SURFACING TOP COURSE TON \$16.00 1,155	\$18,480.00						
LIQUID ASPHALT							
5334 ANTI-STRIPPING ADDITIVE DOL \$458.85 1	\$458.85						
ASPHALT TREATED BASE							
5510 ASPHALT TREATED BASE TON \$40.00 839	\$33,560.00						
CEMENT CONCRETE PAVEMENT							
MODIFIED CONC. CLASS 4000 1 DAY 0.83 FT. S.Y. \$43.00 4,116 SECTION	\$176,988.00						
ASPHALT CONCRETE PAVEMENT							
5764 ASPHALT CONC. PAVEMENT CL. A TON \$80.00 27	\$2,160.00						
TRAFFIC							
6821 PAINT STRIPE       L.F.       \$0.30       1,413         6827 PAINTED CROSSWALK STRIPE       L.F.       \$2.25       710         6844 PAINTED STOP BAR       L.F.       \$3.25       180         6860 PAINTED TRAFFIC ARROWS       EACH       \$20.00       4         6888 TEMPORARY PAVEMENT MARKING       L.F.       \$0.30       1,314	\$1,597.50 \$585.00						

	6956	SEQUENTIAL ARROWS SIGNS	HOUR	\$3.30	1599	\$5,276.70
	6955	ADDITIONAL SEQUENTIAL ARROWS SIGNS	DOL	\$1.00	0	\$0.00
	6959	CHANNELIZATION DEVICES	L.S.	\$1,800.00	1	\$1,800.00
	6979	TRAFFIC CONTROL LABOR	HOUR	\$28.00	1868	\$52,304.00
	6968	TRAFFIC CONTROL VEHICLES	DAY	\$35.00	27	\$945.00
	6969	TRAFFIC CONTROL SUPERVISOR	DAY	\$300.00	41	\$12,300.00
	6982	CONSTRUCTION SIGNS CLASS A	S.F.	\$8.00	184	\$1,472.00
		VEHICLE DETECTION LOOP REPLACEMENT	L.S.	\$11,000.00	L.S.	\$11,000.00
		OTHER ITEMS				
		OTHER ITEMS				
	7340	ADJUST CONC. INLET	EACH	\$500.00	1	\$500.00
	3080	ADJUST MANHOLE	EACH	\$500.00	1	\$500.00
	6243	ADJUST VALVE BOX	EACH	\$300.00	8	\$2,400.00
	7380	ADJUST MONUMENT CASE AND COVER	EACH	\$400.00	2	\$800.00
	7480	ROADSIDE CLEANUP	DOL	\$0.00	0	\$0.00
		CONTRACT SUBTOTAL				\$387,401.15
		WASHINGTON STATE SALES TAX		8.10%		\$31,379.49
		PROJECT SUBTOTAL				\$418,780.64
		PRELIMINARY ENGINEERING		(Actual)		\$50,531.00
_		CONSTRUCTION ENGINEERING		(Actual)		\$61,941.00
		TOTAL ESTIMATED COST				\$531,252.64

Table A-2. SR 27, Pines Road and Sprague Avenue initial ACP construction cost estimate.

Table A-2. SK 27, Thies Road and Sprague Avenue initial ACT construction cost estimate.					
Contract 4486			Construction	on Year: 19	994
SR 27			0.70' ACP		
Pines Road and Sprague A	venue				
Initial Cost of ACP Consti	ruction				
STD. ITEM ITEM NO.		UNITS	UNIT PRICE	QUANTITY	AMOUNT
PREPARATION					
0001 MOBILIZATION (Same as 0188 REMOVING TEMPORARY MARKING		L.S. L.F.	\$0.30	L.S. 0	\$30,000.00 \$0.00
GRADING					
0310 ROADWAY EXCAVATION	I INCL. HAUL	C.Y.	\$16.00	2,086	\$33,376.00
SURFACING					
5120 CRUSHED SURFACING T	TOP COURSE	TON	\$16.00	2,043	\$32,688.00
LIQUID ASPHALT					
5325 ASPHALT FOR TACK CO. 5334 ANTI-STRIPPING ADDITIV		TON DOL	\$200.00 \$1,974.00	2	\$400.00 \$1,974.00
ASPHALT CONCRETE PA	AVEMENT				
5764 ASPHALT CONC. PAVEM 5830 JOB MIX COMPLIANCE P 5835 COMPACTION PRICE AD	RICE ADJUSTMENT	TON DOL DOL	\$38.00 \$2,250.36 \$1,500.24	1,974 1 1	\$75,012.00 \$2,250.36 \$1,500.24
TRAFFIC					
6821 PAINT STRIPE 6827 PAINTED CROSSWALK S 6844 PAINTED STOP BAR 6860 PAINTED TRAFFIC ARRO 6888 TEMPORARY PAVEMENT 6956 SEQUENTIAL ARROWS S 6955 ADDITIONAL SEQUENTIA 6959 CHANNELIZATION DEVIC 6979 TRAFFIC CONTROL LABG 6968 TRAFFIC CONTROL SUP	DWS F MARKING SIGNS AL ARROWS SIGNS CES OR ICLES	L.F. L.F. EACH L.F. HOUR DOL L.S. HOUR DAY DAY	\$0.30 \$2.25 \$3.25 \$20.00 \$0.30 \$3.30 \$0.00 \$1,800.00 \$28.00 \$35.00 \$300.00	710 180 4 1,314 1,599 0 L.S.	\$423.90 \$1,597.50 \$585.00 \$80.00 \$394.20 \$5,276.70 \$0.00 \$1,800.00 \$52,304.00 \$945.00 \$12,300.00

	6982	CONSTRUCTION SIGNS CLASS A VEHICLE DETECTION LOOP REPLACEMENT	S.F. L.S.	\$8.00 \$11,000.00	184 L.S.	\$1,472.00 \$11,000.00
		OTHER ITEMS				
	7340	ADJUST CONC. INLET	EACH	\$500.00	1	\$500.00
	3080	ADJUST MANHOLE	EACH	\$500.00	1	\$500.00
	6243	B ADJUST VALVE BOX	EACH	\$300.00	8	\$2,400.00
	7380	ADJUST MONUMENT CASE AND COVER	EACH	\$400.00	2	\$800.00
	7480	ROADSIDE CLEANUP	DOL	\$0.00	0	\$0.00
		CONTRACT SUBTOTAL				\$269,578.90
		WASHINGTON STATE SALES TAX		8.10%		\$21,835.89
		PROJECT SUBTOTAL				\$291,414.79
_		PRELIMINARY ENGINEERING		(Same as PCCP)		\$50,531.00
		CONSTRUCTION ENGINEERING		(Same as PCCP)		\$61,941.00
		TOTAL ESTIMATED COST				\$403,886.79

Table A-3. SR 27, Pines Road and Sprague Avenue ACP inlay cost estimate.

Contract 4486 Construction Year: 1994					
_	:t 4486 			Oli Teal. I	<del>334</del>
SR 27			0.20' Inlay		
Pines R	load and Sprague Avenue				
ACP In	lay Construction Cost				
STD. ITEM NO.	ITEM	UNITS	UNIT PRICE	QUANTITY	AMOUNT
	PREPARATION				
	MOBILIZATION (10% of all items) REMOVING TEMPORARY PAVEMENT MARKING	L.S. L.F.	\$0.05	L.S. 2,996	\$4,900.00 \$149.80
	LIQUID ASPHALT				
5325	ASPHALT FOR TACK COAT	TON	\$200.00	1	\$200.00
	ANTI-STRIPPING ADDITIVE	DOL	\$570.00	1	\$570.00
	ASPHALT CONCRETE PAVEMENT				
5711	PLANING BITUMINOUS PAVEMENT	S.Y.	\$3.00	4,116	\$12,348.00
	ASPHALT CONC. PAVEMENT CL. A	TON	\$38.00	570	\$21,660.00
	JOB MIX COMPLIANCE PRICE ADJUSTMENT		\$649.80	1	\$649.80
5835	COMPACTION PRICE ADJUSTMENT	DOL	\$433.20	1	\$433.20
	TRAFFIC				
6821	PAINT STRIPE	L.F.	\$0.10	1,413	\$141.30
	PAINTED CROSSWALK STRIPE	S.F.	\$2.25	710	\$1,597.50
	PAINTED STOP BAR	L.F.	\$3.25	180	\$585.00
	PAINTED TRAFFIC ARROWS TEMPORARY PAVEMENT MARKING	EACH L.F.	\$20.00 \$0.15	2,996	\$80.00 \$449.40
	SEQUENTIAL ARROWS SIGNS	HOUR	\$3.00	120	\$360.00
	CHANNELIZATION DEVICES	L.S.	\$1,800.00	L.S.	\$1,800.00
6979	TRAFFIC CONTROL LABOR	HOUR	\$28.00	180	\$5,040.00
	TRAFFIC CONTROL VEHICLES	DAY	\$100.00	3	\$300.00
	TRAFFIC CONTROL SUPERVISOR CONSTRUCTION SIGNS CLASS A	HOUR S.F.	\$35.00 \$6.00	30 184	\$1,050.00 \$1,104.00
0002	OTHER ITEMS	J.i .	ψ0.00	104	ψ1,104.00
	OTHERTIENS				
7480	ROADSIDE CLEANUP	DOL	\$500.00	1	\$500.00

CONTRACT SUBTOTAL WASHINGTON STATE SALES TAX	8.10%	\$53,918.00 \$4,367.36
PROJECT SUBTOTAL		\$58,285.36
ENGINEERING CONTINGENCIES	20.00% 5.00%	\$11,657.07 \$2,914.27
TOTAL ESTIMATED COST		\$72,856.70

Table A-4. SR 90, Broadway Avenue and Thierman Street initial PCCP construction cost estimate.

Table A-4	I. SR 90, Broadway Avenue and Thierman S	treet inii	tial PCCP cons	struction cost	estimate.
Contract SR 90	ct 4800		Construction 0.83' PCCP	n Year: 19	96
Broadw	ay Avenue and Thierman Street				
Initial C	Cost of PCCP Construction				
STD. ITEM NO.	ITEM	UNITS	UNIT PRICE	QUANTITY	AMOUNT
	PREPARATION				
0048 0188	MOBILIZATION (Actual) REMOVING CATCH BASIN REMOVING TEMPORARY PAVEMENT MARKING	L.S. EACH L.F.	\$80,000.00 \$350.00 \$0.05	L.S. 2.0 1,001	\$80,000.00 \$700.00 \$50.05
0215	REMOVING MISCELLANEOUS TRAFFIC MARKING	L.S.	\$12,000.00	L.S.	\$12,000.00
	GRADING				
0310	ROADWAY EXCAVATION INCL. HAUL C.O. #1 - ROADWAY EXCAVATION CREDIT	C.Y. L.S.	\$10.00 (\$5,150.00)	3,600 L.S.	\$36,000.00 (\$5,150.00)
	DRAINAGE				
1180	CONCRETE INLET  SCHEDULE A CULV. PIPE 12 INCH DIAM.  SCHEDULE A CULV. PIPE 18 INCH DIAM.	EACH L.F. L.F.	\$850.00 \$20.00 \$40.00	1 72 212	\$850.00 \$1,440.00 \$8,480.00
	STORM SEWER PIPE				
3090	CATCH BASIN TYPE 1L	EACH	\$1,400.00	2	\$2,800.00
	SURFACING				
5120	CRUSHED SURFACING TOP COURSE	TON	\$20.00	1889	\$37,780.00
	LIQUID ASPHALT				
	ASPHALT FOR TACK COAT ANTI-STRIPPING ADDITIVE	TON DOL	\$300.00 \$112.64	0.53 1	\$159.00 \$112.64
	CEMENT CONCRETE PAVEMENT				
	MODIFIED CONC. CL. 4000 1 DAY, 0.83 FT SECTION	S.Y.	\$40.00	6,657	\$266,280.00
	C.O. #4 - ADDITIONAL CONCRETE POUR	L.S.	\$750.00	L.S.	\$750.00

5685	C.O. # 7 - ADDITIONAL ENGINEERING EPOXY-COATED TIE BAR EPOXY-COATED DOWEL BAR C.O. #2 - EPOXY COATED DOWEL BAR MODIFIED JOINT	L.S. EACH EACH EACH	\$3,000.00 \$4.00 \$15.00 \$7.50	L.S. 245 5,099 136	\$3,000.00 \$980.00 \$76,485.00 \$1,020.00
	ASPHALT CONCRETE PAVEMENT				
5711	BRIDGE APPROACH SLAB GRINDING PLANING BITUMINOUS PAVEMENT C.O. #6 - ADDITIONAL PLANING - FORCE ACCOUNT POLYMER MODIFIED ASPHALT CONC.	HOUR S.Y. DOL	\$450.00 \$2.50 \$2,841.30 \$60.00	15 2,110 1	\$6,750.00 \$5,275.00 \$2,841.30 \$28,620.00
	PAVEMENT CL. A		φοσ.σσ		φ20,020.00
	EROSION CONTROL AND PLANTING				
6419	SEEDING AND FERTILIZING BY HAND	S.Y.	\$3.00	506	\$1,518.00
	TRAFFIC				
6828 6829 6833 6888 6954 6956 6958 6959 6979	CEMENT CONC. BARRIER CURB PLASTIC CROSSWALK STRIPE PLASTIC STOP BAR PLASTIC TRAFFIC ARROWS TEMPORARY PAVEMENT MARKING TRAFFIC SAFETY DRUM SEQUENTIAL ARROWS SIGNS TYPE III BARRICADE CHANNELIZATION DEVICES TRAFFIC CONTROL LABOR C.O. #8 - EQUITABLE ADJUSTMENT TRAFFIC CONTROL VEHICLES TRAFFIC CONTROL SUPERVISOR CONSTRUCTION SIGNS CLASS A VEHICLE DETECTION LOOP REPLACEMENT  OTHER ITEMS	L.F. L.F. EACH L.F. EACH HOUR EACH L.S. HOUR L.S. DAY DAY S.F. L.S.	\$10.00 \$3.00 \$5.00 \$50.00 \$0.05 \$25.00 \$200.00 \$21.00 \$13,291.74 \$45.00 \$250.00 \$14.00 \$30,000.00	524 270 209 16 1,001 111 2,860 4 L.S. 3,623 L.S. 43 43 308 L.S.	\$5,240.00 \$810.00 \$1,045.00 \$800.00 \$50.05 \$2,775.00 \$5,719.00 \$200.00 \$76,083.00 \$13,291.74 \$1,935.00 \$10,750.00 \$4,312.00 \$30,000.00
7006	STRUCTURE EXCAVATION CL. B INCL HAUL	CV	\$5.00	241	\$1,205.00
7000	C.O. #3 - SHORING OR EXTRA EXCAVATION		\$1.00	781	\$781.00
	CL. B ADJUST CONC. INLET REIMBURSEMENT FOR THIRD PARTY DAMAGES	EACH DOL	\$200.00 \$0.00	4 0	\$800.00 \$0.00
7480	TRAINING ROADSIDE CLEANUP TRIMMING AND CLEAN-UP	HOUR DOL L.S.	\$1.00 \$3,083.78 \$20,000.00	283 1 L.S.	\$283.00 \$3,083.78 \$20,000.00
	CONTRACT SUBTOTAL WASHINGTON STATE SALES TAX		(Actual) 8.10%		\$748,104.56 \$60,596.47

PROJECT SUBTOTAL  PRELIMINARYENGINEERING  CONSTRUCTION ENGINEERING	(Actual) (Actual)	\$808,701.03 \$85,006.15 \$88,473.94
TOTAL COST		\$982,181.12

Table A-5. SR 90, Broadway Avenue and Thierman Street initial ACP construction cost estimate.

	. SK 90, Bloadway Avenue and Thierman St				
Contrac	t 4800		Construction Year: 1996		
SR 90			0.80 ' ACP		
Broadwa	ay Avenue and Thierman Street				
Initial C	ost of ACP Construction				
STD. ITEM NO.	ITEM	UNITS	UNIT PRICE	QUANTITY	AMOUNT
	PREPARATION				
0048 0188	MOBILIZATION (Same as PCCP - Actual) REMOVING CATCH BASIN REMOVING TEMPORARY PAVEMENT	L.S. EACH L.F.	\$350.00 \$0.05	L.S. 2.0 1,001.0	\$80,000.00 \$700.00 \$50.05
0215	MARKING REMOVING MISCELLANEOUS TRAFFIC ITEM	L.S.	\$12,000.00	L.S.	\$12,000.00
	GRADING				
0310	ROADWAY EXCAVATION INCL. HAUL	C.Y.	\$10.00	2,823	\$28,230.00
	DRAINAGE				
1180	CONCRETE INLET SCHEDULE A CULV. PIPE 12 INCH DIAM. SCHEDULE A CULV. PIPE 18 INCH DIAM.	EACH L.F. L.F.	\$850.00 \$20.00 \$40.00	1 72 212	\$850.00 \$1,440.00 \$8,480.00
	STORM SEWER PIPE				
3090	CATCH BASIN TYPE 1L	EACH	\$1,400.00	2	\$2,800.00
	SURFACING				
5120	CRUSHED SURFACING TOP COURSE	TON	\$20.00	1,889	\$37,780.00
	LIQUID ASPHALT				
	ASPHALT FOR TACK COAT ANTI-STRIPPING ADDITIVE	TON DOL	\$200.00 \$3,937.00	2.8	\$560.00 \$3,937.00
	ASPHALT CONCRETE PAVEMENT				
5711 5764 5830	BRIDGE APPROACH SLAB GRINDING PLANING BITUMINOUS PAVEMENT ASPHALT CONC. PAVEMENT CL. A JOB MIX COMPLIANCE PRICE ADJUSTMENT COMPACTION PRICE ADJUSTMENT	HOUR S.Y. TON DOL DOL	\$450.00 \$2.50 \$38.00 \$4,488.18 \$2,992.12	15 2,110 3,937 1 1	\$6,750.00 \$5,275.00 \$149,606.00 \$4,488.18 \$2,992.12

### **EROSION CONTROL AND PLANTING**

6419	SEEDING AND FERTILIZING BY HAND	S.Y.	\$3.00	506	\$1,518.00
	TRAFFIC				
6714	CEMENT CONC. BARRIER CURB	L.F.	\$10.00	524	\$5,240.00
6828	PLASTIC CROSSWALK STRIPE	L.F.	\$3.00	270	\$810.00
6829	PLASTIC STOP BAR	L.F.	\$5.00	209	\$1,045.00
6833	PLASTIC TRAFFIC ARROWS	EACH	\$50.00	16	\$800.00
6888	TEMPORARY PAVEMENT MARKING	L.F.	\$0.05	1,001	\$50.05
6954	TRAFFIC SAFETY DRUM	EACH	\$25.00	111	\$2,775.00
6956	SEQUENTIAL ARROWS SIGNS	HOUR	\$2.00	2,860	\$5,719.00
	TYPE III BARRICADE	EACH	\$50.00	4	\$200.00
	CHANNELIZATION DEVICES	L.S.	\$200.00	L.S.	\$200.00
	TRAFFIC CONTROL LABOR	HOUR	\$21.00	3,623	\$76,083.00
	TRAFFIC CONTROL VEHICLES	DAY	\$45.00	43	\$1,935.00
	TRAFFIC CONTROL SUPERVISOR	DAY	\$250.00	43	\$10,750.00
6982	CONSTRUCTION SIGNS CLASS A	S.F.	\$14.00	308	\$4,312.00
	VEHICLE DETECTION LOOP REPLACEMENT	L.S.	\$30,000.00	L.S.	\$30,000.00
	OTHER ITEMS				
7006	STRUCTURE EXCAVATION. CL. B INCL. HAUL	C.Y.	\$5.00	241	\$1,205.00
	SHRNG OR EXTRA EXCAVATION CL. B	S.F.	\$1.00	781	\$781.00
7340	ADJUST CONC. INLET	EACH	\$200.00	4	\$800.00
	REIMBURSEMENT FOR THIRD PARTY DAMAGES	EST.	\$0.00	DOL.	\$0.00
7400	TRAINING	HOUR	\$1.00	283	\$283.00
7480	ROADSIDE CLEANUP	DOL	\$3,083.78	1	\$3,083.78
7490	TRIMMING AND CLEAN-UP	L.S.	\$20,000.00	L.S.	\$20,000.00
	CONTRACT CURTOTAL				ΦΕ40 Ε00 40
	CONTRACT SUBTOTAL WASHINGTON STATE SALES TAX		8.10%		\$513,528.18
	WASHINGTON STATE SALES TAX		6.10%		\$41,595.78
	PROJECT SUBTOTAL				\$555,123.96
	PRELIMINARY ENGINEERING		(Same as PCCF	P)	\$85,006.15
	CONSTRUCTION ENGINEERING		(Same as PCCF		\$88,473.94
	TOTAL ESTIMATED COST				\$728,604.05

Table A-6. SR 90, Broadway Avenue and Thierman Street ACP inlay construction cost estimate.

Table A-6. Sk 90, Broadway Avenue and Thierman Street ACP imay construction cost estimate.					
Contrac	et 4800	Construction Year: 1996			
SR 90		0.20' ACP Inlay			
	you Avanua and Thiorman Street			,	
broadw	ay Avenue and Thierman Street				
ACP In	lay Construction Cost				
STD. ITEM NO.	ITEM	UNITS	UNIT PRICE	QUANTITY	AMOUNT
	PREPARATION				
0001	MOBILIZATION (10% of all items)	L.S.		L.S.	\$6,500.00
	REMOVING TEMPORARY PAVEMENT MARKING	L.F.	\$0.05	4,936	\$246.80
	LIQUID ASPHALT				
5325	ASPHALT FOR TACK COAT	TON	\$200.00	1.4	\$280.00
5334	ANTI-STRIPPING ADDITIVE	DOL	\$912.00	1	\$912.00
	ASPHALT CONCRETE PAVEMENT				
5711	PLANING BITUMINOUS PAVEMENT	S.Y.	\$2.10	6,657	\$13,979.70
	ASPHALT CONC. PAVEMENT CL. A	TON	\$38.00	912	\$34,656.00
		DOL	\$1,039.68	1	\$1,039.68
5835	COMPACTION PRICE ADJUSTMENT	DOL	\$693.12	1	\$693.12
	TRAFFIC				
6828	PLASTIC CROSSWALK STRIPE	S.F.	\$3.00	270	\$810.00
6829	PLASTIC STOP BAR	L.F.	\$5.00	209	\$1,045.00
	PLASTIC TRAFFIC ARROWS	EACH	\$50.00	16	\$800.00
	SEQUENTIAL ARROW SIGNS	HOUR	\$3.00	120	\$360.00
	TEMPORARY PAVEMENT MARKING	L.F.	\$0.15	4,936	\$740.40
	CHANNELIZATION DEVICES	L.S.	\$200.00	L.S.	\$200.00
	TRAFFIC CONTROL LABOR TRAFFIC CONTROL VEHICLE	HOUR DAY	\$28.00	180	\$5040.00
	TRAFFIC CONTROL VEHICLE	HOUR	\$100.00 \$35.00	30	\$300.00 \$1,050.00
	CONSTRUCTION SIGNS CLASS A	S.F.	\$6.00	308	\$1,848.00
	OTHER ITEMS				
7480	ROADSIDE CLEANUP	DOL	\$500.00	1	\$500.00

CONTRACT SUBTOTAL WASHINGTON STATE SALES TAX	8.10%	\$71,000.70 \$5,751.06
PROJECT SUBTOTAL		\$76,751.76
ENGINEERING CONTINGENCIES	20.00% 5.00%	\$15,350.35 \$3,837.59
TOTAL ESTIMATED COST		\$95,939.70

Table A-7. SR 291, Division Street and Francis Avenue initial PCCP construction cost estimate.

1 auto /1-/	Table A-7. SK 291, Division Street and Trancis Avenue initial Feet construction cost estimate.					
Contract SR 2	t 5132		Construction 0.83' PCC	tion Year: 1 P	997	
Division	Street and Francis Avenue					
Initial C	Cost of PCCP Construction					
STD. ITEM NO.	ITEM	UNITS	UNIT PRICE	QUANTITY	AMOUNT	
	PREPARATION					
0585	MOBILIZATION (Same as ACP) REMOVING TRAFFIC ISLAND REMOVING TRAFFIC CURB REMOVING MONUMENT CASE AND COVER  GRADING	L.S. M2 M EACH	\$5.25 \$16.25 \$105.00	L.S. 45 300 1	\$39,000.00 \$236.25 \$4,875.00 \$105.00	
2955	ROADWAY EXCAVATION INCL. HAUL	МЗ	\$11.00	4,115	\$45,265.00	
	SURFACING					
8673	CRUSHED SURFACING BASE COURSE	TONNE	\$17.00	1,996	\$33,932.00	
	CEMENT CONCRETE PAVEMENT					
	MODIFIED CONC. CLASS 28 1 DAY 250 MM SECTION	M2	\$41.50	8,603	\$357,024.50	
	ASPHALT CONCRETE PAVEMENT					
8915	LONGITUDINAL JOINT SEAL	М	\$2.45	205	\$502.25	
	TRAFFIC					
9251 9257 9289 9273 6833 6871 9310	PAINT STRIPE PLASTIC STRIPE PLASTIC GORE STRIPE PLASTIC CROSSWALK STRIPE PLASTIC STOP BAR PLASTIC TRAFFIC ARROWS PLASTIC TRAFFIC LETTERS TEMPORARY PAVEMENT MARKING PERMANENT SIGNING SEQUENTIAL ARROWS SIGNS	M M M2 M EACH EACH M L.S. HOUR	\$0.25 \$2.15 \$3.75 \$20.50 \$10.50 \$43.00 \$17.00 \$0.35 \$1,600.00 \$2.75	1,880 2,215 525 74 74 6 16 1,880 L.S.	\$470.00 \$4,762.25 \$1,968.75 \$1,517.00 \$777.00 \$258.00 \$272.00 \$658.00 \$1,600.00 \$2,200.00	

6979 6968 6969	TEMPORARY TRAFFIC CONTROL DEVICES TRAFFIC CONTROL LABOR TRAFFIC CONTROL VEHICLES TRAFFIC CONTROL SUPERVISOR CONSTRUCTION SIGNS CLASS A  OTHER ITEMS	L.S. HOUR DAY HOUR M2	\$200.00 \$27.50 \$50.00 \$33.00 \$65.00	L.S. 352 35 280 5	\$200.00 \$9,680.00 \$1,750.00 \$9,240.00 \$338.00
3080 3100	QUALITY CONTROL PROGRAM ADJUST INLET ADJUST MANHOLE ADJUST CATCH BASINS ADJUST VALVE BOX	L.S. EACH EACH EACH EACH	\$250.00 \$435.00 \$340.00 \$340.00 \$180.00	L.S. 1 5 1 6	\$250.00 \$435.00 \$1,700.00 \$340.00 \$1,080.00
	CONTRACT SUBTOTAL WASHINGTON STATE SALES TAX PROJECT SUBTOTAL		8.10%		\$520,436.00 \$42,155.32 \$562,591.32
	TOTAL ESTIMATED COST		20.00%		\$112,518.26 <b>\$675,109.58</b>

Table A-8. SR 291, Division Street and Francis Avenue initial ACP construction cost estimate.

Table A-6. SK 291, Division succe and Trancis Avenue initial ACT construction cost estimate.						
Contrac	t 5132		Construc	tion Year:	1997	
SR 2			0.70' ACP	)		
	Street and Francia Avanua					
DIVISION	Street and Francis Avenue					
1	A 1 - 1 A O D O 1 1					
Initial C	Cost of ACP Construction					
STD.	ITEM	LINITO	LINIT	OLIANITITY	AMOUNT	
ITEM	I I EIVI	UNITS	UNIT PRICE	QUANTITY	AMOUNT	
NO.			THIOL			
	PREPARATION					
	MOBILIZATION (10% of Subtotal)	L.S.	4= 0=	L.S.	\$39,000.00	
	REMOVING TRAFFIC ISLAND REMOVING TRAFFIC CURB	M2 M	\$5.25 \$16.25	45 300	\$236.25 \$4,875.00	
0390	REMOVING MONUMENT CASE AND COVER		\$105.00	1.0	\$105.00	
	TIEMOVING MONOMENT GAGE AND GOVERT	LAOIT	ψ105.00	1.0	ψ103.00	
	GRADING					
2955	ROADWAY EXCAVATION INCL. HAUL	M3	\$11.00	3,933	\$43,263.00	
	SURFACING					
	COM AGING					
8673	CRUSHED SURFACING BASE COURSE	TONNE	\$17.00	2,744	\$46,648.00	
	LIQUID ASPHALT					
9722	ASPHALT FOR TACK COAT	TONNE	\$200.00	4	\$800.00	
	ANTI-STRIPPING ADDITIVE	DOL	\$4,476.00	1	\$4,476.00	
0001	7.11.1 GT III T III G 7.15 BT II V E	DOL	φ1,170.00	·	ψ1,170.00	
	ASPHALT CONCRETE PAVEMENT					
	ACRUM T COMO DAVENTO TO	<b>TO</b> 1:::=	<b></b>		<b></b>	
	ASPHALT CONC. PAVEMENT CL. A	TONNE	\$42.00	4,476		
	JOB MIX COMPLIANCE PRICE ADJUSTMENT COMPACTION PRICE ADJUSTMENT	DOL	\$5,639.76 \$3,759.84	1	\$5,639.76 \$3,759.84	
3003	COMITACTION I THE ADJUSTMENT	DOL	φ5,753.04	'	φυ,7 υθ.04	
	TRAFFIC					
	PAINT STRIPE	M	\$0.25	1,880	\$470.00	
	PLASTIC STRIPE	M	\$2.15	2,215	\$4,762.25	
	PLASTIC GORE STRIPE PLASTIC CROSSWALK STRIP	M M2	\$3.75 \$20.50	525 74	\$1,968.75 \$1,517.00	
	PLASTIC CHOSSWALK STRIP	M	\$10.50	74	\$777.00	
	PLASTIC TRAFFIC ARROWS	EACH	\$43.00	6	\$258.00	
	PLASTIC TRAFFIC LETTERS	EACH	\$17.00	16	\$272.00	
	TEMPORARY PAVEMENT MARKING	M	\$0.35	1,880	\$658.00	

6890	PERMANENT SIGNING		L.S.	\$1,600.00	L.S.	\$1,600.00
6956	SEQUENTIAL ARROWS	SIGNS	HOUR	\$2.75	800	\$2,200.00
9380	TEMPORARY TRAFFIC C	CONTROL DEVICES	L.S.	\$200.00	L.S.	\$200.00
6979	TRAFFIC CONTROL LAB	OR	HOUR	\$27.50	352	\$9,680.00
6968	TRAFFIC CONTROL VEH	ICLES	DAY	\$50.00	35	\$1,750.00
6969	TRAFFIC CONTROL SUP	ERVISOR	HOUR	\$33.00	280	\$9,240.00
9398	CONSTRUCTION SIGNS	CLASS A	M2	\$65.00	5	\$338.00
	OTHER ITEMS					
9602	ADJUST INLET		EACH	\$435.00	1	\$435.00
3080	ADJUST MANHOLE		EACH	\$340.00	5	\$1,700.00
3100	ADJUST CATCH BASINS		EACH	\$340.00	1	\$340.00
6243	ADJUST VALVE BOX		EACH	\$180.00	6	\$1,080.00
_	CONTRACT SUBTOTAL					\$376,040.85
	WASHINGTON STATE SA	ALES TAX		8.10%		\$30,459.31
						<b>4</b> 00, 100101
	PROJECT SUBTOTAL					\$406,500.16
	ENGINEERING	(Same as PCCP)				\$112,518.26
	TOTAL ESTIMATED COS	ST				\$519,018.42

Table A-9. SR 291, Division Street and Francis Avenue ACP inlay construction cost estimate.

	. Six 291, Division Street and Francis Avenu					
Contract 5132			Construction Year: 1997			
SR 2 0.20'			0.20' Inlay			
_	Street and Francis Avenue		-			
DIVISION	Sifeet and Francis Avenue				_	
4001						
ACP In	ay Construction Cost				_	
STD.	ITEM	UNITS	UNIT	QUANTITY	AMOUNT	
ITEM			PRICE			
NO.						
	DDED AD ATION					
	PREPARATION					
0001	MOBILIZATION (10% of all items)	L.S.		L.S.	\$10,200.00	
0900	REMOVING TEMPORARY PAVEMENT	M	\$0.20	3,316	\$663.20	
	MARKING					
	LIQUID ASPHALT					
8722	ASPHALT FOR TACK COAT	TONNE	\$200	2	\$400.00	
	ANTI-STRIPPING ADDITIVE	DOL	\$1,305.00	1	\$1,305.00	
	ASPHALT CONCRETE PAVEMENT					
8840	PLANING BITUMINOUS PAVEMENT	M2	\$2.50	8,603	\$21,507.50	
	ASPHALT CONC. PAVEMENT CL. A	TONNE	\$42.00	1,305		
	JOB MIX COMPLIANCE PRICE ADJUSTMENT		\$1,644.30	1	\$1,644.30	
5835	COMPACTION PRICE ADJUSTMENT	DOL	\$1,096.20	1	\$1,096.20	
	TRAFFIC					
0040	DAINT OTDIDE		Φ0.05	4 000	<b>#</b> 050.00	
	PAINT STRIPE PLASTIC STRIPE	M M	\$0.35 \$2.15	1,880 2,215		
	PLASTIC GORE STRIPE	M	\$3.75	525	\$1,968.75	
	PLASTIC CROSSWALK STRIP	M2	\$30.00	74		
	PLASTIC STOP BAR	M	\$17.00	74	\$1,258.00	
6833	PLASTIC TRAFFIC ARROWS	EACH	\$50.00	6	\$300.00	
	PLASTIC TRAFFIC LETTERS	EACH	\$25.00	16	\$400.00	
	TEMPORARY PAVEMENT MARKING	М	\$0.35	3,316	\$1,160.60	
	SEQUENTIAL ARROWS SIGNS	HOUR	\$3.00	120	\$360.00	
	TRAFFIC CONTROL LABOR TRAFFIC CONTROL VEHICLES	HOUR DAY	\$28.00 \$100.00	180 3	\$5,040.00 \$300.00	
	TRAFFIC CONTROL SUPERVISOR	HOUR	\$35.00	30	\$1,050.00	
	CONSTRUCTION SIGNS CLASS A	M2	\$65.00	5	\$325.00	
			,			
	OTHER ITEMS					
7480	ROADSIDE CLEANUP	DOL	\$500.00	1	\$500.00	

CONTRACT SUBTOTAL		\$111,928.80
WASHINGTON STATE SALES TAX	8.10%	\$9,066.23
PROJECT SUBTOTAL		\$120,995.03
ENGINEERING	20.00%	\$24,199.01
CONTINGENCIES	5.00%	\$6,049.75
TOTAL ESTIMATED COST		\$151,243.79

Table A-10. SR 291, Francis Avenue with Maple and Ash Streets initial PCCP construction cost estimate.

1401011101	Table A-10. SK 291, Francis Avenue with Maple and Ash Streets initial Teel construction cost estimate					
Contract 51	132		Construction Year: 1997			
SR 291			0.75' PCCP			
Francis Ave Streets	enue with Maple and Ash					
<b>Initial Cos</b>	t of PCCP Construction					
STD. ITEI ITEM NO.	М	UNITS	UNIT PRICE	QUANTITY	AMOUNT	
PRE	EPARATION					
585 REN 590 REN	BILIZATION (Same as ACP) MOVING TRAFFIC ISLAND MOVING TRAFFIC CURB MOVING MONUMENT CASE AND COVER	L.S. M2 M EACH	\$5.25 \$16.25 \$105.00	L.S. 285 257 1	\$24,000.00 \$1,496.25 \$4,176.25 \$105.00	
GR	ADING					
2955 RO/	ADWAY EXCAVATION INCL. HAUL	МЗ	\$11.00	3,364	\$37,004.00	
STC	ORM SEWER					
CON	CTILE IRON PIPE 200 MM DIAM. NNECT 200MM DIAM. PIPE TO EX. CB TCH BASIN TYPE 2	M EACH EACH	\$80.00 \$135.00 \$1,700.00	5 1 1	\$400.00 \$135.00 \$1,700.00	
SUF	RFACING					
8673 CRI	USHED SURFACING BASE COURSE	TONNE	\$17.00	1,185	\$20,145.00	
CEN	MENT CONCRETE PAVEMENT					
	DIFIED CONC. CLASS 28 1 DAY 225 MM CTION	M2	\$41.50	5,061	\$210,031.50	
ASF	PHALT CONCRETE PAVEMENT					
8915 LON	NGITUDINAL JOINT SEAL	М	\$2.45	234	\$573.30	
TRA	AFFIC					
9229 EXT DEL	MENT CONC BARRIER CURB TRUDED CURB LINEATORS NT STRIPE	M M EACH M	\$25.15 \$15.65 \$36.00 \$0.25	73 203 1 2,170	\$1,835.95 \$3,176.95 \$36.00 \$542.50	

	PLASTIC STRIPE	M	\$2.15	32	\$68.80
	PLASTIC GORE STRIPE	M	\$3.75	33	\$123.75
	PLASTIC CROSSWALK STRIP	M2	\$20.50	71	\$1,455.50
	PLASTIC STOP BAR	M	\$10.50	85	\$892.50
	PLASTIC TRAFFIC ARROWS	EACH	\$43.00	7	\$301.00
	PLASTIC TRAFFIC LETTERS	EACH	\$17.00	16	\$272.00
	TEMPORARY PAVEMENT MARKING	M	\$0.35	2,170	\$759.50
6890	PERMANENT SIGNING	L.S.	\$1,600.00	L.S.	\$1,600.00
	INDUCTION LOOP DETECTORS	EACH	\$800.00	2	\$1,600.00
	TRAFFIC SIGNAL CONTROL SYSTEM.	L.S.	\$12,700.00	L.S.	\$12,700.00
	TRAFFIC COMMUNICATION SYSTEM.	L.S.	\$1,200.00	L.S.	\$1,200.00
	TEMP TRAFFIC SIGNAL SYSTEM MAPLE ST.	L.S.	\$5,000.00	L.S.	\$5,000.00
	TEMP TRAFFIC SIGNAL SYSTEM ASH ST.	L.S.	\$1,000.00	L.S.	\$1,000.00
6956	SEQUENTIAL ARROWS SIGNS	HOUR	\$2.75	600	\$1,650.00
9380	TEMPORARY TRAFFIC CONTROL DEVICES	L.S.	\$200.00	L.S.	\$200.00
6979	TRAFFIC CONTROL LABOR	HOUR	\$27.50	300	\$8,250.00
6968	TRAFFIC CONTROL VEHICLES	DAY	\$50.00	29	\$1,450.00
6969	TRAFFIC CONTROL SUPERVISOR	HOUR	\$33.00	232	\$7,656.00
9398	CONSTRUCTION SIGNS CLASS A	M2	\$65.00	13	\$845.00
	OTHER ITEMS				
	QUALITY CONTROL PROGRAM	L.S.	\$500.00	L.S.	\$500.00
3080	ADJUST MANHOLE	EACH	\$340.00	8	\$2,720.00
6243	ADJUST VALVE BOX	EACH	\$180.00	7	\$1,260.00
	C.O. #7 - PERMANENT SIGNS AT MAPLE/ASH	L.S.	\$2,872.26	L.S.	\$2,872.26
	I/S				
	CONTRACT SUBTOTAL				\$359,734.01
	WASHINGTON STATE SALES TAX		8.10%		\$29,138.45
	PROJECT SUBTOTAL				\$388,872.46
	ENGINEERING		20.00%		\$77,774.49
	TOTAL ESTIMATED COST				\$466,646.96

Table A-11. SR 291, Francis Avenue with Maple and Ash Streets initial ACP construction cost estimate.

Table A-11. Six 291, Trailers Avenue with Maple and Ash Streets initial Act construction cost estimate.						
Contrac	et 5132		Construction Year: 1997			
SR 291			0.70' ACP			
	Avenue with Maple and Ash					
Initial C	Cost of ACP Construction					
STD. ITEM NO.	ITEM	UNITS	UNIT PRICE	QUANTITY	AMOUNT	
	PREPARATION					
0048 0540 0590 0585	MOBILIZATION (10%) REMOVING CATCH BASIN REMOVING CEMENT CONCRETE SIDEWALK REMOVING CEMENT CONCRETE CURB REMOVING TRAFFIC ISLAND REMOVING TRAFFIC CURB REMOVING MONUMENT CASE AND COVER	L.S. EACH M2 M M2 M EACH	\$400.00 \$8.50 \$16.25 \$5.25 \$16.25 \$105.00	L.S. 1 171 82 285 257 1	\$24,000.00 \$400.00 \$1,453.50 \$1,332.50 \$1,496.25 \$4,176.25 \$105.00	
	GRADING					
2955	ROADWAY EXCAVATION INCL. HAUL	M3	\$11.00	2,313	\$25,443.00	
	STORM SEWER					
6387	DUCTILE IRON PIPE 200 MM DIAM. CONNECT 200MM DIAM. PIPE TO EXIST. CATCH BASIN	M EACH	\$80.00 \$135.00	5 1	\$400.00 \$135.00	
3090	CATCH BASIN TYPE 2	EACH	\$1,700.00	1	\$1,700.00	
	SURFACING					
8673	CRUSHED SURFACING BASE COURSE	TONNE	\$17.00	1,354	\$23,018.00	
	LIQUID ASPHALT					
_	ASPHALT FOR TACK COAT ANTI-STRIPPING ADDITIVE	TONNE DOL	\$2,633.00	2.3	\$460.00 \$2,633.00	
	ASPHALT CONCRETE PAVEMENT					
5830	ASPHALT CONC. PAVEMENT CL. A JOB MIX COMPLIANCE PRICE ADJUSTMENT COMPACTION PRICE ADJUSTMENT	TONNE DOL DOL	\$42.00 \$3,317.58 \$2,211,72	2727 1 1	\$110,586.00 \$3,317.58 \$2,211.72	

# **TRAFFIC**

	CEMENT CONC BARRIER CURB	M	\$25.15		\$1,835.95
9229	EXTRUDED CURB	M	\$15.65		\$3,176.95
	DELINEATORS	EACH	\$36.00		\$36.00
	PAINT STRIPE	M	\$0.25		\$542.50
	PLASTIC STRIPE	M	\$2.15		\$68.80
	PLASTIC GORE STRIPE	M	\$3.75		\$123.75
	PLASTIC CROSSWALK STRIP	M2	\$20.50		\$1,455.50
	PLASTIC STOP BAR	M	\$10.50		\$892.50
	PLASTIC TRAFFIC ARROWS	EACH	\$43.00		\$301.00
6871	PLASTIC TRAFFIC LETTERS	EACH	\$17.00	16	\$272.00
9310	TEMPORARY PAVEMENT MARKING	M	\$0.35	2,170	\$759.50
6890	PERMANENT SIGNING	L.S.	\$1,600.00	L.S.	\$1,600.00
	INDUCTION LOOP DETECTORS	EACH	\$800.00	2	\$1,600.00
	TRAFFIC SIGNAL CONTROL SYS	L.S.	\$12,700.00	L.S.	\$12,700.00
	TRAFFIC COMMUNICATION SYSTEM	L.S.	\$1,200.00	L.S.	\$1,200.00
	TEMP TRAFFIC SIGNAL SYS MAPLE ST	L.S.	\$5,000.00	L.S.	\$5,000.00
	TEMP TRAFFIC SIGNAL SYS ASH ST	L.S.	\$1,000.00	L.S.	\$1,000.00
6956	SEQUENTIAL ARROWS SIGNS	HOUR	\$2.75	600	\$1,650.00
9380	TEMP TRAFFIC CONTROL DEVICES	L.S.	\$200.00	L.S.	\$200.00
6979	TRAFFIC CONTROL LABOR	HOUR	\$27.50	300	\$8,250.00
6968	TRAFFIC CONTROL VEHICLES	DAY	\$50.00	29	\$1,450.00
	TRAFFIC CONTROL SUPERVISOR	HOUR	\$33.00	232	\$7,656.00
	CONSTRUCTION SIGNS CLASS A	M2	\$65.00		\$845.00
	OTHER ITEMS				
	OTTENTION OF THE PROPERTY OF T				
	QUALITY CONTROL PROGRAM	L.S.	\$500.00	L.S.	\$500.00
3080	ADJUST MANHOLE	EACH	\$340.00		\$2,720.00
	ADJUST VALVE BOX	EACH	\$180.00		\$1,260.00
00	C.O. #7 - PERMANENT SIGNS AT MAPLE/ASH		\$2,872.26		\$2,872.26
	I/S				<b>+</b> =,= : = := :
	CONTRACT CURTOTAL				<b>\$222.005.54</b>
	CONTRACT SUBTOTAL		0.400/		\$262,835.51
	WASHINGTON STATE SALES TAX		8.10%		\$21,289.68
	PROJECT SUBTOTAL				\$284,125.19
	ENGINEERING (Same as PCCP)				\$77,774.49
	(Jame as 1 John)				Ψ11,114.49
	TOTAL ESTIMATED COST				\$361,899.58

Table A-12. SR 2, Francis Avenue with Maple and Ash Streets ACP inlay construction cost estimate.

1 autc A-1	2. SK 2, Prancis Avenue with Maple and Asi	ii Siiccis	ACI illiay Co	onsu action c	ost estimate.
Contrac	t 5132		Construct	ion Year: <sup>-</sup>	1997
SR 291			0.20' Inlay		
	Avenue with Manle and Asle		,		
	Avenue with Maple and Ash				
Streets					
<b>ACP In</b>	lay Construction Cost				
-	•				
STD.	ITEM	UNITS	UNIT	QUANTITY	AMOUNT
ITEM			PRICE		
NO.					
	PREPARATION				
0001	MOBILIZATION (10% of all items)	L.S.		L.S.	\$6,200.00
	REMOVING TEMPORARY PAVEMENT	L.S. M	\$0.20	496	\$99.20
0300	MARKING	IVI	ψ0.20	430	ψ33.20
	LIQUID ASPHALT				
8722	ASPHALT FOR TACK COAT	TONNE	\$200.00	1.2	\$240.00
5334	ANTI-STRIPPING ADDITIVE	EST	\$780.00	DOL	\$780.00
	ASPHALT CONCRETE PAVEMENT				
0040	PLANING BITUMINOUS PAVEMENT	M2	\$2.50	5,061	\$12,652.50
	ASPHALT CONC. PAVEMENT CL. A	TONNE	\$42.00	780	\$32,760.00
	JOB MIX COMPLIANCE PRICE ADJUSTMENT		\$982.80	1	\$982.80
	COMPACTION PRICE ADJUSTMENT	DOL	\$655.20	1	\$655.20
0000	301111 713 T 1011 T 1113 Z 712 3 3 3 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	202	φοσο.2σ	·	Ψ000.20
	TRAFFIC				
	PAINT STRIPE	M	0.35	2,170	\$759.50
	PLASTIC STRIPE	M	\$6.00	32	\$192.00
	PLASTIC GORE STRIPE	M	\$3.75	33	\$123.75
	PLASTIC CROSSWALK STRIP	M2	\$30	71	\$2,130.00
	PLASTIC STOP BAR	M	\$17.00	85	\$1,445.00
	PLASTIC TRAFFIC ARROWS	EACH EACH	\$50.00	7	\$350.00
	PLASTIC TRAFFIC LETTERS TEMPORARY PAVEMENT MARKING	M M	\$25.00 \$0.35	16	\$400.00
	SEQUENTIAL ARROWS SIGNS	HOUR	\$3.00	496 120	\$173.60 \$360.00
	TRAFFIC CONTROL LABOR	HOUR	\$28.00	180	\$5,040.00
	TRAFFIC CONTROL VEHICLES	DAY	\$100.00	3	\$3,040.00
	TRAFFIC CONTROL SUPERVISOR	HOUR	\$35.00	30	\$1,050.00
	CONSTRUCTION SIGNS CLASS A	M2	\$65.00	13	\$845.00
5550	CO. CO. TICO FIGH CIGHO CLACO A		Ψ00.00	10	ψ0-10.00
	OTHER ITEMS				
7840	ROADSIDE CLEANUP	DOL	\$500.00	1	\$500.00
			,		,

CONTRACT SUBTOTAL WASHINGTON STATE SALES TAX	8.10%	\$68,038.55 \$5,511.12
PROJECT SUBTOTAL		\$73,549.67
ENGINEERING	20.00%	\$14,709.93
CONTINGENCIES	5.00%	\$3,677.48
TOTAL ESTIMATED COST		\$91,937.08

Table A-13. SR 27, Pines Road and Broadway Avenue initial PCCP construction cost estimate.

Contract 5298		Construction	n Vear 10	998	
SR 27		0.83' PCCP			
Pines Road and Broadway Avenue					
I mos rioda dna Broadway / Wondo					
Initial Cost of PCCP Construction					
STD. ITEM	UNITS	UNIT	QUANTITY	AMOUNT	
ITEM NO.		PRICE			
NO.					
PREPARATION					
0001 MOBILIZATION (same as ACP)	L.S.		L.S.	\$25,000.00	
0590 REMOVING TRAFFIC CURB 0900 REMOVING TEMPORARY PAVEMENT	M	\$4.50 \$0.15	253	\$1,138.50	
MARKING	M	φυ.15	1,237.0	\$185.55	
REMOVE MONUMENT CASE AND COVER	EACH	\$60.00	1.0	\$60.00	
GRADING					
2945 ROADWAY EXCAVATION INCL. HAUL	M3	\$15.00	1,825	\$27,375.00	
SURFACING					
8677 CRUSHED SURFACING TOP COURSE	TONNE	\$18.00	1,343	\$24,174.00	
CEMENT CONCRETE PAVEMENT					
MODIFIED CONC. CLASS 28 1 DAY	M2	\$45.00	4,808	\$216,360.00	
LIQUID ASPHALT					
8722 ASPHALT FOR TACK COAT	T	\$200.00 \$53.00	0.1	\$20.00	
5334 ANTI-STRIPPING ADDITIVE	DOL	φ33.00	1	\$53.00	
ASPHALT CONCRETE PAVEMENT					
8840 PLANING BITUMIOUS PAVEMENT	M2	\$1.10	397	\$436.70	
MODIFIED ASPHALT CONC. PAVEMENT CL. A	TONNE	\$30.80	53	\$1,632.40	
5830 JOB MIX COMPLIANCE PRICE ADJUSTMENT 5835 COMPACTION PRICE ADJUSTMENT	DOL DOL	\$49.00 \$33.00	1	\$49.00 \$33.00	
5555 55 //6/10/17 18/02 //B0001 MEIV		Ψ00.00	•	Ψ00.00	

### **TRAFFIC**

9249 9355 9289 9273 6890 6956 9380 6968 6979 6972	TEMPORARY PAVEMENT MARKING PAINT STRIPE PAINTED GORE STRIPE PLASTIC CROSSWALK STRIPE PLASTIC STOP BAR PLASTIC TRAFFIC ARROW PERMANENT SIGNING SEQUENTIAL ARROW SIGN TEMPORARY TRAFFIC CONTROL DEVICES TRAFFIC CONTROL VEHICLE TRAFFIC CONTROL LABOR TRAFFIC CONTROL SUPERVISOR CONSTRUCTION SIGNS CLASS A PREFORMED INDUCTION LOOPS-ROUND AND TYPE 1	M M M2 M EACH L.S. HOUR L.S. DAY HOUR HOUR M2 L.S.	\$0.16 \$0.18 \$0.45 \$28.50 \$15.80 \$60.00 \$2,000.00 \$5.00 \$100.00 \$50.00 \$29.00 \$32.00 \$50.00 \$21,000.00	3,000 3,000 168 44 24 4 L.S. 369 L.S. 30 300 240 10 L.S.	\$480.00 \$540.00 \$75.60 \$1,254.00 \$379.20 \$240.00 \$2,000.00 \$1,845.00 \$100.00 \$1,500.00 \$7,680.00 \$500.00 \$21,000.00
	OTHER ITEMS				
3080 3100 7480	ADJUST VALVE BOX ADJUST MANHOLE ADJUST CATCH BASIN ROADSIDE CLEANUP TRIMMING AND CLEANUP C.O.#4 -EXTRUDED CURB	EACH EACH DOL L.S. M	\$180.00 \$360.00 \$360.00 \$500.00 \$500.00 \$15.00	14 2 2 1 L.S. 222	\$2,520.00 \$720.00 \$720.00 \$500.00 \$500.00 \$3,330.00
	CONTRACT SUBTOTAL				\$351,100.95
	WASHINGTON STATE SALES TAX		8.10%		\$28,439.18
	PROJECT SUBTOTAL				\$379,540.13
	ENGINEERING		20.00	0%	\$75,908.03
	PROJECT ESTIMATED COST				\$455,448.16

Table A-14. SR 27, Pines Road and Broadway Avenue initial ACP construction cost estimate.

Table A-14. SR 27, Pines Road and Broadway Avenue	e initial A	CP constructi	on cost estin	nate.
Contract 5298		Construction	on Year: 1	998
SR 27		0.70' ACP		
Pines Road and Broadway Avenue				
Initial Cost of ACP Construction				
STD. ITEM ITEM NO.	UNITS	UNIT PRICE	QUANTITY	AMOUNT
PREPARATION				
0001 MOBILIZATION (10% of Subtotal) 0590 REMOVING TRAFFIC CURB 0900 REMOVING TEMPORARY PAVEMENT	L.S. M M	4.50 \$0.15	L.S. 253.0 1,237	25,000.00 \$1,138.50 \$185.55
MARKING REMOVE MONUMENT CASE AND COVER	EACH	\$60.00	1.0	\$60.00
GRADING				
2945 ROADWAY EXCAVATION INCL. HAUL	МЗ	\$15.00	1,825	\$27,375.00
SURFACING				
8677 CRUSHED SURFACING TOP COURSE	TONNE	\$18.00	1,761	\$31,698.00
LIQUID ASPHALT				
8722 ASPHALT FOR TACK COAT 5334 ANTI-STRIPPING ADDITIVE	TONNE DOL	\$200.00 \$2,502.00	2.2	\$440.00 \$2,502.00
ASPHALT CONCRETE PAVEMENT				
8870 ASPHALT CONC PAVEMENT CL. A 5830 JOB MIX COMPLIANCE PRICE ADJUSTMENT 5835 COMPACTION PRICE ADJUSTMENT	TONNE DOL DOL	\$42.00 \$3,152.52 \$2,101.68	2,502 1 1	\$105,084.00 \$3,152.52 \$2,101.68
TRAFFIC				
9310 TEMPORARY PAVEMENT MARKING 9249 PAINT STRIPE 9355 PAINTED GORE STRIPE 9289 PLASTIC CROSSWALK STRIPE 9273 PLASTIC STOP BAR PLASTIC TRAFFIC ARROW 6890 PERMANENT SIGNING 6956 SEQUENTIAL ARROW SIGN 9380 TEMPORARY TRAFFIC CONTROL DEVICES	M M M2 M EACH L.S. HOUR L.S.	\$0.16 \$0.18 \$0.45 \$28.50 \$15.80 \$60.00 \$2,000.00 \$5.00 \$100.00	3,000 3000 168 44 24 4 L.S. 369 L.S.	\$480.00 \$540.00 \$75.60 \$1,254.00 \$379.20 \$240.00 \$2,000.00 \$1,845.00 \$100.00

6979 TRAFFIC CONTROL LABOR 6972 TRAFFIC CONTROL SUPERVISOR 9398 CONSTRUCTION SIGNS CLASS A PREFORMED INDUCTION LOOPS ROUND AND TYPE 1  OTHER ITEMS  6243 ADJUST VALVE BOX 3080 ADJUST MANHOLE EACH \$180.00 14 \$2,520.00 3100 ADJUST CATCH BASIN EACH \$360.00 2 \$720.00 3100 ADJUST CATCH BASIN EACH \$360.00 2 \$720.00 7480 ROADSIDE CLEANUP DOL \$500.00 1 \$500.00 7490 TRIMMING AND CLEANUP EXTRUDED CURB  CONTRACT SUBTOTAL WASHINGTON STATE SALES TAX  PROJECT SUBTOTAL ENGINEERING (Same as PCCP) TOTAL ESTIMATED COST  \$340,748.09		6968 TRAFFIC CONTROL VEHICLE	DAY	\$50.00	30	\$1,500.00
6972 TRAFFIC CONTROL SUPERVISOR 9398 CONSTRUCTION SIGNS CLASS A PREFORMED INDUCTION LOOPS ROUND AND TYPE 1  OTHER ITEMS  6243 ADJUST VALVE BOX 3080 ADJUST MANHOLE EACH \$360.00 2 \$720.00 3100 ADJUST CATCH BASIN EACH \$360.00 2 \$720.00 7480 ROADSIDE CLEANUP DOL \$500.00 1 \$500.00 7490 TRIMMING AND CLEANUP EXTRUDED CURB  CONTRACT SUBTOTAL WASHINGTON STATE SALES TAX  PROJECT SUBTOTAL ENGINEERING (Same as PCCP)  #75,908.03		6979 TRAFFIC CONTROL LABOR	HOUR	\$29.00	300	\$8,700.00
9398 CONSTRUCTION SIGNS CLASS A PREFORMED INDUCTION LOOPS ROUND L.S. \$21,000.00 L.S. \$21,000.0		6972 TRAFFIC CONTROL SUPERVISOR	HOUR	\$32.00	240	\$7,680.00
PREFORMED INDUCTION LOOPS ROUND L.S. \$21,000.00 AND TYPE 1  OTHER ITEMS  6243 ADJUST VALVE BOX EACH \$180.00 14 \$2,520.00 3080 ADJUST MANHOLE EACH \$360.00 2 \$720.00 3100 ADJUST CATCH BASIN EACH \$360.00 2 \$720.00 7480 ROADSIDE CLEANUP DOL \$500.00 1 \$500.00 7490 TRIMMING AND CLEANUP L.S. \$500.00 L.S. \$500.00 EXTRUDED CURB M \$15.00 222 \$3,330.00  CONTRACT SUBTOTAL \$253,321.05 WASHINGTON STATE SALES TAX \$20,519.01 PROJECT SUBTOTAL \$273,840.06 ENGINEERING (Same as PCCP)					10	
AND TYPE 1  OTHER ITEMS  6243 ADJUST VALVE BOX						
OTHER ITEMS  6243 ADJUST VALVE BOX  6243 ADJUST MANHOLE  6243 ADJUST MANHOLE  EACH  \$360.00  2 \$720.00  3100 ADJUST CATCH BASIN  EACH  \$360.00  2 \$720.00  7480 ROADSIDE CLEANUP  DOL  \$500.00  1 \$500.00  7490 TRIMMING AND CLEANUP  EXTRUDED CURB  CONTRACT SUBTOTAL  WASHINGTON STATE SALES TAX  PROJECT SUBTOTAL  ENGINEERING  (Same as PCCP)  EACH  \$180.00  14 \$2,520.00  2 \$720.00  2 \$720.00  1 \$500.00  1 \$500.00  1 \$500.00  1 \$500.00  2 \$720.00  3 \$1500.00  1 \$500.00  2 \$720.00  3 \$100 ADJUST CATCH BASIN  EACH  \$180.00  2 \$720.00  3 \$100 ADJUST CATCH BASIN  \$1500.00  \$1 \$500.00  \$1 \$500.00  \$1 \$500.00  \$1 \$500.00  \$1 \$500.00  \$1 \$500.00  \$1 \$500.00  \$1 \$500.00  \$2 \$720.00  \$1 \$500.00  \$1 \$500.00  \$2 \$720.00  \$1 \$500.00  \$1 \$500.00  \$2 \$720.00  \$1 \$500.00  \$2 \$720.00  \$1 \$500.00  \$2 \$720.00  \$1 \$500.00  \$2 \$720.00  \$1 \$500.00  \$2 \$720.00  \$1 \$500.00  \$2 \$720.00  \$1 \$500.00  \$2 \$720.00  \$2 \$720.00  \$2 \$720.00  \$360.00  \$2 \$720.00  \$360.00  \$2 \$720.00  \$360.00  \$2 \$720.00  \$360.00  \$360.00  \$2 \$720.00  \$360.00  \$360.00  \$360.00  \$360.00  \$400.00  \$			L.O.	Ψ21,000.00	2.0.	Ψ21,000.00
6243 ADJUST VALVE BOX 3080 ADJUST MANHOLE EACH \$360.00 3100 ADJUST CATCH BASIN FACH \$360.00 2 \$720.00 3100 ADJUST CATCH BASIN EACH \$360.00 2 \$720.00 7480 ROADSIDE CLEANUP DOL \$500.00 1 \$500.00 7490 TRIMMING AND CLEANUP EXTRUDED CURB  CONTRACT SUBTOTAL WASHINGTON STATE SALES TAX PROJECT SUBTOTAL ENGINEERING (Same as PCCP)  EXTRUDED (Same as PCCP)  FACH \$180.00 14 \$2,520.00 2 \$720.00 2		71110 1 11 2 1				
3080 ADJUST MANHOLE 3100 ADJUST CATCH BASIN FACH 3360.00 2 \$720.00		OTHER ITEMS				
3080 ADJUST MANHOLE 3100 ADJUST CATCH BASIN FACH 3360.00 2 \$720.00		6243 ADJUST VALVE BOX	FACH	\$180.00	14	\$2 520 00
3100 ADJUST CATCH BASIN 7480 ROADSIDE CLEANUP 7490 TRIMMING AND CLEANUP EXTRUDED CURB  CONTRACT SUBTOTAL WASHINGTON STATE SALES TAX PROJECT SUBTOTAL ENGINEERING  S100.00 1 \$500						
7480 ROADSIDE CLEANUP 7490 TRIMMING AND CLEANUP EXTRUDED CURB  CONTRACT SUBTOTAL WASHINGTON STATE SALES TAX  PROJECT SUBTOTAL ENGINEERING (Same as PCCP)  DOL \$500.00 L.S. \$500.00 L.S. \$500.00 L.S. \$500.00 E.S. \$500.00 E.S. \$500.00 E.S. \$253,321.05 \$253,321.05 \$20,519.01 \$273,840.06 ENGINEERING (Same as PCCP)				•		
7490 TRIMMING AND CLEANUP EXTRUDED CURB       L.S. \$500.00 M       \$500.00 LS. \$500.00 M       \$15.00 222 \$3,330.00         CONTRACT SUBTOTAL WASHINGTON STATE SALES TAX       \$253,321.05 \$20,519.01         PROJECT SUBTOTAL ENGINEERING (Same as PCCP)       \$273,840.06 \$75,908.03						
EXTRUDED CURB M \$15.00 222 \$3,330.00  CONTRACT SUBTOTAL \$253,321.05 WASHINGTON STATE SALES TAX 8.10% \$20,519.01  PROJECT SUBTOTAL \$273,840.06  ENGINEERING (Same as PCCP) \$75,908.03				•		
CONTRACT SUBTOTAL \$253,321.05 WASHINGTON STATE SALES TAX 8.10% \$20,519.01  PROJECT SUBTOTAL \$273,840.06  ENGINEERING (Same as PCCP) \$75,908.03				•		
WASHINGTON STATE SALES TAX  8.10%  \$20,519.01  PROJECT SUBTOTAL  \$273,840.06  ENGINEERING (Same as PCCP)  \$75,908.03		EXTRUDED CORB	IVI	\$15.00	222	\$3,330.00
WASHINGTON STATE SALES TAX  8.10%  \$20,519.01  PROJECT SUBTOTAL  \$273,840.06  ENGINEERING (Same as PCCP)  \$75,908.03						
WASHINGTON STATE SALES TAX  8.10%  \$20,519.01  PROJECT SUBTOTAL  \$273,840.06  ENGINEERING (Same as PCCP)  \$75,908.03	_	CONTRACT CURTOTAL				<b>#050 004 05</b>
PROJECT SUBTOTAL \$273,840.06 ENGINEERING (Same as PCCP) \$75,908.03	_					
ENGINEERING (Same as PCCP) \$75,908.03		WASHINGTON STATE SALES TAX		8.10%		\$20,519.01
ENGINEERING (Same as PCCP) \$75,908.03						
		PROJECT SUBTOTAL				\$273,840.06
TOTAL ESTIMATED COST \$349,748.09		ENGINEERING (Same as PCCP)				\$75,908.03
TOTAL ESTIMATED COST \$349,748.09						
		TOTAL ESTIMATED COST				\$349,748.09

Table A-15. SR 27, Pines Road and Broadway Avenue ACP inlay construction cost estimate.

1 aute A-1	5. SR 27, Pines Road and Broadway Avenue	ACP IIII	ay constructi	on cost estin	naic.
Contrac	t 5298		Constructi	ion Year:	1998
SR 27			0.20' Inlay		
	lood and Droodyyay Avanua		5125 mmay		
Pines H	load and Broadway Avenue				
ACP In	lay Construction Cost				
STD. ITEM NO.	ITEM	UNITS	UNIT PRICE	QUANTITY	AMOUNT
	PREPARATION				
	MOBILIZATION (10% of all items) REMOVING TEMPORARY PAVEMENT MARKING	L.S. M	\$0.20	L.S. 1,770	\$6,000.00 \$354.00
	LIQUID ASPHALT				
	ASPHALT FOR TACK COAT ANTI-STRIPPING ADDITIVE	TONNE DOL	\$200.00 \$803.00	1.1 1	\$220.00 \$803.00
	ASPHALT CONCRETE PAVEMENT				
8840	PLANING BITUMIOUS PAVEMENT	M2	\$2.50	4,808	\$12,020.00
8870	ASPHALT CONC PAVEMENT CL A	TONNE	\$42.00	803	\$33,726.00
	JOB MIX COMPLIANCE PRICE ADJUSTMENT COMPACTION PRICE ADJUSTMENT	DOL DOL	\$1,011.78 \$674.52	1 1	\$1,011.78 \$674.52
	TRAFFIC				
9249	PAINT STRIPE	М	\$0.35	3,000	\$1,050.00
9355	PAINTED GORE STRIPE	M	\$0.45	168	\$75.60
	PLASTIC CROSSWALK STRIPE	M2	\$30.00	44	\$1,320.00
	PLASTIC STOP BAR	M	\$17.00	24	\$408.00
	PLASTIC TRAFFIC ARROW	EACH	\$50.00	4	\$200.00
	TEMPORARY PAVEMENT MARKING	M	\$0.35	1,770	\$619.50
	SEQUENTIAL ARROW SIGN TRAFFIC CONTROL VEHICLE	HOUR DAY	\$3.00 \$100.00	120 3	\$360.00 \$300.00
	TRAFFIC CONTROL LABOR	HOUR	\$28.00	180	\$5,040.00
	TRAFFIC CONTROL SUPERVISOR	HOUR	\$35.00	30	\$1,050.00
	CONSTRUCTION SIGNS CLASS A	M2	\$65.00	10	\$650.00
	OTHER ITEMS				
7480	ROADSIDE CLEANUP	DOL	\$500.00	1	\$500.00

CONTRACT SUBTOTAL		\$66,382.40
WASHINGTON STATE SALES TAX	8.10%	\$5,376.97
PROJECT SUBTOTAL		\$71,759.37
ENGINEERING	20.00%	\$14,351.87
CONTINGENCIES	5.00%	\$3,587.97
TOTAL ESTIMATED COST		\$89,699.21

Table A-16. SR 2, Division Street and Third Avenue initial PCCP construction cost estimate.

i able P	1-10. SR 2, Division Street and Third Av	enue init	iai PCCP con	istruction cos	st estimate.	
Contract 5400			Construction Year: 1998			
SR 2			0.83' PCCI	<b>&gt;</b>		
Division	on Street and Third Avenue					
Initial	<b>Cost of PCCP Construction</b>					
STD.	ITEM	UNITS	UNIT PRICE	QUANTITY	AMOUNT	
NO.			PRICE			
	PREPARATION					
	FREFARATION					
000	I MOBILIZATION (Same as ACP)	L.S.		L.S.	\$11,000.00	
0049	REMOVING DRAINAGE STRUCTURE	EACH	\$350.00	1	\$350.00	
0535	REMOVING CEMENT CONCRETE	M2	\$17.00	1,423	\$24,191.00	
0565	PAVEMENT 5 REMOVING ASPHALT CONCRETE	M2	\$6.00	1,638	\$9,828.00	
0000	PAVEMENT  REMOVING TEMPORARY PAVEMENT	М	<b>CO 1</b> E	220	<b>#22.00</b>	
0900	MARKING	IVI	\$0.15	220	\$33.00	
	REMOVING MONUMENT CASE AND COVER	EACH	\$150.00	1	\$150.00	
	COVEN					
	GRADING					
2945	5 ROADWAY EXCAVATION INCL. HAUL	МЗ	\$18.50	397	\$7,344.50	
	STORM SEWER					
309	I CATCH BASIN TYPE 1	EACH	\$1,500.00	1	\$1,500.00	
	SURFACING					
8679	3 CRUSHED SURFACING BASE COURSE	TONNE	\$16.00	718	\$11,488.00	
007	ONOSHED OUTIL ADING BASE OCUNGE	TONINE	ψ10.00	710	ψ11,400.00	
	CEMENT CONCRETE PAVEMENT					
	MODIFIED CONC. CLASS 28 1 DAY 250 MM SECTION	M2	\$50.00	1,638	\$81,900.00	
	IVIIVI SECTION					

# ASPHALT CONCRETE PAVEMENT

8915 LONGITUDINAL JOINT SEAL	М	\$23.00	47	\$1,081.00
TRAFFIC				
9216 CEMENT CONC. BARRIER CURB	M	\$31.00	35	\$1,085.00
9249 PAINT STRIPE	М	\$0.30	621	\$186.30
9289 PLASTIC CROSSWALK STRIPE	M2	\$18.50	14	\$259.00
9310 TEMPORARY PAVEMENT MARKING	М	\$0.15	220	\$33.00
6956 SEQUENTIAL ARROW SIGN	HOUR	\$3.00	168	\$504.00
6964 TEMPORARY TRAFFIC CONTROL DEVICES	L.S.	\$500.00	L.S.	\$500.00
6979 TRAFFIC CONTROL LABOR	HOUR	\$29.00	200	\$5,800.00
6968 TRAFFIC CONTROL VEHICLE	DAY	\$30.00	5	\$150.00
6972 TRAFFIC CONTROL SUPERVISOR	HOUR	\$30.00	40	\$1,200.00
9398 CONSTRUCTION SIGNS CLASS A	M2	\$80.00	14	\$1,120.00
OTHER ITEMS				
9216 STRUCTURE EXCAVATION. CLASS B INCL. HAUL	M3	\$100.00	4	\$400.00
9475 CEMENT CONC. SIDEWALK	M2	\$33.00	5	\$165.00
3080 ADJUST MANHOLE	EACH	\$400.00	1	\$400.00
7480 ROADSIDE CLEANUP	DOL	\$100.00	1	\$100.00
CONTRACT SUBTOTAL WASHINGTON STATE SALES TAX		8.10%		\$160,767.80 \$13,022.19
PROJECT SUBTOTAL				\$173,789.99
ENGINEERING		20.00%		\$34,758.00
TOTAL ESTIMATED COST				\$208,547.99

Table A-17. SR 2, Division Street and Third Avenue initial ACP construction cost estimate.

	-17. SK 2, Division succe and Time A						
Contra	act 5400	Construction Year: 1998					
SR 2			0.70' ACP				
Divisio	on Street and Third Avenue						
Initial	<b>Cost of ACP Construction</b>						
STD. ITEM NO.	ITEM	UNITS	UNIT PRICE	QUANTITY	AMOUNT		
	PREPARATION						
0001	MOBILIZATION (10% of Subtotal)	L.S.		L.S.	\$11,000.00		
0049	REMOVING DRAINAGE STRUCTURE	EACH	\$350.00	1	\$350.00		
0535	REMOVING CEMENT CONCRETE PAVEMENT	M2	\$17.00	1423	\$24,191.00		
0565	REMOVING ASPHALT CONCRETE PAVEMENT	M2	\$6.00	1638	\$9,828.00		
0900	REMOVING TEMPORARY PAVEMENT MARKING	М	\$0.15	220	\$33.00		
	REMOVING MONUMENT CASE AND COVER	EACH	\$150.00	1	\$150.00		
	GRADING						
2945	ROADWAY EXCAVATION INCL. HAUL	M3	\$18.50	397	\$7,344.50		
	STORM SEWER						
3091	CATCH BASIN TYPE 1	EACH	\$1,500.00	1	\$1,500.00		
	SURFACING						
8673	CRUSHED SURFACING BASE COURSE	TONNE	\$16.00	844	\$13,504.00		
	LIQUID ASPHALT						
8722	ASPHALT FOR TACK COAT	TONNE	\$200.00	1	\$200.00		
5334	ANTI-STRIPPING ADDITIVE	DOL	\$891.00	1	\$891.00		

## **ASPHALT CONCRETE PAVEMENT**

8870	ASPHALT CONC. PAVEMENT CL. A	TONNE	\$42.00	891	\$37,422.00
5830	JOB MIX COMPLIANCE PRICE	DOL	\$1,122.66	1	\$1,122.66
5835	ADJUSTMENT COMPACTION PRICE ADJUSTMENT	DOL	\$748.44	1	\$748.44
	TRAFFIC				
9216	CEMENT CONC. BARRIER CURB	M	\$31.00	35	\$1,085.00
9249	PAINT STRIPE	M	\$0.30	621	\$186.30
9289	PLASTIC CROSSWALK STRIPE	M2	\$18.50	14	\$259.00
9310	TEMPORARY PAVEMENT MARKING	M	\$0.15	220	\$33.00
6956	S SEQUENTIAL ARROW SIGN	HOUR	\$3.00	168	\$504.00
6964	TEMPORARY TRAFFIC CONTROL DEVICES	L.S.	\$500.00	L.S.	\$500.00
6979	TRAFFIC CONTROL LABOR	HOUR	\$29.00	200	\$5,800.00
6968	TRAFFIC CONTROL VEHICLE	DAY	\$30.00	5	\$150.00
6972	TRAFFIC CONTROL SUPERVISOR	HOUR	\$30.00	40	\$1,200.00
9398	CONSTRUCTION SIGNS CLASS A	M2	\$80.00	14	\$1,120.00
	OTHER ITEMS				
9216	STRUCTURE EXCAVATION CLASS B INCL. HAUL	M3	\$100.00	4	\$400.00
9475	CEMENT CONC. SIDEWALK	M2	\$33.00	5	\$165.00
3080	ADJUST MANHOLE	EACH	\$400.00	1	\$400.00
7480	ROADSIDE CLEANUP	DOL	\$100.00	1	\$100.00
	CONTRACT SUBTOTAL WASHINGTON STATE SALES TAX		8.10%		\$120,186.90 \$9,735.14
	WAGIIIIGTON STATE SALES TAX		0.1076		ψο,7 ου. 14
	PROJECT SUBTOTAL				\$129,922.04
	ENGINEERING (SAME AS PCCP)				\$34,758.00
	TOTAL ESTIMATED COST				\$164,680.04

Table A-18. SR 2, Division Street and Third Avenue ACP inlay construction cost estimate.

Table A-18. SR 2, Division Street and	Tillia Avellue ACP IIII	ay construct	ion cost estif	
Contract 5400		Construc	tion Year: 1	1998
SR 2		0.20' Inlay	/	
Division Street and Third Aven	iue			
ACP INLAY CONSTRUCTION CO	ST			
STD. ITEM ITEM NO.	UNITS	UNIT PRICE	QUANTITY	AMOUNT
PREPARATION				
0001 MOBILIZATION (10 % of all item	s) L.S.	10.00%	L.S.	\$1,900.00
0900 REMOVING TEMPORARY PAVI MARKING	•	\$0.20	220	\$44.00
LIQUID ASPHALT				
8770 ASHALT FOR TACK COAT	TONNE	\$200.00	0.50	\$100.00
5334 ANTI-STRIPPING ADDITIVE	DOL	\$250.00	DOL	\$250.00
ASPHALT CONCRETE PAVEM	ENT			
8840 PLANING BITUMINOUS PAVEM	1ENT M2	\$2.50	1,638	\$4,095.00
8822 ASPHALT CONC. PAVEMENT C	CL. A TONNE	\$42.00	253	\$10,626.00
5830 JOB MIX COMPLIANCE PRICE	DOL	\$300.00	1	\$300.00
ADJUSTMENT 5835 COMPACTION PRICE ADJUSTN	MENT DOL	\$200.00	1	\$200.00
TRAFFIC				
9249 PAINT STRIPE	М	\$0.35	621	\$217.35
9289 PLASTIC CROSSWALK STRIPE		\$30.00	13.5	\$405.00
9310 TEMPORARY PAVEMENT MAR		\$0.35	220	\$77.00
6979 TRAFFIC CONTROL LABOR	HOUR	\$28.00	40	\$1,120.00
6968 TRAFFIC CONTROL VEHICLE	DAY	\$100.00	1	\$100.00
6972 TRAFFIC CONTROL SUPERVIS	SOR HOUR	\$35.00	10	\$350.00
9398 CONSTRUCTION SIGNS CLASS	S A M2	\$65.00	3.87	\$251.55
OTHER ITEMS				
7480 ROADSIDE CLEANUP	DOL	\$500.00	DOL.	\$500.00

CONTRACT SUBTOTAL WASHINGTON STATE SALES TAX	8.10%	\$20,535.90 \$1,663.41
PROJECT SUBTOTAL		\$22,199.31
ENGINEERING CONTINGENCIES	20.00% 5.00%	\$4,439.86 \$1,109.97
TOTAL ESTIMATED COST		\$27,749.14

Table A-19. SR 395, SR 395 and 19<sup>th</sup> Avenue initial PCCP construction cost estimate.

Table A-19. SR 395, SR 395 and 19 <sup>th</sup> Avenue initial PCCP construction cost estimate.					
Contract 5445			Construct	ion Year:	1998
SR 395			1.0' PCCP		
SR 395 and 19th Aven	ue				
Initial Cost of PCCP (	Construction				
STD. ITEM		UNITS	UNIT	QUANTITY	AMOUNT
ITEM			PRICE		
NO.					
PREPARATION					
0001 MOBILIZATION (Act	rual)	L.S.	\$36,130.00	L.S.	\$36,130.00
0050 REMOVING STRUC	TURE AND	L.S.	\$180.00	L.S.	\$180.00
OBSTRUCTION 0900 REMOVING TEMPO	RARY PAVEMENT	М	\$0.30	2,910	\$873.00
MARKING 0902 REMOVING PAINT	CTDIDE	М	ф <b>1</b> ОО	372	Ф400 CO
0902 REMOVING PAINT	SIRIFE	IVI	\$1.30	3/2	\$483.60
SURFACING					
8673 CRUSHED SURFAC	CING BASE COURSE	TONNE	\$16.30	0	\$0.00
CEMENT CONCRE	TE PAVEMENT				
MODIFIED CONC. F 300 MM SECTION	PAVEMENT CL. 28 1 DAY	M2	\$50.50	5,322	\$268,761.00
LIQUID ASPHALT					
5325 ASPHALT FOR TAC		TONNE	\$200.00		\$20.00
5334 ANTI-STRIPPING A	DUITIVE	DOL	\$85.00	DOL.	\$85.00
ASPHALT CONCRE	ETE PAVEMENT				
	EMENT 300 MM DEPTH	M2	\$3.55	5,322	\$18,893.10
	CONC. PAVEMENT NCE PRICE ADJUSTMENT	TONNE DOL	\$40.50 \$103.28	85 1	\$3,442.50 \$103.28
5835 COMPACTION PRICE		DOL	\$68.85		\$68.85
TRAFFIC					
6832 FLEXIBLE GUIDE P	OST	EACH	\$25.00	15	\$375.00
9249 PAINT STRIPE	001	M	\$0.29	4,430	\$1,284.70
9257 PLASTIC GORE ST		М	\$4.76		\$1,080.52
9289 PLASTIC CROSSW 9273 PLASTIC STOP BAR		M2 M	\$45.75 \$20.87	78 60	\$3,568.50 \$1,252.20
6833 PLASTIC TRAFFIC		EACH	\$55.00	6	\$330.00
9310 TEMPORARY PAVE	EMENT MARKING	М	\$0.25	1,960	\$490.00

6890	PERMANENT SIGNING	L.S.	\$2,320.31	L.S.	\$2,320.31
6911	TRAFFIC SIGNAL DISPLAY AND DETECTION SYSTEM	L.S.	\$28,534.96	L.S.	\$28,534.96
6954	TRAFFIC SAFETY DRUM	EACH	\$30.00	123	\$3,690.00
6956	SEQUENTIAL ARROW SIGN	HOUR	\$3.50	361	\$1,263.50
6994	PORTABLE CHANGEABLE MESSAGE SIGN	EACH	\$7,000.00	2	\$14,000.00
6995	OPERATION OF PORTABLE CHANGEABLE MESSAGE SIGN	HOUR	\$5.00	177	\$885.00
	TYPE III BARRICADE	EACH	\$75.00	4	\$300.00
	TEMPORARY TRAFFIC CONTROL DEVICES	L.S.	\$170.00	L.S.	\$170.00
	TRAFFIC CONTROL LABOR	HOUR	\$29.00	495	\$14,355.00
	TRAFFIC CONTROL VEHICLE	DAY	\$40.00	20	\$800.00
6972	TRAFFIC CONTROL SUPERVISOR	HOUR	\$30.00	160	\$4,800.00
	RESETTING IMPACT ATTENUATOR	EACH	\$1,200.00	3	\$3,600.00
7480	OTHER ITEMS  CONTROLLED DENSITY FILL  ROADSIDE CLEANUP  TRIMMING AND CLEANUP  REMOVING AND RESETTING MONUMENT  CASE AND COVER	M3 EST. L.S. EACH	\$69.08 \$500.00 \$875.00 \$450.00	128 500 L.S. 1	\$8,842.24 \$500.00 \$875.00 \$450.00
	CONTRACT SUBTOTAL				\$422,807.26
	WASHINGTON STATE SALES TAX		7.70%		\$32,556.16
	PROJECT SUBTOTAL				\$455,363.42
	ENGINEERING		20.00%		\$91,072.68
	TOTAL ESTIMATED COST				\$546,436.10

Table A-20. SR 395, SR 395 and 19<sup>th</sup> Avenue initial ACP construction cost estimate.

Tuble 11 2	20. Six 373, Six 373 und 17 Tivende initial Ti	CI COIISU		, cimace.	
Contract 5445			Constructi	on Year:	1998
<b>SR 395</b>			0.80' ACP		
SR 395	and 19th Avenue				
Initial C	Cost of ACP Construction				
STD. ITEM NO.	ITEM	UNITS	UNIT PRICE	QUANTITY	AMOUNT
	PREPARATION				
	MOBILIZATION (Same as PCCP) REMOVING STRUCTURE AND OBSTRUCTION	L.S. L.S.	\$180.00	L.S. L.S.	
0900	REMOVING TEMPORARY PAVEMENT	М	\$0.30	2,910	\$873.00
0902	MARKING REMOVING PAINT STRIPE	М	\$1.30	372	\$483.60
	SURFACING				
8673	CRUSHED SURFACING BASE COURSE	TONNE	\$16.30	712	\$11,605.60
	LIQUID ASPHALT				
	ASPHALT FOR TACK COAT ANTI-STRIPPING ADDITIVE	TONNE DOL	\$200.00 \$3,282.00		
	ASPHALT CONCRETE PAVEMENT				
5830	PLANING BIT. PAVEMENT 300 MM DEPTH ASPHALT CONC. PAVEMENT CL. A JOB MIX COMPLIANCE PRICE ADJUSTMENT COMPACTION PRICE ADJUSTMENT	M2 TONNE DOL DOL	\$3.55 \$40.50 \$4,670.46 \$3,113.64	3,844 DOL.	\$155,682.00 \$4,670.46
	TRAFFIC				
9249 9257 9289 9273 6833 9310	FLEXIBLE GUIDE POST PAINT STRIPE PLASTIC GORE STRIPE PLASTIC CROSSWALK STRIPE PLASTIC STOP BAR PLASTIC TRAFFIC ARROW TEMPORARY PAVEMENT MARKING	EACH M M M2 M EACH M	\$25.00 \$0.29 \$4.76 \$45.75 \$20.87 \$55.00 \$0.25	4,430 227 78 60 6 1,960	\$1,284.70 \$1,080.52 \$3,568.50 \$1,252.20 \$330.00 \$490.00
	PERMANENT SIGNING TRAFFIC SIGNAL DISPLAY AND DETECTION	L.S. L.S.	\$2,320.31 \$28,534.96		' '
6954	SYSTEM TRAFFIC SAFETY DRUM	EACH	\$30.00	123	

6956 SEQUENTIAL ARROW SIGN	HOUR	\$3.50	361	\$1,263.50
6994 PORTABLE CHANGEABLE MESSAGE SIGN	EACH	\$7,000.00	2	\$14,000.00
6995 OPERATION OF PORTABLE CHANGEABLE MESSAGE SIGN	HOUR	\$5.00	177	\$885.00
6958 TYPE III BARRICADE	EACH	\$75.00	4	\$300.00
9380 TEMPORARY TRAFFIC CONTROL DEVICES	L.S.	\$170.00	L.S.	\$170.00
6979 TRAFFIC CONTROL LABOR	HOUR	\$29.00	495	\$14,355.00
6968 TRAFFIC CONTROL VEHICLE	DAY	\$40.00	20	\$800.00
6972 TRAFFIC CONTROL SUPERVISOR	HOUR	\$30.00	160	\$4,800.00
RESETTING IMPACT ATTENUATOR	EACH	\$1200.00	3	\$3,600.00
OTHER ITEMS				
7480 ROADSIDE CLEANUP	DOL	\$500.00	1	\$500.00
7491 TRIMMING AND CLEANUP	L.S.	\$875.00	L.S.	\$875.00
REMOVING AND RESETTING MONUMENT CASE AND COVER	EACH	\$450.00	1	\$450.00
CONTRACT SUBTOTAL				\$325,463.14
WASHINGTON STATE SALES TAX		7.70%		\$25,060.66
PROJECT SUBTOTAL				\$350,523.80
ENGINEERING (SAME AS PCCP)				\$91,072.68
TOTAL ESTIMATED COST				\$441,596.48

Table A-21. SR 395, SR 395 and 19<sup>th</sup> Avenue ACP inlay construction cost estimate.

Table A-21. SK 3/3, SK 3/3 and 1	7 Tivenue Mei min	ay consti	uction cost (	bulliate.	
Contract 5445			Construct	tion Year:	1998
SR 395			0.20' Inlay	,	
			<u> </u>		
SR 395 and 19th Avenue					
ACD Inlaw Construction C					
ACP Inlay Construction C	ost				
STD. ITEM		UNITS	UNIT	QUANTITY	AMOUNT
ITEM			PRICE		
NO.					
PREPARATION					
0001 MOBILIZATION (10% of all	l itams)	L.S.		L.S.	\$6,200.00
0900 REMOVING TEMPORARY		M	\$0.20		\$425.20
MARKING			****	_,	¥ :
LIQUID ASPHALT					
8722 ASPHALT FOR TACK COA	ΑT	TONNE	\$200.00	1.2	\$240.00
5334 ANTI-STRIPPING ADDITIV	/E	DOL	\$791.00	1	\$791.00
ASPHALT CONCRETE PA	AVEMENT				
8840 PLANING BITUMINOUS P	AVEMENT	M2	\$2.50	5,322	\$13,305.00
8870 ASPHALT CONC. PAVEM		TONNE	\$40.50		\$32,035.50
5830 JOB MIX COMPLIANCE P			\$961	1	\$961.00
5835 COMPACTION PRICE AD.	JUSTMENT	DOL	\$641	1	\$641.00
TRAFFIC					
9249 PAINT STRIPE		М	\$0.35	4,430	\$1,550.50
9257 PLASTIC GORE STRIPE		M	\$3.75		\$851.25
9289 PLASTIC CROSSWALK S	TRIPE	M2	\$30.00		\$2,340.00
9273 PLASTIC STOP BAR	147	M	\$17.00	60	\$1,020.00
6833 PLASTIC TRAFFIC ARRO' 9310 TEMPORARY PAVEMENT		EACH	\$50.00	0.100	\$300.00
6979 TRAFFIC CONTROL LABO		M HOUR	\$0.35 \$28.00	•	\$744.10 \$5,040.00
6968 TRAFFIC CONTROL VEHI		DAY	\$100.00		\$3,040.00
6972 TRAFFIC CONTROL SUPI		HOUR	\$35.00		\$1,050.00
OTHER ITEMS					
7480 ROADSIDE CLEANUP		DOL	\$500.00	1	\$500.00

CONTRACT SUBTOTAL		\$68,294.55
WASHINGTON STATE SALES TAX	7.70%	\$5,258.68
PROJECT SUBTOTAL		\$73,553.23
ENGINEERING	20.00%	\$14,710.65
CONTINGENCIES	5.00%	\$3,677.66
TOTAL ESTIMATED COST		\$91,941.54

PCCP Intersections Design and Construction in Washington State

## APPENDIX B – LIFE CYCLE COST ANALYSIS

Tables B-1 to B-28 show summaries of the Life Cycle Cost Analysis for the following comparisons:

<b>Tables</b>	<u>Comparison</u>
B-1 to B-7	PCCP reconstruction vs. ACP reconstruction with inlays at four year cycles – life cycle cost analysis.
B-8 to B-14	PCCP reconstruction vs. ACP reconstruction with inlays at six year cycles – life cycle cost analysis.
B-15 to B-21	PCCP reconstruction vs. ACP reconstruction with inlays at six year cycles – life cycle cost analysis.
B-22 to B-28	PCCP reconstruction vs. ACP inlays with four year inlay cycles – life cycle cost analysis.
B-29 to B-35	PCCP reconstruction vs. ACP inlays with six year inlay cycles – life cycle cost analysis.
B-36 to B-42	PCCP reconstruction vs. ACP inlays with eight year inlay cycles – life cycle cost analysis.

Table B-1. SR 27, Pines Road and Sprague Avenue PCCP reconstruction versus ACP reconstruction with inlays at four-year cycles - life cycle cost analysis.

**SR 27 - Pines Road and Sprague Avenue** 

					ACP						
Year	Year 0	Year 4	Year 8	Year 12	Year 16	Year 20	Year 24	Year 28	Year 32	Year 36	Total
<b>Construction Total</b>	403,890	72,860	72,860	72,860	72,860	72,860	72,860	72,860	72,860	72,860	1,059,630
PW (no user cost)	403,890	62,281	53,238	45,508	38,901	33,252	28,424	24,297	20,769	17,754	728,315
<b>Construction Total</b>	403,890	72,860	72,860	72,860	72,860	72,860	72,860	72,860	72,860	72,860	1,059,630
<b>User Costs</b>	121,941	8,308	8,991	9,732	10,531	11,405	12,337	13,368	14,468	15,649	226,730
PW (with user costs)	525,831	69,383	59,808	51,587	44,523	38,457	33,237	28,755	24,894	21,567	898,041

40 Year Annualized Costs: 36,800 Including User Costs: 45,400

PCCP												
Year	Year 0									Total		
<b>Construction Total</b>	531,250									531,250		
PW (no user cost)	531,250									531,250		
<b>Construction Total</b>	531,250									531,250		
<b>User Costs</b>	121,941									121,941		
PW (with user costs)	653,191									653,191		

40 Year Annualized Costs: 26,800 Including User Costs: 33,000

Table B-2. SR 27, Pines Road and Broadway Avenue PCCP reconstruction versus ACP reconstruction with inlays at four-year cycles - life cycle cost analysis.

# SR 27 - Pines Road and Broadway Avenue

					ACP						
Year	Year 0	Year 4	Year 8	Year 12	Year 16	Year 20	Year 24	Year 28	Year 32	Year 36	Total
<b>Construction Total</b>	349,750	89,700	89,700	89,700	89,700	89,700	89,700	89,700	89,700	89,700	1,157,050
PW (no user cost)	349,750	76,676	65,543	56,026	47,892	40,938	34,994	29,913	25,570	21,857	749,158
<b>Construction Total</b>	349,750	89,700	89,700	89,700	89,700	89,700	89,700	89,700	89,700	89,700	1,157,050
<b>User Costs</b>	222,241	6,513	7,051	7,654	8,273	8,957	9,698	10,485	11,359	12,291	304,522
PW (with user costs)	571,991	82,243	70,695	60,807	52,309	45,026	38,777	33,409	28,808	24,852	1,008,917

40 Year Annualized Costs: 37,900 Including User Costs: 51,000

PCCP											
Year	Year 0										Total
<b>Construction Total</b>	455,450										455,450
PW (no user cost)	455,450										455,450
<b>Construction Total</b>	455,450										455,450
<b>User Costs</b>	222,241										222,241
PW (with user costs)	677,691										677,691

40 Year Annualized Costs: 23,000 Including User Costs: 34,200

Table B-3. SR 2, Division Street and Francis Avenue PCCP reconstruction versus ACP reconstruction with inlays at four-year cycles - life cycle cost analysis.

#### SR 2 - Division Street and Francis Avenue

					ACP						
Year	Year 0	Year 4	Year 8	Year 12	Year 16	Year 20	Year 24	Year 28	Year 32	Year 36	Total
<b>Construction Total</b>	519,020	151,240	151,240	151,240	151,240	151,240	151,240	151,240	151,240	151,240	1,880,180
PW (no user cost)	519,020	129,281	110,510	94,464	80,748	69,024	59,002	50,435	43,112	36,852	1,192,448
<b>Construction Total</b>	519,020	151,240	151,240	151,240	151,240	151,240	151,240	151,240	151,240	151,240	1,880,180
<b>User Costs</b>	751,880	11,349	12,283	13,304	14,388	15,582	16,868	18,257	19,769	21,388	895,344
PW (w/ user costs)	1,270,900	138,982	119,485	102,774	88,430	76,135	65,583	56,523	48,747	42,064	2,009,623

40 Year Annualized Costs: 60,200 Including User Costs: 101,500

**PCCP** Year Year 0 **Total Construction Total** 675,110 675,110 PW (no user cost) 675,110 675,110 **Construction Total** 675,110 675,110 **User Costs** 751,880 751,880 PW (w/ user costs) 1,426,990 1,426,990

40 Year Annualized Costs: 34,100
Including User Costs: 72,100

651,994

PW (w/ user costs)

Table B-4. SR 291, Francis Avenue with Maple and Ash Streets PCCP reconstruction versus ACP reconstruction with inlays at four-year cycles - life cycle cost analysis.

SR 291 - Francis Avenue with Maple and Ash Streets

					ACP						
Year	Year 0	Year 4	Year 8	Year 12	Year 16	Year 20	Year 24	Year 28	Year 32	Year 36	Total
<b>Construction Total</b>	361,900	91,940	91,940	91,940	91,940	91,940	91,940	91,940	91,940	91,940	1,189,360
PW (no user cost)	361,900	78,591	67,180	57,425	49,088	41,960	35,868	30,660	26,208	22,403	771,282
<b>Construction Total</b>	361,900	91,940	91,940	91,940	91,940	91,940	91,940	91,940	91,940	91,940	1,189,360
<b>User Costs</b>	185,354	8,602	9,317	10,090	10,914	11,813	12,782	13,849	14,979	16,230	293,930
PW (w/ user costs)	547,254	85,944	73,987	63,728	54,915	47,352	40,854	35,278	30,478	26,358	1,006,147

40 Year Annualized Costs: 39,000 Including User Costs: 50,800

**PCCP** Year Year 0 **Total Construction Total** 466,640 466,640 PW (no user cost) 466,640 466,640 466,640 **Construction Total** 466,640 185,354 **User Costs** 185,354

40 Year Annualized Costs: 23,600
Including User Costs: 32,900

651,994

Table B-5. SR 395, SR 395 and 19<sup>th</sup> Avenue PCCP reconstruction versus ACP reconstruction with inlays at four-year cycles - life cycle cost analysis.

#### SR 395 - SR 395 and 19th Avenue

					ACP						
Year	Year 0	Year 4	Year 8	Year 12	Year 16	Year 20	Year 24	Year 28	Year 32	Year 36	Total
<b>Construction Total</b>	441,600	91,940	91,940	91,940	91,940	91,940	91,940	91,940	91,940	91,940	1,269,060
PW (no user cost)	441,600	78,591	67,180	57,425	49,088	41,960	35,868	30,660	26,208	22,403	850,982
<b>Construction Total</b>	441,600	91,940	91,940	91,940	91,940	91,940	91,940	91,940	91,940	91,940	1,269,060
<b>User Costs</b>	49,454	4,108	4,439	4,812	5,208	5,646	6,106	6,613	7,161	7,743	101,290
PW (w/ user costs)	491,054	82,102	70,423	60,431	51,868	44,537	38,250	32,865	28,250	24,290	924,070

40 Year Annualized Costs: 43,000 Including User Costs: 46,700

PCCP											
Year	Year 0									Total	
<b>Construction Total</b>	546,440									546,440	
PW (no user cost)	546,440									546,440	
<b>Construction Total</b>	546,440									546,440	
<b>User Costs</b>	49,454									49,454	
PW (w/ user costs)	595,894									595,894	

40 Year Annualized Costs: 27,600 Including User Costs: 30,100 Table B-6. SR 90, Broadway Avenue and Thierman Street PCCP reconstruction versus ACP reconstruction with inlays at four-year cycles - life cycle cost analysis.

## **SR 90 - Broadway Avenue and Thierman Street**

					ACP						
Year	Year 0	Year 4	Year 8	Year 12	Year 16	Year 20	Year 24	Year 28	Year 32	Year 36	Total
<b>Construction Total</b>	728,600	95,940	95,940	95,940	95,940	95,940	95,940	95,940	95,940	95,940	1,592,060
PW (no user cost)	728,600	82,010	70,102	59,924	51,223	43,786	37,428	31,994	27,348	23,378	1,155,793
<b>Construction Total</b>	728,600	95,940	95,940	95,940	95,940	95,940	95,940	95,940	95,940	95,940	1,592,060
<b>User Costs</b>	95,856	3,538	3,831	4,135	4,480	4,856	5,266	5,687	6,162	6,659	140,470
PW (w/ user costs)	824,856	85,034	72,902	62,507	53,615	46,002	39,483	33,890	29,105	25,000	1,271,994

40 Year Annualized Costs: 58,400 Including User Costs: 64,300

			PCCP			
Year	Year 0					Total
<b>Construction Total</b>	982,180					982,180
PW (no user cost)	982,180					982,180
<b>Construction Total</b>	982,180					982,180
<b>User Costs</b>	95,856					95,856
PW (w/ user costs)	1,078,036					1,078,036

40 Year Annualized Costs: 49,600 Including User Costs: 54,500

Table B-7. SR 2, Division Street and Third Avenue PCCP reconstruction versus ACP reconstruction with inlays at four-year cycles - life cycle cost analysis.

SR 2 - Division Street and Third Avenue

ACP											
Year	Year 0	Year 4	Year 8	Year 12	Year 16	Year 20	Year 24	Year 28	Year 32	Year 36	Total
<b>Construction Total</b>	164,680	27,750	27,750	27,750	27,750	27,750	27,750	27,750	27,750	27,750	414,430
PW (no user costs)	164,680	23,721	20,277	17,333	14,816	12,665	10,826	9,254	7,910	6,762	288,243
<b>Construction Total</b>	164,680	27,750	27,750	27,750	27,750	27,750	27,750	27,750	27,750	27,750	414,430
<b>User Costs</b>	63,942	980	1,079	1,160	1,252	1,355	1,477	1,592	1,719	1,857	76,413
PW (w/ user costs)	228,123	24,599	21,065	18,057	15,484	13,283	11,402	9,785	8,400	7,214	357,373

40 Year Annualized Costs: 14,600 Including User Costs: 18,100

		PCCP	
Year	Year 0		Total
<b>Construction Total</b>	208,540		208,540
PW (no user cost)	208,540		208,540
<b>Construction Total</b>	208,540		208,540
<b>User Costs</b>	63,942		63,942
PW (w/ user costs)	272,482		272,482

40 Year Annualized Costs: 10,500 Including User Costs: 13,800

Table B-8. SR 27, Pines Road and Sprague Avenue PCCP reconstruction versus ACP reconstruction with inlays at six-year cycles - life cycle cost analysis.

## **SR 27 - Pines Road and Sprague Avenue**

				ACP					
Year	Year 0	Year 6	Year 12	Year 18	Year 24	Year 30	Year 36	Year 40	Total
<b>Construction Total</b>	403,890	72,860	72,860	72,860	72,860	72,860	72,860	-24,287	816,763
PW (no user costs)	403,890	57,582	45,508	35,966	28,424	22,464	17,754	-5,059	606,530
<b>Construction Total</b>	403,890	72,860	72,860	72,860	72,860	72,860	72,860	-24,287	816,763
<b>User Costs</b>	121,941	8,644	9,732	10,966	12,337	13,907	15,649		193,176
PW (w/ user costs)	525,831	64,414	51,587	41,379	33,237	26,752	21,567	-5,059	759,708

40 Year Annualized Costs: Excluding User Costs: 30,600 Including User Costs: 38,400

	PCCP								
Year	Year 0							Total	
<b>Construction Total</b>	531,250							531,250	
PW (no user costs)	531,250							531,250	
<b>Construction Total</b>	531,250							531,250	
<b>User Costs</b>	121,941							121,941	
PW (w/ user costs)	653,191							653,191	

40 Year Annualized Costs: Excluding User Costs: 26,800 Including User Costs: 33,000

Table B-9. SR 27, Pines Road and Broadway Avenue PCCP reconstruction versus ACP reconstruction with inlays at six-year cycles - life cycle cost analysis.

## **SR 27 - Pines Road and Broadway Avenue**

ACP									
Year	Year 0	Year 6	Year 12	Year 18	Year 24	Year 30	Year 36	Year 40	Total
<b>Construction Total</b>	349,750	89,700	89,700	89,700	89,700	89,700	89,700	-29,900	858,050
PW (no user costs)	349,750	70,891	56,026	44,278	34,994	27,656	21,857	-6,228	599,225
<b>Construction Total</b>	349,750	89,700	89,700	89,700	89,700	89,700	89,700	-29,900	858,050
<b>User Costs</b>	222,241	6,791	7,654	8,609	9,698	10,913	12,291		278,197
PW (w/ user costs)	571,991	76,258	60,807	48,528	38,777	31,021	24,852	-6,228	846,007

40 Year Annualized Costs: Excluding User Costs: 30,300 Including User Costs: 42,700

	PCCP								
Year	Year 0					Total			
<b>Construction Total</b>	455,450					455,450			
PW (no user costs)	455,450					455,450			
<b>Construction Total</b>	455,450					455,450			
<b>User Costs</b>	222,241					222,241			
PW (w/ user costs)	677,691					677,691			

40 Year Annualized Costs: Excluding User Costs: 23,000 Including User Costs: 34,200

Table B-10. SR 2, Division Street and Francis Avenue PCCP reconstruction versus ACP reconstruction with inlays at six-year cycles - life cycle cost analysis.

## SR 2 - Division Street and Francis Avenue

				ACP					
Year	Year 0	Year 6	Year 12	Year 18	Year 24	Year 30	Year 36	Year 40	Total
<b>Construction Total</b>	519,020	151,240	151,240	151,240	151,240	151,240	151,240	-50,413	1,376,047
PW (no user costs)	519,020	119,527	94,464	74,656	59,002	46,630	36,852	-10,501	939,652
<b>Construction Total</b>	519,020	151,240	151,240	151,240	151,240	151,240	151,240	-50,413	1,376,047
<b>User Costs</b>	751,880	11,804	13,304	14,988	16,868	18,996	21,388		849,228
PW (w/ user costs)	1,270,900	128,856	102,774	82,055	65,583	52,487	42,064	-10,501	1,734,218

40 Year Annualized Costs: Excluding User Costs: 47,500 Including User Costs: 87,600

	PCCP								
Year	Year 0								Total
<b>Construction Total</b>	675,110								675,110
PW (no user costs)	675,110								675,110
<b>Construction Total</b>	675,110								675,110
<b>User Costs</b>	751,880								751,880
PW (w/ user costs)	1,426,990								1,426,990

40 Year Annualized Costs: Excluding User Costs: 34,100 Including User Costs: 72,100

Table B-11. SR 291, Francis Avenue/Maple and Ash Streets PCCP reconstruction versus ACP reconstruction with inlays at six-year cycles - life cycle cost analysis.

**SR 291 - Francis Avenue with Maple and Ash Streets** 

ACP									
Year	Year 0	Year 6	Year 12	Year 18	Year 24	Year 30	Year 36	Year 40	Total
<b>Construction Total</b>	361,900	91,940	91,940	91,940	91,940	91,940	91,940	-30,647	882,893
PW (no user costs)	361,900	72,662	57,425	45,384	35,868	28,347	22,403	-6,383	617,605
<b>Construction Total</b>	361,900	91,940	91,940	91,940	91,940	91,940	91,940	-30,647	882,893
<b>User Costs</b>	185,354	8,954	10,090	11,346	12,782	14,408	16,230		259,164
PW (w/ user costs)	547,254	79,738	63,728	50,985	40,854	32,789	26,358	-6,383	835,322

40 Year Annualized Costs: Excluding User Costs: 31,200 Including User Costs: 42,200

PCCP								
Year	Year 0							Total
<b>Construction Total</b>	466,640							466,640
PW (no user costs)	466,640							466,640
<b>Construction Total</b>	466,640							466,640
<b>User Costs</b>	185,354							185,354
PW (w/ user costs)	651,994							651,994

40 Year Annualized Costs: Excluding User Costs: 23,600 Including User Costs: 32,900

Table B-12. SR 395, SR 395 and 19<sup>th</sup> Avenue PCCP reconstruction versus ACP reconstruction with inlays at six-year cycles - life cycle cost analysis.

## SR 395 - SR 395 and 19th Avenue

				ACP					
Year	Year 0	Year 6	Year 12	Year 18	Year 24	Year 30	Year 36	Year 40	Total
<b>Construction Total</b>	441,600	91,940	91,940	91,940	91,940	91,940	91,940	-30,647	962,593
PW (no user costs)	441,600	72,662	57,425	45,384	35,868	28,347	22,403	-6,383	697,305
<b>Construction Total</b>	441,600	91,940	91,940	91,940	91,940	91,940	91,940	-30,647	962,593
<b>User Costs</b>	49,454	4,283	4,812	5,425	6,106	6,875	7,743		84,698
PW (w/ user costs)	491,054	76,046	60,431	48,062	38,250	30,467	24,290	-6,383	762,216

40 Year Annualized Costs: Excluding User Costs: 35,200

Including User Costs: 38,500

	PCCP								
Year	Year 0		Total						
<b>Construction Total</b>	546,440		546,440						
PW (no user costs)	546,440		546,440						
<b>Construction Total</b>	546,440		546,440						
<b>User Costs</b>	49,454		49,454						
PW (w/ user costs)	595,894		595,894						

40 Year Annualized Costs: Excluding User Costs: 27,600 Including User Costs: 30,100

Table B-13. SR 90, Broadway Avenue and Thierman Street PCCP reconstruction versus ACP reconstruction with inlays at six-year cycles - life cycle cost analysis.

## **SR 90 - Broadway Avenue and Thierman Street**

	ACP								
Year	Year 0	Year 6	Year 12	Year 18	Year 24	Year 30	Year 36	Year 40	Total
<b>Construction Total</b>	728,600	95,940	95,940	95,940	95,940	95,940	95,940	-31,980	1,272,260
PW (no user costs)	728,600	75,823	59,924	47,359	37,428	29,580	23,378	-6,661	995,430
<b>Construction Total</b>	728,600	95,940	95,940	95,940	95,940	95,940	95,940	-31,980	1,272,260
<b>User Costs</b>	95,856	3,690	4,135	4,662	5,266	5,915	6,659		126,183
PW (w/ user costs)	824,456	78,739	62,507	49,660	39,483	31,404	25,000	-6,661	1,104,587

40 Year Annualized Costs: Excluding User Costs: 50,300 Including User Costs: 55,800

	PCCP							
Year	Year 0							Total
<b>Construction Total</b>	982,180							982,180
PW (no user costs)	982,180							982,180
<b>Construction Total</b>	982,180							982,180
<b>User Costs</b>	95,856							95,856
PW (w/ user costs)	1,078,036							1,078,036

40 Year Annualized Costs: Excluding User Costs: 49,600 Including User Costs: 54,500

Table B-14. SR 2, Division Street and Third Avenue PCCP reconstruction versus ACP reconstruction with inlays at six-year cycles - life cycle cost analysis.

## SR 2 - Division Street and Third Avenue

ACP									
Year	Year 0	Year 6	Year 12	Year 18	Year 24	Year 30	Year 36	Year 40	Total
<b>Construction Total</b>	164,680	27,750	27,750	27,750	27,750	27,750	27,750	-9,240	321,930
PW (no user costs)	164,680	21,931	17,333	13,698	10,826	8,556	6,762	-1,927	241,859
<b>Construction Total</b>	164,680	27,750	27,750	27,750	27,750	27,750	27,750	-9,240	321,760
<b>User Costs</b>	63,443	1,015	1,160	1,298	1,477	1,650	1,857		71,900
PW (w/ user costs)	228,123	22,733	18,057	14,339	11,402	9,065	7,214	-1,927	309,007

40 Year Annualized Costs: Excluding User Costs: 12,200 Including User Costs: 15,600

		PCCP		
Year	Year 0		T	'otal
<b>Construction Total</b>	208,540		20	08,540
PW (no user costs)	208,540		20	08,540
<b>Construction Total</b>	208,540		20	08,540
<b>User Costs</b>	63,443			53,443
PW (w/ user costs)	271,983		27	71,983

40 Year Annualized Costs: Excluding User Costs: 10,500 Including User Costs: 13,800

Table B-15. SR 27, Pines Road and Sprague Avenue PCCP reconstruction versus ACP reconstruction with inlays at eight-year cycles - life cycle cost analysis.

# SR 27 - Pines Road and Sprague Avenue

	ACP						
Year	Year 0	Year 8	Year 16	Year 24	Year 32	Total	
<b>Construction Total</b>	403,890	72,860	72,860	72,860	72,860	695,330	
PW (no user cost)	403,890	53,238	38,901	28,424	20,769	545,222	
<b>Construction Total</b>	403,890	72,860	72,860	72,860	72,860	695,330	
<b>User Costs</b>	121,941	8,991	10,531	12,337	14,468	168,268	
PW (with user costs)	525,831	59,808	44,523	33,237	24,894	688,293	

40 Year Annualized Costs: Excluding User Costs: 27,500 Including User Costs: 34,800

PCCP						
Year	Year 0				Total	
<b>Construction Total</b>	531,250				531,250	
PW (no user cost)	531,250				531,250	
<b>Construction Total</b>	531,250				531,250	
<b>User Costs</b>	121,941				121,941	
PW (with user costs)	653,191				653,191	

40 Year Annualized Costs: Excluding User Costs: 26,800 Including User Costs: 33,000

Table B-16. SR 27, Pines Road and Broadway Avenue PCCP reconstruction versus ACP reconstruction with inlays at eight-year cycles - life cycle cost analysis.

## SR 27 - Pines Road and Broadway Avenue

	ACP						
Year	Year 0	Year 8	Year 16	Year 24	Year 32	Total	
<b>Construction Total</b>	349,750	89,700	89,700	89,700	89,700	708,550	
PW (no user cost)	349,750	65,543	47,892	34,994	25,570	523,748	
<b>Construction Total</b>	349,750	89,700	89,700	89,700	89,700	708,550	
<b>User Costs</b>	222,241	7,051	8,273	9,698	11,359	258,622	
PW (with user costs)	571,991	70,695	52,309	38,777	28,808	762,580	

40 Year Annualized Costs: Excluding User Costs: 26,500 Including User Costs: 38,500

	PCCP						
Year	Year 0	Total					
<b>Construction Total</b>	455,450	455,450					
PW (no user cost)	455,450	455,450					
<b>Construction Total</b>	455,450	455,450					
<b>User Costs</b>	222,241	222,241					
PW (with user costs)	677,691	677,691					

40 Year Annualized Costs: Excluding User Costs: 23,000 Including User Costs: 34,200

Table B-17. SR 2, Divisions Street and Francis Avenue PCCP reconstruction versus ACP reconstruction with inlays at eight-year cycles - life cycle cost analysis.

#### SR 2 - Division Street and Francis Avenue

ACP						
Year	Year 0	Year 8	Year 16	Year 24	Year 32	Total
<b>Construction Total</b>	519,020	151,240	151,240	151,240	151,240	1,123,980
PW (no user cost)	519,020	110,510	80,748	59,002	43,112	812,392
<b>Construction Total</b>	519,020	151,240	151,240	151,240	151,240	1,123,980
<b>User Costs</b>	751,880	12,283	14,388	16,868	19,769	815,188
PW (with user costs)	1,270,900	119,485	88,430	65,583	48,747	1,593,145

Excluding User Costs: 41,000 Including User Costs: 80,500

PCCP						
Year	Year 0				Total	
<b>Construction Total</b>	675,110				675,110	
PW (no user cost)	675,110				675,110	
<b>Construction Total</b>	675,110				675,110	
<b>User Costs</b>	751,880				751,880	
PW (with user costs)	1,426,990				1,426,990	

40 Year Annualized Costs: Excluding User Costs: 34,100 Including User Costs: 72,100

Table B-18. SR 27, Francis Avenue with Maple and Ash Streets PCCP reconstruction versus ACP reconstruction with inlays at eight-year cycles - life cycle cost analysis.

## SR 291 - Francis Avenue with Maple and Ash Streets

	ACP						
Year	Year 0	Year 8	Year 16	Year 24	Year 32	Total	
<b>Construction Total</b>	316,900	91,940	91,940	91,940	91,940	684,660	
PW (no user cost)	316,900	67,180	49,088	35,868	26,208	495,243	
<b>Construction Total</b>	316,900	91,940	91,940	91,940	91,940	684,660	
<b>User Costs</b>	185,354	9,317	10,914	12,782	14,979	233,346	
PW (with user costs)	502,254	73,987	54,915	40,854	30,478	702,489	

40 Year Annualized Costs: Excluding User Costs: 25,000 Including User Costs: 35,500

PCCP					
Year	Year 0	Total			
<b>Construction Total</b>	466,640	466,640			
PW (no user cost)	466,640	466,640			
<b>Construction Total</b>	466,640	466,640			
<b>User Costs</b>	185,354	185,354			
PW (with user costs)	651,994	651,994			

40 Year Annualized Costs: Excluding User Costs: 23,600 Including User Costs: 32,900

Table B-19. SR 395, SR 395 and 19th Avenue PCCP reconstruction versus ACP reconstruction with inlays at eight-year cycles - life cycle cost analysis.

#### SR 395 - SR 395 and 19th Avenue

	ACP											
Year	Year 0	Year 8	Year 16	Year 24	Year 32	Total						
<b>Construction Total</b>	441,600	91,940	91,940	91,940	91,940	809,360						
PW (no user cost)	441,600	67,180	49,088	35,868	26,208	619,943						
<b>Construction Total</b>	441,600	91,940	91,940	91,940	91,940	809,360						
<b>User Costs</b>	49,454	4,439	5,208	6,106	7,161	72,368						
PW (with user costs)	491,054	70,423	51,868	38,250	28,250	679,845						

40 Year Annualized Costs: Excluding User Costs: 31,300 Including User Costs: 34,300

	PCCP									
Year	Year 0					Total				
<b>Construction Total</b>	546,440					546,440				
PW (no user cost)	546,440					546,440				
<b>Construction Total</b>	546,440					546,440				
User Costs	49,454					546,440 49,454				
PW (with user costs)	595,894					595,894				

40 Year Annualized Costs: Excluding User Costs: 27,600 Including User Costs: 30,100

Table B-20. SR 90, Broadway Avenue and Thierman Street PCCP reconstruction versus ACP reconstruction with inlays at eight-year cycles - life cycle cost analysis.

## SR 90 - Broadway Avenue and Thierman Street

	ACP											
Year	Year 0	Year 8	Year 16	Year 24	Year 32	Total						
<b>Construction Total</b>	728,600	95,940	95,940	95,940	95,940	1,112,360						
PW (no user cost)	728,600	70,102	51,223	37,428	27,348	914,702						
<b>Construction Total</b>	728,600	95,940	95,940	95,940	95,940	1,112,360						
User Costs	95,856	3,831	4,480	5,266	6,162	115,595						
PW (with user costs)	824,456	72,902	53,615	39,483	29,105	1,019,560						

40 Year Annualized Costs: Excluding User Costs: 46,200 Including User Costs: 51,500

	PCCP										
Year	Year 0			Total							
<b>Construction Total</b>	982,180			982,180							
PW (no user cost)	982,180			982,180							
<b>Construction Total</b>	982,180			982,180							
<b>User Costs</b>	95,856			95,856							
PW (with user costs)	1,078,036			1,078,036							

40 Year Annualized Costs: Excluding User Costs: 49,600 Including User Costs: 54,500

Table B-21. SR 2, Division Street and Third Avenue PCCP reconstruction versus ACP reconstruction with inlays at eight-year cycles - life cycle cost analysis.

#### SR 2 - Division Street and Third Avenue

	ACP											
Year	Year 0	Year 8	Year 16	Year 24	Year 32	Total						
<b>Construction Total</b>	164,680	27,750	27,750	27,750	27,750	275,680						
PW (no user cost)	164,680	20,277	14,816	10,826	7,910	218,509						
<b>Construction Total</b>	164,680	27,750	27,750	27,750	27,750	275,680						
<b>User Costs</b>	63,443	1,061	1,252	1,459	1,719	68,934						
PW (with user costs)	228,123	21,052	15,484	11,395	8,400	284,455						

40 Year Annualized Costs: Excluding User Costs: 11,000 Including User Costs: 14,400

	PCCP									
Year	Year 0					Total				
<b>Construction Total</b>	208,540					208,540				
PW (no user cost)	208,540					208,540				
<b>Construction Total</b>	208,540					208,540				
<b>User Costs</b>	63,443					63,443				
PW (with user costs)	271,983					271,983				

40 Year Annualized Costs: Excluding User Costs: 10,500 Including User Costs: 13,800

Table B-22. SR 27, Pines Road and Sprague Avenue PCCP reconstruction versus ACP inlays with four-year cycles - life cycle cost analysis.

# **SR 27 - Pines Road and Sprague Avenue**

	ACP										
Year	Year 0	Year 4	Year 8	Year 12	Year 16	Year 20	Year 24	Year 28	Year 32	Year 36	Total
<b>Construction Total</b>	72,860	72,860	72,860	72,860	72,860	72,860	72,860	72,860	72,860	72,860	728,600
PW (no user cost)	72,860	62,281	53,238	45,508	38,901	33,252	28,424	24,297	20,769	17,754	397,285
<b>Construction Total</b>	72,860	72,860	72,860	72,860	72,860	72,860	72,860	72,860	72,860	72,860	758,600
<b>User Costs</b>	7,677	8,308	8,991	9,732	10,531	11,405	12,337	13,368	14,468	15,649	112,466
PW (with user costs)	80,537	69,383	59,808	51,587	44,523	38,457	33,237	28,755	24,894	21,567	452,747

40 Year Annualized Costs: Excluding Delay Costs: 20,100 Including Delay Costs: 22,900

	PCCP										
Year	Year 0					Total					
<b>Construction Total</b>	531,250					531,250					
PW (no user cost)	531,250					531,250					
<b>Construction Total</b>	531,250					531,250					
<b>User Costs</b>	121,941					121,941					
PW (with user costs)	653,191					653,191					

40 Year Annualized Costs: Excluding Delay Costs: 26,800 Including Delay Costs: 33,000

Table B-23. SR 27, Pines Road and Broadway Avenue PCCP reconstruction versus ACP inlays with four-year cycles - life cycle cost analysis.

SR 27 - Pines Road and Broadway Avenue

	ACP										
Year	Year 0	Year 4	Year 8	Year 12	Year 16	Year 20	Year 24	Year 28	Year 32	Year 36	Total
<b>Construction Total</b>	89,700	89,700	89,700	89,700	89,700	89,700	89,700	89,700	89,700	89,700	897,000
PW (no user cost)	89,700	76,676	65,543	56,026	47,892	40,938	34,994	29,913	25,570	21,857	489,108
<b>Construction Total</b>	89,700	89,700	89,700	89,700	89,700	89,700	89,700	89,700	89,700	89,700	897,000
<b>User Costs</b>	6,027	6,513	7,051	7,654	8,273	8,957	9,698	10,485	11,359	12,291	88,308
PW (with user costs)	95,727	82,243	70,695	60,807	52,309	45,026	38,777	33,409	28,808	24,852	532,653

40 Year Annualized Costs: Excluding Delay Costs: 24,700 Including Delay Costs: 26,900

	PCCP										
Year	Year 0								Total		
<b>Construction Total</b>	455,450								455,450		
PW (no user cost)	455,450								455,450		
<b>Construction Total</b>	455,450								455,450		
<b>User Costs</b>	222,241								222,241		
PW (with user costs)	677,691								677,691		

Excluding Delay Costs: 23,000 Including Delay Costs: 34,200

Table B-24. SR 2, Division Street and Francis Avenue PCCP reconstruction versus ACP inlays with four-year cycles - life cycle cost analysis.

SR 2 - Division Street and Francis Avenue

	ACP										
Year	Year 0	Year 4	Year 8	Year 12	Year 16	Year 20	Year 24	Year 28	Year 32	Year 36	Total
<b>Construction Total</b>	151,240	151,240	151,240	151,240	151,240	151,240	151,240	151,240	151,240	151,240	1,512,400
PW (no user cost)	151,240	129,281	110,510	94,464	80,748	69,024	59,002	50,435	43,112	36,852	824,668
<b>Construction Total</b>	151,240	151,240	151,240	151,240	151,240	151,240	151,240	151,240	151,240	151,240	1,512,400
<b>User Costs</b>	10,484	11,349	12,283	13,304	14,388	15,582	16,868	18,257	19,769	21,388	153,672
PW (with user costs)	161,724	138,982	119,485	102,774	88,430	76,135	65,583	56,523	48,747	42,064	900,447

40 Year Annualized Costs: Excluding Delay Costs: 41,700 Including Delay Costs: 45,500

	PCCP										
Year	Year 0										Total
<b>Construction Total</b>	675,110										675,110
PW (no user cost)	675,110										675,110
Construction Total	675,110										675,110
<b>User Costs</b>	751,880										751,880
PW (with user costs)	1,426,990										1,426,990

40 Year Annualized Costs: Excluding Delay Costs: 34,100
Including Delay Costs: 72,100

Table B-25. SR 291, Francis Avenue with Maple and Ash Streets PCCP reconstruction versus ACP inlays with four-year cycles - life cycle cost analysis.

**SR 291 - Francis Avenue with Maple and Ash Streets** 

					ACP						
Year	Year 0	Year 4	Year 8	Year 12	Year 16	Year 20	Year 24	Year 28	Year 32	Year 36	Total
<b>Construction Total</b>	91,940	91,940	91,940	91,940	91,940	91,940	91,940	91,940	91,940	91,940	919,400
PW (no user cost)	91,940	78,591	67,180	57,425	49,088	41,960	35,868	30,660	26,208	22,403	501,322
<b>Construction Total</b>	91,940	91,940	91,940	91,940	91,940	91,940	91,940	91,940	91,940	91,940	919,400
<b>User Costs</b>	7,951	8,602	9,317	10,090	10,914	11,813	12,782	13,849	14,979	16,230	116,527
PW (with user costs)	99,891	85,944	73,987	63,728	54,915	47,352	40,854	35,278	30,478	26,358	558,784

40 Year Annualized Costs: Excluding Delay Costs: 25,300 Including Delay Costs: 28,200

			PCCP			
Year	Year 0					Total
<b>Construction Total</b>	466,640					466,640
PW (no user cost)	466,640					466,640
<b>Construction Total</b>	466,640					466,640
<b>User Costs</b>	185,354					185,354
PW (with user costs)	651,994					651,994

40 Year Annualized Costs: Excluding Delay Costs: 23,600 Including Delay Costs: 32,900

Table B-26. SR 395, SR 395 and 19th Avenue PCCP reconstruction versus ACP inlays with four-year cycles - life cycle cost analysis.

#### SR 395 - SR 395 and 19th Avenue

					ACP						
Year	Year 0	Year 4	Year 8	Year 12	Year 16	Year 20	Year 24	Year 28	Year 32	Year 36	Total
<b>Construction Total</b>	91,940	91,940	91,940	91,940	91,940	91,940	91,940	91,940	91,940	91,940	919,400
PW (no user cost)	91,940	78,591	67,180	57,425	49,088	41,960	35,868	30,660	26,208	22,403	501,322
<b>Construction Total</b>	91,940	91,940	91,940	91,940	91,940	91,940	91,940	91,940	91,940	91,940	919,400
User Costs	3,799	4,108	4,439	4,812	5,208	5,646	6,106	6,613	7,161	7,743	55,635
PW (with user costs)	95,739	82,102	70,423	60,431	51,868	44,537	38,250	32,865	28,250	24,290	528,755

40 Year Annualized Costs: Excluding Delay Costs: 25,300 Including Delay Costs: 26,700

			<b>PCCP</b>			
Year	Year 0					Total
<b>Construction Total</b>	546,440					546,440
PW (no user cost)	546,440					546,440
Construction Total	546,440					546,440
User Costs	49,454					49,454
PW (with user costs)	595,894					595,894

Excluding Delay Costs: 27,600 Including Delay Costs: 30,100

Table B-27. SR 90, Broadway Avenue and Thierman Street PCCP reconstruction versus ACP inlays with four-year cycles - life cycle cost analysis.

## **SR 90 - Broadway Avenue and Thierman Street**

					ACP						
Year	Year 0	Year 4	Year 8	Year 12	Year 16	Year 20	Year 24	Year 28	Year 32	Year 36	Total
<b>Construction Total</b>	95,940	95,940	95,940	95,940	95,940	95,940	95,940	95,940	95,940	95,940	959,400
PW (no user cost)	95,940	82,010	70,102	59,924	51,223	43,786	37,428	31,994	27,348	23,378	523,133
<b>Construction Total</b>	95,940	95,940	95,940	95,940	95,940	95,940	95,940	95,940	95,940	95,940	959,400
<b>User Costs</b>	3,269	3,538	3,831	4,135	4,480	4,856	5,266	5,687	6,162	6,659	47,883
PW (with user costs)	99,209	85,034	72,902	62,507	53,615	46,002	39,483	33,890	29,105	25,000	546,747

40 Year Annualized Costs: Excluding Delay Costs: 26,400 Including Delay Costs: 27,600

			<b>PCCP</b>			
Year	Year 0					Total
<b>Construction Total</b>	982,180					982,180
PW (no user cost)	982,180					982,180
<b>Construction Total</b>	982,180					982,180
<b>User Costs</b>	95,856					95,856
PW (with user costs)	1,078,036					1,078,036

40 Year Annualized Costs: Excluding Delay Costs: 49,600 Including Delay Costs: 54,500

Table B-28. SR 2, Division Street and Third Avenue PCCP reconstruction versus ACP inlays with four-year cycles - life cycle cost analysis.

# SR 2 - Division Street and Third Avenue

					ACP						
Year	Year 0 Year 4	Year 4	Year 8	Year 12	Year 16	Year 20	Year 8   Year 12   Year 16   Year 20   Year 24   Year 28   Year 35   Year 36	Year 28	Year 32	Year 36	Total
Construction Total	27,750	27,750 27,750	27,750	27,750 27,750	27,750	27,750	27,750	27,750	27,750	27,750	277,200
PW (no user cost)	27,750	23,721	20,277	17,333	14,816	12,665		9,254	7,910		151,313
Construction Total	27,750	27,750	27.750	27,750	27,750	27,750	27,750	27.750	27,750	27,750	277,200
User Costs	911	086	1,079	1,160	1,252	1,355	1,477	1,592			13,382
PW (with user costs) 28,661	28,661	24,599	21,065	18,057	15,484		11,402	9,785		7,214	157,911

7,600 Excluding Delay Costs: Including Delay Costs: 40 Year Annualized Costs:

		PCCP	
Year	Year 0		Total
Construction Total	208,540		208,540
PW (no user cost)	208,540		208,540
Construction Total	208,540		208,540
User Costs	63,942		63,942
<b>PW</b> (with user costs) $272,482$	272,482		272,482

40 Year Annualized Costs:

Excluding Delay Costs: Including Delay Costs:

10,500 13,800 Table B-29. SR 27, Pines Road and Sprague Avenue PCCP reconstruction versus ACP inlays with six-year cycles - life cycle cost analysis.

# **SR 27 - Pines Road and Sprague Avenue**

				ACP					
Year	Year 0	Year 6	Year 12	Year 18	Year 24	Year 30	Year 36	Salvage	Total
<b>Construction Total</b>	72,860	72,860	72,860	72,860	72,860	72,860	72,860	-24,287	485,733
PW (no user cost)	72,860	57,582	45,508	35,966	28,424	22,464	17,754	-5,059	275,500
<b>Construction Total</b>	72,860	72,860	72,860	72,860	72,860	72,860	72,860	-24,287	485,733
<b>User Costs</b>	7,677	8,644	9,732	10,966	12,337	13,907	15,649		78,912
PW (with user costs)	80,537	64,414	51,587	41,379	33,237	26,752	21,567	-5,059	314,414

40 Year Annualized Cost: Excluding User Costs: 13,900 Including User Costs: 15,900

		<b>PCCP</b>			
Year	Year 0				Total
<b>Construction Total</b>	531,250				531,250
PW (no user cost)	531,250				531,250
<b>Construction Total</b>	531,250				531,250
<b>User Costs</b>	121,941				121,941
PW (with user costs)	653,191				653,191

40 Year Annualized Cost: Excluding User Costs: 26,800 Including User Costs: 33,000

Table B-30. SR 27, Pines Road and Broadway Avenue PCCP reconstruction versus ACP inlays with six-year cycles - life cycle cost analysis.

# SR 27 - Pines Road and Broadway Avenue

				ACP					
Year	Year 0	Year 6	Year 12	Year 18	Year 24	Year 30	Year 36	Salvage	Total
<b>Construction Total</b>	89,700	89,700	89,700	89,700	89,700	89,700	89,700	-29,900	627,900
PW (no user cost)	89,700	70,891	56,026	44,278	34,994	27,656	21,857	-6,228	339,175
<b>Construction Total</b>	89,700	89,700	89,700	89,700	89,700	89,700	89,700	-29,900	627,900
<b>User Costs</b>	6,027	6,791	7,654	8,609	9,698	10,913	12,291		61,983
PW (with user costs)	95,727	76,258	60,807	48,528	38,777	31,021	24,852	-6,228	369,743

40 Year Annualized Cost: Excluding User Costs: 17,100
Including User Costs: 18,700

		<b>PCCP</b>			
Year	Year 0				Total
<b>Construction Total</b>	455,450				455,450
PW (no user cost)	455,450				455,450
<b>Construction Total</b>	455,450				455,450
<b>User Costs</b>	222,241				222,241
PW (with user costs)	677,691				677,691

40 Year Annualized Cost: Excluding User Costs: 23,000 Including User Costs: 34,200

Table B-31. SR 2, Division Street and Francis Avenue PCCP reconstruction versus ACP inlays with six-year cycles - life cycle cost analysis.

## SR 2 - Division Street and Francis Avenue

ACP									
Year	Year 0	Year 6	Year 12	Year 18	Year 24	Year 30	Year 36	Salvage	Total
<b>Construction Total</b>	151,240	151,240	151,240	151,240	151,240	151,240	151,240	-50,413	1,058,680
PW (no user cost)	151,240	119,527	94,464	74,656	59,002	46,630	36,852	-10,501	571,872
<b>Construction Total</b>	151,240	151,240	151,240	151,240	151,240	151,240	151,240	-50,413	1,058,680
<b>User Costs</b>	10,484	11,804	13,304	14,988	16,868	18,996	21,388		107,832
PW (with user costs)	161,154	128,856	102,774	82,055	65,583	52,487	42,064	-10,501	625,042

40 Year Annualized Cost: Excluding User Costs: 28,900 Including User Costs: 31,600

PCCP								
Year	Year 0					Total		
<b>Construction Total</b>	675,110					675,110		
PW (no user cost)	675,110					675,110		
<b>Construction Total</b>	675,110					675,110		
<b>User Costs</b>	751,880					751,880		
PW (with user costs)	1,426,990					1,426,990		

40 Year Annualized Cost: Excluding User Costs: 34,100
Including User Costs: 72,100

Table B-32. SR 291, Francis Avenue with Maple and Ash Streets PCCP reconstruction versus ACP inlays with six-year cycles - life cycle cost analysis.

## **SR 291 - Francis Avenue with Maple and Ash Streets**

ACP									
Year	Year 0	Year 6	Year 12	Year 18	Year 24	Year 30	Year 36	Salvage	Total
<b>Construction Total</b>	91,940	91,940	91,940	91,940	91,940	91,940	91,940	-30,647	643,580
PW (no user cost)	91,940	72,662	57,425	45,384	35,868	28,347	22,403	-6,383	347,645
<b>Construction Total</b>	91,940	91,940	91,940	91,940	91,940	91,940	91,940	-30,647	643,580
<b>User Costs</b>	7,951	8,954	10,090	11,346	12,782	14,408	16,230		81,761
PW (with user costs)	99,891	79,738	63,728	50,985	40,854	32,789	26,358	-6,383	387,959

40 Year Annualized Cost: Excluding User Costs: 17,600
Including User Costs: 19,600

PCCP									
Year	Year 0								Total
<b>Construction Total</b>	466,640								466,640
PW (no user cost)	466,640								466,640
<b>Construction Total</b>	466,640								466,640
<b>User Costs</b>	185,354								185,354
PW (with user costs)	651,994								651,994

40 Year Annualized Cost: Excluding User Costs: 23,600 Including User Costs: 32,900

Table B-33. SR 395, SR 395 and 19th Avenue PCCP reconstruction versus ACP inlays with six-year cycles - life cycle cost analysis.

#### SR 395 - SR 395 and 19th Avenue

	ACP								
Year	Year 0	Year 6	Year 12	Year 18	Year 24	Year 30	Year 36	Salvage	Total
<b>Construction Total</b>	91,940	91,940	91,940	91,940	91,940	91,940	91,940	-30,647	643,580
PW (no user cost)	91,940	72,662	57,425	45,384	35,868	28,347	22,403	-6,383	347,645
<b>Construction Total</b>	91,940	91,940	91,940	91,940	91,940	91,940	91,940	-30,647	643,580
<b>User Costs</b>	3,799	4,283	4,812	5,425	6,106	6,875	7,743		39,043
PW (with user costs)	95,739	76,046	60,431	48,062	38,250	30,467	24,290	-6,383	366,901

40 Year Annualized Cost: Excluding User Costs: 17,600
Including User Costs: 18,500

PCCP									
Year	Year 0								Total
<b>Construction Total</b>	546,440								546,440
PW (no user cost)	546,440								546,440
<b>Construction Total</b>	546,440								546,440
<b>User Costs</b>	49,454								49,454
PW (with user costs)	595,894								595,894

40 Year Annualized Cost: Excluding User Costs: 27,600 Including User Costs: 30,100

Table B-34. SR 90, Broadway Avenue and Thierman Street PCCP reconstruction versus ACP inlays with six-year cycles - life cycle cost analysis.

# **SR 90 - Broadway Avenue and Thierman Street**

ACP									
Year	Year 0	Year 6	Year 12	Year 18	Year 24	Year 30	Year 36	Salvage	Total
<b>Construction Total</b>	95,940	95,940	95,940	95,940	95,940	95,940	95,940	-31,980	671,580
PW (no user cost)	95,940	75,823	59,924	47,359	37,428	29,580	23,378	-6,661	362,770
<b>Construction Total</b>	95,940	95,940	95,940	95,940	95,940	95,940	95,940	-31,980	671,580
<b>User Costs</b>	3,269	3,690	4,135	4,662	5,266	5,915	6,659		33,596
PW (with user costs)	99,209	78,739	62,507	49,660	39,483	31,404	25,000	-6,661	379,340

40 Year Annualized Cost: Excluding User Costs: 18,300
Including User Costs: 19,200

PCCP								
Year	Year 0				Total			
<b>Construction Total</b>	982,180				982,180			
PW (no user cost)	982,180				982,180			
<b>Construction Total</b>	982,180				982,180			
<b>User Costs</b>	95,856				95,856			
PW (with user costs)	1,078,036				1,078,036			

40 Year Annualized Cost: Excluding User Costs: 49,600 Including User Costs: 54,500

Table B-35. SR 2, Division Street and Third Avenue PCCP reconstruction versus ACP inlays with six-year cycles - life cycle cost analysis.

#### SR 2 - Division and Third Avenue

ACP									
Year	Year 0	Year 6	Year 12	Year 18	Year 24	Year 30	Year 36	Salvage	Total
<b>Construction Total</b>	27,750	27,750	27,750	27,750	27,750	27,750	27,750	-9,250	185,000
PW (no user cost)	27,750	21,931	17,333	13,698	10,826	8,556	6,762	-1,927	104,929
<b>Construction Total</b>	27,750	27,750	27,750	27,750	27,750	27,750	27,750	-9,250	185,000
<b>User Costs</b>	911	1,015	1,160	1,298	1,477	1,650	1,857		9,368
PW (with user costs)	28,661	22,733	18,057	14,339	11,402	9,065	7,214	-1,927	109,545

40 Year Annualized Cost: Excluding User Costs: 5,300 Including User Costs: 5,500

PCCP								
Year	Year 0				Total			
<b>Construction Total</b>	208,540				208,540			
PW (no user cost)	208,540				208,540			
<b>Construction Total</b>	208,540				208,540			
<b>User Costs</b>	63,942				63,942			
PW (with user costs)	272,482				272,482			

40 Year Annualized Cost: Excluding User Costs: 10,500 Including User Costs: 13,800

Table B-36. SR 27, Pines Road and Sprague Avenue PCCP reconstruction versus ACP inlays with eight-year cycles - life cycle cost analysis.

# SR 27 - Pines Road and Sprague Avenue

ACP								
Year	Year 0	Year 8	Year 16	Year 24	Year 32	Total		
<b>Construction Total</b>	72,860	72,860	72,860	72,860	72,860	364,300		
PW (no user cost)	72,860	53,238	38,901	28,424	20,769	214,192		
<b>Construction Total</b>	72,860	72,860	72,860	72,860	72,860	364,300		
User Costs	7,677	8,991	10,531	12,337	14,468	54,004		
PW (with user costs)	80,537	59,808	44,523	33,237	24,894	242,999		

40 Year Annualized Cost Excluding User Costs: 10,800 Including User Costs: 12,300

РССР								
Year	Year 0	Total						
<b>Construction Total</b>	531,250	531,250						
PW (no user cost)	531,250	531,250						
<b>Construction Total</b>	531,250	531,250						
User Costs	121,941	121,941						
PW (with user costs)	653,191	653,191						

40 Year Annualized Cost Excluding User Costs: 26,800 Including User Costs: 33,000

Table B-37. SR 2, Pines Road and Broadway Avenue PCCP reconstruction versus ACP inlays with eight-year cycles - life cycle cost analysis.

ACP								
Year	Year 0	Year 8	Year 16	Year 24	Year 32	Total		
<b>Construction Total</b>	89,700	89,700	89,700	89,700	89,700	448,500		
PW (no user cost)	89,700	65,543	47,892	34,994	25,570	263,698		
<b>Construction Total</b>	89,700	89,700	89,700	89,700	89,700	448,500		
User Costs	6,027	7,051	8,273	9,698	11,359	42,408		
PW (with user costs)	95,727	70,695	52,309	38,777	28,808	286,316		

40 Year Annualized Cost Excluding User Costs: 13,300 Including User Costs: 14,500

PCCP								
Year	Year 0					Total		
<b>Construction Total</b>	455,450					455,450		
PW (no user cost)	455,450					455,450		
<b>Construction Total</b>	455,450					455,450		
<b>User Costs</b>	222,241					222,241		
PW (with user costs)	677,691					677,691		

40 Year Annualized Cost Excluding User Costs: 23,000 Including User Costs: 34,200

Table B-38. SR 27, Division Street and Francis Avenue PCCP reconstruction versus ACP inlays with eight-year cycles - life cycle cost analysis.

#### SR 2 - Division Street and Francis Avenue

ACP								
Year	Year 0	Year 8	Year 16	Year 24	Year 32	Total		
<b>Construction Total</b>	151,240	151,240	151,240	151,240	151,240	756,200		
PW (no user cost)	151,240	110,510	80,748	59,002	43,112	444,612		
<b>Construction Total</b>	151,240	151,240	151,240	151,240	151,240	756,200		
User Costs	10,484	12,283	14,388	16,868	19,769	73,792		
PW (with user costs)	161,724	119,485	88,430	65,583	48,747	483,969		

40 Year Annualized Cost Excluding User Costs: 22,500 Including User Costs: 24,500

PCCP								
Year	Year 0		Total					
<b>Construction Total</b>	675,110		675,110					
PW (no user cost)	675,110		675,110					
<b>Construction Total</b>	675,110		675,110					
<b>User Costs</b>	751,880		751,880					
PW (with user costs)	1,426,990		1,426,990					

40 Year Annualized Cost Excluding User Costs: 34,100 Including User Costs: 72,100

Table B-39. SR 291, Francis Avenue with Maple and Ash Streets PCCP reconstruction versus ACP inlays with eight-year cycles - life cycle cost analysis.

#### **SR 291 - Francis Avenue with Maple and Ash Streets**

ACP								
Year	Year 0	Year 8	Year 16	Year 24	Year 32	Total		
<b>Construction Total</b>	91,940	91,940	91,940	91,940	91,940	459,700		
PW (no user cost)	91,940	67,180	49,088	35,868	26,208	270,283		
Construction Total	91,940	91,940	91,940	91,940	91,940	459,700		
User Costs	7,951	9,317	10,914	12,782	14,979	55,943		
PW (with user costs)	99,891	73,987	54,915	40,854	30,478	300,126		

40 Year Annualized Cost Excluding User Costs: 13,700 Including User Costs: 15,200

PCCP								
Year	Year 0					Total		
<b>Construction Total</b>	466,640					466,640		
PW (no user cost)	466,640					466,640		
<b>Construction Total</b>	466,640					466,640		
<b>User Costs</b>	185,354					185,354		
PW (with user costs)	651,994					651,994		

40 Year Annualized Cost Excluding User Costs: 23,600 Including User Costs: 32,900

Table B-40. SR 395, SR 395 and 19th Avenue PCCP reconstruction versus ACP inlays with eight-year cycles - life cycle cost analysis.

#### SR 395 - SR 395 and 19th Avenue

ACP									
Year 0   Year 8   Year 16   Year 24   Year 32   Tota									
<b>Construction Total</b>	91,940	91,940	91,940	91,940	91,940	459,700			
PW (no user cost)	91,940	67,180	49,088	35,868	26,208	270,283			
Construction Total	91,940	91,940	91,940	91,940	91,940	459,700			
<b>User Costs</b>	3,799	4,439	5,208	6,106	7,161	26,713			
PW (with user costs)	95,739	70,423	51,868	38,250	28,250	284,530			

40 Year Annualized Cost Excluding User Costs: 13,700 Including User Costs: 14,400

PCCP							
Year	Year 0					Total	
<b>Construction Total</b>	546,440					546,440	
PW (no user cost)	546,440					546,440	
Construction Total	546,440					546,440	
User Costs	49,454					49,454	
PW (with user costs)	595,894					595,894	

40 Year Annualized Cost Excluding User Costs: 27,600 Including User Costs: 30,100

Table B-41. SR 90, Broadway Avenue and Thierman Street PCCP reconstruction versus ACP inlays with eight-year cycles - life cycle cost analysis.

#### SR 90 - Broadway Avenue and Thierman Street

ACP										
Year 0 Year 8 Year 16 Year 24 Year 32 Total										
<b>Construction Total</b>	95,940	95,940	95,940	95,940	95,940	479,700				
PW (no user cost)	95,940	70,102	51,223	37,428	27,348	282,042				
<b>Construction Total</b>	95,940	95,940	95,940	95,940	95,940	479,700				
User Costs	3,269	3,831	4,480	5,266	6,162	23,008				
PW (with user costs)	99,209	72,902	53,615	39,483	29,105	294,313				

40 Year Annualized Cost Excluding User Costs: 14,200 Including User Costs: 14,900

		PCCP	
Year	Year 0		Total
<b>Construction Total</b>	982,180		982,180
PW (no user cost)	982,180		982,180
<b>Construction Total</b>	982,180		982,180
<b>User Costs</b>	95,856		95,856
PW (with user costs)	1,078,036		1,078,036

40 Year Annualized Cost Excluding User Costs: 49,600 Including User Costs: 54,500

Table B-42. SR 2, Division Street and Third Avenue PCCP reconstruction versus ACP inlays with eight-year cycles - life cycle cost analysis.

#### SR 2 - Division and Third Avenue

ACP								
Year	Year 0	Year 8	Year 16	Year 24	Year 32	Total		
<b>Construction Total</b>	27,750	27,750	27,750	27,750	27,750	138,750		
PW (no user cost)	27,750	20,277	14,816	10,826	7,910	81,579		
<b>Construction Total</b>	27,750	27,750	27,750	27,750	27,750	138,750		
<b>User Costs</b>	911	1,061	1,252	1,459	1,719	6,402		
PW (with user costs)	28,631	21,052	15,484	11,395	8,400	84,993		

40 Year Annualized Cost Excluding User Costs: 4,100 Including User Costs: 4,300

PCCP							
Year	Year 0					Total	
<b>Construction Total</b>	208,540					208,540	
PW (no user cost)	208,540					208,540	
<b>Construction Total</b>	208,540					208,540	
<b>User Costs</b>	63,942					63,942	
PW (with user costs)	272,482					272,482	

40 Year Annualized Cost Excluding User Costs: 10,500 Including User Costs: 13,800

#### APPENDIX C – USER DELAY TIME SUMMARY AND CALCULATIONS

Tables C-1 to C-62 show the calculations used to compute total delay time at each intersection:

<u>Tables</u>	<u>Calculation</u>
C-1	Calculation of total delay time at each intersection for PCCP reconstruction or ACP reconstruction.
C-2 to C-27	Calculation of daily delay time at each intersection for PCCP or ACP reconstruction. Calculations were based on day or night construction.
C-28 to C-34	Calculation of total delay time at each intersection for ACP inlays at four year cycles.
C-35 to C-41	Calculation of total delay time at each intersection for ACP inlays at six year cycles.
C-42 to C-48	Calculation of total delay time at each intersection for ACP inlays at eight year cycles.
C-49 to C-62	Calculation of total daily time at each intersection for ACP inlays. Calculations were based on night construction.

Table C-1. Calculation of total delay time at each intersection for PCCP or ACP reconstruction.

Approach	Delay per Day (hours)	Number of Days	Total Delay (hours)	Percent Trucks (%)	Truck Delay (hours)	Auto Delay (hours)
SR 27 - Pines Road	840	5	4200	6.5	273.0	3927.0
SR 27 - Pines Road	60	15	900	6.5	58.5	841.5
Sprague Avenue	840	5	4200	6.5	273.0	3927.0
Sprague Avenue	60	15	900	6.5	58.5	841.5
<b>Total Delay (hours)</b>			10,200		663	9,537

# SR 27 – Pines Road and Broadway Avenue

Approach	Delay per Day (hours)	Number of Days	Total Delay (hours)	Percent Trucks (%)	Truck Delay (hours)	Auto Delay (hours)
SR 27 - Pines Road	219	10	2190	6.5	142.4	2047.7
SR 27 - Pines Road	437	20	8740	6.5	568.1	8171.9
Broadway Avenue	328	10	3280	6.5	213.2	3066.8
Broadway Avenue	219	20	4380	6.5	284.7	4095.3
<b>Total Delay (hours)</b>			18,590		1,208	17,382

SR 2 - Division Street and Francis Avenue

Approach	Delay per Day (hours)	Number of Days	Total Delay (hours)	Percent Trucks (%)	Truck Delay (hours)	Auto Delay (hours)
SR 2 - Division Street	314	10	3140	2.6	81.6	3058.4
SR 2 - Division Street	1254	25	31350	2.6	815.1	30534.9
SR 291 - Francis Ave.	271	10	2710	2.8	75.9	2634.1
SR 291 - Francis Ave.	1085	25	27125	2.8	759.5	26365.5
<b>Total Delay (hours)</b>			64,350		1,733	62,593

Table C-1 (cont.). Calculation of total delay time at each intersection for PCCP or ACP reconstruction.

SR 291 - Francis Avenue with Maple and Ash Streets

Approach	Delay per Day (hours)	Number of Days	Total Delay (hours)	Percent Trucks (%)	Truck Delay (hours)	Auto Delay (hours)
SR 291 - Francis Ave.	814	5	4070	2.8	114.0	3956.0
SR 291 - Francis Ave.	271	24	6504	2.8	182.1	6321.9
Ash & Maple Streets	407	5	2035	2.0	40.7	1994.3
Ash & Maple Streets	136	24	3264	2.0	65.3	3198.7
<b>Total Delay (hours)</b>			15,873		402	15,471

# **SR 395 - SR 395 and 19th Avenue**

Approach	Delay per Day (hours)	Number of Days	Total Delay (hours)	Percent Trucks (%)	Truck Delay (hours)	Auto Delay (hours)
SR 395	228	5	1140	19.0	216.6	923.4
SR 395	114	10	1140	19.0	216.6	923.4
19 <sup>th</sup> Avenue	171	5	855	5.0	42.8	812.3
19 <sup>th</sup> Avenue	85	10	850	5.0	42.5	807.5
<b>Total Delay (hours)</b>			3,985		518	3,467

# SR 90 - Broadway Avenue and Thierman Street

Approach	Delay per Day (hours)	Number of Days	Total Delay (hours)	Percent Trucks (%)	Truck Delay (hours)	Auto Delay (hours)
Broadway Avenue	290	15	4350	17.0	739.5	3610.5
Broadway Avenue	145	15	2175	17.0	369.8	1805.2
City Streets	43	15	645	30.0	193.5	451.5
City Streets	21	15	315	30.0	94.5	220.5
<b>Total Delay (hours)</b>			7,485		1,397	6,088

Table C-1 (cont.). Calculation of total delay time at each intersection for PCCP or ACP reconstruction.

# **SR 2 - Division Street and Third Avenue**

Approach	Delay per Day (hours)	Number of Days	Total Delay (hours)	Percent Trucks (%)	Truck Delay (hours)	Auto Delay (hours)
SR 2 – Division Street	1025	5	5125	5.5	282	4843
Third Avenue	51	5	255	5.5	14	241
<b>Total Delay (hours)</b>			5,380		296	5,084

Table C-2. Daily delay time for PCCP construction on SR 27, Pines Road and Sprague Avenue – Pines Road approaches.

# SR 27- Pines Road and Sprague Avenue Intersection

Pines Road Approach

Hour	Hourly Distribution	Hourly ADT	Delay per Vehicle (minutes)	Total Delay (minutes)	Total Delay (hours)
12-1	0.9	155	0	0	0.0
1-2	0.5	86	0	0	0.0
2-3	0.4	69	0	0	0.0
3-4	0.4	69	0	0	0.0
4-5	0.6	103	0	0	0.0
5-6	1.8	310	0	0	0.0
6-7	4.4	758	4	3032	50.5
7-8	6.2	1,067	4	4268	71.1
8-9	5.7	981	4	3924	65.4
9-10	5.1	878	4	3512	58.5
10-11	5.2	895	4	3580	59.7
11-12	5.6	964	4	3856	64.3
12-13	6.0	1,033	4	4132	68.9
13-14	5.9	1,016	4	4064	67.7
14-15	6.4	1,102	4	4408	73.5
15-16	7.4	1,274	4	5096	84.9
16-17	7.8	1,343	4	5372	89.5
17-18	7.5	1,291	4	5164	86.1
18-19	5.9	1,016	0	0	0.0
19-20	4.8	826	0	0	0.0
20-21	4.0	689	0	0	0.0
21-22	3.3	568	0	0	0.0
22-23	2.4	413	0	0	0.0
23-24	1.7	293	0	0	0.0
<b>Totals</b>		17,200		50,408	840

Table C-3. Nightly delay time for PCCP construction on SR 27, Pines Road and Sprague Avenue – Pines Road approaches.

Pines Road Approaches

Hour	Hourly Distribution	Hourly ADT	Delay per Vehicle (minutes)	Total Delay (minutes)	Total Delay (hours)
12-1	0.9	155	1	155	2.6
1-2	0.5	86	1	86	1.4
2-3	0.4	69	1	69	1.1
3-4	0.4	69	1	69	1.1
4-5	0.6	103	1	103	1.7
5-6	1.8	310	1	310	5.2
6-7	4.4	758	0	0	0.0
7-8	6.2	1,067	0	0	0.0
8-9	5.7	981	0	0	0.0
9-10	5.1	878	0	0	0.0
10-11	5.2	895	0	0	0.0
11-12	5.6	964	0	0	0.0
12-13	6.0	1,033	0	0	0.0
13-14	5.9	1,016	0	0	0.0
14-15	6.4	1,102	0	0	0.0
15-16	7.4	1,274	0	0	0.0
16-17	7.8	1,343	0	0	0.0
17-18	7.5	1,291	0	0	0.0
18-19	5.9	1,016	0	0	0.0
19-20	4.8	826	1	826	13.8
20-21	4.0	689	1	689	11.5
21-22	3.3	568	1	568	9.5
22-23	2.4	413	1	413	6.9
23-24	1.7	293	1	293	4.9
<b>Totals</b>		17,200		3,581	60

Table C-4. Daily delay time for PCCP construction on SR 27, Pines Road and Sprague Avenue – Sprague Avenue approaches.

Sprague Avenue Approaches

Hour	Hourly Distribution	Hourly ADT	Delay per Vehicle (minutes)	Total Delay (minutes)	Total Delay (hours)
12-1	0.9	155	0	0	0.0
1-2	0.5	86	0	0	0.0
2-3	0.4	69	0	0	0.0
3-4	0.4	69	0	0	0.0
4-5	0.6	103	0	0	0.0
5-6	1.8	310	0	0	0.0
6-7	4.4	758	4	3032	50.5
7-8	6.2	1,067	4	4268	71.1
8-9	5.7	981	4	3924	65.4
9-10	5.1	878	4	3512	58.5
10-11	5.2	895	4	3580	59.7
11-12	5.6	964	4	3856	64.3
12-13	6.0	1,033	4	4132	68.9
13-14	5.9	1,016	4	4064	67.7
14-15	6.4	1,102	4	4408	73.5
15-16	7.4	1,274	4	5096	84.9
16-17	7.8	1,343	4	5372	89.5
17-18	7.5	1,291	4	5164	86.1
18-19	5.9	1,016	0	0	0.0
19-20	4.8	826	0	0	0.0
20-21	4.0	689	0	0	0.0
21-22	3.3	568	0	0	0.0
22-23	2.4	413	0	0	0.0
23-24	1.7	293	0	0	0.0
<b>Totals</b>		17,200		50,412	840

Table C-5. Nightly delay time for PCCP construction on SR 27, Pines Road and Sprague Avenue – Sprague Avenue approaches.

Sprague Avenue Approaches

Hour	Hourly Distribution	Hourly ADT	Delay per Vehicle (minutes)	Total Delay (minutes)	Total Delay (hours)
12-1	0.9	155	1	155	2.6
1-2	0.5	86	1	86	1.4
2-3	0.4	69	1	69	1.1
3-4	0.4	69	1	69	1.1
4-5	0.6	103	1	103	1.7
5-6	1.8	310	1	310	5.2
6-7	4.4	758	0	0	0.0
7-8	6.2	1,067	0	0	0.0
8-9	5.7	981	0	0	0.0
9-10	5.1	878	0	0	0.0
10-11	5.2	895	0	0	0.0
11-12	5.6	964	0	0	0.0
12-13	6.0	1,033	0	0	0.0
13-14	5.9	1,016	0	0	0.0
14-15	6.4	1,102	0	0	0.0
15-16	7.4	1,274	0	0	0.0
16-17	7.8	1,343	0	0	0.0
17-18	7.5	1,291	0	0	0.0
18-19	5.9	1,016	0	0	0.0
19-20	4.8	826	1	826	13.8
20-21	4.0	689	1	689	11.5
21-22	3.3	568	1	568	9.5
22-23	2.4	413	1	413	6.9
23-24	1.7	293	1	293	4.9
<b>Totals</b>		17,200		3,581	60

Table C-6. Daily delay time for PCCP construction on SR 27, Pines Road and Broadway Avenue – Pines Road approaches.

Pines Road Approach

ADT = 25,608

Hour	Hourly Distribution	Hourly ADT	Delay per Vehicle (minutes)	Total Delay (minutes)	Total Delay (hours)
12-1	0.9	161	0	0	0.0
1-2	0.5	90	0	0	0.0
2-3	0.4	72	0	0	0.0
3-4	0.4	72	0	0	0.0
4-5	0.6	108	0	0	0.0
5-6	1.8	323	0	0	0.0
6-7	4.4	789	2	1578	26.3
7-8	6.2	1,111	2	2222	37.0
8-9	5.7	1,022	2	2044	34.1
9-10	5.1	914	2	1828	30.5
10-11	5.2	932	2	1864	31.1
11-12	5.6	1,004	2	2008	33.5
12-13	6.0	1,076	2	2152	35.9
13-14	5.9	1,058	2	2116	35.3
14-15	6.4	1,147	2	2294	38.2
15-16	7.4	1,326	2	2652	44.2
16-17	7.8	1,398	2	2796	46.6
17-18	7.5	1,344	2	2688	44.8
18-19	5.9	1,058	0	0	0.0
19-20	4.8	860	0	0	0.0
20-21	4.0	717	0	0	0.0
21-22	3.3	592	0	0	0.0
22-23	2.4	430	0	0	0.0
23-24	1.7	305	0	0	0.0
<b>Totals</b>		17,908		26,242	437

Table C-7. Nightly delay time for PCCP construction on SR 27, Pines Road and Broadway Avenue – Pines Road approaches.

Pines Road Approach

ADT = 25,608

Hour	Hourly Distribution	Hourly ADT	Delay per Vehicle (minutes)	Total Delay (minutes)	Total Delay (hours)
12-1	0.9	161	0	0	0.0
1-2	0.5	90	0	0	0.0
2-3	0.4	72	0	0	0.0
3-4	0.4	72	0	0	0.0
4-5	0.6	108	0	0	0.0
5-6	1.8	323	0	0	0.0
6-7	4.4	789	1	789	13.1
7-8	6.2	1,111	1	1,111	18.5
8-9	5.7	1,022	1	1,022	17.0
9-10	5.1	914	1	914	15.2
10-11	5.2	932	1	932	15.5
11-12	5.6	1,004	1	1,004	16.7
12-13	6.0	1,076	1	1,076	17.9
13-14	5.9	1,058	1	1,058	17.6
14-15	6.4	1,147	1	1,147	19.1
15-16	7.4	1,326	1	1,326	22.1
16-17	7.8	1,398	1	1,398	23.3
17-18	7.5	1,344	1	1,344	22.4
18-19	5.9	1,058	0	0	0.0
19-20	4.8	860	0	0	0.0
20-21	4.0	717	0	0	0.0
21-22	3.3	592	0	0	0.0
22-23	2.4	430	0	0	0.0
23-24	1.7	305	0	0	0.0
Totals		17,908		13,121	219

Table C-8. Daily delay time for PCCP construction on SR 27, Pines Road and Broadway Avenue – Broadway Avenue approaches.

Broadway Avenue Approaches

ADT = 12,804

Hour	Hourly Distribution	Hourly ADT	Delay per Vehicle (minutes)	Total Delay (minutes)	Total Delay (hours)
12-1	0.9	81	0	0	0.0
1-2	0.5	45	0	0	0.0
2-3	0.4	36	0	0	0.0
3-4	0.4	36	0	0	0.0
4-5	0.6	54	0	0	0.0
5-6	1.8	161	0	0	0.0
6-7	4.4	394	3	1182	19.7
7-8	6.2	556	3	1668	27.8
8-9	5.7	511	3	1533	25.6
9-10	5.1	457	3	1371	22.9
10-11	5.2	466	3	1398	23.3
11-12	5.6	502	3	1506	25.1
12-13	6.0	538	3	1614	26.9
13-14	5.9	529	3	1587	26.5
14-15	6.4	574	3	1722	28.7
15-16	7.4	663	3	1989	33.2
16-17	7.8	699	3	2097	35.0
17-18	7.5	672	3	2016	33.6
18-19	5.9	529	0	0	0.0
19-20	4.8	430	0	0	0.0
20-21	4.0	359	0	0	0.0
21-22	3.3	296	0	0	0.0
22-23	2.4	215	0	0	0.0
23-24	1.7	152	0	0	0.0
<b>Totals</b>		8,954		19,683	328

Table C-9. Nightly delay time for PCCP construction on SR 27, Pines Road and Broadway Avenue – Broadway Avenue approaches.

Broadway Avenue Approaches

ADT = 12,804

Hour	Hourly Distribution	Hourly ADT	Delay per Vehicle (minutes)	Total Delay (minutes)	Total Delay (hours)
12-1	0.9	81	0	0	0.0
1-2	0.5	45	0	0	0.0
2-3	0.4	36	0	0	0.0
3-4	0.4	36	0	0	0.0
4-5	0.6	54	0	0	0.0
5-6	1.8	161	0	0	0.0
6-7	4.4	394	2	788	13.1
7-8	6.2	556	2	1112	18.5
8-9	5.7	511	2	1022	17.0
9-10	5.1	457	2	914	15.2
10-11	5.2	466	2	932	15.5
11-12	5.6	502	2	1004	16.7
12-13	6.0	538	2	1076	17.9
13-14	5.9	529	2	1058	17.6
14-15	6.4	574	2	1148	19.1
15-16	7.4	663	2	1326	22.1
16-17	7.8	699	2	1398	23.3
17-18	7.5	672	2	1344	22.4
18-19	5.9	529	0	0	0.0
19-20	4.8	430	0	0	0.0
20-21	4.0	359	0	0	0.0
21-22	3.3	296	0	0	0.0
22-23	2.4	215	0	0	0.0
23-24	1.7	152	0	0	0.0
<b>Totals</b>		8,954		13,122	219

Table C-10. Daily delay time for PCCP construction on SR 2, Division Street and Francis Avenue – Division Street approaches.

#### SR 2 – Division Street and Francis Avenue

**Division Street Approaches** 

ADT = 36,726

Hour	Hourly Distribution	Hourly ADT	Delay per Vehicle (minutes)	Total Delay (minutes)	Total Delay (hours)
12-1	0.9	231	0	0	0.0
1-2	0.5	129	0	0	0.0
2-3	0.4	103	0	0	0.0
3-4	0.4	103	0	0	0.0
4-5	0.6	154	0	0	0.0
5-6	1.8	463	0	0	0.0
6-7	4.4	1,131	4	4,524	75.4
7-8	6.2	1,594	4	6,376	106.3
8-9	5.7	1,465	4	5,860	97.7
9-10	5.1	1,311	4	5,244	87.4
10-11	5.2	1,337	4	5,348	89.1
11-12	5.6	1,440	4	5,760	96.0
12-13	6.0	1,542	4	6,168	102.8
13-14	5.9	1,517	4	6,068	101.1
14-15	6.4	1,645	4	6,580	109.7
15-16	7.4	1,902	4	7,608	126.8
16-17	7.8	2,005	4	8,020	133.7
17-18	7.5	1,928	4	7,712	128.5
18-19	5.9	1,517	0	0	0.0
19-20	4.8	1,234	0	0	0.0
20-21	4.0	1,028	0	0	0.0
21-22	3.3	848	0	0	0.0
22-23	2.4	617	0	0	0.0
23-24	1.7	437	0	0	0.0
<b>Totals</b>		25,682		75,268	1,254

Table C-11. Nightly delay time for PCCP construction on SR 2, Division Street and Francis Avenue – Division Street approaches.

#### SR 2 – Division Street and Francis Avenue

**Division Street Approaches** 

ADT = 36,726

Hour	Hourly Distribution	Hourly ADT	Delay per Vehicle (minutes)	Total Delay (minutes)	Total Delay (hours)
12-1	0.9	231	0	0	0.0
1-2	0.5	129	0	0	0.0
2-3	0.4	103	0	0	0.0
3-4	0.4	103	0	0	0.0
4-5	0.6	154	0	0	0.0
5-6	1.8	463	0	0	0.0
6-7	4.4	1,131	1	1,131	18.9
7-8	6.2	1,594	1	1,594	26.6
8-9	5.7	1,465	1	1,465	24.4
9-10	5.1	1,311	1	1,311	21.9
10-11	5.2	1,337	1	1,337	22.3
11-12	5.6	1,440	1	1,440	24.0
12-13	6.0	1,542	1	1,542	25.7
13-14	5.9	1,517	1	1,517	25.3
14-15	6.4	1,645	1	1,645	27.4
15-16	7.4	1,902	1	1,902	31.7
16-17	7.8	2,005	1	2,005	33.4
17-18	7.5	1,928	1	1,928	32.1
18-19	5.9	1,517	0	0	0.0
19-20	4.8	1,234	0	0	0.0
20-21	4.0	1,028	0	0	0.0
21-22	3.3	848	0	0	0.0
22-23	2.4	617	0	0	0.0
23-24	1.7	437	0	0	0.0
<b>Totals</b>		25,682		18,817	314

Table C-12. Daily delay time for PCCP construction on SR 2, Division Street and Francis Avenue – Francis Avenue approaches.

#### SR 2 - Division Street and Francis Avenue

Francis Avenue Approaches

Hour	Hourly Distribution	Hourly ADT	Delay per Vehicle (minutes)	Total Delay (minutes)	Total Delay (hours)
12-1	0.9	200	0	0	0.0
1-2	0.5	111	0	0	0.0
2-3	0.4	89	0	0	0.0
3-4	0.4	89	0	0	0.0
4-5	0.6	133	0	0	0.0
5-6	1.8	400	0	0	0.0
6-7	4.4	978	4	3,912	65.2
7-8	6.2	1,379	4	5,516	91.9
8-9	5.7	1,268	4	5,072	84.5
9-10	5.1	1,134	4	4,536	75.6
10-11	5.2	1,156	4	4,624	77.1
11-12	5.6	1,245	4	4,980	83.0
12-13	6.0	1,334	4	5,336	89.0
13-14	5.9	1,312	4	5,248	87.5
14-15	6.4	1,423	4	5,692	94.9
15-16	7.4	1,646	4	6,584	109.7
16-17	7.8	1,735	4	6,940	115.6
17-18	7.5	1,668	4	6,672	111.2
18-19	5.9	1,312	0	0	0.0
19-20	4.8	1,067	0	0	0.0
20-21	4.0	890	0	0	0.0
21-22	3.3	734	0	0	0.0
22-23	2.4	534	0	0	0.0
23-24	1.7	378	0	0	0.0
<b>Totals</b>		22,215		65,112	1,085

Table C-13. Nightly delay time for PCCP construction on SR 2 Division Street and Francis Avenue – Francis Avenue approaches.

#### SR 2 – Division Street and Francis Avenue

# Francis Avenue Approaches

Hour	Hourly Distribution	Hourly ADT	Delay per Vehicle (minutes)	Total Delay (minutes)	Total Delay (hours)
12-1	0.9	200	0	0	0.0
1-2	0.5	111	0	0	0.0
2-3	0.4	89	0	0	0.0
3-4	0.4	89	0	0	0.0
4-5	0.6	133	0	0	0.0
5-6	1.8	400	0	0	0.0
6-7	4.4	978	1	978	16.3
7-8	6.2	1,379	1	1,379	23.0
8-9	5.7	1,268	1	1,268	21.1
9-10	5.1	1,134	1	1,134	18.9
10-11	5.2	1,156	1	1,156	19.3
11-12	5.6	1,245	1	1,245	20.8
12-13	6.0	1,334	1	1,334	22.2
13-14	5.9	1,312	1	1,312	21.9
14-15	6.4	1,423	1	1,423	23.7
15-16	7.4	1,646	1	1,646	27.4
16-17	7.8	1,735	1	1,735	28.9
17-18	7.5	1,668	1	1,668	27.8
18-19	5.9	1,312	0	0	0.0
19-20	4.8	1,067	0	0	0.0
20-21	4.0	890	0	0	0.0
21-22	3.3	734	0	0	0.0
22-23	2.4	534	0	0	0.0
23-24	1.7	378	0	0	0.0
<b>Totals</b>		22,215		16,278	271

Table C-14. Daily delay time for PCCP construction on SR 291, Division Street with Maple and Ash Streets – Francis Avenue approaches.

SR 291 - Francis Avenue with Maple and Ash Streets

Francis Avenue Approaches

Hour	Hourly Distribution	Hourly ADT	Delay per Vehicle (minutes)	Total Delay (minutes)	Total Delay (hours)
			(,	(,	( )
12-1	0.9	200	0	0	0.0
1-2	0.5	111	0	0	0.0
2-3	0.4	89	0	0	0.0
3-4	0.4	89	0	0	0.0
4-5	0.6	133	0	0	0.0
5-6	1.8	400	0	0	0.0
6-7	4.4	978	3	2,934	48.9
7-8	6.2	1,379	3	4,137	69.0
8-9	5.7	1,268	3	3,804	63.4
9-10	5.1	1,134	3	3,402	56.7
10-11	5.2	1,156	3	3,468	57.8
11-12	5.6	1,245	3	3,735	62.3
12-13	6.0	1,334	3	4,002	66.7
13-14	5.9	1,312	3	3,936	65.6
14-15	6.4	1,423	3	4,269	71.2
15-16	7.4	1,646	3	4,938	82.3
16-17	7.8	1,735	3	5,205	86.8
17-18	7.5	1,668	3	5,004	83.4
18-19	5.9	1,312	0	0	0.0
19-20	4.8	1,067	0	0	0.0
20-21	4.0	890	0	0	0.0
21-22	3.3	734	0	0	0.0
22-23	2.4	534	0	0	0.0
23-24	1.7	378	0	0	0.0
<b>Totals</b>		22,215		48,834	814

Table C-15. Nightly delay time for PCCP construction on SR 291, Division Street with Maple and Ash Streets – Francis Avenue approaches.

SR 291 - Francis Avenue with Maple and Ash Streets

Francis Avenue Approaches

Hour	Hourly Distribution	Hourly ADT	Delay per Vehicle (minutes)	Total Delay (minutes)	Total Delay (hours)
12-1	0.9	200	0	0	0.0
1-2	0.5	111	0	0	0.0
2-3	0.4	89	0	0	0.0
3-4	0.4	89	0	0	0.0
4-5	0.6	133	0	0	0.0
5-6	1.8	400	0	0	0.0
6-7	4.4	978	1	978	16.3
7-8	6.2	1,379	1	1,379	23.0
8-9	5.7	1,268	1	1,268	21.1
9-10	5.1	1,134	1	1,134	18.9
10-11	5.2	1,156	1	1,156	19.3
11-12	5.6	1,245	1	1,245	20.8
12-13	6.0	1,334	1	1,334	22.2
13-14	5.9	1,312	1	1,312	21.9
14-15	6.4	1,423	1	1,423	23.7
15-16	7.4	1,646	1	1,646	27.4
16-17	7.8	1,735	1	1,735	28.9
17-18	7.5	1,668	1	1,668	27.8
18-19	5.9	1,312	0	0	0.0
19-20	4.8	1,067	0	0	0.0
20-21	4.0	890	0	0	0.0
21-22	3.3	734	0	0	0.0
22-23	2.4	534	0	0	0.0
23-24	1.7	378	0	0	0.0
<b>Totals</b>		22,215		16,278	271

Table C-16. Daily delay time for PCCP construction on SR 291 Division Street with Maple and Ash Streets – city streets approaches.

# SR 291 - Francis Avenue with Maple and Ash Streets

City Streets Approaches

ADT = 15,884

Hour	Hourly Distribution	Hourly ADT	Delay per Vehicle (minutes)	Total Delay (minutes)	Total Delay (hours)
12-1	0.9	100	0	0	0.0
1-2	0.5	56	0	0	0.0
2-3	0.4	44	0	0	0.0
3-4	0.4	44	0	0	0.0
4-5	0.6	67	0	0	0.0
5-6	1.8	200	0	0	0.0
6-7	4.4	489	3	1,467	24.5
7-8	6.2	689	3	2,067	34.5
8-9	5.7	634	3	1,902	31.7
9-10	5.1	567	3	1,701	28.4
10-11	5.2	578	3	1,734	28.9
11-12	5.6	623	3	1,869	31.2
12-13	6.0	667	3	2,001	33.4
13-14	5.9	656	3	1,968	32.8
14-15	6.4	712	3	2,136	35.6
15-16	7.4	823	3	2,469	41.2
16-17	7.8	867	3	2,601	43.4
17-18	7.5	834	3	2,502	41.7
18-19	5.9	656	0	0	0.0
19-20	4.8	534	0	0	0.0
20-21	4.0	445	0	0	0.0
21-22	3.3	367	0	0	0.0
22-23	2.4	267	0	0	0.0
23-24	1.7	189	0	0	0.0
<b>Totals</b>		11,108		24,417	407

Table C-17. Nightly delay time for PCCP construction on SR 291 Division Street with Maple and Ash Streets – city streets approaches.

# SR 291 - Francis Avenue with Maple and Ash Streets

City Streets Approaches

ADT = 15,884

Hour	Hourly Distribution	Hourly ADT	Delay per Vehicle (minutes)	Total Delay (minutes)	Total Delay (hours)
12-1	0.9	100	0	0	0.0
1-2	0.5	56	0	0	0.0
2-3	0.4	44	0	0	0.0
3-4	0.4	44	0	0	0.0
4-5	0.6	67	0	0	0.0
5-6	1.8	200	0	0	0.0
6-7	4.4	489	1	489	8.2
7-8	6.2	689	1	689	11.5
8-9	5.7	634	1	634	10.6
9-10	5.1	567	1	567	9.5
10-11	5.2	578	1	578	9.6
11-12	5.6	623	1	623	10.4
12-13	6.0	667	1	667	11.1
13-14	5.9	656	1	656	10.9
14-15	6.4	712	1	712	11.9
15-16	7.4	823	1	823	13.7
16-17	7.8	867	1	867	14.5
17-18	7.5	834	1	834	13.9
18-19	5.9	656	0	0	0.0
19-20	4.8	534	0	0	0.0
20-21	4.0	445	0	0	0.0
21-22	3.3	367	0	0	0.0
22-23	2.4	267	0	0	0.0
23-24	1.7	189	0	0	0.0
<b>Totals</b>		11,108		8,139	136

Table C-18. Daily delay time for PCCP construction on SR 395, SR 395 and  $19^{th}$  Avenue – SR 395 approaches.

# SR 395 - SR 395 and 19th Avenue

SR 395 Approach Legs

ADT = 13,370

Hour	Hourly Distribution	Hourly ADT	Delay per Vehicle (minutes)	Total Delay (minutes)	Total Delay (hours)
12-1	0.9	84	0	0	0.0
1-2	0.5	47	0	0	0.0
2-3	0.4	37	0	0	0.0
3-4	0.4	37	0	0	0.0
4-5	0.6	56	0	0	0.0
5-6	1.8	168	0	0	0.0
6-7	4.4	412	2	824	13.7
7-8	6.2	580	2	1,160	19.3
8-9	5.7	533	2	1,066	17.8
9-10	5.1	477	2	954	15.9
10-11	5.2	487	2	974	16.2
11-12	5.6	524	2	1,048	17.5
12-13	6.0	562	2	1,124	18.7
13-14	5.9	552	2	1,104	18.4
14-15	6.4	599	2	1,198	20.0
15-16	7.4	693	2	1,386	23.1
16-17	7.8	730	2	1,460	24.3
17-18	7.5	702	2	1,404	23.4
18-19	5.9	552	0	0	0.0
19-20	4.8	449	0	0	0.0
20-21	4.0	374	0	0	0.0
21-22	3.3	309	0	0	0.0
22-23	2.4	225	0	0	0.0
23-24	1.7	159	0	0	0.0
<b>Totals</b>		9,350		13,702	228

Table C-19. Daily delay time for PCCP construction on SR 395 SR 395 and  $19^{th}$  Avenue – SR 395 approaches.

# SR 395 - SR 395 and 19th Avenue

SR 395 Approach Legs

ADT = 13,370

Hour	Hourly Distribution	Hourly ADT	Delay per Vehicle (minutes)	Total Delay (minutes)	Total Delay (hours)
12-1	0.9	84	0	0	0.0
1-2	0.5	47	0	0	0.0
2-3	0.4	37	0	0	0.0
3-4	0.4	37	0	0	0.0
4-5	0.6	56	0	0	0.0
5-6	1.8	168	0	0	0.0
6-7	4.4	412	1	412	6.9
7-8	6.2	580	1	580	9.7
8-9	5.7	533	1	533	8.9
9-10	5.1	477	1	477	8.0
10-11	5.2	487	1	487	8.1
11-12	5.6	524	1	524	8.7
12-13	6.0	562	1	562	9.4
13-14	5.9	552	1	552	9.2
14-15	6.4	599	1	599	10
15-16	7.4	693	1	693	11.6
16-17	7.8	730	1	730	12.2
17-18	7.5	702	1	702	11.7
18-19	5.9	552	0	0	0.0
19-20	4.8	449	0	0	0.0
20-21	4.0	374	0	0	0.0
21-22	3.3	309	0	0	0.0
22-23	2.4	225	0	0	0.0
23-24	1.7	159	0	0	0.0
<b>Totals</b>		9,350		6,851	114

Table C-20. Nightly delay time for PCCP construction on SR 395, SR 395 and 19<sup>th</sup> Avenue – 19<sup>th</sup> Avenue approaches.

# SR 395 - SR 395 and 19<sup>th</sup> Avenue

19th Avenue Approach Legs

ADT = 10,000

Hour	Hourly Distribution	Hourly ADT	Delay per Vehicle (minutes)	Total Delay (minutes)	Total Delay (hours)
12-1	0.9	63	0	0	0.0
1-2	0.5	35	0	0	0.0
2-3	0.4	28	0	0	0.0
3-4	0.4	28	0	0	0.0
4-5	0.6	42	0	0	0.0
5-6	1.8	126	0	0	0.0
6-7	4.4	308	2	616	10.3
7-8	6.2	434	2	868	14.5
8-9	5.7	399	2	798	13.3
9-10	5.1	357	2	714	11.9
10-11	5.2	364	2	728	12.1
11-12	5.6	392	2	784	13.1
12-13	6.0	420	2	840	14.0
13-14	5.9	413	2	826	13.8
14-15	6.4	448	2	896	14.9
15-16	7.4	518	2	1,036	17.3
16-17	7.8	546	2	1,092	18.2
17-18	7.5	525	2	1,050	17.5
18-19	5.9	413	0	0	0.0
19-20	4.8	336	0	0	0.0
20-21	4.0	280	0	0	0.0
21-22	3.3	231	0	0	0.0
22-23	2.4	168	0	0	0.0
23-24	1.7	119	0	0	0.0
<b>Totals</b>		6,993		10,248	171

Table C-21. Nightly delay time for PCCP construction on SR 395 SR 395 and 19<sup>th</sup> Avenue – 19th Avenue approaches.

#### SR 395 - SR 395 and 19th Avenue

19th Avenue Approach Legs

ADT = 10,000

Hour	Hourly Distribution	Hourly ADT	Delay per Vehicle (minutes)	Total Delay (minutes)	Total Delay (hours)
12-1	0.9	63	0	0	0.0
1-2	0.5	35	0	0	0.0
2-3	0.4	28	0	0	0.0
3-4	0.4	28	0	0	0.0
4-5	0.6	42	0	0	0.0
5-6	1.8	126	0	0	0.0
6-7	4.4	308	1	308	5.1
7-8	6.2	434	1	434	7.2
8-9	5.7	399	1	399	6.7
9-10	5.1	357	1	357	6.0
10-11	5.2	364	1	364	6.1
11-12	5.6	392	1	392	6.5
12-13	6.0	420	1	420	7.0
13-14	5.9	413	1	413	6.9
14-15	6.4	448	1	448	7.5
15-16	7.4	518	1	518	8.6
16-17	7.8	546	1	546	9.1
17-18	7.5	525	1	525	8.8
18-19	5.9	413	0	0	0.0
19-20	4.8	336	0	0	0.0
20-21	4.0	280	0	0	0.0
21-22	3.3	231	0	0	0.0
22-23	2.4	168	0	0	0.0
23-24	1.7	119	0	0	0.0
<b>Totals</b>		6,993		5,124	85

Table C-22. Daily delay time for PCCP construction on SR 90, Broadway Avenue and Thierman Street – Broadway Avenue approaches.

SR 90 - Broadway Avenue and Thierman Road

Broadway Avenue Approaches

ADT = 17,000

Hour	Hourly Distribution	Hourly ADT	Delay per Vehicle (minutes)	Total Delay (minutes)	Total Delay (hours)
12-1	0.9	107	0	0	0.0
1-2	0.5	60	0	0	0.0
2-3	0.4	48	0	0	0.0
3-4	0.4	48	0	0	0.0
4-5	0.6	71	0	0	0.0
5-6	1.8	214	0	0	0.0
6-7	4.4	524	2	1,048	17.5
7-8	6.2	738	2	1,476	24.6
8-9	5.7	678	2	1,356	22.6
9-10	5.1	607	2	1,214	20.2
10-11	5.2	619	2	1,238	20.6
11-12	5.6	666	2	1,332	22.2
12-13	6.0	714	2	1,428	23.8
13-14	5.9	702	2	1,404	23.4
14-15	6.4	762	2	1,524	25.4
15-16	7.4	881	2	1,762	29.4
16-17	7.8	928	2	1,856	30.9
17-18	7.5	893	2	1,786	29.8
18-19	5.9	702	0	0	0.0
19-20	4.8	571	0	0	0.0
20-21	4.0	476	0	0	0.0
21-22	3.3	393	0	0	0.0
22-23	2.4	286	0	0	0.0
23-24	1.7	202	0	0	0.0
Totals		11,888		17,424	290

Table C-23. Nightly delay time for PCCP construction on SR 90 Broadway Avenue and Thierman Road – Broadway Avenue approaches.

SR 90 - Broadway Avenue and Thierman Road

**Broadway Avenue Approaches** 

ADT = 17,000

Hour	Hourly Distribution	Hourly ADT	Delay per Vehicle (minutes)	Total Delay (minutes)	Total Delay (hours)
12-1	0.9	107	0	0	0.0
1-2	0.5	60	0	0	0.0
2-3	0.4	48	0	0	0.0
3-4	0.4	48	0	0	0.0
4-5	0.6	71	0	0	0.0
5-6	1.8	214	0	0	0.0
6-7	4.4	524	1	524	8.7
7-8	6.2	738	1	738	12.3
8-9	5.7	678	1	678	11.3
9-10	5.1	607	1	607	10.1
10-11	5.2	619	1	619	10.3
11-12	5.6	666	1	666	11.1
12-13	6.0	714	1	714	11.9
13-14	5.9	702	1	702	11.7
14-15	6.4	762	1	762	12.7
15-16	7.4	881	1	881	14.7
16-17	7.8	928	1	928	15.5
17-18	7.5	893	1	893	14.9
18-19	5.9	702	0	0	0.0
19-20	4.8	571	0	0	0.0
20-21	4.0	476	0	0	0.0
21-22	3.3	393	0	0	0.0
22-23	2.4	286	0	0	0.0
23-24	1.7	202	0	0	0.0
<b>Totals</b>		11,888		8,712	145

Table C-24. Daily delay time for PCCP construction on SR 90, Broadway Avenue and Thierman Road – city street approaches.

## SR 90 - Broadway Avenue and Thierman Road

City Street Approaches

ADT = 2,500

Hour	Hourly Distribution	Hourly ADT	Delay per Vehicle (minutes)	Total Delay (minutes)	Total Delay (hours)
12-1	0.9	16	0	0	0.0
1-2	0.5	9	0	0	0.0
2-3	0.4	7	0	0	0.0
3-4	0.4	7	0	0	0.0
4-5	0.6	11	0	0	0.0
5-6	1.8	32	0	0	0.0
6-7	4.4	77	2	154	2.6
7-8	6.2	109	2	218	3.6
8-9	5.7	100	2	200	3.3
9-10	5.1	89	2	178	3.0
10-11	5.2	91	2	182	3.0
11-12	5.6	98	2	196	3.3
12-13	6.0	105	2	210	3.5
13-14	5.9	103	2	206	3.4
14-15	6.4	112	2	224	3.7
15-16	7.4	130	2	260	4.3
16-17	7.8	137	2	274	4.6
17-18	7.5	131	2	262	4.4
18-19	5.9	103	0	0	0.0
19-20	4.8	84	0	0	0.0
20-21	4.0	70	0	0	0.0
21-22	3.3	58	0	0	0.0
22-23	2.4	42	0	0	0.0
23-24	1.7	30	0	0	0.0
<b>Totals</b>		1,748		2,562	43

Table C-25. Nightly delay time for PCCP construction on SR 90, Broadway Avenue and Thierman Road – city street approaches.

## SR 90 - Broadway Avenue and Thierman Road

City Street Approaches

ADT = 2,500

Hour	Hourly Distribution	Hourly ADT	Delay per Vehicle (minutes)	Total Delay (minutes)	Total Delay (hours)
12-1	0.9	16	0	0	0.0
1-2	0.5	9	0	0	0.0
2-3	0.4	7	0	0	0.0
3-4	0.4	7	0	0	0.0
4-5	0.6	11	0	0	0.0
5-6	1.8	32	0	0	0.0
6-7	4.4	77	1	77	1.3
7-8	6.2	109	1	109	1.8
8-9	5.7	100	1	100	1.7
9-10	5.1	89	1	89	1.5
10-11	5.2	91	1	91	1.5
11-12	5.6	98	1	98	1.6
12-13	6.0	105	1	105	1.8
13-14	5.9	103	1	103	1.7
14-15	6.4	112	1	112	1.9
15-16	7.4	130	1	130	2.2
16-17	7.8	137	1	137	2.3
17-18	7.5	131	1	131	2.2
18-19	5.9	103	0	0	0.0
19-20	4.8	84	0	0	0.0
20-21	4.0	70	0	0	0.0
21-22	3.3	58	0	0	0.0
22-23	2.4	42	0	0	0.0
23-24	1.7	30	0	0	0.0
<b>Totals</b>		1,748		1,281	21

Table C-26. Daily delay time for PCCP construction on SR 2, Division Street and Third Avenue – Division Street approaches.

#### SR 2 - Division Street and Third Avenue

Division Approach Leg

ADT = 12,000

Hour	Hourly Distribution	Hourly ADT	Delay per Vehicle (minutes)	Total Delay (minutes)	Total Delay (hours)
12-1	0.9	76	0	0	0.0
1-2	0.5	42	0	0	0.0
2-3	0.4	34	0	0	0.0
3-4	0.4	34	0	0	0.0
4-5	0.6	50	0	0	0.0
5-6	1.8	151	0	0	0.0
6-7	4.4	370	10	3,700	61.7
7-8	6.2	521	10	5,210	86.8
8-9	5.7	479	10	4,790	79.8
9-10	5.1	428	10	4,280	71.3
10-11	5.2	437	10	4,370	72.8
11-12	5.6	470	10	4,700	78.3
12-13	6.0	504	10	5,040	84.0
13-14	5.9	496	10	4,960	82.7
14-15	6.4	538	10	5,380	89.7
15-16	7.4	622	10	6,220	103.7
16-17	7.8	655	10	6,550	109.2
17-18	7.5	630	10	6,300	105.0
18-19	5.9	496	0	0	0.0
19-20	4.8	403	0	0	0.0
20-21	4.0	336	0	0	0.0
21-22	3.3	277	0	0	0.0
22-23	2.4	202	0	0	0.0
23-24	1.7	143	0	0	0.0
<b>Totals</b>		8,392		61,500	1,025

Table C-27. Nightly delay time for PCCP construction on SR 2, Division Street and Third Avenue – Third Avenue approach.

#### SR 2 – Division Street and Third Avenue

# Third Avenue Approach

ADT = 6,000

Hour	Hourly Distribution	Hourly ADT	Delay per Vehicle (minutes)	Total Delay (minutes)	Total Delay (hours)
12-1	0.9	38	0	0	0.0
1-2	0.5	21	0	0	0.0
2-3	0.4	17	0	0	0.0
3-4	0.4	17	0	0	0.0
4-5	0.6	25	0	0	0.0
5-6	1.8	76	0	0	0.0
6-7	4.4	185	1	185	3.1
7-8	6.2	260	1	260	4.3
8-9	5.7	239	1	239	4.0
9-10	5.1	214	1	214	3.6
10-11	5.2	218	1	218	3.6
11-12	5.6	235	1	235	3.9
12-13	6.0	252	1	252	4.2
13-14	5.9	248	1	248	4.1
14-15	6.4	269	1	269	4.5
15-16	7.4	311	1	311	5.2
16-17	7.8	328	1	328	5.5
17-18	7.5	315	1	315	5.3
18-19	5.9	248	0	0	0.0
19-20	4.8	202	0	0	0.0
20-21	4.0	168	0	0	0.0
21-22	3.3	139	0	0	0.0
22-23	2.4	101	0	0	0.0
23-24	1.7	71	0	0	0.0
<b>Totals</b>		4,196		3,074	51

Table C-28. Calculation of delay time on SR 27, Pines Road and Sprague Avenue with four-year ACP inlay cycles.

SR 27 - Pines Road and Sprague Avenue

Approach	Average Daily Traffic	Delay per Day (hours)	Number of Days	Total Delay (hours)	Percent Trucks (%)	Truck Delay (hours)	Auto Delay (hours)
SR 27 - Pines Road							
Year 0	24,596	107.0	3	321	6.5	20.9	300.1
Year 4	26,624	115.8	3	347	6.5	22.6	324.9
Year 8	28,818	125.4	3	376	6.5	24.4	351.7
Year 12	31,194	135.7	3	407	6.5	26.5	380.6
Year 16	33,765	146.9	3	441	6.5	28.6	412.0
Year 20	36,548	159.0	3	477	6.5	31.0	446.0
Year 24	39,561	172.1	3	516	6.5	33.6	482.7
Year 28	42,822	186.3	3	559	6.5	36.3	522.5
Year 32	46,352	201.6	3	605	6.5	39.3	565.6
Year 36	50,173	218.3	3	655	6.5	42.6	612.2
Sprague Avenue							
Year 0	24,596	107.0	3	321	6.5	20.9	300.1
Year 4	26,624	115.8	3	347	6.5	22.6	324.9
Year 8	28,818	125.4	3	376	6.5	24.4	351.7
Year 12	31,194	135.7	3	407	6.5	26.5	380.6
Year 16	33,765	146.9	3	441	6.5	28.6	412.0
Year 20	36,548	159.0	3	477	6.5	31.0	446.0
Year 24	39,561	172.1	3	516	6.5	33.6	482.7
Year 28	42,822	186.3	3	559	6.5	36.3	522.5
Year 32	46,352	201.6	3	605	6.5	39.3	565.6
Year 36	50,173	218.3	3	655	6.5	42.6	612.2
<b>Total Delay (Both Legs)</b>							
Year 0				642		42.0	600.0
Year 4				695		45.0	650.0
Year 8				752		49.0	703.0
Year 12				814		53.0	761.0
Year 16				881		57.0	824.0
Year 20				954		62.0	892.0
Year 24				1033		67.0	965.0
Year 28				1118		73.0	1045.0
Year 32				1210		79.0	1131.0
Year 36				1310		85.0	1224.0

Table C-29. Calculation of delay time on SR 27, Pines Road and Broadway Avenue with four-year ACP inlay cycles.

SR 27 - Pines Road and Broadway Avenue

Approach	Average Daily Traffic	Delay per Day (hours)	Number of Days	Total Delay (hours)	Percent Trucks (%)	Truck Delay (hours)	Auto Delay (hours)
SR 27 - Pines Road							
Year 0	25,608	112.0	3	336	6.5	21.8	314.2
Year 4	27,719	121.2	3	364	6.5	23.6	340.1
Year 8	30,004	131.2	3	394	6.5	25.6	368.1
Year 12	32,477	142.0	3	426	6.5	27.7	398.4
Year 16	35,154	153.8	3	461	6.5	30.0	431.3
Year 20	38,052	166.4	3	499	6.5	32.5	466.8
Year 24	41,189	180.1	3	540	6.5	35.1	505.3
Year 28	44,584	195.0	3	585	6.5	38.0	547.0
Year 32	48,259	211.1	3	633	6.5	41.2	592.0
Year 36	52,237	228.5	3	685	6.5	44.6	640.9
<b>Broadway Avenue</b>							
Year 0	12,804	56.0	3	168	6.5	10.9	157.1
Year 4	13,859	60.6	3	182	6.5	11.8	170.0
Year 8	15,002	65.6	3	197	6.5	12.8	184.0
Year 12	16,239	71.0	3	213	6.5	13.8	199.2
Year 16	17,577	76.9	3	231	6.5	15.0	215.6
Year 20	19,026	83.2	3	250	6.5	16.2	233.4
Year 24	20,594	90.1	3	270	6.5	17.6	252.7
Year 28	22,292	97.5	3	292	6.5	19.0	273.5
Year 32	24,130	105.5	3	317	6.5	20.6	296.0
Year 36	26,119	114.2	3	343	6.5	22.3	320.4
<b>Total Delay (Both Legs)</b>							
Year 0				504		33.0	471.0
Year 4				546		35.0	510.0
Year 8				591		38.0	552.0
Year 12				639		42.0	598.0
Year 16				692		45.0	647.0
Year 20				749		49.0	700.0
Year 24				811		53.0	758.0
Year 28				877		57.0	820.0
Year 32				950		62.0	888.0
Year 36				1028		67.0	961.0

Table C-30. Calculation of delay time on SR 2, Division Street and Francis Avenue with four-year ACP inlay cycles.

**SR 2 - Division Street and Francis Avenue** 

Approach	Average Daily Traffic	Delay per Day (hours)	Number of Days	Total Delay (hours)	Percent Trucks (%)	Truck Delay (hours)	Auto Delay (hours)
SR 2 - Division Street							
Year 0	36,726	160.0	3	480	2.6	12.5	467.5
Year 4	39,753	173.2	3	520	2.6	13.5	506.1
Year 8	43,030	187.5	3	562	2.6	14.6	547.8
Year 12	46,577	202.9	3	609	2.6	15.8	592.9
Year 16	50,417	219.6	3	659	2.6	17.1	641.8
Year 20	54,573	237.8	3	713	2.6	18.5	694.7
Year 24	59,071	257.3	3	772	2.6	20.1	752.0
Year 28	63,941	278.6	3	836	2.6	21.7	814.0
Year 32	69,212	301.5	3	905	2.6	23.5	881.1
Year 36	74,917	326.4	3	979	2.6	25.5	953.7
SR 291 - Francis Ave.							
Year 0	31,768	139.0	3	417	2.8	11.7	405.3
Year 4	34,387	150.5	3	451	2.8	12.6	438.7
Year 8	37,221	162.9	3	489	2.8	13.7	474.9
Year 12	40,290	176.3	3	529	2.8	14.8	514.0
Year 16	43,611	190.8	3	572	2.8	16.0	556.4
Year 20	47,206	206.5	3	620	2.8	17.3	602.3
Year 24	51,097	223.6	3	671	2.8	18.8	651.9
Year 28	55,309	242.0	3	726	2.8	20.3	705.7
Year 32	59,868	262.0	3	786	2.8	22.0	763.8
Year 36	64,803	283.5	3	851	2.8	23.8	826.8
<b>Total Delay (Both Legs)</b>							
Year 0				897		24.0	873.0
Year 4				971		26.0	945.0
Year 8				1051		28.0	1023.0
Year 12				1138		31.0	1107.0
Year 16				1231		33.0	1198.0
Year 20				1333		36.0	1297.0
Year 24				1443		39.0	1404.0
Year 28				1562		42.0	1520.0
Year 32				1690		46.0	1645.0
Year 36				1830		49.0	1781.0

Table C-31. Calculation of delay time on SR 291, Francis Avenue with Maple and Ash Streets with four-year ACP inlay cycles.

SR 291 - Francis Avenue with Maple and Ash Streets

Approach	Average Daily Traffic	Delay per Day (hours)	Number of Days	Total Delay (hours)	Percent Trucks (%)	Truck Delay (hours)	Auto Delay (hours)
SR 291 - Francis Ave.							
Year 0	31,768	139.0	3	417	2.8	11.7	405.3
Year 4	34,387	150.5	3	451	2.8	12.6	438.7
Year 8	37,221	162.9	3	489	2.8	13.7	474.9
Year 12	40,290	176.3	3	529	2.8	14.8	514.0
Year 16	43,611	190.8	3	572	2.8	16.0	556.4
Year 20	47,206	206.5	3	620	2.8	17.3	602.3
Year 24	51,097	223.6	3	671	2.8	18.8	651.9
Year 28	55,309	242.0	3	726	2.8	20.3	705.7
Year 32	59,868	262.0	3	786	2.8	22.0	763.8
Year 36	64,803	283.5	3	851	2.8	23.8	826.8
<b>Ash &amp; Maple Streets</b>							
Year 0	15,884	88.0	3	264	2.0	5.3	258.7
Year 4	17,193	95.3	3	286	2.0	5.7	280.0
Year 8	18,611	103.1	3	309	2.0	6.2	303.1
Year 12	20,145	111.6	3	335	2.0	6.7	328.1
Year 16	21,805	120.8	3	362	2.0	7.2	355.2
Year 20	23,603	130.8	3	392	2.0	7.8	384.4
Year 24	25,548	141.5	3	425	2.0	8.5	416.1
Year 28	27,654	153.2	3	460	2.0	9.2	450.4
Year 32	29,934	165.8	3	498	2.0	10.0	487.6
Year 36	32,402	179.5	3	539	2.0	10.8	527.8
<b>Total Delay (Both Legs)</b>							
Year 0				681		17.0	664.0
Year 4				737		18.0	719.0
Year 8				798		20.0	778.0
Year 12				864		22.0	842.0
Year 16				935		23.0	912.0
Year 20				1012		25.0	987.0
Year 24				1095		27.0	1068.0
Year 28				1186		30.0	1156.0
Year 32				1283		32.0	1251.0
Year 36				1389		35.0	1355.0

Table C-32. Calculation of delay time on SR 395, SR 395 and 19<sup>th</sup> Avenue with four-year ACP inlay cycles.

SR 395 - SR 395 and 19th Avenue

Approach	Average Daily Traffic	Delay per Day (hours)	Number of Days	Total Delay (hours)	Percent Trucks (%)	Truck Delay (hours)	Auto Delay (hours)
SR 395							
Year 0	13,370	58.0	3	174	19.0	33.1	140.9
Year 4	14,472	62.8	3	188	19.0	35.8	152.6
Year 8	15,665	68.0	3	204	19.0	38.7	165.1
Year 12	16,956	73.6	3	221	19.0	41.9	178.7
Year 16	18,354	79.6	3	239	19.0	45.4	193.5
Year 20	19,867	86.2	3	259	19.0	49.1	209.4
Year 24	21,505	93.3	3	280	19.0	53.2	226.7
Year 28	23,277	101.0	3	303	19.0	57.6	245.4
Year 32	25,196	109.3	3	328	19.0	62.3	265.6
Year 36	27,273	118.3	3	355	19.0	67.4	287.5
19th Avenue							
Year 0	10,000	44.0	3	132	5.0	6.6	125.4
Year 4	10,824	47.6	3	143	5.0	7.1	135.7
Year 8	11,717	51.6	3	155	5.0	7.7	146.9
Year 12	12,682	55.8	3	167	5.0	8.4	159.0
Year 16	13,728	60.4	3	181	5.0	9.1	172.1
Year 20	14,859	65.4	3	196	5.0	9.8	186.3
Year 24	16,084	70.8	3	212	5.0	10.6	201.7
Year 28	17,410	76.6	3	230	5.0	11.5	218.3
Year 32	18,845	82.9	3	249	5.0	12.4	236.3
Year 36	20,399	89.8	3	269	5.0	13.5	255.8
<b>Total Delay (Both Legs)</b>							
Year 0				306		40.0	266.0
Year 4				331		43.0	288.0
Year 8				359		46.0	312.0
Year 12				388		50.0	338.0
Year 16				420		54.0	366.0
Year 20				455		59.0	396.0
Year 24				492		64.0	428.0
Year 28				533		69.0	464.0
Year 32				577		75.0	502.0
Year 36				624		81.0	543.0

Table C-33. Calculation of delay time on SR 90, Broadway Avenue and Thierman Street with four-year ACP inlay cycles.

SR 90 - Broadway Avenue and Thierman Street

Approach	Average Daily Traffic	Delay per Day (hours)	Number of Days	Total Delay (hours)	Percent Trucks (%)	Truck Delay (hours)	Auto Delay (hours)
<b>Broadway Avenue</b>							
Year 0	17,000	74.0	3	222	17.0	37.7	184.3
Year 4	18,401	80.1	3	240	17.0	40.9	199.4
Year 8	19,918	86.7	3	260	17.0	44.2	215.9
Year 12	21,560	93.8	3	282	17.0	47.9	233.7
Year 16	23,337	101.6	3	305	17.0	51.8	252.9
Year 20	25,261	110.0	3	330	17.0	56.1	273.8
Year 24	27,343	119.0	3	357	17.0	60.7	296.4
Year 28	29,597	128.8	3	387	17.0	65.7	320.8
Year 32	32,037	139.5	3	418	17.0	71.1	347.2
Year 36	34,678	151.0	3	453	17.0	77.0	375.9
City Streets							
Year 0	2,500	11.0	3	33	30.0	9.9	23.1
Year 4	2,706	11.9	3	36	30.0	10.7	25.0
Year 8	2,929	12.9	3	39	30.0	11.6	27.1
Year 12	3,171	14.0	3	42	30.0	12.6	29.3
Year 16	3,432	15.1	3	45	30.0	13.6	31.7
Year 20	3,715	16.3	3	49	30.0	14.7	34.3
Year 24	4,021	17.7	3	53	30.0	15.9	37.2
Year 28	4,353	19.2	3	57	30.0	17.2	40.2
Year 32	4,711	20.7	3	62	30.0	18.7	43.5
Year 36	5,100	22.4	3	67	30.0	20.2	47.1
<b>Total Delay (Both Legs)</b>							
Year 0				255		48.0	207.0
Year 4				276		52.0	224.0
Year 8				299		56.0	243.0
Year 12				323		60.0	263.0
Year 16				350		65.0	285.0
Year 20				379		71.0	308.0
Year 24				410		77.0	334.0
Year 28				444		83.0	361.0
Year 32				481		90.0	391.0
Year 36				520		97.0	423.0

Table C-34. Calculation of delay time on SR 2, Division Street and Third Avenue with four-year ACP inlay cycles.

**SR 2 - Division Street and Third Avenue** 

Approach	Average Daily Traffic	Delay per Day (hours)	Number of Days	Total Delay (hours)	Percent Trucks (%)	Truck Delay (hours)	Auto Delay (hours)
SR 2 - Division							
Year 0	12,000	52.0	1	52	2.8	1.5	50.5
Year 4	12,989	56.3	1	56	2.8	1.6	54.7
Year 8	14,060	60.9	1	61	2.8	1.7	59.2
Year 12	15,219	65.9	1	66	2.8	1.8	64.1
Year 16	16,473	71.4	1	71	2.8	2.0	69.4
Year 20	17,831	77.3	1	77	2.8	2.2	75.1
Year 24	19,301	83.6	1	84	2.8	2.3	81.3
Year 28	20,892	90.5	1	91	2.8	2.5	88.0
Year 32	22,614	98.0	1	98	2.8	2.7	95.3
Year 36	24,479	106.1	1	106	2.8	3.0	103.1
Third Avenue							
Year 0	6,000	26.0	1	26	2.8	0.7	25.3
Year 4	6,495	28.1	1	28	2.8	0.8	27.4
Year 8	7,030	30.5	1	30	2.8	0.9	29.6
Year 12	7,609	33.0	1	33	2.8	0.9	32.1
Year 16	8,237	35.7	1	36	2.8	1.0	34.7
Year 20	8,916	38.6	1	39	2.8	1.1	37.6
Year 24	9,651	41.8	1	42	2.8	1.2	40.6
Year 28	10,446	45.3	1	45	2.8	1.3	44.0
Year 32	11,307	49.0	1	49	2.8	1.4	47.6
Year 36	12,239	53.0	1	53	2.8	1.5	51.6
<b>Total Delay (Both Legs)</b>							
Year 0				78		2.0	76.0
Year 4				84		2.0	82.0
Year 8				91		3.0	89.0
Year 12				99		3.0	96.0
Year 16				107		3.0	104.0
Year 20				116		3.0	113.0
Year 24				125		4.0	122.0
Year 28				136		4.0	132.0
Year 32				147		4.0	143.0
Year 36				159		4.0	155.0

Table C-35. Calculation of delay time on SR 27, Pines Road and Sprague Avenue with six-year ACP inlay cycles.

SR 27 - Pines Road and Sprague Avenue

Approach	Average Daily Traffic	Delay per Day (hours)	Number of Days	Total Delay (hours)	Percent Trucks (%)	Truck Delay (hours)	Auto Delay (hours)
SR 27 - Pines Road							
Year 0	24,596	107.0	3	321	6.5	20.9	300.1
Year 6	27,699	120.5	3	361	6.5	23.5	338.0
Year 12	31,194	135.7	3	407	6.5	26.5	380.6
Year 18	35,129	152.8	3	458	6.5	29.8	428.7
Year 24	39,561	172.1	3	516	6.5	33.6	482.7
Year 30	44,552	193.8	3	581	6.5	37.8	543.7
Year 36	50,173	218.3	3	655	6.5	42.6	612.2
Sprague Avenue							
Year 0	24,596	107.0	3	321	6.5	20.9	300.1
Year 6	27,699	120.5	3	361	6.5	23.5	338.0
Year 12	31,194	135.7	3	407	6.5	26.5	380.6
Year 18	35,129	152.8	3	458	6.5	29.8	428.7
Year 24	39,561	172.1	3	516	6.5	33.6	482.7
Year 30	44,552	193.8	3	581	6.5	37.8	543.7
Year 36	50,173	218.3	3	655	6.5	42.6	612.2
Total Delay (Both Legs)							
Year 0				642		42.0	600.0
Year 6				723		47.0	676.0
Year 12				814		53.0	761.0
Year 18				917		60.0	857.0
Year 24				1033		67.0	965.0
Year 30				1163		76.0	1087.0
Year 36				1310		85.0	1224.0

Table C-36. Calculation of delay time on SR 27, Pines Road and Broadway Avenue with six-year ACP inlay cycles.

SR 27 - Pines Road and Broadway Avenue

Approach	Average Daily Traffic	Delay per Day (hours)	Number of Days	Total Delay (hours)	Percent Trucks (%)	Truck Delay (hours)	Auto Delay (hours)
SR 27 - Pines Road							
Year 0	25,608	112.0	3	336	6.5	21.8	314.2
Year 6	28,839	126.1	3	378	6.5	24.6	353.8
Year 12	32,477	142.0	3	426	6.5	27.7	398.4
Year 18	36,575	160.0	3	480	6.5	31.2	448.7
Year 24	41,189	180.1	3	540	6.5	35.1	505.3
Year 30	46,385	202.9	3	609	6.5	39.6	569.1
Year 36	52,237	228.5	3	685	6.5	44.6	640.9
Broadway Avenue							
Year 0	12,804	56.0	3	168	6.5	10.9	157.1
Year 6	14,419	63.1	3	189	6.5	12.3	176.9
Year 12	16,239	71.0	3	213	6.5	13.8	199.2
Year 18	18,287	80.0	3	240	6.5	15.6	224.3
Year 24	20,594	90.1	3	270	6.5	17.6	252.7
Year 30	23,193	101.4	3	304	6.5	19.8	284.5
Year 36	26,119	114.2	3	343	6.5	22.3	320.4
<b>Total Delay (Both Legs)</b>							
Year 0				504		33.0	471.0
Year 6				568		37.0	531.0
Year 12				639		42.0	598.0
Year 18				720		47.0	673.0
Year 24				811		53.0	758.0
Year 30				913		59.0	854.0
Year 36				1028		67.0	961.0

Table C-37. Calculation of delay time on SR 2, Division Street and Francis Avenue with six-year ACP inlay cycles.

**SR 2 - Division Street and Francis Avenue** 

Approach	Average Daily Traffic	Delay per Day (hours)	Number of Days	Total Delay (hours)	Percent Trucks (%)	Truck Delay (hours)	Auto Delay (hours)
SR 2 - Division Street							
Year 0	36,726	160.0	3	480	2.6	12.5	467.5
Year 6	41,359	180.2	3	541	2.6	14.1	526.5
Year 12	46,577	202.9	3	609	2.6	15.8	592.9
Year 18	52,454	228.5	3	686	2.6	17.8	667.7
Year 24	59,071	257.3	3	772	2.6	20.1	752.0
Year 30	66,524	289.8	3	869	2.6	22.6	846.8
Year 36	74,917	326.4	3	979	2.6	25.5	953.7
SR 291 - Francis Ave.							
Year 0	31,768	139.0	3	417	2.8	11.7	405.3
Year 6	35,776	156.5	3	470	2.8	13.1	456.5
Year 12	40,290	176.3	3	529	2.8	14.8	514.0
Year 18	45,373	198.5	3	596	2.8	16.7	578.9
Year 24	51,097	223.6	3	671	2.8	18.8	651.9
Year 30	57,543	251.8	3	755	2.8	21.1	734.2
Year 36	64,803	283.5	3	851	2.8	23.8	826.8
Total Delay (Both Legs)							
Year 0				897		24.0	873.0
Year 6				1010		27.0	983.0
Year 12				1138		31.0	1107.0
Year 18				1281		35.0	1247.0
Year 24				1443		39.0	1404.0
Year 30				1625		44.0	1581.0
Year 36				1830		49.0	1781.0

Table C-38. Calculation of delay time on SR 291, Francis Avenue with Maple and Ash Streets with six-year ACP inlay cycles.

**SR 291 - Francis Avenue with Maple and Ash Streets** 

Approach	Average Daily Traffic	Delay per Day (hours)	Number of Days	Total Delay (hours)	Percent Trucks (%)	Truck Delay (hours)	Auto Delay (hours)
SR 291 - Francis Ave.							
Year 0	31,768	139.0	3	417	2.8	11.7	405.3
Year 6	35,776	156.5	3	470	2.8	13.1	456.5
Year 12	40,290	176.3	3	529	2.8	14.8	514.0
Year 18	45,373	198.5	3	596	2.8	16.7	578.9
Year 24	51,097	223.6	3	671	2.8	18.8	651.9
Year 30	57,543	251.8	3	755	2.8	21.1	734.2
Year 36	64,803	283.5	3	851	2.8	23.8	826.8
Ash & Maple Streets							
Year 0	15,884	88.0	3	264	2.0	5.3	258.7
Year 6	17,888	99.1	3	297	2.0	5.9	291.4
Year 12	20,145	111.6	3	335	2.0	6.7	328.1
Year 18	22,686	125.7	3	377	2.0	7.5	369.5
Year 24	25,548	141.5	3	425	2.0	8.5	416.1
Year 30	28,772	159.4	3	478	2.0	9.6	468.6
Year 36	32,402	179.5	3	539	2.0	10.8	527.8
Total Delay (Both Legs)							
Year 0				681		17.0	664.0
Year 6				767		19.0	748.0
Year 12				864		22.0	842.0
Year 18				973		24.0	948.0
Year 24				1095		27.0	1068.0
Year 30				1234		31.0	1203.0
Year 36				1389		35.0	1355.0

Table C-39. Calculation of delay time on SR 395, SR 395 and 19<sup>th</sup> Avenue with six-year ACP inlay cycles.

**SR 395 - SR 395 and 19th Avenue** 

Approach	Average Daily Traffic	Delay per Day (hours)	Number of Days	Total Delay (hours)	Percent Trucks (%)	Truck Delay (hours)	Auto Delay (hours)
SR 395							
Year 0	13,370	58.0	3	174	19.0	33.1	140.9
Year 6	15,057	65.3	3	196	19.0	37.2	158.7
Year 12	16,956	73.6	3	221	19.0	41.9	178.7
Year 18	19,096	82.8	3	249	19.0	47.2	201.3
Year 24	21,505	93.3	3	280	19.0	53.2	226.7
Year 30	24,218	105.1	3	315	19.0	59.9	255.3
Year 36	27,273	118.3	3	355	19.0	67.4	287.5
19th Avenue							
Year 0	10,000	44.0	3	132	5.0	6.6	125.4
Year 6	11,262	49.6	3	149	5.0	7.4	141.2
Year 12	12,682	55.8	3	167	5.0	8.4	159.0
Year 18	14,282	62.8	3	189	5.0	9.4	179.1
Year 24	16,084	70.8	3	212	5.0	10.6	201.7
Year 30	18,114	79.7	3	239	5.0	12.0	227.1
Year 36	20,399	89.8	3	269	5.0	13.5	255.8
<b>Total Delay (Both Legs)</b>							
Year 0				306		40.0	266.0
Year 6				345		45.0	300.0
Year 12				388		50.0	338.0
Year 18				437		57.0	380.0
Year 24				492		64.0	428.0
Year 30				554		72.0	482.0
Year 36				624		81.0	543.0

Table C-40. Calculation of delay time on SR 90, Broadway Avenue and Thierman Road with six-year ACP inlay cycles.

**SR 90 - Broadway Avenue and Thierman Street** 

Approach	Average Daily Traffic	Delay per Day (hours)	Number of Days	Total Delay (hours)	Percent Trucks (%)	Truck Delay (hours)	Auto Delay (hours)
<b>Broadway Avenue</b>							
Year 0	17,000	74.0	3	222	17.0	37.7	184.3
Year 6	19,145	83.3	3	250	17.0	42.5	207.5
Year 12	21,560	93.8	3	282	17.0	47.9	233.7
Year 18	24,280	105.7	3	317	17.0	53.9	263.2
Year 24	27,343	119.0	3	357	17.0	60.7	296.4
Year 30	30,793	134.0	3	402	17.0	68.4	333.8
Year 36	34,678	151.0	3	453	17.0	77.0	375.9
City Streets							
Year 0	2,500	11.0	3	33	30.0	9.9	23.1
Year 6	2,815	12.4	3	37	30.0	11.1	26.0
Year 12	3,171	14.0	3	42	30.0	12.6	29.3
Year 18	3,571	15.7	3	47	30.0	14.1	33.0
Year 24	4,021	17.7	3	53	30.0	15.9	37.2
Year 30	4,528	19.9	3	60	30.0	17.9	41.8
Year 36	5,100	22.4	3	67	30.0	20.2	47.1
Total Delay (Both Legs)							
Year 0				255		48.0	207.0
Year 6				287		54.0	234.0
Year 12				323		60.0	263.0
Year 18				364		68.0	296.0
Year 24				410		77.0	334.0
Year 30				462		86.0	376.0
Year 36				520		97.0	423.0

Table C-41. Calculation of delay time on SR 2, Division Street and Third Avenue with six-year ACP inlay cycles.

**SR 2 - Division Street and Third Avenue** 

Approach	Average Daily Traffic	Delay per Day (hours)	Number of Days	Total Delay (hours)	Percent Trucks (%)	Truck Delay (hours)	Auto Delay (hours)
SR 2 - Division							
Year 0	12,000	52.0	1	52	2.8	1.5	50.5
Year 6	13,514	58.6	1	59	2.8	1.6	56.9
Year 12	15,219	65.9	1	66	2.8	1.8	64.1
Year 18	17,139	74.3	1	74	2.8	2.1	72.2
Year 24	19,301	83.6	1	84	2.8	2.3	81.3
Year 30	21,736	94.2	1	94	2.8	2.6	91.6
Year 36	24,479	106.1	1	106	2.8	3.0	103.1
Third Avenue							
Year 0	6,000	26.0	1	26	2.8	0.7	25.3
Year 6	6,757	29.3	1	29	2.8	0.8	28.5
Year 12	7,609	33.0	1	33	2.8	0.9	32.1
Year 18	8,569	37.1	1	37	2.8	1.0	36.1
Year 24	9,651	41.8	1	42	2.8	1.2	40.6
Year 30	10,868	47.1	1	47	2.8	1.3	45.8
Year 36	12,239	53.0	1	53	2.8	1.5	51.6
Total Delay (Both Legs)							
Year 0				78		2.0	76.0
Year 6				88		2.0	85.0
Year 12				99		3.0	96.0
Year 18				111		3.0	108.0
Year 24				125		4.0	122.0
Year 30				141		4.0	137.0
Year 36				159		4.0	155.0

Table C-42. Calculation of delay time on SR 27, Pines Road and Sprague Avenue with eight-year ACP inlay cycles.

**SR 27 - Pines Road and Sprague Avenue** 

Approach	Average Daily Traffic	Delay per Day (hours)	Number of Days	Total Delay (hours)	Percent Trucks (%)	Truck Delay (hours)	Auto Delay (hours)
SR 27 - Pines Road							
Year 0	24,596	107.0	3	321	6.5	20.9	300.1
Year 8	28,818	125.4	3	376	6.5	24.4	351.7
Year 16	33,765	146.9	3	441	6.5	28.6	412.0
Year 24	39,561	172.1	3	516	6.5	33.6	482.7
Year 32	46,352	201.6	3	605	6.5	39.3	565.6
Sprague Avenue							
Year 0	24,596	107.0	3	321	6.5	20.9	300.1
Year 8	28,818	125.4	3	376	6.5	24.4	351.7
Year 16	33,765	146.9	3	441	6.5	28.6	412.0
Year 24	39,561	172.1	3	516	6.5	33.6	482.7
Year 32	46,352	201.6	3	605	6.5	39.3	565.6
Total Delay (Both Le	gs)						
Year 0				642		42.0	600.0
Year 8				752		49.0	703.0
Year 16				881		57.0	824.0
Year 24				1033		67.0	965.0
Year 32				1210		79.0	1131.0

Table C-43. Calculation of delay time on SR 27, Pines Road and Broadway Avenue with eight-year ACP inlay cycles.

SR 27 - Pines Road and Broadway Avenue

Approach	Average Daily Traffic	Delay per Day (hours)	Number of Days	Total Delay (hours)	Percent Trucks (%)	Truck Delay (hours)	Auto Delay (hours)
SR 27 - Pines Road							
Year 0	25,608	112.0	3	336	6.5	21.8	314.2
Year 8	30,004	131.2	3	394	6.5	25.6	368.1
Year 16	35,154	153.8	3	461	6.5	30.0	431.3
Year 24	41,189	180.1	3	540	6.5	35.1	505.3
Year 32	48,259	211.1	3	633	6.5	41.2	592.0
<b>Broadway Avenue</b>							
Year 0	12,804	56.0	3	168	6.5	10.9	157.1
Year 8	15,002	65.6	3	197	6.5	12.8	184.0
Year 16	17,577	76.9	3	231	6.5	15.0	215.6
Year 24	20,594	90.1	3	270	6.5	17.6	252.7
Year 32	24,130	105.5	3	317	6.5	20.6	296.0
Total Delay (Both Leg	gs)						
Year 0				504		33.0	471.0
Year 8				591		38.0	552.0
Year 16				692		45.0	647.0
Year 24				811		53.0	758.0
Year 32				950		62.0	888.0

Table C-44. Calculation of delay time on SR 2, Division Street and Francis Avenue with eight-year ACP inlay cycles.

**SR 2 - Division Street and Francis Avenue** 

Approach	Average Daily Traffic	Delay per Day (hours)	Number of Days	Total Delay (hours)	Percent Trucks (%)	Truck Delay (hours)	Auto Delay (hours)
SR 2 - Division Street							
Year 0	36,726	160.0	3	480	2.6	12.5	467.5
Year 8	43,030	187.5	3	562	2.6	14.6	547.8
Year 16	50,417	219.6	3	659	2.6	17.1	641.8
Year 24	59,071	257.3	3	772	2.6	20.1	752.0
Year 32	69,212	301.5	3	905	2.6	23.5	881.1
SR 291 - Francis Ave.							
Year 0	31,768	139.0	3	417	2.8	11.7	405.3
Year 8	37,221	162.9	3	489	2.8	13.7	474.9
Year 16	43,611	190.8	3	572	2.8	16.0	556.4
Year 24	51,097	223.6	3	671	2.8	18.8	651.9
Year 32	59,868	262.0	3	786	2.8	22.0	763.8
Total Delay (Both Leg	gs)						
Year 0				897		24.0	873.0
Year 8				1051		28.0	1023.0
Year 16				1231		33.0	1198.0
Year 24				1443		39.0	1404.0
Year 32				1690		46.0	1645.0

Table C-45. Calculation of delay time on SR 291, Francis Avenue with Maple and Ash Streets with eight-year ACP inlay cycles.

**SR 291 - Francis Avenue with Maple and Ash Streets** 

Approach	Average Daily Traffic	Delay per Day (hours)	Number of Days	Total Delay (hours)	Percent Trucks (%)	Truck Delay (hours)	Auto Delay (hours)
SR 291 - Francis Ave.	,						
Year 0	31,768	139.0	3	417	2.8	11.7	405.3
Year 8	37,221	162.9	3	489	2.8	13.7	474.9
Year 16	43,611	190.8	3	572	2.8	16.0	556.4
Year 24	51,097	223.6	3	671	2.8	18.8	651.9
Year 32	59,868	262.0	3	786	2.8	22.0	763.8
Ash & Maple Streets							
Year 0	15,884	88.0	3	264	2.0	5.3	258.7
Year 8	18,611	103.1	3	309	2.0	6.2	303.1
Year 16	21,805	120.8	3	362	2.0	7.2	355.2
Year 24	25,548	141.5	3	425	2.0	8.5	416.1
Year 32	29,934	165.8	3	498	2.0	10.0	487.6
Total Delay (Both Lea	gs)						
Year 0				681		17.0	664.0
Year 8				798		20.0	778.0
Year 16				935		23.0	912.0
Year 24				1095		27.0	1068.0
Year 32				1283		32.0	1251.0

Table C-46. Calculation of delay time on SR 395, SR 395 and 19<sup>th</sup> Avenue with eight-year ACP inlay cycles.

**SR 395 - SR 395 and 19th Avenue** 

Approach	Average Daily Traffic	Delay per Day (hours)	Number of Days	Total Delay (hours)	Percent Trucks (%)	Truck Delay (hours)	Auto Delay (hours)
SR 395							
Year 0	13,370	58.0	3	174	19.0	33.1	140.9
Year 8	15,665	68.0	3	204	19.0	38.7	165.1
Year 16	18,354	79.6	3	239	19.0	45.4	193.5
Year 24	21,505	93.3	3	280	19.0	53.2	226.7
Year 32	25,196	109.3	3	328	19.0	62.3	265.6
19th Avenue							
Year 0	10,000	44.0	3	132	5.0	6.6	125.4
Year 8	11,717	51.6	3	155	5.0	7.7	146.9
Year 16	13,728	60.4	3	181	5.0	9.1	172.1
Year 24	16,084	70.8	3	212	5.0	10.6	201.7
Year 32	18,845	82.9	3	249	5.0	12.4	236.3
Total Delay (Both Leg	gs)						
Year 0				306		40.0	266.0
Year 8				359		46.0	312.0
Year 16				420		54.0	366.0
Year 24				492		64.0	428.0
Year 32				577		75.0	502.0

Table C-47. Calculation of delay time on SR 90, Broadway Avenue and Thierman Street with eight-year ACP inlay cycles.

**SR 90 - Broadway Avenue and Thierman Street** 

Approach	Average Daily Traffic	Delay per Day (hours)	Number of Days	Total Delay (hours)	Percent Trucks (%)	Truck Delay (hours)	Auto Delay (hours)
<b>Broadway Avenue</b>							
Year 0	17,000	74.0	3	222	17.0	37.7	184.3
Year 8	19,918	86.7	3	260	17.0	44.2	215.9
Year 16	23,337	101.6	3	305	17.0	51.8	252.9
Year 24	27,343	119.0	3	357	17.0	60.7	296.4
Year 32	32,037	139.5	3	418	17.0	71.1	347.2
City Streets							
Year 0	2,500	11.0	3	33	30.0	9.9	23.1
Year 8	2,929	12.9	3	39	30.0	11.6	27.1
Year 16	3,432	15.1	3	45	30.0	13.6	31.7
Year 24	4,021	17.7	3	53	30.0	15.9	37.2
Year 32	4,711	20.7	3	62	30.0	18.7	43.5
Total Delay (Both Leg	gs)						
Year 0				255		48.0	207.0
Year 8				299		56.0	243.0
Year 16				350		65.0	285.0
Year 24				410		77.0	334.0
Year 32				481		90.0	391.0

Table C-48. Calculation of delay time on SR 2, Division Street and Third Avenue with eight-year ACP inlay cycles.

**SR 2 - Division Street and Third Avenue** 

Approach	Average Daily Traffic	Delay per Day (hours)	Number of Days	Total Delay (hours)	Percent Trucks (%)	Truck Delay (hours)	Auto Delay (hours)
SR 2 - Division							
Year 0	12,000	52.0	1	52	2.8	1.5	50.5
Year 8	14,060	60.9	1	61	2.8	1.7	59.2
Year 16	16,473	71.4	1	71	2.8	2.0	69.4
Year 24	19,301	83.6	1	84	2.8	2.3	81.3
Year 32	22,614	98.0	1	98	2.8	2.7	95.3
Third Avenue							
Year 0	6,000	26.0	1	26	2.0	0.5	25.5
Year 8	7,030	30.5	1	30	2.0	0.6	29.9
Year 16	8,237	35.7	1	36	2.0	0.7	35.0
Year 24	9,651	41.8	1	42	2.0	0.8	41.0
Year 32	11,307	49.0	1	49	2.0	1.0	48.0
Total Delay (Both Leg	gs)						
Year 0				78		2.0	76.0
Year 8				91		2.0	89.0
Year 16				107		3.0	104.0
Year 24				125		3.0	122.0
Year 32				147		4.0	143.0

Table C-49. Nightly delay time for ACP inlay on SR 27, Pines Road and Sprague Avenue – Pines Road approaches.

## SR 27 - Pines Road and Sprague Avenue

# Pines Road Approaches

ADT = 24,596

Hour	Hourly Distribution	Hourly ADT	Delay per Vehicle (minutes)	Total Delay (minutes)	Total Delay (hours)
12-1	0.9	155	1	155	2.6
1-2	0.5	86	1	86	1.4
2-3	0.4	69	1	69	1.2
3-4	0.4	69	1	69	1.2
4-5	0.6	103	1	103	1.7
5-6	1.8	310	1	310	5.2
6-7	4.4	758	0	0	0.0
7-8	6.2	1,067	0	0	0.0
8-9	5.7	981	0	0	0.0
9-10	5.1	878	0	0	0.0
10-11	5.2	895	0	0	0.0
11-12	5.6	964	0	0	0.0
12-13	6.0	1,033	0	0	0.0
13-14	5.9	1,016	0	0	0.0
14-15	6.4	1,102	0	0	0.0
15-16	7.4	1,274	0	0	0.0
16-17	7.8	1,343	0	0	0.0
17-18	7.5	1,291	0	0	0.0
18-19	5.9	1,016	2	2,032	33.9
19-20	4.8	826	2	1,652	27.5
20-21	4.0	689	1	689	11.5
21-22	3.3	568	1	568	9.5
22-23	2.4	413	1	413	6.9
23-24	1.7	293	1	293	4.9
<b>Totals</b>		17,200		6,439	107

Table C-50. Nightly delay time for ACP inlay on SR 27, Pines Road and Sprague Avenue – Sprague Avenue approaches.

## SR 27 - Pines Road and Sprague Avenue

Sprague Avenue Approaches

ADT = 24,596

Hour	Hourly Distribution	Hourly ADT	Delay per Vehicle (minutes)	Total Delay (minutes)	Total Delay (hours)
12-1	0.9	155	1	155	2.6
1-2	0.5	86	1	86	1.4
2-3	0.4	69	1	69	1.2
3-4	0.4	69	1	69	1.2
4-5	0.6	103	1	103	1.7
5-6	1.8	310	1	310	5.2
6-7	4.4	758	0	0	0.0
7-8	6.2	1,067	0	0	0.0
8-9	5.7	981	0	0	0.0
9-10	5.1	878	0	0	0.0
10-11	5.2	895	0	0	0.0
11-12	5.6	964	0	0	0.0
12-13	6.0	1,033	0	0	0.0
13-14	5.9	1,016	0	0	0.0
14-15	6.4	1,102	0	0	0.0
15-16	7.4	1,274	0	0	0.0
16-17	7.8	1,343	0	0	0.0
17-18	7.5	1,291	0	0	0.0
18-19	5.9	1,016	2	2,032	33.9
19-20	4.8	826	2	1,652	27.5
20-21	4.0	689	1	689	11.5
21-22	3.3	568	1	568	9.5
22-23	2.4	413	1	413	6.9
23-24	1.7	293	1	293	4.9
<b>Totals</b>		17,200		6,439	107

Table C-51. Nightly delay time for ACP inlay on SR 27, Pines Road and Broadway Avenue – Pines Road approaches.

## SR 27 - Pines Road and Broadway Avenue

Pines Road Approach

ADT = 25,608

Hour	Hourly Distribution	Hourly ADT	Delay per Vehicle (minutes)	Total Delay (minutes)	Total Delay (hours)
12-1	0.9	161	1	161	2.7
1-2	0.5	90	1	90	1.5
2-3	0.4	72	1	72	1.2
3-4	0.4	72	1	72	1.2
4-5	0.6	108	1	108	1.8
5-6	1.8	323	1	323	5.4
6-7	4.4	789	0	0	0.0
7-8	6.2	1,111	0	0	0.0
8-9	5.7	1,022	0	0	0.0
9-10	5.1	914	0	0	0.0
10-11	5.2	932	0	0	0.0
11-12	5.6	1,004	0	0	0.0
12-13	6.0	1,076	0	0	0.0
13-14	5.9	1,058	0	0	0.0
14-15	6.4	1,147	0	0	0.0
15-16	7.4	1,326	0	0	0.0
16-17	7.8	1,398	0	0	0.0
17-18	7.5	1,344	0	0	0.0
18-19	5.9	1,058	2	2,116	35.3
19-20	4.8	860	2	1,720	28.7
20-21	4.0	717	1	717	12.0
21-22	3.3	592	1	592	9.9
22-23	2.4	430	1	430	7.2
23-24	1.7	305	1	305	5.1
<b>Totals</b>		17,908		6,706	112

Table C-52. Nightly delay time for ACP inlay on SR 27, Pines Road and Broadway Avenue – Broadway Avenue approaches.

## SR 27 - Pines Road and Broadway Avenue

Broadway Avenue Approaches

ADT = 12,804

Hour	Hourly Distribution	Hourly ADT	Delay per Vehicle (minutes)	Total Delay (minutes)	Total Delay (hours)
12-1	0.9	81	1	81	1.4
1-2	0.5	45	1	45	0.8
2-3	0.4	36	1	36	0.6
3-4	0.4	36	1	36	0.6
4-5	0.6	54	1	54	0.9
5-6	1.8	161	1	161	2.7
6-7	4.4	394	0	0	0.0
7-8	6.2	556	0	0	0.0
8-9	5.7	511	0	0	0.0
9-10	5.1	457	0	0	0.0
10-11	5.2	466	0	0	0.0
11-12	5.6	502	0	0	0.0
12-13	6.0	538	0	0	0.0
13-14	5.9	529	0	0	0.0
14-15	6.4	574	0	0	0.0
15-16	7.4	663	0	0	0.0
16-17	7.8	699	0	0	0.0
17-18	7.5	672	0	0	0.0
18-19	5.9	529	2	1,058	17.6
19-20	4.8	430	2	860	14.3
20-21	4.0	359	1	359	6.0
21-22	3.3	296	1	296	4.9
22-23	2.4	215	1	215	3.6
23-24	1.7	152	1	152	2.5
<b>Totals</b>		8,954		3,353	56

Table C-53. Nightly delay time for ACP inlay on SR 2, Division Street and Francis Avenue – Division Street approaches.

#### SR 2 – Division Street and Francis Avenue

**Division Street Approaches** 

ADT = 36,726

Hour	Hourly Distribution	Hourly ADT	Delay per Vehicle (minutes)	Total Delay (minutes)	Total Delay (hours)
12-1	0.9	231	1	231	3.9
1-2	0.5	129	1	129	2.2
2-3	0.4	103	1	103	1.7
3-4	0.4	103	1	103	1.7
4-5	0.6	154	1	154	2.6
5-6	1.8	463	1	463	7.7
6-7	4.4	1,131	0	0	0.0
7-8	6.2	1,594	0	0	0.0
8-9	5.7	1,465	0	0	0.0
9-10	5.1	1,311	0	0	0.0
10-11	5.2	1,337	0	0	0.0
11-12	5.6	1,440	0	0	0.0
12-13	6.0	1,542	0	0	0.0
13-14	5.9	1,517	0	0	0.0
14-15	6.4	1,645	0	0	0.0
15-16	7.4	1,902	0	0	0.0
16-17	7.8	2,005	0	0	0.0
17-18	7.5	1,928	0	0	0.0
18-19	5.9	1,517	2	3,034	50.6
19-20	4.8	1,234	2	2,468	41.1
20-21	4.0	1,028	1	1,028	17.1
21-22	3.3	848	1	848	14.1
22-23	2.4	617	1	617	10.3
23-24	1.7	437	1	437	7.3
<b>Totals</b>		25,682		9,615	160

Table C-54. Nightly delay time for ACP inlay on SR 2, Division Street and Francis Avenue – Francis Avenue approaches.

#### SR 2 – Division Street and Francis Avenue

Francis Avenue Approaches

ADT = 31,768

Hour	Hourly Distribution	Hourly ADT	Delay per Vehicle (minutes)	Total Delay (minutes)	Total Delay (hours)
12-1	0.9	200	1	200	3.3
1-2	0.5	111	1	111	1.9
2-3	0.4	89	1	89	1.5
3-4	0.4	89	1	89	1.5
4-5	0.6	133	1	133	2.2
5-6	1.8	400	1	400	6.7
6-7	4.4	978	0	0	0.0
7-8	6.2	1,379	0	0	0.0
8-9	5.7	1,268	0	0	0.0
9-10	5.1	1,134	0	0	0.0
10-11	5.2	1,156	0	0	0.0
11-12	5.6	1,245	0	0	0.0
12-13	6.0	1,334	0	0	0.0
13-14	5.9	1,312	0	0	0.0
14-15	6.4	1,423	0	0	0.0
15-16	7.4	1,646	0	0	0.0
16-17	7.8	1,735	0	0	0.0
17-18	7.5	1,668	0	0	0.0
18-19	5.9	1,312	2	2,624	43.7
19-20	4.8	1,067	2	2,135	35.6
20-21	4.0	890	1	890	14.8
21-22	3.3	734	1	734	12.2
22-23	2.4	534	1	534	8.9
23-24	1.7	378	1	378	6.3
<b>Totals</b>		22,215		8,317	139

Table C-55. Nightly delay time for ACP inlay on SR 291, Francis Avenue with Maple and Ash Streets – Francis Avenue approaches.

## SR 291 – Francis Avenue with Maple and Ash Streets

Francis Avenue Approaches

ADT = 31,768

Hour	Hourly Distribution	Hourly ADT	Delay per Vehicle (minutes)	Total Delay (minutes)	Total Delay (hours)
12-1	0.9	200	1	200	3.3
1-2	0.5	111	1	111	1.9
2-3	0.4	89	1	89	1.5
3-4	0.4	89	1	89	1.5
4-5	0.6	133	1	133	2.2
5-6	1.8	400	1	400	6.7
6-7	4.4	978	0	0	0.0
7-8	6.2	1,379	0	0	0.0
8-9	5.7	1,268	0	0	0.0
9-10	5.1	1,134	0	0	0.0
10-11	5.2	1,156	0	0	0.0
11-12	5.6	1,245	0	0	0.0
12-13	6.0	1,334	0	0	0.0
13-14	5.9	1,312	0	0	0.0
14-15	6.4	1,423	0	0	0.0
15-16	7.4	1,646	0	0	0.0
16-17	7.8	1,735	0	0	0.0
17-18	7.5	1,668	0	0	0.0
18-19	5.9	1,312	2	2,624	43.7
19-20	4.8	1,067	2	2,135	35.6
20-21	4.0	890	1	890	14.8
21-22	3.3	734	1	734	12.2
22-23	2.4	534	1	534	8.9
23-24	1.7	378	1	378	6.3
<b>Totals</b>		22,215		8,317	139

Table C-56. Nightly delay time for ACP inlay on SR 291, Francis Avenue with Maple and Ash Streets – city streets approaches.

## SR 291 - Francis Avenue with Maple and Ash Streets

City Streets Approaches

ADT = 15,884

Hour	Hourly Distribution	Hourly ADT	Delay per Vehicle (minutes)	Total Delay (minutes)	Total Delay (hours)
12-1	0.9	100	1	100	1.7
1-2	0.5	56	1	56	0.9
2-3	0.4	44	1	44	0.7
3-4	0.4	44	1	44	0.7
4-5	0.6	67	1	67	1.1
5-6	1.8	200	1	200	3.3
6-7	4.4	489	0	0	0.0
7-8	6.2	689	0	0	0.0
8-9	5.7	634	0	0	0.0
9-10	5.1	567	0	0	0.0
10-11	5.2	578	0	0	0.0
11-12	5.6	623	0	0	0.0
12-13	6.0	667	0	0	0.0
13-14	5.9	656	0	0	0.0
14-15	6.4	712	0	0	0.0
15-16	7.4	823	0	0	0.0
16-17	7.8	867	0	0	0.0
17-18	7.5	834	2	1,668	27.8
18-19	5.9	656	2	1,312	21.9
19-20	4.8	534	1	534	8.9
20-21	4.0	445	1	445	7.4
21-22	3.3	367	1	367	6.1
22-23	2.4	267	1	267	4.4
23-24	1.7	189	1	189	3.2
<b>Totals</b>		11,108		5,293	88

Table C-57. Nightly delay time for ACP inlay on SR 395, SR 395 with  $19^{th}$  Avenue – SR 395 approaches.

## SR 395 - SR 395 and 19th Avenue

# SR 395 Approach Legs

ADT = 13,370

Hour	Hourly Distribution	Hourly ADT	Delay per Vehicle (minutes)	Total Delay (minutes)	Total Delay (hours)
12-1	0.9	84	1	84	1.4
1-2	0.5	47	1	47	0.8
2-3	0.4	37	1	37	0.6
3-4	0.4	37	1	37	0.6
4-5	0.6	56	1	56	0.9
5-6	1.8	168	1	168	2.8
6-7	4.4	412	0	0	0.0
7-8	6.2	580	0	0	0.0
8-9	5.7	533	0	0	0.0
9-10	5.1	477	0	0	0.0
10-11	5.2	487	0	0	0.0
11-12	5.6	524	0	0	0.0
12-13	6.0	562	0	0	0.0
13-14	5.9	552	0	0	0.0
14-15	6.4	599	0	0	0.0
15-16	7.4	693	0	0	0.0
16-17	7.8	730	0	0	0.0
17-18	7.5	702	0	0	0.0
18-19	5.9	552	2	1,104	18.4
19-20	4.8	449	2	898	15.0
20-21	4.0	374	1	374	6.2
21-22	3.3	309	1	309	5.2
22-23	2.4	225	1	225	3.8
23-24	1.7	159	1	159	2.7
<b>Totals</b>		9,350		3,498	58

Table C-58. Nightly delay time for ACP inlay on SR 395, SR 395 with  $19^{th}$  Avenue  $-19^{th}$  Avenue approaches.

## SR 395 - SR 395 and 19th Avenue

19th Avenue Approach Legs

ADT = 10,000

Hour	Hourly Distribution	Hourly ADT	Delay per Vehicle (minutes)	Total Delay (minutes)	Total Delay (hours)
12-1	0.9	63	1	63	1.1
1-2	0.5	35	1	35	0.6
2-3	0.4	28	1	28	0.5
3-4	0.4	28	1	28	0.5
4-5	0.6	42	1	42	0.7
5-6	1.8	126	1	126	2.1
6-7	4.4	308	0	0	0.0
7-8	6.2	434	0	0	0.0
8-9	5.7	399	0	0	0.0
9-10	5.1	357	0	0	0.0
10-11	5.2	364	0	0	0.0
11-12	5.6	392	0	0	0.0
12-13	6.0	420	0	0	0.0
13-14	5.9	413	0	0	0.0
14-15	6.4	448	0	0	0.0
15-16	7.4	518	0	0	0.0
16-17	7.8	546	0	0	0.0
17-18	7.5	525	0	0	0.0
18-19	5.9	413	2	826	13.8
19-20	4.8	336	2	672	11.2
20-21	4.0	280	1	280	4.7
21-22	3.3	231	1	231	3.9
22-23	2.4	168	1	168	2.8
23-24	1.7	119	1	119	2.0
<b>Totals</b>		6,993		2,618	44

Table C-59. Nightly delay time for ACP inlay on SR 90, Broadway Avenue and Thierman Roads – Broadway Avenue approaches.

## SR 90 - Broadway Avenue and Thierman Road

Broadway Avenue Approaches

ADT = 17,000

Hour	Hourly Distribution	Hourly ADT	Delay per Vehicle (minutes)	Total Delay (minutes)	Total Delay (hours)
12-1	0.9	107	1	107	1.8
1-2	0.5	60	1	60	1.0
2-3	0.4	48	1	48	0.8
3-4	0.4	48	1	48	0.8
4-5	0.6	71	1	71	1.2
5-6	1.8	214	1	214	3.6
6-7	4.4	524	0	0	0.0
7-8	6.2	738	0	0	0.0
8-9	5.7	678	0	0	0.0
9-10	5.1	607	0	0	0.0
10-11	5.2	619	0	0	0.0
11-12	5.6	666	0	0	0.0
12-13	6.0	714	0	0	0.0
13-14	5.9	702	0	0	0.0
14-15	6.4	762	0	0	0.0
15-16	7.4	881	0	0	0.0
16-17	7.8	928	0	0	0.0
17-18	7.5	893	0	0	0.0
18-19	5.9	702	2	1,402	23.4
19-20	4.8	571	2	1,142	19.0
20-21	4.0	476	1	476	7.9
21-22	3.3	393	1	393	6.6
22-23	2.4	286	1	286	4.8
23-24	1.7	202	1	202	3.4
<b>Totals</b>		11,888		4,451	74

Table C-60. Nightly delay time for ACP inlay on SR 90, Broadway Avenue and Thierman Roads – City Streets approaches.

## SR 90 - Broadway Avenue and Thierman Road

City Street Approaches

ADT = 2,500

Hour	Hourly Distribution	Hourly ADT	Delay per Vehicle (minutes)	Total Delay (minutes)	Total Delay (hours)
12-1	0.9	16	1	16	0.3
1-2	0.5	9	1	9	0.1
2-3	0.4	7	1	7	0.1
3-4	0.4	7	1	7	0.1
4-5	0.6	11	1	11	0.2
5-6	1.8	32	1	32	0.5
6-7	4.4	77	0	0	0.0
7-8	6.2	109	0	0	0.0
8-9	5.7	100	0	0	0.0
9-10	5.1	89	0	0	0.0
10-11	5.2	91	0	0	0.0
11-12	5.6	98	0	0	0.0
12-13	6.0	105	0	0	0.0
13-14	5.9	103	0	0	0.0
14-15	6.4	112	0	0	0.0
15-16	7.4	130	0	0	0.0
16-17	7.8	137	0	0	0.0
17-18	7.5	131	0	0	0.0
18-19	5.9	103	2	206	3.4
19-20	4.8	84	2	168	2.8
20-21	4.0	70	1	70	1.2
21-22	3.3	58	1	58	1.0
22-23	2.4	42	1	42	0.7
23-24	1.7	30	1	30	0.5
<b>Totals</b>		1,748		656	11

Table C-61. Nightly delay time for ACP inlay on SR 2, Division Street and Third Avenue – Division Street approaches.

#### SR 2 – Division Street and Third Avenue

Division Approach Legs

ADT = 12,000

Hour	Hourly Distribution	Hourly ADT	Delay per Vehicle (minutes)	Total Delay (minutes)	Total Delay (hours)
12-1	0.9	76	1	76	1.3
1-2	0.5	42	1	42	0.7
2-3	0.4	34	1	34	0.6
3-4	0.4	34	1	34	0.6
4-5	0.6	50	1	50	0.8
5-6	1.8	151	1	151	2.5
6-7	4.4	370	0	0	0.0
7-8	6.2	521	0	0	0.0
8-9	5.7	479	0	0	0.0
9-10	5.1	428	0	0	0.0
10-11	5.2	437	0	0	0.0
11-12	5.6	470	0	0	0.0
12-13	6.0	504	0	0	0.0
13-14	5.9	496	0	0	0.0
14-15	6.4	538	0	0	0.0
15-16	7.4	622	0	0	0.0
16-17	7.8	655	0	0	0.0
17-18	7.5	630	0	0	0.0
18-19	5.9	496	2	992	16.5
19-20	4.8	403	2	806	13.4
20-21	4.0	336	1	336	5.6
21-22	3.3	277	1	277	4.6
22-23	2.4	202	1	202	3.4
23-24	1.7	143	1	143	2.4
<b>Totals</b>		8,392		3,142	52

Table C-62. Nightly delay time for ACP inlay on SR 2, Division Street and Third Avenue – Third Avenue approaches.

#### SR 2 – Division Street and Third Avenue

# Third Avenue Approaches

ADT = 6,000

Hour	Hourly Distribution	Hourly ADT	Delay per Vehicle (minutes)	Total Delay (minutes)	Total Delay (hours)
12-1	0.9	38	1	38	0.6
1-2	0.5	21	1	21	0.4
2-3	0.4	17	1	17	0.3
3-4	0.4	17	1	17	0.3
4-5	0.6	25	1	25	0.4
5-6	1.8	76	1	76	1.3
6-7	4.4	185	0	0	0.0
7-8	6.2	260	0	0	0.0
8-9	5.7	239	0	0	0.0
9-10	5.1	214	0	0	0.0
10-11	5.2	218	0	0	0.0
11-12	5.6	235	0	0	0.0
12-13	6.0	252	0	0	0.0
13-14	5.9	248	0	0	0.0
14-15	6.4	269	0	0	0.0
15-16	7.4	311	0	0	0.0
16-17	7.8	328	0	0	0.0
17-18	7.5	315	0	0	0.0
18-19	5.9	248	2	496	8.3
19-20	4.8	202	2	403	6.7
20-21	4.0	168	1	168	2.8
21-22	3.3	139	1	139	2.3
22-23	2.4	101	1	101	1.7
23-24	1.7	71	1	71	1.2
<b>Totals</b>		4,197		1,572	26

## **APPENDIX D – USER DELAY COST CALCULATIONS**

Tables D-1 to D-22 show the calculations used to compute total delay costs at each intersection for PCCP and ACP reconstruction or ACP inlay at four-, six-, or eight-year cycles.

<u>Tables</u>	<u>Calculation</u>
D-1	Delay costs for PCCP or ACP initial construction.
D-2 to D-8	Calculation of delay costs at each intersection for ACP inlays at four year cycles.
D-9 to D-15	Calculation of delay costs at each intersection for ACP inlays at six year cycles.
D-16 to D-22	Calculation of delay costs at each intersection for ACP inlays at eight year cycles.

Table D-1. Delay costs for initial PCCP or ACP construction.

# SR 27 and Sprague Avenue

Delay Type	Hours	Delay Cost (\$/hr)	Delay Cost (\$)
Truck Delay	663	18.50	12,265.50
Auto Delay	9537	11.50	109,675.50
<b>Total Delay Cost</b>			\$121,941

# SR 27 and Broadway Avenue

Delay Type	Hours	Delay Cost (\$/hr)	Delay Cost (\$)
Truck Delay	1208	18.50	22,348.00
Auto Delay	17382	11.50	199,893.00
<b>Total Delay Cost</b>			\$222,241

#### **Division Street and Francis Avenue**

Delay Type	Hours	Delay Cost (\$/hr)	Delay Cost (\$)
Truck Delay	1733	18.50	32,060.50
Auto Delay	62593	11.50	719,819.50
<b>Total Delay Cost</b>			\$751,880.00

# Francis Avenue with Maple and Ash Streets

<b>Delay Type</b>	Hours	Delay Cost (\$/hr)	Delay Cost (\$)
Truck Delay	402	18.50	7,437.00
Auto Delay	15471	11.50	177,916.50
<b>Total Delay Cost</b>			\$185,353.50

Table D-1 (cont.). Delay costs for initial PCCP or ACP construction.

# SR 395 and 19th Avenue

Delay Type	Hours	Delay Cost (\$/hr)	Delay Cost (\$)
Truck Delay	518	18.50	9,583.00
Auto Delay	3467	11.50	39,870.50
<b>Total Delay Cost</b>			\$49,454

# **Broadway Avenue and Thierman Road**

<b>Delay Type</b>	Hours	Delay Cost (\$/hr)	Delay Cost (\$)
Truck Delay	1397	18.50	25,844.50
Auto Delay	6088	11.50	70,012.00
<b>Total Delay Cost</b>			\$92,857

## **Division Street and Third Avenue**

Delay Type	Hours	Delay Cost (\$/hr)	Delay Cost (\$)
Truck Delay	296	18.50	5,476.00
Auto Delay	5084	11.50	58,466.00
<b>Total Delay Cost</b>			\$63,942

Table D-2. Calculation of delay costs on SR 27, Pines Road and Sprague Avenue for ACP inlays with four-year cycles.

SR 27 - Pines Road and Sprague Avenue

	Truck Delay (hours)	Auto Delay (hours)	Delay Cost (\$/hr)	Delay Cost (\$)	Total Delay Cost (\$)
Year 0 Truck Delay	42		18.50	\$777	
Auto Delay		600	11.50	\$6,900	
Year 4					\$7,677
Truck Delay	45		18.50	\$833	
Auto Delay		650	11.50	\$7,475	
<b>X</b> 70					\$8,308
Year 8 Truck Delay	49		18.50	\$907	
Auto Delay		703	11.50	\$8,085	
					\$8,992
Year 12 Truck Delay	53		18.50	\$981	
Auto Delay		761	11.50	\$8,752	
<b>T</b> 7 46					\$9,733
Year 16 Truck Delay	57		18.50	\$1,055	
Auto Delay		824	11.50	\$9,476	
					\$10,531

Table D-2 (cont.). Calculation of delay costs on SR 27, Pines Road and Sprague Avenue for ACP inlays with four-year cycles.

	Truck Delay (hours)	Auto Delay (hours)	Delay Cost (\$/hr)	Delay Cost (\$)	Total Delay Cost (\$)
Year 20 Truck	62		18.50	\$1,147	
Delay Auto Delay		892	11.50	\$10,258	
<b>V</b> 24					\$11,405
Year 24 Truck Delay	67		18.50	\$1,240	
Auto Delay		965	11.50	\$11,098	
Year 28					\$12,338
Truck Delay	73		18.50	\$1,351	
Auto Delay		1045	11.50	\$12,018	
Vaan 22					\$13,369
Year 32 Truck Delay	79		18.50	\$1,462	
Auto Delay		1131	11.50	\$13,007	
V 26					\$14,469
Year 36 Truck Delay	85		18.50	\$1,573	
Auto Delay		1224	11.50	\$14,076	
					\$15,649

Table D-3. Calculation of delay costs on SR 27, Pines Road and Broadway Avenue for ACP inlays with four-year cycles.

SR 27 - Pines Road and Broadway Avenue

	Truck Delay (hours)	Auto Delay (hours)	Delay Cost (\$/hr)	Delay Cost (\$)	Total Delay Cost (\$)
Year 0					
Truck Delay	33		18.50	\$611	
Auto Delay		471	11.50	\$5,417	
Year 4					\$6,028
Truck Delay	35		18.50	\$648	
Auto Delay		510	11.50	\$5,865	
Year 8					\$6,513
Truck Delay	38		18.50	\$703	
Auto Delay		552	11.50	\$6,348	
Year 12					\$7,051
Truck Delay	42		18.50	\$777	
Auto Delay		598	11.50	\$6,877	
Year 16					\$7,654
Truck Delay	45		18.50	\$833	
Auto Delay		647	11.50	\$7,441	
					\$8,274

Table D-3 (cont.). Calculation of delay costs on SR 27, Pines Road and Broadway Avenue for ACP inlays with four-year cycles.

	Truck Delay (hours)	Auto Delay (hours)	Delay Cost (\$/hr)	Delay Cost (\$)	Total Delay Cost (\$)
Year 20 Truck	49		18.50	\$907	
Delay Auto Delay		700	11.50	\$8,050	
<b>X</b> / 24					\$8,957
Year 24 Truck Delay	53		18.50	\$981	
Auto Delay		758	11.50	\$8,717	
Year 28					\$9,698
Truck Delay	57		18.50	\$1,055	
Auto Delay		820	11.50	\$9,430	
Waan 22					\$10,485
Year 32 Truck Delay	62		18.50	\$1,147	
Auto Delay		888	11.50	\$10,212	
Voor 26					\$11,359
Year 36 Truck Delay	67		18.50	\$1,240	
Auto Delay		961	11.50	\$11,052	
					\$12,292

Table D-4. Calculation of delay costs on SR 2, Division Street and Francis Avenue for ACP inlays with four-year cycles.

SR 2 - Division Street and Francis Avenue

	Truck Delay (hours)	Auto Delay (hours)	Delay Cost (\$/hr)	Delay Cost (\$)	Total Delay Cost (\$)
Year 0 Truck	24		18.50	\$444	
Delay Auto Delay		873	11.50	\$10,040	
T7 4					\$10,484
Year 4 Truck Delay	26		18.50	\$481	
Auto Delay		945	11.50	\$10,868	
Year 8					\$11,349
Truck Delay	28		18.50	\$518	
Auto Delay		1023	11.50	\$11,765	
Voor 12					\$12,283
Year 12 Truck Delay	31		18.50	\$574	
Auto Delay		1107	11.50	\$12,731	
Voor 16					\$13,305
Year 16 Truck Delay	33		18.50	\$611	
Auto Delay		1198	11.50	\$13,777	
					\$14,388

Table D-4. Calculation of delay costs on SR 2, Division Street and Francis Avenue for ACP inlays with four-year cycles.

	Truck Delay (hours)	Auto Delay (hours)	Delay Cost (\$/hr)	Delay Cost (\$)	Total Delay Cost (\$)
Year 20 Truck	36		18.50	\$666	
Delay Auto Delay		1297	11.50	\$14,916	
Year 24					\$15,582
Truck Delay	39		18.50	\$722	
Auto Delay		1404	11.50	\$16,146	
V					\$16,868
Year 28 Truck Delay	42		18.50	\$777	
Auto Delay		1520	11.50	\$17,480	
V 22					\$18,257
Year 32 Truck Delay	46		18.50	\$851	
Auto Delay		1645	11.50	\$18,918	
Voor 26					\$19,769
Year 36 Truck Delay	49		18.50	\$907	
Auto Delay		1781	11.50	\$20,482	
					\$21,389

Table D-5. Calculation of delay costs on SR 291, Francis Avenue with Maple and Ash Streets for ACP inlays with four-year cycles.

**SR 2 – Francis Avenue with Maple and Ash Streets** 

	Truck Delay (hours)	Auto Delay (hours)	Delay Cost (\$/hr)	Delay Cost (\$)	Total Delay Cost (\$)
<b>Year 0</b> Truck Delay	17		18.50	\$315	
Auto Delay		664	11.50	\$7,636	
Year 4					\$7,951
Truck Delay	18		18.50	\$333	
Auto Delay		719	11.50	\$8,269	
<b>1</b> 7 0					\$8,602
Year 8 Truck Delay	20		18.50	\$370	
Auto Delay		778	11.50	\$8,947	
					\$9,317
Year 12 Truck Delay	22		18.50	\$407	
Auto Delay		842	11.50	\$9,683	
<b>T</b> 7					\$10,090
Year 16 Truck Delay	23		18.50	\$426	
Auto Delay		912	11.50	\$10,488	
					\$10,914

Table D-5 (cont.). Calculation of delay costs on SR 291, Francis Avenue with Maple and Ash Streets for ACP inlays with four-year cycles.

	Truck Delay (hours)	Auto Delay (hours)	Delay Cost (\$/hr)	Delay Cost (\$)	Total Delay Cost (\$)
Year 20 Truck Delay	25		18.50	\$463	
Auto Delay		987	11.50	\$11,351	
Year 24					\$11,814
Truck Delay	27		18.50	\$500	
Auto Delay		1068	11.50	\$12,282	
Year 28					\$12,782
Truck Delay	30		18.50	\$555	
Auto Delay		1156	11.50	\$13,294	
¥7. 22					\$13,849
Year 32 Truck Delay	32		18.50	\$592	
Auto Delay		1251	11.50	\$14,387	
V 06					\$14,979
Year 36 Truck Delay	35		18.50	\$648	
Auto Delay		1355	11.50	\$15,583	
					\$16,231

Table D-6. Calculation of delay costs on SR 395, SR 395 and 19th Avenue for ACP inlays with four-year cycles.

## **SR 395 - SR 395 and 19th Avenue**

	Truck Delay (hours)	Auto Delay (hours)	Delay Cost (\$/hr)	Delay Cost (\$)	Total Delay Cost (\$)
<b>Year 0</b> Truck Delay	40		18.50	\$740	
Auto Delay		266	11.50	\$3,059	
Year 4					\$3,799
Truck Delay	43		18.50	\$796	
Auto Delay		288	11.50	\$3,312	
Year 8					\$4,108
Truck Delay	46		18.50	\$851	
Auto Delay		312	11.50	\$3,588	
V 10					\$4,439
Year 12 Truck Delay	50		18.50	\$925	
Auto Delay		338	11.50	\$3,887	
<b>V</b> 16					\$4,812
Year 16 Truck Delay	54		18.50	\$999	
Auto Delay		366	11.50	\$4,209	
					\$5,208

Table D-6 (cont.). Calculation of delay costs on SR 395, SR 395 and 19th Avenue for ACP inlays with four-year cycles.

	Truck Delay (hours)	Auto Delay (hours)	Delay Cost (\$/hr)	Delay Cost (\$)	Total Delay Cost (\$)
Year 20 Truck Delay	59		18.50	\$1,092	
Auto Delay		396	11.50	\$4,554	
Year 24					\$5,646
Truck Delay	64		18.50	\$1,184	
Auto Delay		428	11.50	\$4,922	
Year 28					\$6,106
Truck Delay	69		18.50	\$1,277	
Auto Delay		464	11.50	\$5,336	
¥7 22					\$6,613
Year 32 Truck Delay	75		18.50	\$1,388	
Auto Delay		502	11.50	\$5,773	
T. 24					\$7,161
Year 36 Truck Delay	81		18.50	\$1,499	
Auto Delay		543	11.50	\$6,245	
					\$7,744

Table D-7. Calculation of delay costs on SR 90, Broadway Avenue and Thierman Road for ACP inlays with four-year cycles.

SR 90 - Broadway Avenue and Thierman Road

	Truck Delay (hours)	Auto Delay (hours)	Delay Cost (\$/hr)	Delay Cost (\$)	Total Delay Cost (\$)
Year 0 Truck Delay	48		18.50	\$888	
Auto Delay		207	11.50	\$2,381	
Year 4					\$3,269
Truck Delay	52		18.50	\$962	
Auto Delay		224	11.50	\$2,576	
Voor 0					\$3,538
Year 8 Truck Delay	56		18.50	\$1,036	
Auto Delay		243	11.50	\$2,795	
					\$3,831
Year 12 Truck Delay	60		18.50	\$1,110	
Auto Delay		263	11.50	\$3,025	
					\$4,135
Year 16 Truck Delay	65		18.50	\$1,203	
Auto Delay		285	11.50	\$3,278	
					\$4,481

Table D-7 (cont.). Calculation of delay costs on SR 90, Broadway Avenue and Thierman Road for ACP inlays with four-year cycles.

	Truck Delay (hours)	Auto Delay (hours)	Delay Cost (\$/hr)	Delay Cost (\$)	Total Delay Cost (\$)
Year 20 Truck Delay	71		18.50	\$1,314	
Auto Delay		308	11.50	\$3,542	
Year 24					\$4,856
Truck Delay	77		18.50	\$1,425	
Auto Delay		334	11.50	\$3,841	
Year 28					\$5,266
Truck Delay	83		18.50	\$1,536	
Auto Delay		361	11.50	\$4,152	
¥7. 22					\$5,688
Year 32 Truck Delay	90		18.50	\$1,665	
Auto Delay		391	11.50	\$4,497	
<b>T</b>					\$6,162
Year 36 Truck Delay	97		18.50	\$1,795	
Auto Delay		423	11.50	\$4,865	
					\$6,660

Table D-8. Calculation of delay costs on SR 2, Division Street and Third Avenue for ACP inlays with four-year cycles.

SR 2 - Division Street and Third Avenue

	Truck Delay (hours)	Auto Delay (hours)	Delay Cost (\$/hr)	Delay Cost (\$)	Total Delay Cost (\$)
Year 0 Truck	2		18.50	\$37	
Delay Auto Delay		76	11.50	\$874	
·					\$911
Year 4 Truck Delay	2		18.50	\$37	
Auto Delay		82	11.50	\$943	
Year 8					\$980
Truck Delay	3		18.50	\$56	
Auto Delay		89	11.50	\$1,024	
Year 12					\$1,080
Truck Delay	3		18.50	\$56	
Auto Delay		96	11.50	\$1,104	
Voor 16					\$1,160
Year 16 Truck Delay	3		18.50	\$56	
Auto Delay		104	11.50	\$1,196	
					\$1,252

Table D-8 (cont.). Calculation of delay costs on SR 2, Division Street and Third Avenue for ACP inlays with four-year cycles.

	Truck Delay (hours)	Auto Delay (hours)	Delay Cost (\$/hr)	Delay Cost (\$)	Total Delay Cost (\$)
Year 20 Truck	3		18.50	\$56	
Delay Auto Delay		113	11.50	\$1,300	
Year 24					\$1,356
Truck Delay	4		18.50	\$74	
Auto Delay		122	11.50	\$1,403	
Year 28					\$1,477
Truck Delay	4		18.50	\$74	
Auto Delay		132	11.50	\$1,518	
W					\$1,592
Year 32 Truck Delay	4		18.50	\$74	
Auto Delay		143	11.50	\$1,645	
Voor 26					\$1,719
Year 36 Truck Delay	4		18.50	\$74	
Auto Delay		155	11.50	\$1,783	
					\$1,857

Table D-9. Calculation of delay costs on SR 27, Pines Road and Sprague Avenue for ACP inlays with six-year cycles.

SR 27 - Pines Road and Sprague Avenue

	Truck Delay (hours)	Auto Delay (hours)	Delay Cost (\$/hr)	Delay Cost (\$)	Total Delay Cost (\$)
Year 0 Truck Delay	42		18.50	\$777	
Auto Delay	.2	600	11.50	\$6,900	
Year 6					\$7,677
Truck Delay	47		18.50	\$870	
Auto Delay		676	11.50	\$7,774	\$8,644
Year 12					φο,044
Truck Delay	53		18.50	\$981	
Auto Delay		761	11.50	\$8,752	\$9,733
Year 18					Ψ9,133
Truck Delay	60		18.50	\$1,110	
Auto Delay		857	11.50	\$9,856	\$10,966
Year 24					Ψ10,200
Truck Delay	67		18.50	\$1,240	
Auto Delay		965	11.50	\$11,098	\$12,338
Year 30					\$12,336
Truck Delay	76		18.50	\$1,406	
Auto Delay		1087	11.50	\$12,501	¢12 000
Year 36					\$13,908
Truck Delay	85		18.50	\$1,573	
Auto Delay		1224	11.50	\$14,076	
					\$15,649

Table D-10. Calculation of delay costs on SR 27, Pines Road and Broadway Avenue for ACP inlays with six-year cycles.

SR 27 - Pines Road and Broadway Avenue

	Truck Delay (hours)	Auto Delay (hours)	Delay Cost (\$/hr)	Delay Cost (\$)	Total Delay Cost (\$)
Year 0 Truck Delay Auto Delay	33	471	18.50 11.50	\$611 \$5,417	
Year 6 Truck Delay Auto Delay	37	531	18.50 11.50	\$685 \$6,107	\$6,028
Year 12 Truck Delay Auto Delay	42	598	18.50 11.50	\$777 \$6,877	\$6,792
Year 18 Truck Delay Auto Delay	47	673	18.50 11.50	\$870 \$7,740	\$7,654
Year 24 Truck Delay Auto Delay	53	758	18.50 11.50	\$981 \$8,717	\$8,610
Year 30 Truck Delay Auto Delay	59	854	18.50 11.50	\$1,092 \$9,821	\$9,698
Year 36 Truck Delay Auto Delay	67	961	18.50 11.50	\$1,240 \$11,052	\$10,913
Tuto Delay		701	11.50	Ψ11,032	\$12,292

Table D-11. Calculation of delay costs on SR 2, Division Street and Francis Avenue for ACP inlays with six-year cycles.

**SR 2 - Division Street and Francis Avenue** 

	Truck Delay (hours)	Auto Delay (hours)	Delay Cost (\$/hr)	Delay Cost (\$)	Total Delay Cost (\$)
Year 0					
Truck Delay	24		18.50	\$444	
Auto Delay		873	11.50	\$10,040	<b>010.404</b>
Voor 6					\$10,484
Year 6 Truck Delay	27		18.50	\$500	
Auto Delay	21	983	11.50	\$11,305	
Tuto Belay		703	11.50	Ψ11,505	\$11,805
Year 12					, ,
Truck Delay	31		18.50	\$574	
Auto Delay		1107	11.50	\$12,731	
					\$13,305
Year 18					
Truck Delay	35	10.47	18.50	\$648	
Auto Delay		1247	11.50	\$14,341	¢14.000
Year 24					\$14,989
Truck Delay	39		18.50	\$722	
Auto Delay	37	1404	11.50	\$16,146	
11000 2 0101		1.0.	11.00	Ψ10,1.0	\$16,868
Year 30					•
Truck Delay	44		18.50	\$814	
Auto Delay		1581	11.50	\$18,182	
					\$18,996
Year 36	40		10.50	<b>400</b>	
Truck Delay	49	1701	18.50	\$907	
Auto Delay		1781	11.50	\$20,482	\$21,389
					\$41,309

Table D-12. Calculation of delay costs on SR 2, Francis Avenue with Maple and Ash Streets for ACP inlays with six-year cycles.

**SR 291 - Francis Avenue with Maple and Ash Streets** 

	Truck Delay (hours)	Auto Delay (hours)	Delay Cost (\$/hr)	Delay Cost (\$)	Total Delay Cost (\$)
Year 0					
Truck Delay	17		18.50	\$315	
Auto Delay		664	11.50	\$7,636	
					\$7,951
Year 6					
Truck Delay	19		18.50	\$352	
Auto Delay		748	11.50	\$8,602	
					\$8,954
Year 12					
Truck Delay	22		18.50	\$407	
Auto Delay		842	11.50	\$9,683	
					\$10,090
Year 18					
Truck Delay	24		18.50	\$444	
Auto Delay		948	11.50	\$10,902	
					\$11,346
Year 24					
Truck Delay	27		18.50	\$500	
Auto Delay		1068	11.50	\$12,282	
**					\$12,782
Year 30	2.1		10.50	ф <b>г</b> д 4	
Truck Delay	31	1202	18.50	\$574	
Auto Delay		1203	11.50	\$13,835	
V 26					\$14,409
Year 36	25		10.50	Φ <i>C</i> 4Ω	
Truck Delay	35	1255	18.50	\$648	
Auto Delay		1355	11.50	\$15,583	¢1.6.221
					\$16,231

Table D-13. Calculation of delay costs on SR 395, SR 395 and 19<sup>th</sup> Avenue for ACP inlays with six-year cycles.

# SR 395 - SR 395 and 19th Avenue

	Truck Delay (hours)	Auto Delay (hours)	Delay Cost (\$/hr)	Delay Cost (\$)	Total Delay Cost (\$)
Year 0					
Truck Delay	40		18.50	\$740	
Auto Delay		266	11.50	\$3,059	
					\$3,799
Year 6			10.50	<b>#022</b>	
Truck Delay	45	200	18.50	\$833	
Auto Delay		300	11.50	\$3,450	Φ4.202
Year 12					\$4,283
Truck Delay	50		18.50	\$925	
Auto Delay	30	338	11.50	\$3,887	
Auto Delay		336	11.50	\$5,667	\$4,812
Year 18					Ψ4,012
Truck Delay	57		18.50	\$1,055	
Auto Delay		380	11.50	\$4,370	
•				. ,	\$5,425
Year 24					
Truck Delay	64		18.50	\$1,184	
Auto Delay		428	11.50	\$4,922	
					\$6,106
Year 30					
Truck Delay	72		18.50	\$1,332	
Auto Delay		482	11.50	\$5,543	
					\$6,875
Year 36	0.1		10.50	<b>#1 100</b>	
Truck Delay	81	5.42	18.50	\$1,499	
Auto Delay		543	11.50	\$6,245	\$7.74 <i>4</i>
					\$7,744

Table D-14. Calculation of delay costs on SR 90, Broadway Avenue and Thierman Street for ACP inlays with six-year cycles.

SR 90 - Broadway Avenue and Thierman Street

	Truck Delay (hours)	Auto Delay (hours)	Delay Cost (\$/hr)	Delay Cost (\$)	Total Delay Cost (\$)
Year 0					
Truck Delay	48		18.50	\$888	
Auto Delay		207	11.50	\$2,381	
					\$3,269
Year 6	~ A		10.70	Φ000	
Truck Delay	54	224	18.50	\$999	
Auto Delay		234	11.50	\$2,691	\$3,690
Year 12					\$3,090
Truck Delay	60		18.50	\$1,110	
Auto Delay		263	11.50	\$3,025	
J				. ,	\$4,135
Year 18					
Truck Delay	68		18.50	\$1,258	
Auto Delay		296	11.50	\$3,404	
					\$4,662
Year 24			10.50	<b>41.42</b> 7	
Truck Delay	77	224	18.50	\$1,425	
Auto Delay		334	11.50	\$3,841	\$5,266
Year 30					\$3,200
Truck Delay	86		18.50	\$1,591	
Auto Delay	00	376	11.50	\$4,324	
				+ -,	\$5,915
Year 36					
Truck Delay	97		18.50	\$1,795	
Auto Delay		423	11.50	\$4,865	
					\$6,660

Table D-15. Calculation of delay costs on SR 2, Division Street and Third Avenue for ACP inlays with six-year cycles.

**SR 2 - Division Street and Third Avenue** 

	Truck Delay (hours)	Auto Delay (hours)	Delay Cost (\$/hr)	Delay Cost (\$)	Total Delay Cost (\$)
Year 0					
Truck Delay	2		18.50	\$37	
Auto Delay		76	11.50	\$874	
					\$911
Year 6					
Truck Delay	2		18.50	\$37	
Auto Delay		85	11.50	\$978	<b>4.04</b>
¥7 10					\$1,015
Year 12	3		18.50	<b>\$56</b>	
Truck Delay	3	96		\$56 \$1,104	
Auto Delay		90	11.50	\$1,104	\$1,160
Year 18					\$1,100
Truck Delay	3		18.50	\$56	
Auto Delay	J	108	11.50	\$1,242	
Time Delay		100	11.00	¥ 1,2 · 2	\$1,298
Year 24					, ,
Truck Delay	4		18.50	\$74	
Auto Delay		122	11.50	\$1,403	
					\$1,477
Year 30					
Truck Delay	4		18.50	\$74	
Auto Delay		137	11.50	\$1,576	
					\$1,650
Year 36					
Truck Delay	4		18.50	\$74	
Auto Delay		155	11.50	\$1,783	ф4 0 <b>7-</b>
					\$1,857

Table D-16. Calculation of delay costs on SR 27, Pines Road and Sprague Avenue for ACP inlays with eight-year cycles.

SR 27 - Pines Road and Sprague Avenue

	Truck Delay (hours)	Auto Delay (hours)	Delay Cost (\$/hr)	Delay Cost (\$)	Total Delay Cost (\$)
Year 0					
Truck Delay	42.0		18.50	777	
Auto Delay		600.0	11.50	6900	
					\$7,677
Year 8					
Truck Delay	49.0		18.50	906.5	
Auto Delay		703.0	11.50	8084.5	
					\$8,991
Year 16					
Truck Delay	57.0		18.50	1054.5	
Auto Delay		824.0	11.50	9476.0	
					\$10,532
Year 24					
Truck Delay	67.0		18.50	1239.5	
Auto Delay		965.0	11.50	11097.5	
					\$12,337
Year 32					
Truck Delay	79.0		18.50	1461.5	
Auto Delay		1131.0	11.50	13006.5	
					\$14,468

Table D-17. Calculation of delay costs on SR 27, Pines Road and Broadway Avenue for ACP inlays with eight-year cycles.

SR 27 - Pines Road and Broadway Avenue

	Truck Delay (hours)	Auto Delay (hours)	Delay Cost (\$/hr)	Delay Cost (\$)	Total Delay Cost (\$)
Year 0					
Truck Delay	33.0		18.50	610.5	
Auto Delay		471.0	11.50	5416.5	
					\$6,027
Year 8					
Truck Delay	38.0		18.50	703	
Auto Delay		552.0	11.50	6348	
					\$7,051
Year 16					
Truck Delay	45.0		18.50	832.5	
Auto Delay		647.0	11.50	7440.5	
					\$8,273
Year 24					
Truck Delay	53.0		18.50	980.5	
Auto Delay		758.0	11.50	8717.0	
					\$9,698
Year 32					
Truck Delay	62.0		18.50	1147	
Auto Delay		888.0	11.50	10212	
					\$11,359

Table D-18. Calculation of delay costs on SR 2, Division Street and Francis Avenue for ACP inlays with eight-year cycles.

SR 2 - Division Street and Francis Avenue

	Truck Delay (hours)	Auto Delay (hours)	Delay Cost (\$/hr)	Delay Cost (\$)	Total Delay Cost (\$)
Year 0					
Truck Delay	24.0		18.50	444.0	
Auto Delay		873.0	11.50	10039.5	
					\$10,484
Year 8					
Truck Delay	28.0		18.50	518.0	
Auto Delay		1023.0	11.50	11764.5	
					\$12,283
Year 16					
Truck Delay	33.0		18.50	610.5	
Auto Delay		1198.0	11.50	13777.0	
					\$14,388
Year 24					
Truck Delay	39.0		18.50	721.5	
Auto Delay		1404.0	11.50	16146.0	
T7 24					\$16,868
Year 32	46.0		10.70	071.0	
Truck Delay	46.0	16470	18.50	851.0	
Auto Delay		1645.0	11.50	18917.5	<b>410.760</b>
					\$19,769

Table D-19. Calculation of delay costs on SR 2, Francis Avenue with Maple and Ash Streets for ACP inlays with eight-year cycles.

**SR 2 - Francis Avenue with Maple and Ash Streets** 

	Truck Delay (hours)	Auto Delay (hours)	Delay Cost (\$/hr)	Delay Cost (\$)	Total Delay Cost (\$)
Year 0					
Truck Delay	17.0		18.50	314.5	
Auto Delay		664.0	11.50	7636.0	
					\$7,951
Year 8					
Truck Delay	20.0		18.50	370	
Auto Delay		778.0	11.50	8947	
					\$9,317
Year 16					
Truck Delay	23.0		18.50	425.5	
Auto Delay		912.0	11.50	10488.0	
					\$10,914
Year 24					
Truck Delay	27.0		18.50	499.5	
Auto Delay		1068.0	11.50	12282.0	
					\$12,782
Year 32					
Truck Delay	32.0		18.50	592.0	
Auto Delay		1251.0	11.50	14386.5	
					\$14,979

Table D-20. Calculation of delay costs on SR 395, SR 395 and 19<sup>th</sup> Avenue for ACP inlays with eight-year cycles.

# SR 395 - SR 395 and 19th Avenue

	Truck Delay (hours)	Auto Delay (hours)	Delay Cost (\$/hr)	Delay Cost (\$)	Total Delay Cost (\$)
Year 0					
Truck Delay	40.0		18.50	740	
Auto Delay		266.0	11.50	3059	
					\$3,799
Year 8					
Truck Delay	46.0		18.50	851	
Auto Delay		312.0	11.50	3588	
					\$4,439
Year 16					
Truck Delay	54.0		18.50	999	
Auto Delay		366.0	11.50	4209	
					\$5,208
Year 24					
Truck Delay	64.0		18.50	1184	
Auto Delay		428.0	11.50	4922	
					\$6,106
Year 32					
Truck Delay	75.0		18.50	1387.5	
Auto Delay		502.0	11.50	5773.0	
					\$7,161

Table D-21. Calculation of delay costs on SR 90, Broadway Avenue and Thierman Road for ACP inlays with eight-year cycles.

SR 90 - Broadway Avenue and Thierman Road

	Truck Delay (hours)	Auto Delay (hours)	Delay Cost (\$/hr)	Delay Cost (\$)	Total Delay Cost (\$)
Year 0					
Truck Delay	48.0		18.50	888.0	
Auto Delay		207.0	11.50	2380.5	
					\$3,269
Year 8					
Truck Delay	56.0		18.50	1036.0	
Auto Delay		243.0	11.50	2794.5	
					\$3,831
Year 16					
Truck Delay	65.0		18.50	1202.5	
Auto Delay		285.0	11.50	3277.5	
					\$4,480
Year 24					
Truck Delay	77.0		18.50	1424.5	
Auto Delay		334.0	11.50	3841.0	
					\$5,266
Year 32					
Truck Delay	90.0		18.50	1665.0	
Auto Delay		391.0	11.50	4496.5	
					\$6,162

Table D-22. Calculation of delay costs on SR 2, Division Street and Third Avenue for ACP inlays with eight-year cycles.

**SR 2 - Division Street and Third Avenue** 

	Truck Delay (hours)	Auto Delay (hours)	Delay Cost (\$/hr)	Delay Cost (\$)	Total Delay Cost (\$)
Year 0					
Truck Delay	2.0		18.50	37	
Auto Delay		76.0	11.50	874	
					\$911
Year 8					
Truck Delay	2.0		18.50	37.0	
Auto Delay		89.0	11.50	1023.5	
					\$1,061
Year 16					
Truck Delay	3.0		18.50	55.5	
Auto Delay		104.0	11.50	1196.0	
					\$1,252
Year 24					
Truck Delay	3.0		18.50	55.5	
Auto Delay		122.0	11.50	1403.0	
					\$1,459
Year 32					
Truck Delay	4.0		18.50	74.0	
Auto Delay		143.0	11.50	1644.5	
					\$1,719

# **APPENDIX E - SAMPLE CONSTRUCTION STAGING**

The following plans show the staging sequence used by ACME Materials and Construction from Spokane, Washington to construct concrete intersections. Three examples include:

<u>Figure</u>	Staging Type
E-1 to E-6.	<b>Construction under traffic</b> - SR 2, Division Street and Francis Avenue, Stages 1 through 6.
E-7 to E-9.	<b>Partial closure with detours</b> - SR 27, Pines Road and Broadway Avenue, Stages 1 through 3.
E-10 to E-15.	Combination closure with construction under traffic and a full intersection closure - SR 395, SR 395 and West Kennewick Avenue, Stages 1 through 4.

Figure E-1. Construction staging for construction under traffic - SR 2, Division Street and Francis Avenue, Stage 1.

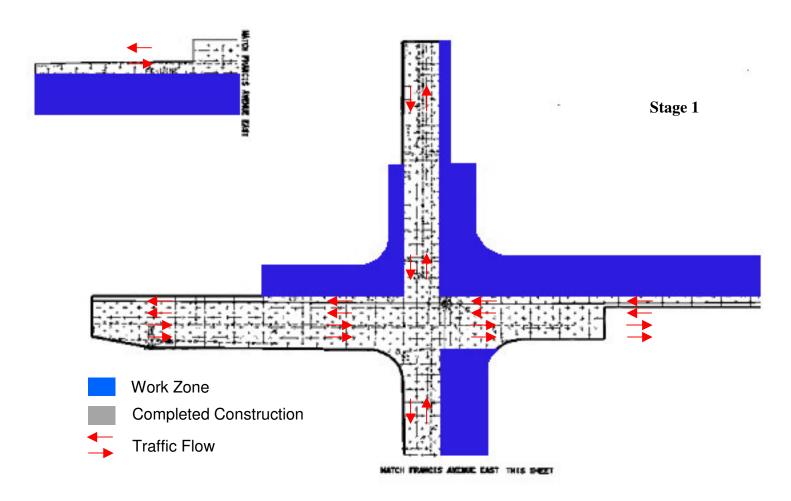


Figure E-2. Construction staging for construction under traffic - SR 2, Division Street and Francis Avenue, Stage 2.



Figure E-3. Construction staging for construction under traffic - SR 2, Division Street and Francis Avenue, Stage 3.

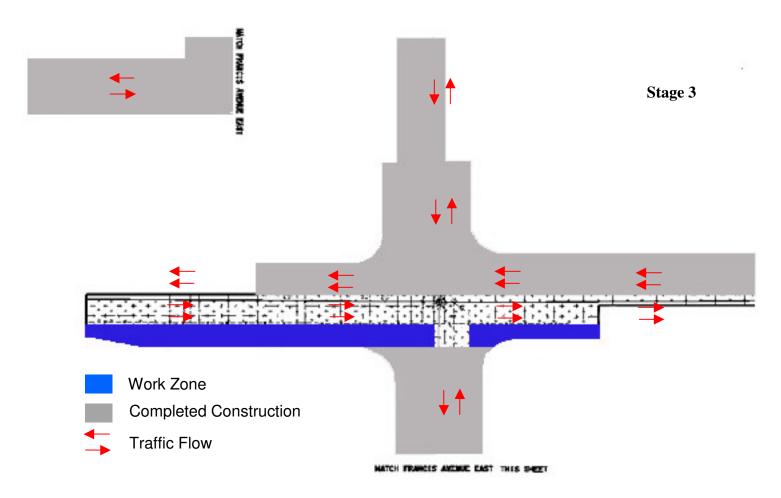


Figure E-4. Construction staging for construction under traffic - SR 2, Division Street and Francis Avenue, Stage 4.

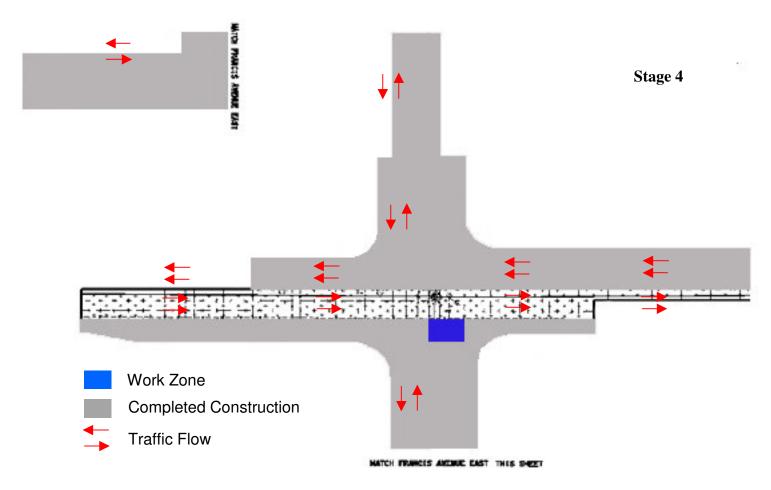


Figure E-5. Construction staging for construction under traffic - SR 2, Division Street and Francis Avenue, Stage 5.

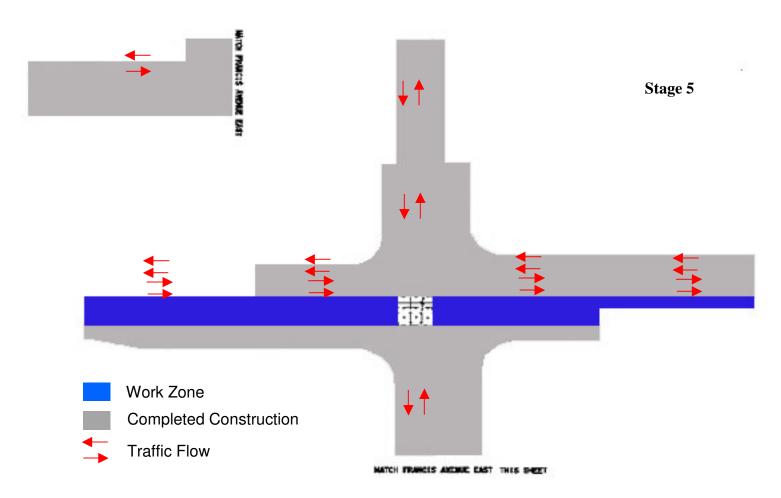


Figure E-6. Construction staging for construction under traffic - SR 2, Division Street and Francis Avenue, Stage 6.

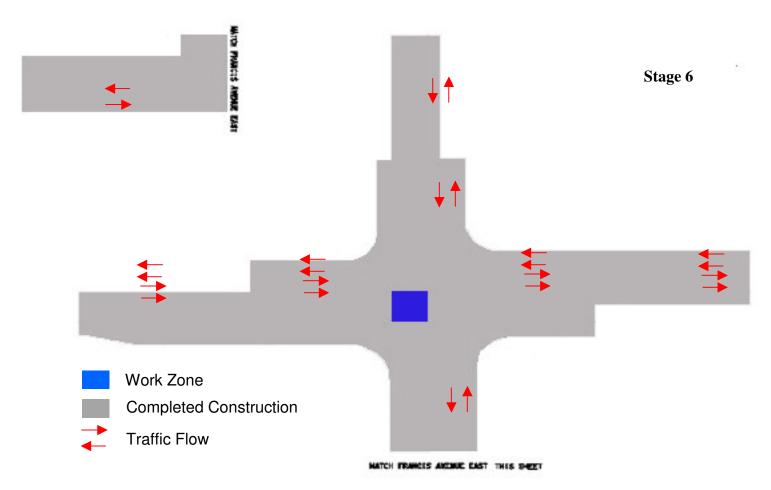


Figure E-7. Construction staging for a partial closure with detours - SR 27, Pines Road and Broadway Avenue, Stage 1.

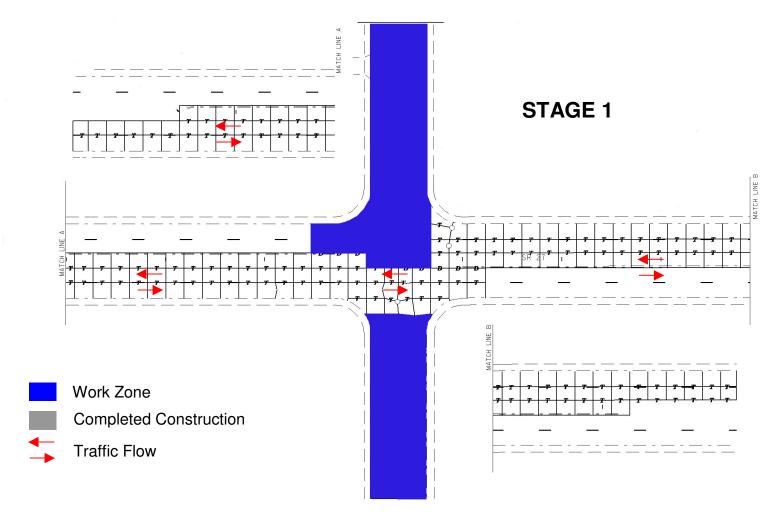


Figure E-8. Construction staging for a partial closure with detours - SR 27, Pines Road and Broadway Avenue, Stage 2.

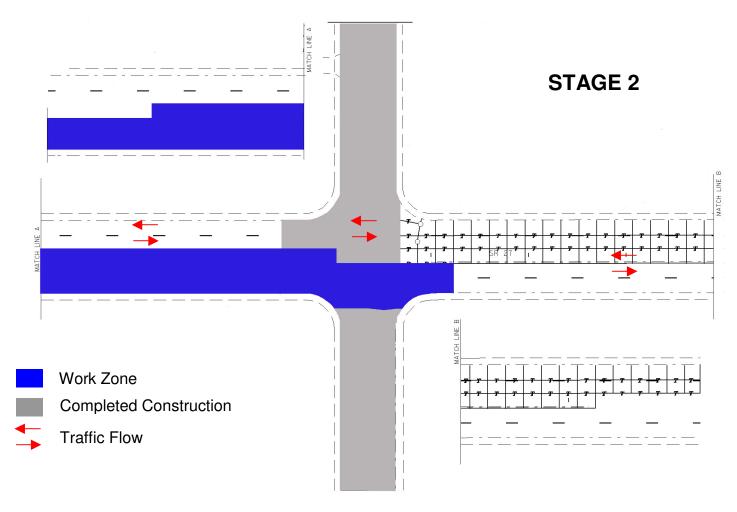


Figure E-9. Construction staging for a partial closure with detours - SR 27, Pines Road and Broadway Avenue, Stage 3.

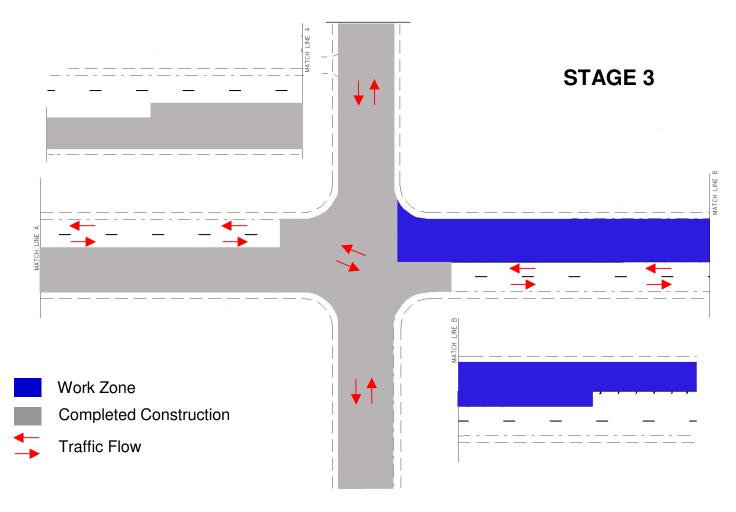


Figure E-10. Construction staging for a combination closure with construction under traffic and a full intersection closure - SR 395, SR 395 and West Kennewick Avenue, Stage 1.

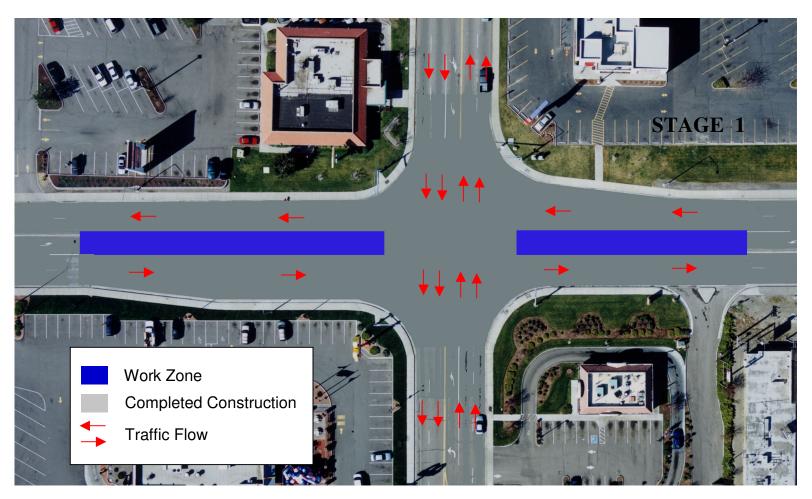


Figure E-11. Construction staging for a combination closure with construction under traffic and a full intersection closure - SR 395, SR 395 and West Kennewick Avenue, Stage 2.

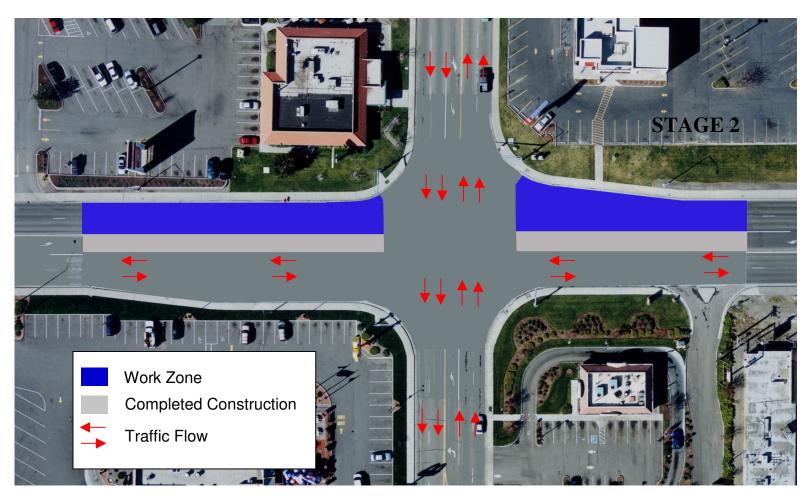


Figure E-12. Construction staging for a combination with construction under traffic and a full intersection closure - SR 395, SR 395 and West Kennewick Avenue, Stage 3.

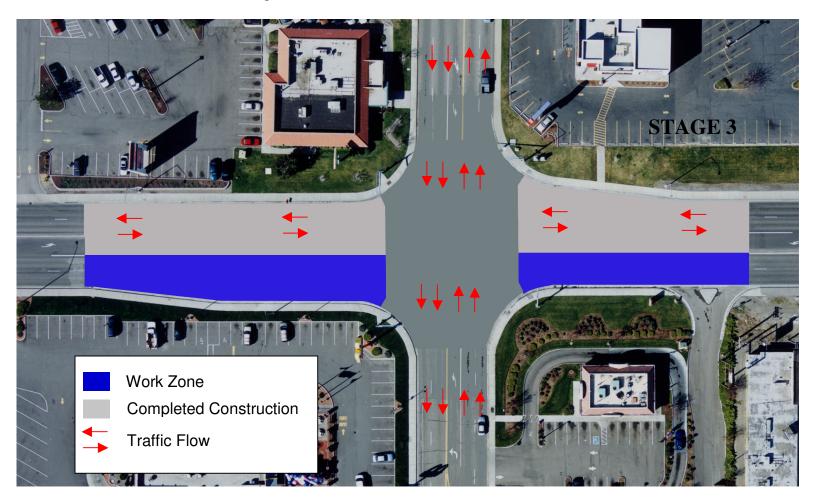


Figure E-13. Construction staging for a combination closure with construction under traffic and a full intersection closure - SR 395, SR 395 and West Kennewick Avenue, Stage 4.

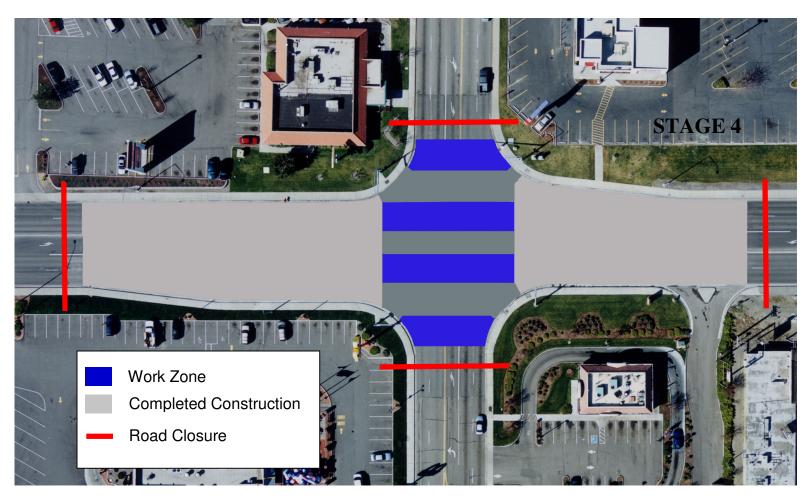


Figure E-14. Construction staging for a combination closure with construction under traffic and a full intersection closure - SR 395, SR 395 and West Kennewick Avenue, Stage 4A.


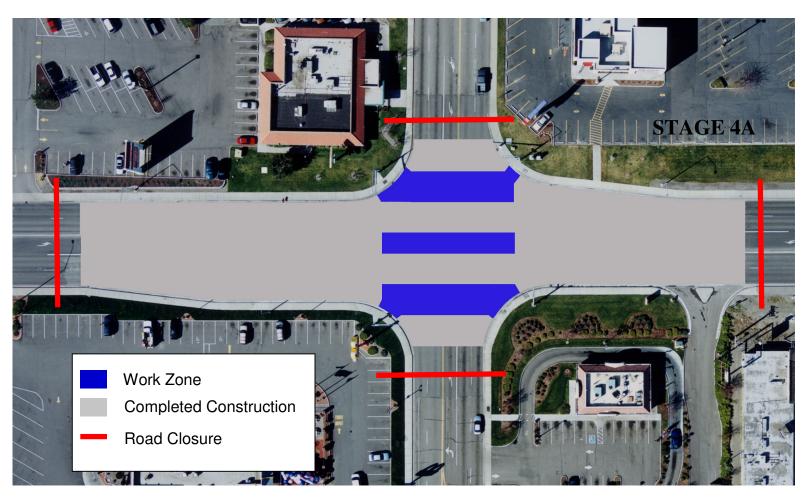


Figure E-15. Completed construction - SR 395, SR 395 and West Kennewick Avenue.

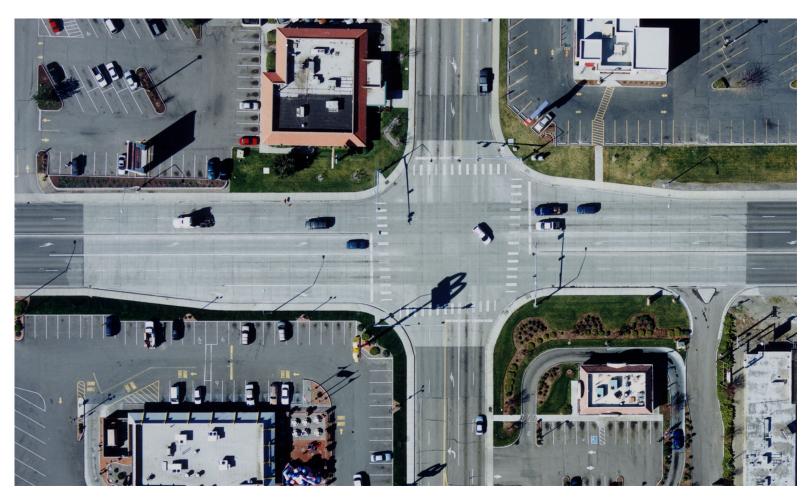

PCCP Intersections Design and Construction in Washington State

# APPENDIX F – TRAFFIC CONTROL RESTRICTIONS AND STAGING REQUIREMENTS

The following special provision for traffic control restrictions and staging requirements is from the SR 2, Division Street and Francis Avenue contract.

## **Public Convenience and Safety**

## **Construction Under Traffic**

Section 1-07.23(1) is supplemented with the following:

The construction safety zone for this project measured from the outside edge of the traveled way is:

```
0.5 meters from SR 291 Sta. 0+000.000 to Sta. 5+854.000
```

8.7 meters from SR 291 Sta. 5+854.000 to Sta. 8+429.017

During nonworking hours, equipment or materials shall not be within the safety zone unless it is protected by permanent guardrail or temporary concrete barrier. The use of temporary concrete barrier shall be permitted only if the Engineer approves the installation and location.

During the actual hours of work, unless protected as described above, only materials absolutely necessary to construction shall be within the safety zone and only construction vehicles absolutely necessary to construction shall be allowed within the safety zone or allowed to stop or park on the shoulder of the roadway.

The Contractor's nonessential vehicles and employees private vehicles shall not be permitted to park within the safety zone at any time unless protected as described above.

The third paragraph of Section 1-07.23(1) is supplemented with the following:

The Contractor shall notify in writing the affected business or residence and the Engineer 24 to 72 hours prior to beginning work. The notification shall include when the work will begin, the order in which driveways will be constructed, and the length of time the work will require. This shall be in effect for each business or residence.

Access to at least one driveway shall be provided at all times during business working hours.

Where the Contractor's operation requires the temporary closure of a driveway, the following shall apply:

At properties with alternate access, driveway closures shall be maintained for the minimum time required to perform work. If the closure is expected to exceed two hours, the work shall be performed during non-working hours of the affected business.

At properties without alternate access, the Contractor shall meet with the property owner(s) to find a mutually agreeable time to perform the work.

No vertical edges greater than 75 millimeters will be allowed in front or in back of the approach. Temporary crushed surfacing or asphalt pavement shims shall be used where required to provide adequate vehicle clearance.

During any suspension of work, asphalt pavement shims shall be used where drop-offs exceed 38 millimeters to provide adequate vehicle clearance. Shim placement may need to be re-evaluated in the event ponding occurs as a result of the shim.

Deviation from the above requirements shall not occur unless the Contractor has requested the deviation in writing and the Engineer has provided written approval.

#### **Traffic Control Restrictions**

There will be no interruptions to traffic except while performing work. The contractor shall maintain the following traffic control while performing actual work within the roadway:

#### Southbound Division Street

There shall be a minimum of two southbound lanes of traffic maintained on Division Street between the hours of 7:00 a.m. to 8:00 a.m. and 3:00 p.m. to 7:00 p.m. and during the Contractors non-working hours.

#### **Northbound Division Street**

There shall be a minimum of two northbound lanes of traffic maintained on Division Street between the hours of 7:00 a.m. to 8:00 a.m. and 3:00 p.m. to 7:00 p.m. and during the Contractors non-working hours.

#### **Francis Avenue**

With the exception of the PCCP construction at the intersections of Division St., Maple St., and Ash St., there shall be no disruptions to traffic

on Francis Avenue between the hours of 7:00 a.m. to 8:00 a.m. and 3:30 p.m. to 5:00 p.m. a minimum of one through lane and the left turn lane of traffic in each direction shall be maintained at all other times. During all other work hours, additional lanes may be closed with prior approval from the Engineer.

The Contractor shall submit a traffic control plan to be approved by the Engineer prior to implementation.

Within the special provision for the Cement Concrete Pavement the following was included (see Appendix I):

## **Staging Plan**

The Contractor shall submit a staging plan to the Engineer for approval for the construction of the Cement Concrete pavement at SR 2, Division Street, and SR 291, Maple Street and Ash Street intersections as shown in the plans at the preconstruction meeting.

The staging plans shall comply with the requirements of the Manual on Uniform Traffic Control Devices (M.U.T.C.D.) and as outlined in Section 1-07.23.

The 7<sup>th</sup>, 10<sup>th</sup>, 19<sup>th</sup>, and 27<sup>th</sup> Avenue Intersection contract in Kennewick included the following traffic control provisions:

# **Public Convenience and Safety**

## **Construction Under Traffic**

Section 1-07.23(1) is supplemented with the following:

The construction safety zone for this project is 9.4 meters from the outside edge of the traveled way.

During nonworking hours, equipment or materials shall not be within the safety zone unless it is protected by permanent guardrail or temporary concrete barrier. The use of temporary concrete barrier shall be permitted only if the Engineer approves the installation and location.

During the actual hours of work, unless protected as described above, only materials absolutely necessary to construction shall be within the safety zone and only construction vehicles absolutely necessary to construction shall be allowed within the safety zone or allowed to stop or park on the shoulder of the roadway.

The Contractor's nonessential vehicles and employees private vehicles shall not be permitted to park within the safety zone at any time unless protected as described above.

Deviation from the above requirements shall not occur unless the Contractor has requested the deviation in writing and the Engineer has provided written approval.

All lanes and shoulder areas on this project shall be clear and open to traffic on holidays and holiday weekends beginning at noon of the day preceding a holiday or holiday weekend and shall remain clear until 11:00 p.m. of the holiday or last day of the holiday weekend. Holidays shall be those as outlined in Section 1-08.5, and in addition, during the week of July 19-26, 1998, Tri Cities Columbia Cup (hydroplane races) all accesses shall be opened to their normal configurations. During this period the Contractor shall not be permitted to have lane closures.

The Contractor shall not close any two adjacent intersections to traffic at the same time. The maximum closure time at each intersection shall be 4 calendar days.

During work hours, the Contractor may restrict traffic through the construction areas; however, at least one lane in each direction on SR 395 or equivalent must remain open to traffic at all times.

Traffic shall not be delayed more than 15 minutes at any time. All traffic congestion shall be allowed to clear before traffic is delayed again. There shall be no delay to medical, fire, or any other emergency vehicles.

The Contractor shall provide access to the local businesses at all time during the construction.

When unforeseen conditions occur which require traffic control measures, the Contractor shall cooperate with the Engineer in providing proper control to ensure safety to the traveling public, and to the personnel and equipment working on this project.

The Contractor shall notify the Engineer, in writing, five working days in advance of implementing any wide load detours.

Grooved pavement signs shall be placed 200 meters in advance of any areas that are planed.

Bump signs shall be placed 100 meters prior to any bump area.

Abrupt lane edge signs shall be placed prior to any abrupt lane edges and every 760 meters staggered along each side of the abrupt lane edges.

Within the special provision for the Cement Concrete Pavement the following was included (see Appendix I):

## **Staging Plan**

The Contractor shall submit a staging plan to the Engineer for approval for the construction of the Cement Concrete pavement at SR 395, 7<sup>th</sup>, 10<sup>th</sup>, 19<sup>th</sup>, and 27<sup>th</sup> Avenue.

The staging plans shall comply with the requirements of the Manual on Uniform Traffic Control Devices (M.U.T.C.D.) and as outlined in Section 1-07.23.

# APPENDIX G – JOINTING DETAILS

The following instructions for intersection joint layout are taken from the ACPA's Concrete Information Pamphlet – Intersection Joint Layout [6]. These guidelines are by no means comprehensive for all intersections. The details show basic jointing for a right angle and skewed T-intersection. Other intersections may require individual attention for unique geometry that these examples do not address.

The primary goal of this method, as summarized by the ACPA, is to minimize or eliminate joints that intersect another joint or the pavement edge at an acute angle. Concrete panels with joints intersecting other joints or edges at angles of less than 60 degrees tend to crack. Right-angle intersections can be designed to eliminate all angles of less than 90 degrees for roadway slabs. There may be some acute angles at the curb line. Skewed intersections will likely require joints with angles of less than 90 degrees. In most cases angles of less than 60 degrees can be avoided.

The following definitions are provided for a better understanding of concrete intersection jointing terminology:

**Doglegs**: Construction block-outs at points where the pavement changes width.


**Circumference-Return Line**: A lightly drawn line 0.5-1.0 m (1.5-3.0 ft.) from the face of the gutter along the curve between the edges of the intersecting roads. For obtuse angles the line is ½ the nominal lane width from the gutter. Any joint that meets the circumference-return line is brought along the curve's radius to the back of the curb and gutter.

**Taper-Return Line**: A lightly drawn line 0.5 m (1.5 ft.) from the face of the gutter at the start of a turn lane taper. Any longitudinal joint that meets a taper-return line defines a location for a dogleg in the gutter.


**Crossroad Return Line**: A lightly drawn line 0.5 m (1.5 ft) from the edge of the mainline roadway at a skewed intersection. Any cross-road longitudinal joint will meet a transverse joint for the mainline roadway at the cross-road return line.

**Intersection Box**: The box formed by the edge of the mainline and intersecting paving lanes (including turning lanes).


# Jointing Guidelines for Right-Angle Intersections

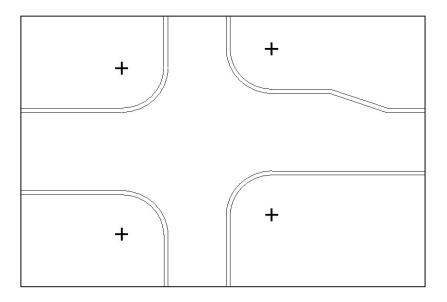


**Step 1:** Draw all pavement edges and back of curb lines on the plan view.




**Step 2:** Lightly draw the circumference-return, taper-return, and the cross-road-return line(s).

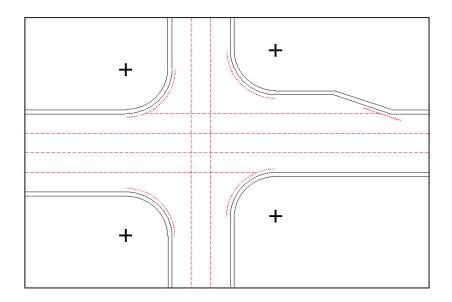


**Step 3:** Draw all lines that define lanes on the mainline and cross road. (Do not extend these lines past the circumference-return, taper-return, or cross-road-return lines.)

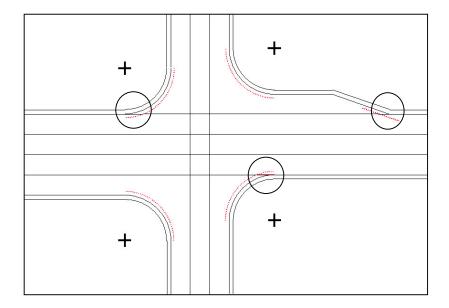


**Step 4:** Define the mainline lanes for paving. Find all locations where the mainline lanes intersect circumference-return or taper-return lines. At these locations only, extend the mainline paving edge lines past the circumference-return or taper return line(s).

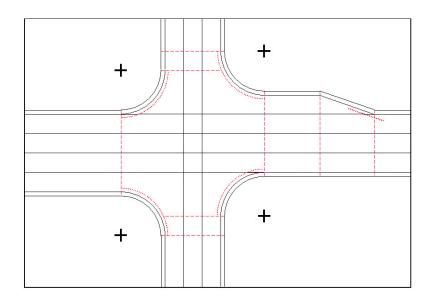


**Step 5:** Add transverse joints at all locations where the pavement changes width, extending the joints through the curb and gutter. Do not extend joints that intercept a circumference-return or cross-road-return line, except at the tangent points.




**Step 6:** Add transverse joint(s) between and beyond the joints you defined in Step 5, but do not add joints to the center of the intersection yet. Attempt to keep the distance between joints less than the maximum desirable length. Usually, the maximum length is about 3.6 to 4.5m (12 to 15 ft.).

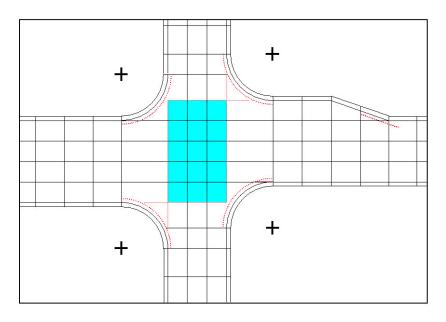


**Step 7:** By extending the edge of pavement lines for the cross road and any turning lanes, define the intersection box.

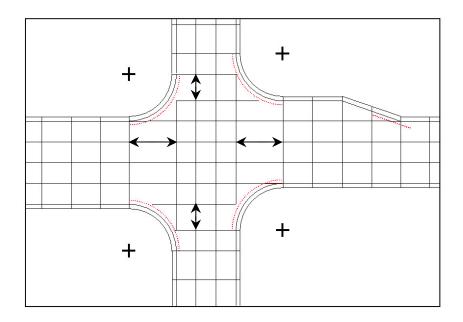

**Step 8:** Check the distances between the "intersection box" and the surrounding joints.

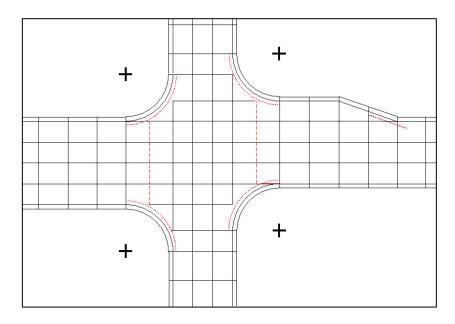


**Step 9:** If the distance is more than the maximum desirable joint spacing, then add transverse joint(s) at an equal spacing (panel lengths of 12 to 15 feet are desirable). Do not extend these joints past the circumference-return or cross-road-return lines.

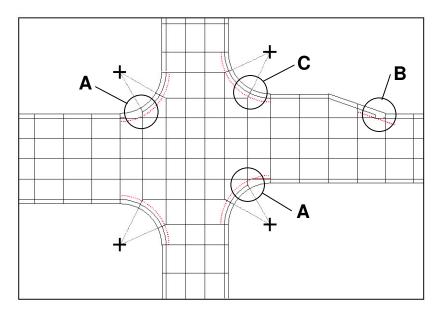

**Step 10:** Lightly extend lines from the center of the curve(s) to the points defined by the "intersection box." Add joints along these radius lines. Finally, make slight adjustments to eliminate doglegs in the mainline edges (See figures G-1 to G-3).

After developing the jointing plan, plot any catch basins, manholes or other fixtures that are within the intersection. Non-telescoping manholes will require a boxout or isolation to allow for vertical and horizontal slab movement. Consider using rounded boxouts or placing fillets on the corners of square boxouts to avoid crack-inducing corners. Also, for square boxouts, wire-mesh or small diameter reinforcing bars in the concrete around any interior corners will hold cracks tight should they develop. Telescoping manholes can be cast integrally within the concrete and do not necessarily require a boxout. The two-piece casting does not inhibit vertical movement and is less likely to create cracks within the pavement.

Finally, when a joint is within 1.2 meters of a fixture, it is desirable to adjust the joint so that it will pass through the fixture or the boxout surrounding the fixture. These steps are shown in Step 11.

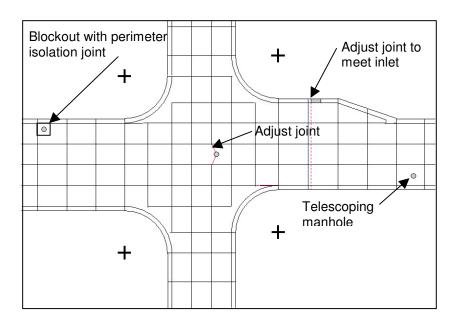

**Step 11:** Adjust joints for utility fixtures.

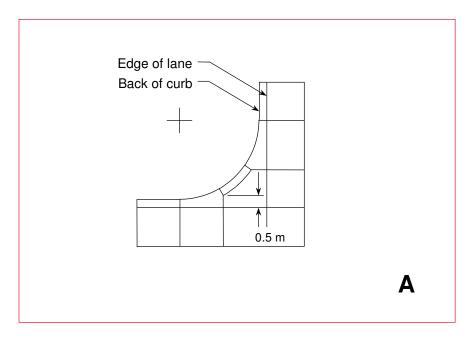


Figure G-1. Width change and dogleg in gutter near point of curvature.

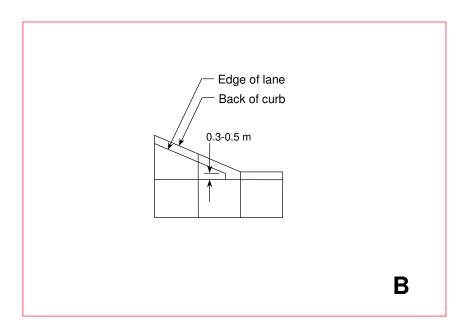


Figure G-2. Width change and dogleg in gutter near start of a taper.



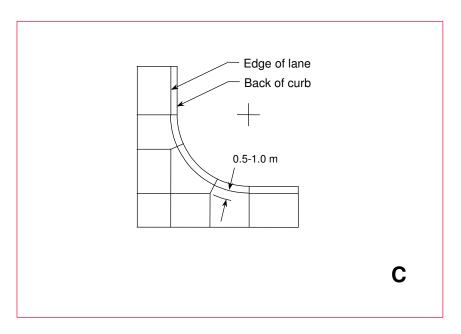


Figure G-3. Width change and dogleg in paving slab for handpour areas.


# **Jointing Guidelines for Skewed Intersection**

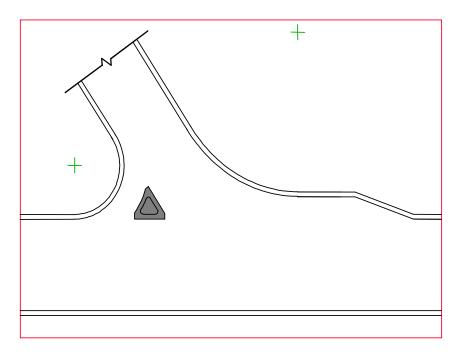


**Step 1:** Draw all pavement edges and back of curb lines on the plan view.

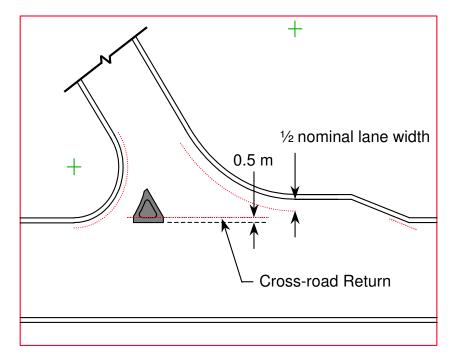


**Step 2:** Lightly draw the circumference-return, taper-return, and the cross-road-return line(s).

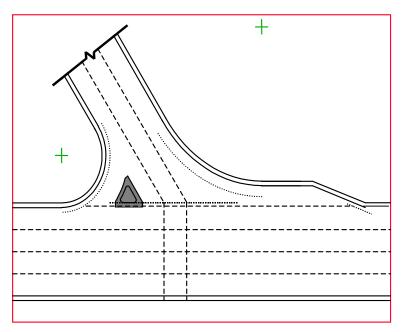


**Step 3:** Draw all lines that define lanes on the mainline and cross road. (Do not extend these lines past the circumference-return, taper-return, or cross-road-return lines.)

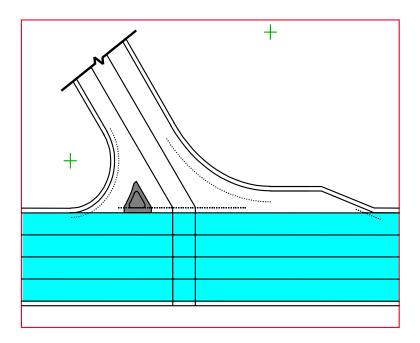


**Step 4:** Define the mainline lanes for paving. Find all locations where the mainline lanes intersect circumference-return or taper-return lines. At these locations only, extend the mainline paving edge lines past the circumference-return or taper return line(s).

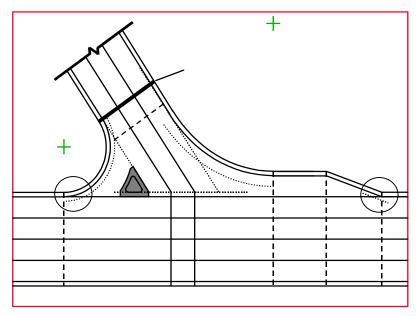


**Step 5:** Add transverse joints at all locations where the pavement changes width, extending the joints through the curb and gutter. Do not extend joints that intercept a circumference-return or cross-road-return line, except at the tangent points. The joint at the tangent point farthest from the mainline becomes an isolation joint in the cross road for T- and unsymmetrical intersections.

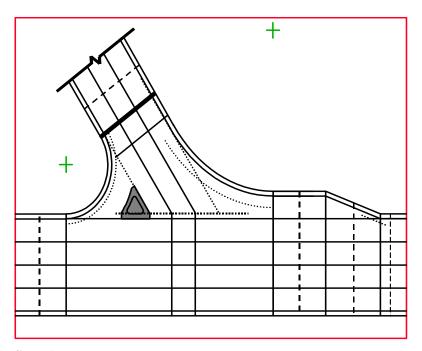


**Step 6:** Add transverse joint(s) between and beyond the joints you defined in Step 5, but do not add joints to the center of the intersection yet. Attempt to keep the distance between joints less than the maximum desirable length. Usually the maximum length is about 3.6 to 4.5m (12 to 15 ft.).

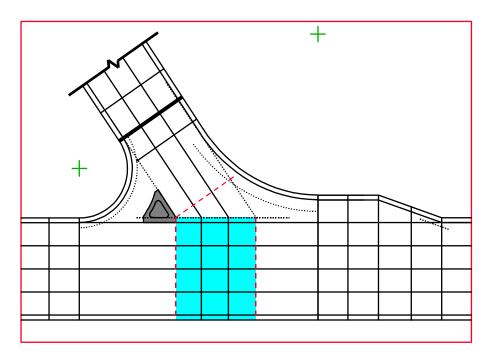


**Step 7**: By extending the edge of pavement lines for the cross road and any turning lanes, define the intersection box. For Skewed intersections do not extend the lines for the turning lanes. Instead, place a transverse joint normal to the cross road centerline starting from the corner of the intersection box that is nearest to the acute angle of the intersection

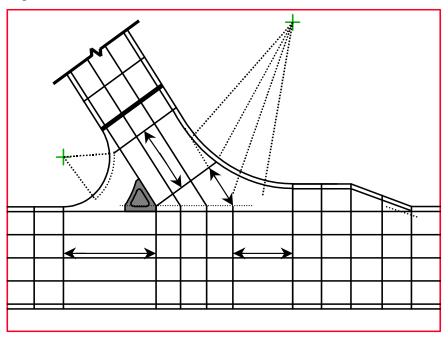

**Step 8:** Check the distances between the "intersection box" and the surrounding joints.

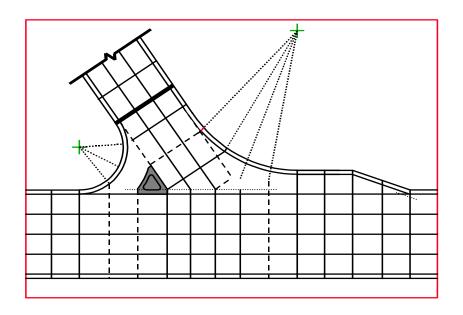

**Step 9:** If the distance is more than the maximum desirable joint spacing, then add transverse joint(s) at an equal spacing (panel lengths of 12 to 15 feet are desirable). Do not extend these joints past the circumference-return or cross-road-return lines.

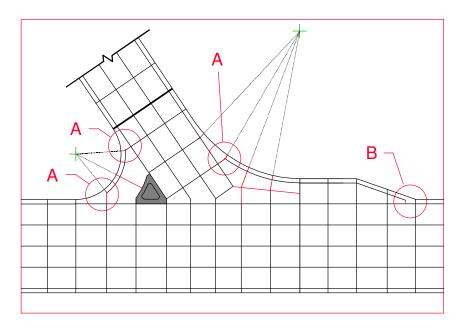

**Step 10:** Lightly extend lines from the center of the curve(s) to the points defined by the "intersection box". Add joints along these radius lines. Finally, make slight adjustments to eliminate doglegs in the mainline edges (See figures G-1 to G-3).

# **Skewed Intersection Layout Alternative**

The alternative for a skewed intersection, shown in Figure G-4, is useful for simple curve radii greater than 11 m and offset or compound radius curves. It can simplify field construction when the contractor builds the curve area in a single hand pour (indicated by the shaded area).

It is necessary to add an additional longitudinal joint near the center of the slabs that exceed 5 meters wide. The additional joint should prevent the occurrence of a longitudinal crack. It is desirable to begin and end the additional longitudinal joint at a transverse joint, as shown in the diagram. Some agencies core a small 50-millimeter hole through the slab at the ends of this longitudinal joint to prevent sympathy cracking (see Photo G-1).

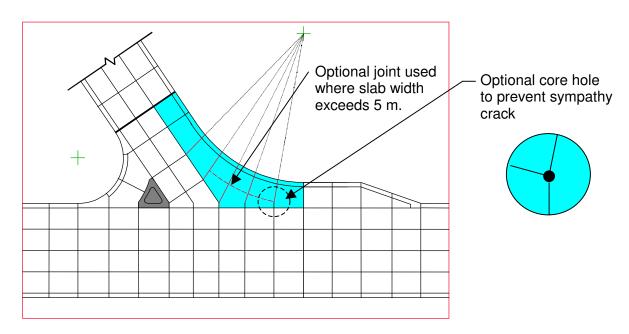


Figure G-4. Skewed intersection Layout Alternative.



Photo G-1. Drilled hole that can be used to prevent a sympathy crack where joints tee (See Photo 45).

# Wide Medians and Dual Left-Turn Lanes Options

Large urban and suburban intersections that contain dual left turn lanes create joint alignment challenges. The medians in these large intersections are often up to 9.2 meters wide. The diagram in Figure G-5 shows how to skew joints through the intersection box in order to maintain the joints along the lane lines for dual left-turn lanes. The ability to use this method will depend on construction staging; it is just one option to apply for complex intersections.

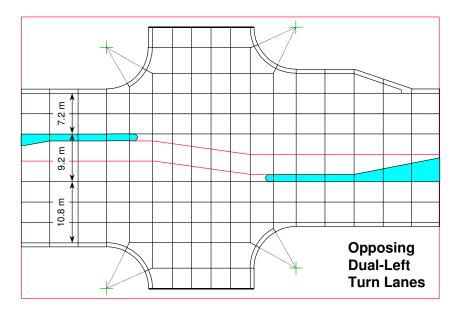


Figure G-5. Wide median and dual left-turn lane jointing.

# **Medians and Dual Left-Turn Lanes Options**

Large urban and suburban intersections that contain dual left turn lanes create joint alignment challenges. The medians in these large intersections are often up to 9.2 meters wide. The diagram in Figure G-5 shows how to skew joints through the intersection box in order to maintain the joints along the lane lines for dual left-turn lanes. The ability to use this method will depend on construction staging; it is just one option to apply for complex intersections.

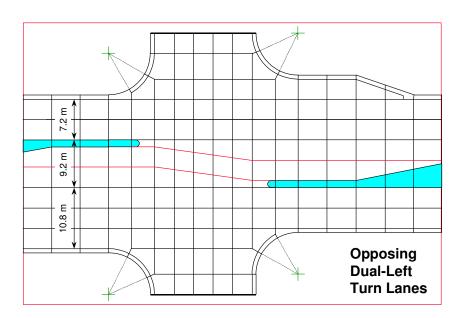


Figure G-5. Wide median and dual left-turn lane jointing.

# **APPENDIX H – SAMPLE JOINTING PLANS**

Figures H-1 to H-13 show sample jointing plans that have been used on WSDOT contracts. A revised jointing plan follows each contract plan to illustrate revisions that should be made on future intersections.

<u>Figure</u>	<u>Intersection</u>
H-1	SR 2, Division Street and Francis Avenue - contract jointing plan
H-2	SR 2, Division Street and Francis Avenue - revised jointing plan
H-3	SR 27, Pines Road and Broadway Avenue - contract jointing plan
H-4	SR 27, Pines Road and Broadway Avenue - revised jointing plan
H-5	SR 27, Pines Road and Broadway Avenue - boxout details
H-6	SR 2, Division Street to Third Avenue - contract jointing plan
H-7	SR 2, Division Street to Third Avenue - revised jointing plan
H-8	SR 291, Francis Avenue with Maple Street - contract jointing plan
H-9	SR 291, Francis Avenue with Maple Street - revised jointing plan
H-10	SR 291, Francis Avenue with Ash Street - contract jointing plan
H-11	SR 291, Francis Avenue with Ash Street - revised jointing plan
H-12	SR 291, Division to Lowell Avenue - joint details
H-13	SR 90, Evergreen Interchange - PCCP interface at a skewed bridge approach slab
H-14	Spokane County jointing plan – Sullivan Road and 32 <sup>nd</sup> Avenue intersection.

3.35m 3.35m 3.36m 3.35m 4.27m FE 0+361.576 SR 291 NE 1/4 NE 1/4 SE 1/4 SE 1/4 SEC. 31 SEC. 30 CITY OF SPOKANE SR 291 0+090.910 T.26N., R.43E., W.M. FERLINE 3.350 3.510 4.83m EQUATION SR 291 0+048.030 DS 9+140.787 P.O.T. BK= FE 0+411.481 DS 9+140.787 P.O.T. AHD (0.34m RT) SR 2 MP 291.18 PCCP DETAIL SO NOTE: SEE SHEET MD 2 FOR TYPICAL JOINT DETAILS. 9+252,512 SEE SHEET TI 1 FOR NEW TRAFFIC ISLAND DETAILS. SR 291 0+026.640 = SR 291 0+023,178 = TRANSVERSE JOINT LOCATIONS SHOWN ARE APPROXIMATE AND MAY BE MODIFIED TO FIT FIELD CONDITIONS DS 9+150.349 DS 9+123.752 DS 9+084.140 DS 9+113.084 DS 9+161.016 DS 9+237.272 LANE WIDTHS 3.66m 3.66m SR 2 DIVISION STREET 3.35m 3.35n DS~LINE N 02°07'04"W 3.35m LANE WIDTHS 9+030.960 3.96m 3.96m 3.35m 3.35m 3.35m 3.35m 3.66m 3.81m DS 9+190.368 DS 9+049.049 NW 1/4 NW 1/4 DS 9+117.310 / SEC. 32 CARE TO BE INSTALLED ON WORTH =10.69m DS 9+164.482 LEGEND CONSTRUCTION E=-# CATCH BASIN TYPE 1 NEW APPROACH EX WATER METER BOX EX CATCH BASIN EX DS 9+140.787 P.O.T. AHD.= SUPPORT CABLE WATER LINE EX S 9+153.814 0+327.876 SR 291 000+000.000 P.O.T.= SW 1/4 SW 1/4 SEEPAGE CATCH BASIN NEW CATCH BASIN TYPE 2 EX MANHOLE EX GAS LINE EX OVERHEAD TELEPHONE EX DRY WELL TYPE 2 NEW GRATE INLET TYPE 3 NEW FE 0+304.801 P.O.T. SEC. 29 VALVE EX SIGNAL SERVICE CABINET EX UTILITY POLE EX GRATE INLET EX OVERHEAD POWER EX STORM SEWER LINE EX SHALLOW MANHOLE TYPE III-48 NEW PIPE NEW MILE POSTS SANITARY SEVER LINE EX HONUMENT EX TELEPHONE JUNCTION BOX EX
PORTLAND CONCRETE CEMENT PAVING LIMIT NEW DOVEL NEW TIE BAR NEW JOINT SR 2 MP 291.18 = FIRE HYDRANT EX SR 291 MP 0.00 JUNCTION BOX EX MATCH FRANCIS AVENUE EAST THIS SHEET EXISTING EDGE OF TRAVELLED WAY EGION STATE FED.AID PROJ.NO. SR 29J PC1 DESIGNED R 10 WASH ENTERED BY CHECKED BY PROJ. ENGR. Division St. to Loyal Ava. JOS HUMBER L2555 SHEET 56 0F 100 SHEETS Allen/Kay H. White P.E.

PCCP Detail

Figure H-1. SR 2, Division Street and Francis Avenue – contract jointing plan.

CONTRACT NO

REGIONAL ADM.

DATE DATE

EQUAL EXTENSION REVISED JOINTING PLAN ACROSS LANES MATCH EQUAL EXTENSION ACROSS LANES TRANSVERSE JOINT LOCATIONS SHOWN ARE APPROXIMATE AND MAY BE EAST MODIFIED TO FIT FIELD CONDITIONS EQUAL EXTENSION DOWEL BARS REMOVED DOWEL BARS REMOVED ACROSS LANES FROM RADIAL JOINTS FROM RADIAL JOINTS DOWEL BARS REMOVED EQUAL EXTENSION DOWEL BARS REMOVED FROM RADIAL JOINTS FROM RADIAL JOINTS ACROSS LANES-JOINTING DETAILS LEGEND BASED ON THE AMERICAN CONCRETE PAVEMENT ASSOCIATION INTERSECTION JOINT LAYOUT DOWEL BAR RECOMMENDED GUIDELINES (1996) TIE BAR NEW JOINT MATCH FRANCIS AVENUE EAST THIS SHEET ECTON STATE FED.ALD PROJ.NO. DESIGNED BY SR 291 PC1 10 WASH M. Allen J. Ryan Division St. to Loyel Ave. Washington State
Department of Tran CHECKED BY Allen/Kay
PROJ. ENGR. H. White P.E.
EGGIONAL ADM. J.C.Lenzi L2555 56 0F 100 PCCP Detail REVISION

Figure H-2. SR 2, Division Street and Francis Avenue - revised jointing plan.


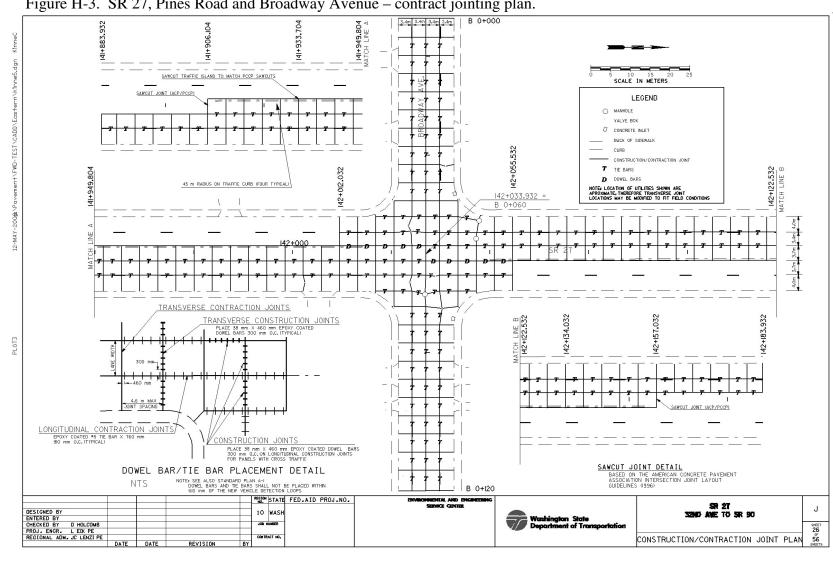


Figure H-3. SR 27, Pines Road and Broadway Avenue – contract jointing plan.

EQUAL EXTENSION REVISED JOINTING PLAN ACROSS LANE JOINTING DETAILS BASED ON THE AMERICAN CONCRETE PAVEMENT ASSOCIATION INTERSECTION JOINT LAYOUT GUIDELINES (1996) PROVIDE DOWEL BARS -FOR TRANSVERSE JOINTS PROVIDE DOWEL BARS FOR TRANSVERSE JOINTS-PROVIDE DOWEL BARS FOR BOTH DIRECTION WITHIN INTERSECTION-LEGEND CONSTRUCTION/CONTRACTION JOINT DOWEL BARS MANHOLE EOUAL EXTENSION ACROSS LANE VALVE BOX REGION STATE FED.AID PROJ.NO. SR 27 DESIGNED BY
ENTERED BY
CHECKED BY D HOLCOMB
PROJ. ENGR. L EIK PE
REGIONAL ADM. JC LENZI PE 10 WASH 32ND AVE TO SR 90 Washington State
Department of Transportation JOB NUMBER CONSTRUCTION/CONTRACTION JOINT PLAN REVISION

Figure H-4. SR 27, Pines Road and Broadway Avenue – revised jointing plan.

Figure H-5. SR 27, Pines Road and Broadway Avenue – boxout details.

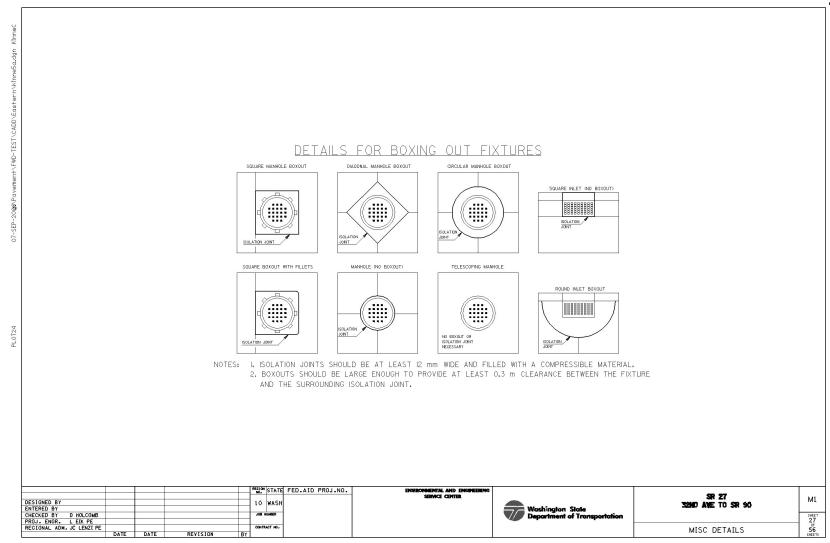

T.25N. R.43E. W.M. LEGEND PCCP AREA QUANTITY TABULATION NOTE EXISTING MONUMENT CASE & COVER EXISTING CATCH BASIN 0 EXISTING MANHOLE • DOWEL BARS TIE BARS DIVISION ST. TXE TYPE C PRECAST TRAFFIC CURB NOTE: SEE STANDARD PLAN A-1 448+500 D-LINE R= 31.728m K 449+322.718 D 448+451.647 (4.363m RT) K 449+375.000 PCCP DETAIL SR 2 SR 90 TO TRENT AVE. L2852 SHEET 21 OF 45 MENION STATE FED.AID PROJ.NO. SR 2 SR 90 TO TRENT AVE. PC1 DESIGNED BY DIVISION/BROWNE TEAM ENTERED BY J. HARVEY CHECKED BY C. KAY, PE / B.WESTBY PROJ. ENOR. H. WHITE, PE REGIONAL ADM. J.C. LENZI, PE 10 WASH Washington State Department of Trai 98Z004 SHEET
21
OF
45
SHEETS

PCCP DETAILS

Figure H-6. SR 2, Division Street to Third Avenue – contract jointing plan.

REVISED JOINTING PLAN LEGEND DOWEL BARS TIE BARS DIVISION ST. PROVIDE TIE BARS IN LIEU OF DOWEL BARS JOINTING DETAILS BASED ON THE AMERICAN CONCRETE PAVEMENT ASSOCIATION INTERSECTION JOINT LAYOUT GUIDELINES (1996) TRANSVERSE JOINT LOCATIONS SHOWN ARE APPROXIMATE AND MAY BE MODIFIED TO FIT FIELD CONDITIONS SR 2 SR 90 TO TRENT AVE. L2852 SHEET 21 OF 45 REGION STATE FED.AID PROJ.NO. SR 2 SR 90 TO TRENT AVE. DESIGNED BY DIVISION/BROWNE TEAM
ENTERED BY J. HARVEY
CHECKED BY C.KAY, PE / B.WESTBY
PROJ. ENGR. H. WHITE, PE PC1 10 WASH JOB HUMBER 98Z004 CONTRACT NO.


PCCP DETAILS

Figure H-7. SR 2, Division Street to Third Avenue – revised jointing plan.

LEGEND SR 291 PCCP AREA T.26N.R.42E. W.M. -SR 291 1+755.337 (0.305m LT) PCCP DETAIL QUANTITY TABULATION NOTE 0.30mR -SR 291 1+779.196 (0.305m LT) EXISTING WATER LINE N.T.S. EXISTING GAS LINE -2.743mR SEE SHEET MD2 FOR TYPICAL JOINT DETAILS EXISTING STORM SEWER LINE 61mR [] EXISTING TYPE 2 CATCH BASIN 14.02m [ SEE TRAFFIC CONTROL SYSTEM PLANS FOR SIGNAL EXISTING MANHOLE ST. - SR 291 1+755.219 (0.271m LT) SIGN RELOCATION (REMOVAL LOCATION) ∠SR 291 1+779.196 (5.181m RT) SYSTEM DETAILS MAPLE SIGN RELOCATION TRANSVERSE JOINT LOCATIONS SHOWN (NEW LOCATION) ARE APPROXIMATE AND MAY BE DOWELS TIE BARS TRAFFIC ISLAND DETAIL MODIFIED TO FIT FIELD CONDITIONS M 0+967.090 F 1+792.015= M 1+000.000 шш 1 3 1 2 F 1+588.713 2°42′30" LT 21.94n FRANCIS AVE. N 87\*04' 30" W SR 291 TΟ DIVISION ST. 1+706,975 F 1+807.866 F 1+827,991 -0.610m M=1+022.555 (2.134m RT) /(2.743m RT) R=15.24m \_\_ 10.97m \_\_ F 1+807.699 AVE. (2.693m RT) LOWELL TRAFFIC ISLAND DETAIL 유 REGION STATE FED.AID PROJ.NO. NOMENTAL AND ENGINE SERVICE CENTER SR 291 D1VIS1ON 9 L2555/L2643 SHEET 57 OF 100 SR 291 DESIGNED BY M. Allen
ENTERED BY J. Harvey
CHECKED BY Allen/Kay
PROJ. ENGR. H. White P.E. PC2 10 WASH Division St. to Lowel Ave. JOS HUHBER L2555 SHEET 57 0F 100 SHEETS REGIONAL ADM. J.C. Lenzi PCCP Detail

Figure H-8. SR 291, Francis Avenue with Maple Street – contract jointing plan.


Figure H-9. SR 291, Francis Avenue with Maple Street – revised jointing plan.

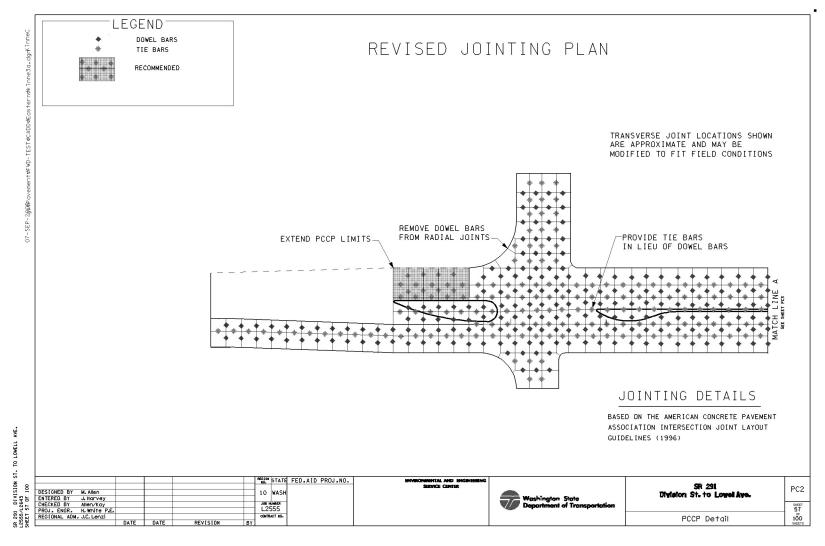

LEGEND SR 291 T.26N.R.42E. W.M. PCCP AREA F 1+863.729 (0.914m RT) SR 291 1+907.802 (0.304m RT) QUANTITY TABULATION NOTE F 1+857.756 F 1+878.048 EXISTING WATER LINE (2.134m RT) (2.183m RT)/ SR 291 1+931.779 (4.606m RT) EXISTING GAS LINE R= 15.24m R=15.24m EXISTING STORM SEWER LINE [] EXISTING TYPE 2 CATCH BASIN R= 0.305m 0.30mR 2.743m R EXISTING MANHOLE F 1+877.881/ SIGN RELOCATION (REMOVAL LOCATION) (2.743m RT) SR 291 1+907.802 SIGN RELOCATION TRAFFIC ISLAND DETAIL (5.182m RT) ∠ SR 291 1+931.661 (NEW LOCATION) (5.182m RT) DOWELS F 1+892.563 TRAFFIC ISLAND DETAIL TIE BARS A 1+000.000 ST. SEE SHEET MD2 FOR TYPICAL JOINT DETAILS SEE TRAFFIC CONTROL SYSTEM PLANS FOR SIGNAL ASH 0+982.322 SYSTEM DETAILS TRANSVERSE JOINT LOCATIONS SHOWN ARE APPROXIMATE AND MAY BE MODIFIED TO FIT FIELD CONDITIONS 2+000 S 89\*52'30" W 1+980.076 TO INDIAN TRAIL ROAD FRANCIS AVE. SR 291 1+930.546 ASH 1+022.555 F 2+401.616 1+909.021 A.P. 0°20'30" LT PCCP DETAIL AVE LOWELL 14.94m N.T.S. SR 291 DIVISION S' 12555/L2643 SHEET 58 OF 100 FED.AID PROJ.NO. SR 291 DESIGNED BY M. Allen
ENTERED BY J. Harvey
CHECKED BY Allen/Kay
PROJ. ENGR. H. White P.E.
REGIONAL ADM. J.C. Lenzi PC3 10 WASH Division St. to Lowell Ave. Washington State
Department of Transportation JOB NUMBER L2555 58 OF 100 SHEETS CONTRACT NO. PCCP Detail

Figure H-10. SR 291, Francis Avenue with Ash Street – contract jointing plan.

Figure H-11. SR 291, Francis Avenue with Ash Street – revised jointing plan.

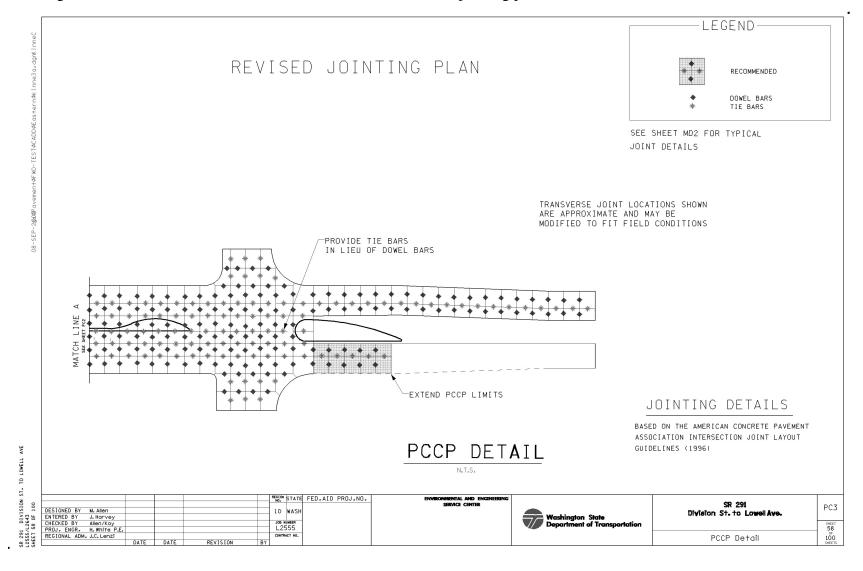

TRANSVERSE CONTRACTION JOINTS 4.52m MAX SPACING DOWEL BARS 32mm DIA. X 0.46m MAX SPACING: 0.30m O.C. n+¢FWD-TEST¢CADD¢Eαs+er LONGITUDINAL CONTRACTION OR CONSTRUCTION JOINTS 0.15m ¥ A WIDTH 0.46m #5 TIE BARS X 0.76m MAX SPACING: 0.91m 0.C. LANE \_0.15m -CURBLINE 0.46m -0.30m--0.30m 0.30m #5 TIE BARS XO.76m -0.61m PCCP JOINT MAX SPACING 0.91m 0.C. □0.61m DOWEL BARS 32mm DIAM. X 0.46m MAX SPACING 0.30m 0.C. CROSS STREET TRAFFIC FLOW TYPICAL DOWEL AND TIE BAR DETAILS TRAFFIC FLOW SR2 @ SR291 I/S NOTE: ALSO SEE STANDARD PLAN A-1 DOWEL BARS AND TIE BARS SHALL NOT BE PLACED WITHIN 0.61m OF THE NEW PREFORMED DETECTION LOOPS SR291 @ MAPLE ST. AND ASH ST. I/S'S AVE. SR 291 DIVISION ST. TO LOWELL L2555/L2643 SHEET 55 OF 100 RECION STATE FED.AID PROJ.NO. SR 291 DESIGNED BY M. Allen
ENTERED BY J. Harvey
CHECKED BY L.P.E.
PROJ. ENGR. H. White P.E.
REGIONAL ADM. J.C. Lenzi MD2 10 WASH Division St. to Lowell Ave. Washington State
Department of Transportation

SHEET 55 OF 100 SHEETS

Miscellaneous Detail

Figure H-12. SR 291, Division to Lowell Avenue – joint details.

JOB NUMBER L2555

CONTRACT NO.

Figure H-13. SR 90, Evergreen Interchange – PCCP interface at a skewed bridge approach slab. Dowel bars should be aligned parallel with the roadway centerline.


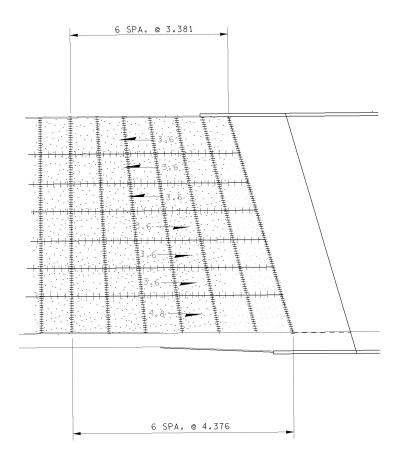


Figure H-14. Spokane County jointing plan – Sullivan Road and 32<sup>nd</sup> Avenue intersection.

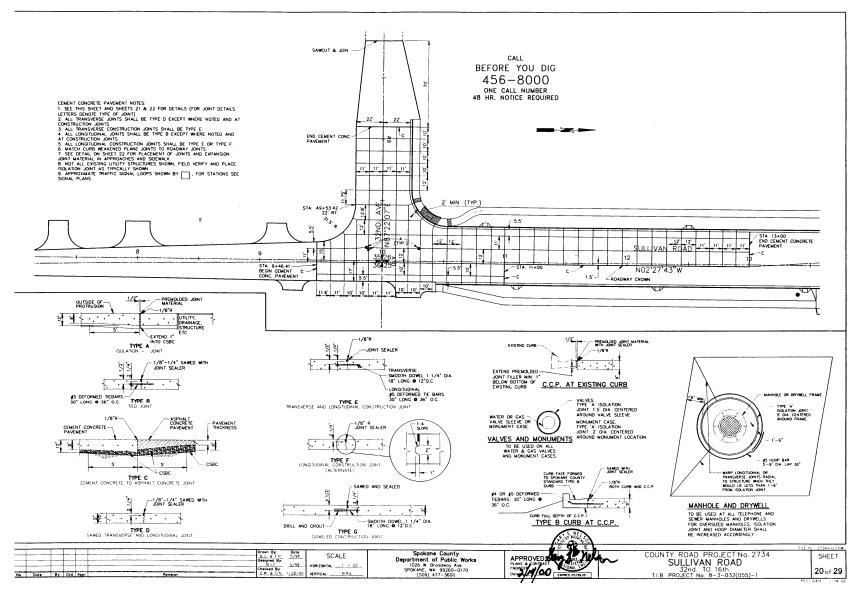

# APPENDIX I – SPECIAL PROVISON FOR INTERSECTION CONSTRUCTION

The following special provision highlights important elements for PCCP intersection construction. This special provision was written to complement WSDOT's 2000 Standard Specifications for Road, Bridge, and Municipal Construction [11]. The special provision is a summary of the special provisions that have been included on past PCCP intersection projects that have resulted in good construction.

#### CEMENT CONCRETE PAVEMENT

## **Description**

Section 5-05.2 is supplemented with the following:

This work shall consist of constructing Portland Cement Concrete Intersections.

#### **Materials**

Section 5-05.2 is supplemented with the following:

Epoxy-coated dowel bars shall be in accordance with Section 9-07.

All tie bars shall be epoxy-coated in accordance with Section 9-07.3 and shall be epoxy-coated 100% on all surfaces including the ends.

Grout shall be an epoxy resin in accordance with Section 9-26.

Use of a water reducing agent is required. The amount used shall be within the manufacturer's recommended dose range and approve by the Engineer.

Water reducing and air entraining admixture shall conform to the requirements of Section 9-23.

#### **Construction Requirements**

Section 5-05.3 is supplemented with the following:

#### Staging Plan

The Contractor shall submit at the pre-construction meeting a staging plan to the Engineer for approval for the construction of the cement concrete pavement at \*\*\*\$\$\$\*\*\*\* intersection.

The staging plan shall comply with the requirements of the Manual on Uniform Traffic Control Devises (M.U.T.C.D.) and as outlined in Section 1-07.23 **Public Convenience and Safety**.

#### Surveying

The Contractor shall be responsible for setting and maintaining all alignment stakes and grades necessary for the construction of the grade by reshaping existing surfacing materials. Except for the survey control data to be furnished by the Contracting Agency, calculations, surveying, and measuring required for setting and maintaining the necessary lines and grades shall be the Contractor's responsibility. The Contractor shall provide the Contracting Agency copies of such calculations and staking data when requested by the Engineer. Copies of the Contracting Agency provided survey data are available for the bidder's inspection at the office of the Engineer.

To facilitate the establishment of these lines and elevations, the Contracting Agency will provide the Contractor with the following survey control:

- 1. An elevation bench mark and two points on roadway center line in the SR \*\*\*\$\$\$\*\*\* intersection vicinity of \*\*\*\$\$\$\*\*\*.
- 2. Technical advice if requested.
- 3. One copy of transit notes showing references to control points in the vicinity of the intersection listed above.

The Contractor shall give the Contracting Agency one-week notification to allow adequate time to provide the data.

The Contractor shall ensure a surveying accuracy within the following tolerances:

Stationing 1/4 inch
Alignment 1/4 inch
Grade +0/-1/4 inch

At the Contracting Agency's discretion, it may spot-check the Contractor's surveying. These spot-checks will not change the requirements for normal checking and testing as described elsewhere, and do not relieve the Contractor of the responsibility of producing a finished product that is in accordance with the contract.

In all disputes concerning accuracy of lines and elevation, the Contracting Agency shall be assumed correct and the Contractor shall correct the discrepancies before construction work may proceed. No additional compensations will be paid for the corrective work.

## Placing, Spreading, and Compacting Concrete

Section 5-05.3(7) is revised to read as follows:

All of the requirements for concrete mix, finish, and surface smoothness apply, regardless of the methods used to place the pavement.

#### **Joints**

Section 5-05.3(8) is supplemented with the following:

The Contractor shall provide an isolation joint (see Details for Boxing Out Fixtures, Contract Plans sheet \*\*\*\$\$\$\*\*\*\*) around all valves, and manholes, located within the cement concrete pavement limits shown in the plans unless the valve or manhole flange Is located below the bottom of the cement concrete. If a transverse or longitudinal joint is within 4 feet of a manhole, or catch basin, the joint shall be skewed to pass through the center of the valve, manhole, or catch basin. If a transverse or longitudinal joint is within 1 foot of a valve the joint shall be skewed to pass through the center of the valve.

When cement concrete pavement is placed adjacent to existing cement concrete (i.e. existing curb), lightweight roofing paper shall be placed between the existing and new concrete to provide a bond breaker. In addition the joint next to the existing curbing shall be finished with a ½ inch radius edger.

#### Tie Bars and Dowel Bars

Section 5-05.3(10) is supplemented with the following:

Dowel and tie bars shall not be placed within 2 feet of the new detection loops.

The dowel bars to be placed at new transverse contraction joints shall be coated with parting compound on all sides before the bar is placed in a chair or approved device.

Tie bars shall not be placed within 18 inches of a transverse joint.

Dowel baskets shall be secured to the base material with steel stakes having a minimum diameter of ½ inches. These stakes should be embedded into the vase a minimum depth of 10 inches

for untreated aggregate base or natural subgrade. A minimum of 8 stakes per basket is recommended. The Contracting Agency will not require the Contractor to secure dowel baskets provided the Contractor demonstrates movement will not occur during concrete pour and vibration.

#### Surface Smoothness

Section 5-05.3(12) is revised to read:

The pavement smoothness will be checked under the supervision of the Engineer no later than 5:00 p.m. of the day following placement of concrete, with equipment furnished by the Contractor.

Surface smoothness will be measured with a 10-foot straightedge. A 10-foot straightedge will be placed parallel to the centerline so as to bridge any depression and touch all high spots. Should the surface vary more than 1/8-inch from the lower edge of the straightedge, the Contractor shall reduce the high portion to the 1/8-inch tolerance by abrasive means at no expense to the Contracting Agency. It is further provided that if reduction of high portions of the surface involves breaking, dislodging, or other disturbance of the aggregates, such cutting will not be permitted until the pavement has achieved its desired age. If in the opinion of the Engineer irregularities cannot be satisfactorily removed by such methods, the Contractor shall remove and replace the pavement at no expense to the Contraction Agency.

Smoothness perpendicular to the centerline will be measured with a 10-foot straightedge. The transverse slope of the finished pavement shall be uniform to a degree such that no variations greater than 1/4-inch are present when tested with a 10-foot long straightedge laid in a direction perpendicular to the centerline. Any areas that are in excess of the specified tolerance shall be corrected by abrasive means.

#### Curing

Section 5-05.3(13) is supplemented with the following:

After the concrete surface has been finished as specified, A State specified white pigment curing compound shall be applied at 1.5 the normal rate specified.

#### Opening to Traffic

Section 5-05.3(17) is supplemented with the following:

Prior to opening to traffic, the cement concrete pavement shall have a minimum compressive strength of 2,500 psi as determined from cylinders made at the time of placement, cured under comparable conditions, and tested in accordance with AASHTO T22-92.

Fabrication, curing, and testing of cylinders to measure early strength shall be the responsibility of the Contractor. The Contractor shall obtain the services of an independent laboratory to perform these activities and these laboratories shall be approved by the Engineer. At the Contractor's option, the time for opening pavement may be determined through the use of the maturity in accordance with ASTM C 1074. The Contractor shall develop the maturity-strength relationship and provide maturity curves along with supporting data for approval by the Engineer. The Contractor shall furnish all equipment, including thermal or maturity meter, thermocouples, wire and qualified personnel to monitor maturity and provide information to the Engineer. Field procedures to monitor maturity shall be submitted to the Engineer for approval prior to use. The pavement shall not be opened to traffic until the maturity-strength relationship shows the pavement has a compressive strength of 2,500 psi and approved by the Engineer.

The use of the maturity meter for concrete acceptance will not be permitted.

The pavement shall be cleaned prior to opening to traffic.

All costs associated with furnishing molds, fabrication, curing, and testing of early strength cylinders shall be at the Contractor's expense.

# Payment

Item 1 of Section 5-05.5 is revised to read:

"Cement Conc. Pavement", per cubic yard.

The unit contract price per cubic yard for "Cement Conc. Pavement" shall include all labor and costs associated with furnishing and installing epoxy coated dowel bars and tie bars, constructing isolation joints for valves, manholes, and catch basins, and setting and maintaining alignment stakes and grades necessary for the placement of "Cement Conc. Pavement".

# APPENDIX J – SPECIAL PROVISION FOR TRAFFIC DETECTION

The following is sample of a special provision for traffic detection.

#### ILLUMINATION, TRAFFIC SIGNAL SYSTEMS AND ELECTRICAL

#### **Construction Requirements**

#### **Inductive Loop Vehicle Detectors**

Section 8-20.3(14)C is supplemented with the following:

Pre-Formed, round, induction loops shall be installed as follows:

- 1. All loops shall be installed as follows:
  - A. In the crushed surfacing a maximum of 75 mm below the surface and a maximum of 48 hours prior to being overlaid with ACP or PCCP.
  - B. Installed in the existing pavement (after any grinding and prior to final overlay as applicable). The loop and lead-in slot shall be a minimum of 20 mm wide and a maximum of 40 mm wide. (If a NFLS model F38 is used, the slot shall be 10 mm wide to 20 mm wide). The slots shall provide a minimum of 75 mm cover from loop to final pavement surface. The slots shall be sealed with high polymer rubber-asphalt sealant.
  - C. The loops shall be tested in accordance with section 8-20.3(14)D tests A & D prior to overlay at the splice location.
  - D. The loops shall be tested in accordance with section 8-20.3(14)D after the overlay and prior to signal turn on at the cabinet.
- 2. The lead-in conduit or hose shall be installed in unpaved areas between the pavement and the junction box by trenching to a depth of 0.5 m.
- 3. The lead-in shall be spliced to the two conductor shielded cable in accordance with the requirements of Standard Plan J-8a.
- 4. The loops for installation in sawcuts shall use 3/8" diameter hose or conduit. The loops for installation in the crushed surfacing shall use ½" or 5/8" hose or conduit.
- 5. The loops shall be from one of the vendors listed and constructed as detailed below:

Never-Fail Loop Systems (NFLS) Model F or F38 Model C De-Tech MFG c/o Capital Enterprises Pre-formed loop assembly Salem, OR

IDC Detector Systems Model 1700 Series Fullerton, CA

- A. The loops shall have a minimum of 4 turns for installation in existing pavement. The loops shall have a minimum of 5 turns for installation in crushed surfacing below the PCCP overlay. The loop and loop lead-in shall be continuous (unspliced).
- B. The loop and the loop lead-in shall be pre-formed and shall be encased in polyproplene conduit and/or 1700 kPa. hydraulic hose and/or 15500 kPa. flex hose. The loop and loop lead-in hose and/or conduit shall be 100% injected with a hot rubber-asphalt sealant.
- C. The loop lead-in shall be twisted a minimum of two turns per 0.3 M.

## **Payment**

Section 8-20.5 is supplemented with the following

"Pre-formed Induction Loop", per each

The unit contract prices for "pre-formed Induction Loop" shall be full pay for all costs involved in furnishing all labor, materials, tools, and equipment necessary or incidental to the construction and installation of the complete and operable induction loop system.

#### **Conduction Cable**

Section 9-29.3, item 8 is deleted and replaced with the following:

#### **Preformed Induction Loops**

The detector loop wire shall be No. 16 AWG stranded copper wire, Class B, with chemically cross-linked polyethylene type THWN insulation of code thickness.