



# The Alaskan Way Viaduct & Seawall Replacement Project

03.07

## Repairs to Foundations Between Columbia Street and Yesler Way

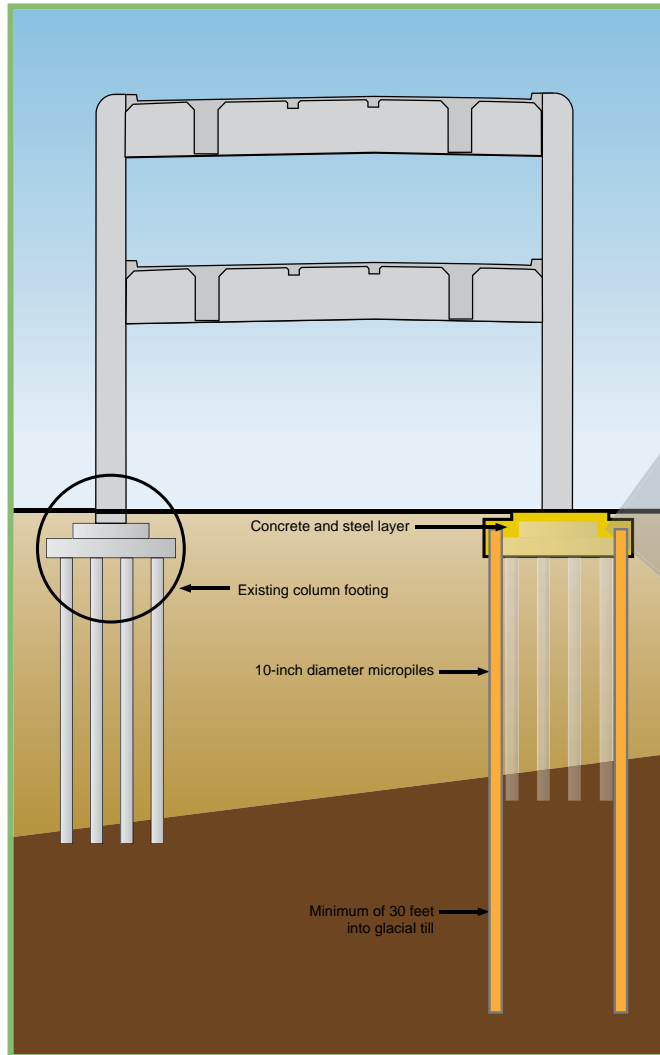

Column footings are not visible above ground.



Micropiles

Existing viaduct column footing

### What will be done?

- Strengthen the footings to prevent further sinking into the soil
- A series of micropiles, which are steel and concrete rods, will be drilled into stable soil
- Additional reinforcing layer of steel and concrete will be placed around existing footings
- The work will begin in 2007 and take five to six months to complete