



TYPE 3 ANCHOR

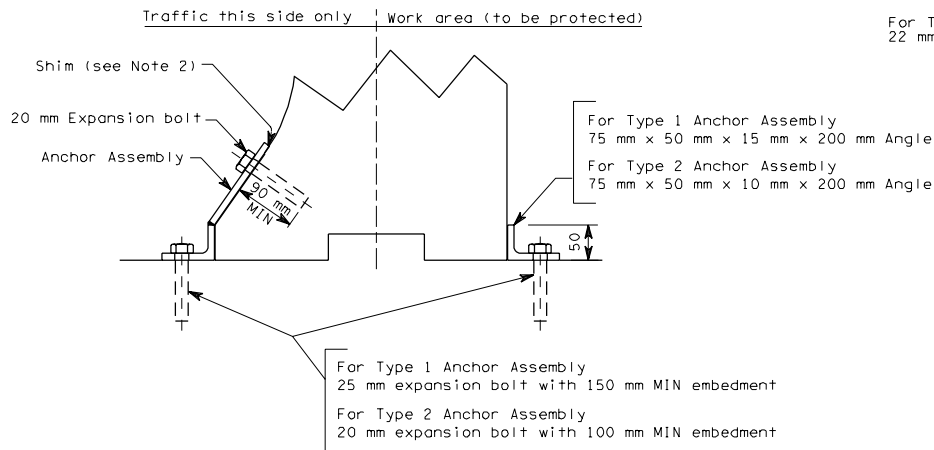

PART SECTION THROUGH SINGLE FACE BARRIER

NOTES

1. After removing temporary barrier from structures, clean and fill deck bolt holes with a 2:1 sand/cement grout, by volume.
2. Shims may be required to fit the bracket to the median barrier and roadway surface.
3. Location of anchors is to be adjusted to miss the main reinforcing in the deck when drilling holes.
4. For Type 1 Anchor Assembly provide two assemblies for each section of concrete median barrier on the roadway surface, located approximately 750 mm from barrier ends.
5. For Type 2 Anchor Assembly provide three assemblies for each section of concrete median barrier on the roadway surface, located approximately 750 mm from barrier ends and at center of barrier.

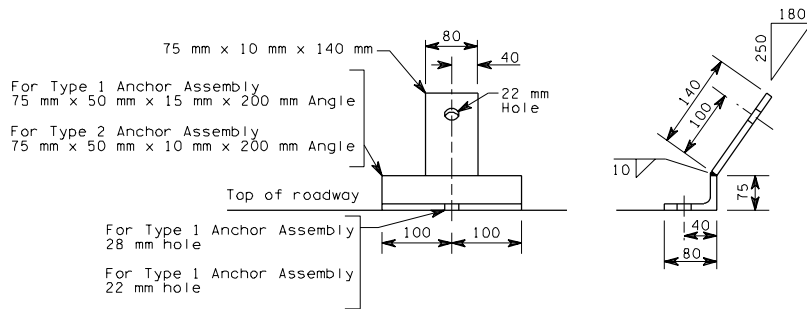

ANCHOR ASSEMBLY

(TYPE 1 AND 2)

ALL DIMENSIONS ARE IN MILLIMETERS  
UNLESS OTHERWISE NOTED

CONCRETE BARRIER  
ANCHORS

STANDARD PLAN C-8e

APPROVED FOR PUBLICATION

STATE DESIGN ENGINEER

DATE

WASHINGTON STATE DEPARTMENT OF TRANSPORTATION  
OLYMPIA, WASHINGTON