

Chemical and Physical Characteristics of Compost Leachates

A Review

Report prepared for the
Washington State Department of Transportation

Nirmalya Chatterjee¹, Markus Flury¹, Curtis Hinman², Craig G. Cogger¹

¹Department of Crop and Soil Sciences

²Department of Biological Systems Engineering and WSU Extension

Washington State University
2606 W Pioneer, Puyallup, WA, 98371

August 22, 2013

TECHNICAL REPORT STANDARD TITLE PAGE

| | | |
|--|---------------------------------------|---------------------------|
| 1. REPORT NO. WA-RD 819.1 | 2. GOVERNMENT ACCESSION NO. | 3. RECIPIENTS CATALOG NO. |
| 4. TITLE AND SUBTITLE Chemical and Physical Characteristics of Compost Leachates-A Review | 5. REPORT DATE August 22, 2013 | |
| | 6. PERFORMING ORGANIZATION CODE | |
| 7. AUTHOR(S) Chatterjee, N., M. Flury, C. Hinman, C. G. Cogger | 8. PERFORMING ORGANIZATION REPORT NO. | |
| 9. PERFORMING ORGANIZATION NAME AND ADDRESS Washington State University Puyallup, WA 98374 | 10. WORK UNIT NO. | |
| | 11. CONTRACT OR GRANT NO. | |
| 12. CPONSORING AGENCY NAME AND ADDRESS | 13. TYPE OF REPORT AND PERIOD COVERED | |
| | 14. SPONSORING AGENCY CODE | |
| 15. SUPPLEMENTARY NOTES This study was conducted in cooperation with the U.S. Department of Transportation, Federal Highway Administration. | | |
| 16. ABSTRACT In this report, we review the existing literature on compost leachates, with special emphasis on the chemical and physical characteristics of the leachate constituents. We briefly summarize the biochemical processes occurring during composting and the use and applications of compost in the environment. We then review the chemical and physical characteristics of feedstock, compost, and compost leachate. We finally discuss environmental implications of the compost leachate. The compost source material, i.e., the feedstock, determines to a large degree the types of leachates. Well-cured compost has been found to eliminate phytotoxic effects of raw feedstock and promote nutrient availability when applied as soil amendment. Feedstock selection and waste-stream separation play an important role in keeping non-degradable contaminants, like heavy metals and plastics, out of the compost. Leachate from compost is yellow to dark-brown in color, mainly due to the presence of dissolved and particulate organic matter. Characterization of the amount and type of organic material (both dissolved and particulate) in compost leachate indicates that, in the early stages of composting, the leached organic matter contains oxidized functional groups, and in the later stages of composting, there is an increase of phenolic (a benzene ring with an OH group) functional groups. The increase of phenolic groups indicates degradation of lignin in the maturing compost. Together with the leaching of organic matter, there is evidence for leaching of various nutrients and contaminants present in the original feedstock. Contaminants can leach by direct dissolution out of the compost, as well as with the help of dissolved and particulate organic matter, both of which have a high sorption affinity for inorganic and organic constituents, and which can enhance contaminant leaching via the mechanism of | | |

colloid-facilitated transport. Organic matter, nutrient, and contaminant concentrations are highest in the initial leachate, and the concentrations decrease considerably with increasing amount of rain or runoff water leaching through the compost.

| | | | |
|---|--|----------------------------|-----------|
| 17. KEY WORDS Compost, leaching, organic matter, nutrients | | 18. DISTRIBUTION STATEMENT | |
| 19. SECURITY CLASSIF. (of this report) None | 20. SECURITY CLASSIF. (of this page) None | 21. NO. OF PAGES 54 | 22. PRICE |

Disclaimer

The contents of this report reflect the views of the authors, who are responsible for the facts and the accuracy of the data presented herein. The contents do not necessarily reflect the official views or policies of the Washington State Department of Transportation. This report does not constitute a standard, specification or regulation.

Executive Summary

In this paper, we review the existing literature on compost leachates, with special emphasis on the chemical and physical characteristics of the leachate constituents. We briefly summarize the biochemical processes occurring during composting and the use and applications of compost in the environment. We then review the chemical and physical characteristics of feedstock, compost, and compost leachate. We finally discuss environmental implications of the compost leachate.

The compost source material, i.e., the feedstock, determines to a large degree the types of leachates. Well-cured compost has been found to eliminate phytotoxic effects of raw feedstock and promote nutrient availability when applied as soil amendment. Feedstock selection and waste-stream separation play an important role in keeping non-degradable contaminants, like heavy metals and plastics, out of the compost.

Leachate from compost is yellow to dark-brown in color, mainly due to the presence of dissolved and particulate organic matter. Characterization of the amount and type of organic material (both dissolved and particulate) in compost leachate indicates that, in the early stages of composting, the leached organic matter contains oxidized functional groups, and in the later stages of composting, there is an increase of phenolic (a benzene ring with an OH group) functional groups. The increase of phenolic groups indicates degradation of lignin in the maturing compost. Together with the leaching of organic matter, there is evidence for leaching of various nutrients and contaminants present in the original feedstock. Contaminants can leach by direct dissolution out of the compost, as well as with the help of dissolved and particulate organic matter, both of which have a high sorption affinity for inorganic and organic constituents, and which can enhance contaminant leaching via the mechanism of colloid-facilitated transport. Organic matter, nutrient, and contaminant concentrations are highest in the initial leachate, and the concentrations decrease considerably with increasing amount of rain or runoff water leaching through the compost.

Contents

| | |
|---|-----------|
| Executive Summary | 3 |
| 1 Introduction | 6 |
| 2 Objectives of this Review | 7 |
| 3 Method of Literature Review | 7 |
| 4 Basics of Composting | 7 |
| 4.1 What is Composting? | 7 |
| 4.2 Biochemistry of Composting | 8 |
| 4.3 Use and Application of Compost | 9 |
| 4.3.1 Waste Management | 9 |
| 4.3.2 Nutrient Management | 9 |
| 4.3.3 Pathogen Control and Public Health Issues | 10 |
| 4.3.4 Environmental Issues | 10 |
| 5 Physical, Chemical, and Biological Characteristics | 11 |
| 5.1 Feedstock | 11 |
| 5.1.1 Categories | 11 |
| 5.1.2 Nitrogen Availability and Mobilization | 12 |
| 5.2 Compost | 15 |
| 5.2.1 Categorization and Characterization | 15 |
| 5.2.2 Physical and Chemical Properties | 16 |
| 5.2.3 Microbiology | 16 |
| 5.2.4 Maturity and Stability | 18 |
| 5.2.5 Phytotoxicity | 19 |
| 5.2.6 Organic Matter, C/N Ratio, and Nutrients | 20 |

| | | |
|-----------|---|-----------|
| 5.2.7 | Heavy Metals | 24 |
| 5.2.8 | Chelation and Multi-Site Sorption | 25 |
| 5.2.9 | Organic Pollutants | 26 |
| 5.3 | Leachate | 27 |
| 5.3.1 | What is Compost Leachate? | 27 |
| 5.3.2 | Dissolved and Colloidal Organic Matter | 28 |
| 5.3.3 | Interactions of Organic Contaminants with Dissolved and Colloidal Organic Matter | 31 |
| 5.3.4 | Heavy (Trace) Metal Sequestration and Mobilization | 32 |
| 5.3.5 | Nutrients in Compost Leachates | 35 |
| 6 | Implications and Conclusions | 38 |
| 6.1 | Leaching of Organic Matter and Nutrients | 38 |
| 6.2 | Facilitated Leaching and Retention of Organic Contaminants and Metals . . | 39 |
| 6.3 | Bioavailability and Toxicity | 39 |
| 7 | Research Needs | 40 |
| 8 | Acknowledgements | 41 |
| 9 | List of Abbreviations | 42 |
| 10 | Glossary | 43 |
| 11 | References | 44 |

1 Introduction

Most municipal and industrial waste is being disposed off in landfills. However, due to the ever increasing volume of waste, landfill disposal becomes increasingly expensive, and therefore, efforts at minimizing the waste stream are needed. Organic waste can be recycled by composting. Studies at landfills and waste management sites have indicated that more than 50% and potentially up to 75% (by weight) of wastes generated by urban communities and small-scale industrial operations are of organic, and potentially biodegradable nature [Engineering Solutions and Design, Inc., 2004; Cascadia Consulting Group, 2009]. Thus, there is great potential for reducing the waste stream through composting.

Efforts to minimize waste streams have led to large-scale recycling of organic waste through composting. The composted end-products are applied to soil to improve both its nutritional and structural characteristics: in farms, public and private gardens, recreational parks, and, on roadsides. Compost is also being used as an amendment in stormwater filtration systems.

While compost has beneficial aspects, such as providing nutrients to plants, increasing soil organic carbon content, and contaminant retention in rain-gardens, the leachate coming out of the compost itself can be environmentally problematic. Proper characterization of the nature of the compost leachate is necessary to predict potential harmful effects of compost applications in the environment. Understanding leachate characteristics also allows optimal design of compost amendments to wetland mitigation sites, rain gardens, bioinfiltration cells, soil treatment layers, bioswales, filter strips, and cartridge and other filter media facilities.

Important questions are how compost interacts with rainfall or runoff water and what the effect of compost leachate is on underlying soil and groundwater. The composition of the leachate from directly applied compost and the change in runoff water quality are questions of special concern.

2 Objectives of this Review

The objective of this paper is to review information on chemical and physical characteristics of compost leachate and highlight environmental implications. Because the leachate is, to a large extent, determined by the raw material (feedstock) and conditions of composting, we first discuss characteristics of feedstock and the compost itself, and then focus on chemical and physical characteristics of the leachate. We then discuss implications of compost leaching on mobilization and retention of nutrients and contaminants.

3 Method of Literature Review

We compiled and reviewed scientific literature on composts and compost leachates with special emphasis on chemical and physical characteristics of the leachate. We surveyed the primary as well as secondary literature using the resources of the Washington State University library system. In addition, we used a number of online resources like those of the websites of the United States Composting Council, various state Department of Transportation, the ScienceDirect database, the American Chemical Society Chemical Abstract Service SciFinder tool (<https://scifinder.cas.org>), the National Transportation Library (<http://ntlsearch.bts.gov/tris/index.do>), and the Transportation Research Board's Research in Progress (<http://rip.trb.org>). All source documents used in this review were compiled and archived electronically.

4 Basics of Composting

4.1 What is Composting?

Composting is the controlled decomposition of organic material such as leaves, twigs, wood-waste, lawn clipping, food scraps, and other organic matter. Composting involves a wide variety of physical, chemical, and biological transformations of the feedstock. Mesoorgan-

isms, like worms and millipeds, can break down larger aggregates of organic matter mostly by mechanical means. Chemical transformations in the composting process are mediated by microorganisms, primarily bacteria and fungi. The main components of compost are degradation products (e.g., humin, humic, and fulvic acids) of plant and animal body matter (e.g., cellulose, lignin, sugars, and proteins).

4.2 Biochemistry of Composting

The lignin, cellulose, sugars, fats (and waxes), and proteins of the feedstocks constitute the food for the organisms mediating the decomposition during composting. Compost feedstocks contain nitrogenous matter aside from the major elemental components of organic compounds (i.e., C, H, and O). The ratio of available C to N is a critical parameter for biodegradation, and optimal composting occurs with a C/N ratio between 20 and 30 [Rynk *et al.*, 1992]. The C/N ratios in most finished compost products are between 12 and 20 [Rynk *et al.*, 1992]. During aerobic decomposition, plant matter like lignin, cellulose, sugars, and proteins become progressively more oxidized to form molecules of lower molecular weight but with more functional groups. The product of this decomposition of organic matter is called humus.

Although biodegradation can occur under both aerobic and anaerobic conditions, composting works best under aerobic conditions. There are microbes that can function without oxygen, but the process of anaerobic respiration is less energy efficient because it uses chemical species like sulfate, sulfur, nitrates, carbon dioxide, oxidized metal ions (like Fe(III), Cr(VI), As(VI), Mn(IV)) as the electron acceptors instead of molecular oxygen. Anaerobic oxidation releases H_2S , NH_3 , mercaptans (R-SH), amines (R-NH_2), CH_4 , acetates, lactates, and reduced metal ions, products that are undesirable because of their smell or toxic nature. Therefore to prevent anaerobic conditions from developing, artificial aeration is often provided by pushing or pulling air through compost piles.

4.3 Use and Application of Compost

4.3.1 Waste Management

Composting organic waste allows for decomposing the organic materials into a more compact form for management [Benson and Othman, 1993; Tognetti et al., 2011]. Compost has been used at the household or small farm level for recycling of organic matter and nutrients for thousands of years. Since the late 20th century, more and more large-scale composting facilities were established to manage and recycle organic waste from urban areas. Particularly in recent years, these urban composting activities have been viewed as promising efforts to reduce waste streams to landfills and manage waste in a more sustainable manner.

4.3.2 Nutrient Management

Compost is made from a variety of feedstocks such as plants materials from agricultural fields and vegetable gardens, animal waste (manure), municipal solid waste, yard waste (garden and park trimmings), domestic and commercial food waste, and municipal and industrial wastewater processing sludge (biosolids). Green waste is organic wastes primarily consisting of fresh plant material, though domestic and commercial food waste is often included under this classification [Oregon Department of Environmental Quality, 2001]. Green waste contains appreciable amounts of nitrogen, phosphorus, and mineral nutrients [Raj and Antil, 2011; Amlinger et al., 2003] and has low C/N ratios. Feedstocks such as hay, paper, cardboard, and dry plant leaves contain primarily carbon, oxygen, and hydrogen [Goyal et al., 2005; Zmora-Nahum et al., 2005; Raj and Antil, 2011] and have high C/N ratios, such waste is called brown waste. Compost made from green waste usually contains large amounts of nitrogen and phosphorus. Composting therefore plays an important role in nutrient cycling. Currently compost finds use as nutrient sources in farmlands, public and private gardens, parks, highway embankments, and landscaping.

4.3.3 Pathogen Control and Public Health Issues

Pathogen control and degradation of toxic organic compounds by composting are important measures of public health. The composting process is a key method to control pathogenic organisms that are present in municipal sewage and solid waste. Composting involves aerobic respiration by bacterial and fungal organisms, which break down organic matter. The degradation process raises the temperature in the compost piles to between 45°C and 70°C. In this temperature range beneficial thermophilic bacteria thrive, while many bacterial pathogens and weed seeds are killed [Turner *et al.*, 2005; Erickson *et al.*, 2009]. A recent review by Wichuk *et al.* [2011] shows that composting can eliminate most phytopathogens.

Studies have indicated that compost and compost extracts applied to commercially important crops (e.g., wheat, peppers, tomato, okra) can suppress some pathogens and weeds [Kavroulakis *et al.*, 2005; Tilston *et al.*, 2005; Boulter-Bitzer *et al.*, 2006; Termorshuizen *et al.*, 2006; Yogev *et al.*, 2010]. Similar beneficial functions of compost applications have been reported for suppression of snow mold infections of Fusarium Patch and Typhula Blight in turf grass [Boulter *et al.*, 2002]. Composting is also effective in inactivating pathogenic viruses [Senne *et al.*, 1994; Guardabassi *et al.*, 2003; Bendfeldt *et al.*, 2006; Tablante and Malone, 2006; Benson *et al.*, 2008; Guan *et al.*, 2010].

4.3.4 Environmental Issues

Oxygen is necessary for bacterial respiration that drives the composting process. Thus, composting occurs best in open-air piles (called wind-rows), or in containers and bins that have air access. Natural aeration is also often augmented using air pumps. The respiration during the decomposition process in composting causes release of carbon dioxide. Under oxygen-limited conditions, the decomposition process also produces a variety of other gases, like methane, nitrogen oxides, volatile organic compounds, and ammonia. Feedstock high in nitrogen content tends to release considerable amounts of nitrogen oxides and ammonia if anaerobic conditions prevail in the compost pile [Finstein and Morris, 1975].

In large composting facilities, rain or snow may fall on compost piles, and the water percolating through the pile can leach out. There is also the possibility of leaching from the feedstock itself. When compost is applied as a soil amendment to agricultural fields, gardens, or roadsides, then soluble and dispersible materials can be leached from the compost by rain or irrigation water. This compost leachate contains soluble minerals, organic matter, and suspended solids, including mineral and organic colloids and potentially pathogens [Christensen, 1983; Christensen, 1984; Christensen and Tjell, 1984; Boulter-Bitzer et al., 2006; Chen et al., 2010]. The exact composition of the leachate is determined by the nature of the feedstock, the degree of progress of the composting process, and the composition of the liquid that infiltrates into the compost. For example, compost applied to roadsides will be exposed to leaching by road runoff, which can carry metals and hydrocarbons. These chemicals will interact with the solid and soluble components in composts, and while some contaminants can become immobilized in the compost, some can leach with compost leachates.

5 Physical, Chemical, and Biological Characteristics

5.1 Feedstock

5.1.1 Categories

The feedstock used is the primary determinant of the composition and physical and chemical properties of the final compost. The feedstock and the manner of composting dictates the essential properties of the compost like the C/N ratio, available macronutrients (e.g., N, P, K, Ca) and micronutrients (e.g., Fe, Mg, Mo) for plant and associated micro flora and fauna (bacteria and fungi). Feedstock and the composting process also influence the structure and texture of the produced compost.

Feedstock for making compost varies tremendously, and depending on its composition, the feedstock and resulting compost may or may not contain contaminants. The types of feedstock also vary seasonally as different materials are available for composting. Feedstock

from mixed municipal waste usually contains more contaminants than feedstock that is separated and sorted according to origin, like yard waste, park trimmings, or commercial food waste. Compost feedstocks are regulated in different manner by different jurisdictions, some of which have stringent regulations in separating compost feedstock.

Major classes of organic feedstock suitable for composting are summarized in Table 1, with data from two waste characterization studies carried out in Ohio and California [*Engineering Solutions and Design, Inc.*, 2004; *Cascadia Consulting Group*, 2009]. The table shows that a considerable amount of municipal waste is organic and can be composted. In the California study, for example, it was found that lumber from construction wastes made up around 15% of the total waste stream. Such data indicate the great potential of composting as a recycling method, thereby saving valuable and limited landfill space for more intractable wastes.

5.1.2 Nitrogen Availability and Mobilization

Nitrogen is a macronutrient for plants. Bacterial metabolism can convert organic forms of nitrogen in soil and nitrogen in the atmosphere into inorganic forms of nitrogen (NH_4^+ , NO_3^- , NO_2^-) which plants can take up. Mineralized nitrogen is susceptible to loss as dissolved salts in run-off and can cause pollution in surrounding water bodies. *Amlinger et al.* [2003] provides a detailed review of nitrogen availability and mobilization in composts based on biosolid and yard-waste feedstocks.

Himanen and Hänninen [2011] compared different compost feedstocks, i.e., source-separated kitchen waste, anaerobically and aerobically digested municipal wastewater sludge, for their composting activity and nutrient dynamics during the composting process. Table 2 lists C and N contents and C/N ratios for the three composting feedstocks bulked up with sphagnum peat (1:1 v/v). The results show the increasing N-mineralization in the initial stages of the composting process, indicated both by the increased mineralized N content and the decreasing C/N ratio, although the trend is not so clear for the aerobic sludge com-

Table 1: Feedstock classification of compostable wastes. Data from *Engineering Solutions and Design, Inc.* [2004], *Cascadia Consulting Group* [2009], and *Rynk et al.* [1992].

| Name | Source | %w/w* | Moisture | Class [†] | Major constituents ^{††} |
|-----------------------------------|---|-----------------|-----------------------|--------------------|--|
| Paper fibre | Card/paper board, office paper, newsprint, magazines, corrugated paper | 35–45 | Low | Brown | Cellulose |
| Yard waste | Green plant matter—domestic and municipal garden and park grass, tree, shrubby trimmings, roadside leaf litter | 8–12 | Low or Medium | Green | Lignin, cellulose, sugars—nitrogen, phosphorus, and mineral rich |
| Food waste | Domestic food waste, commercial food wastes | 5–15 | High | Green | Sugar, proteins, and fat, some minerals |
| Forest waste, Lumber [‡] | Construction, saw-mill dust, wood chips, bark, wood and fiber board industry waste | 15 [‡] | Low | Brown | Lignin, cellulose (potentially contaminated with toxic organic compounds and heavy metal from preservatives, paints and fillers) |
| Sewage sludge (Biosolids) | Municipal sewage and waste water processing sludge/solids | – | Variable | Green | Nitrogen and phosphorus and mineral rich, potentially pathogenic (raw sludge solids), may contain toxic heavy metals |
| Animal manure | Livestock (mixture of animal fecal matter and bedding materials like straw) | – | Medium or High | Green | Lignin, cellulose, hemicellulose—acidic, nitrogen, phosphorus, and mineral rich, may contain antibiotics |
| Plant manure | Nitrogenous crops like legumes, seaweeds, brewing industry (spent hops, barley), meat operations (rumen contents) | – | Medium | Green | Lignin, cellulose, hemicellulose, proteins—nitrogen and phosphorus rich |
| Farm waste (Non-manure) | Hay, straws, chaff | – | Variable, usually Low | Green | Usually high C/N ratio, mineral rich |
| Biomedical wastes | Hospitals, hospices, clinics | <3 | Low | § | Usually polymers, glass and metal, contaminated with body fluids, potentially pathogenic unless source segregated |
| Other | Diapers, textiles (clothes, upholstery, drapey) | <10 | Low or Medium | Brown | Mostly cellulose, may contain nitrogen from synthetic fibers, some potentially polymeric material hard to degrade in compost |

* Percentage of the total incoming waste at 11 municipal solid waste centers in Ohio [*Engineering Solutions and Design, Inc.*, 2004], unless noted otherwise. [†] Green wastes are typically fresh plant material and have low C/N ratios of 10–20, brown wastes are usually more carbonaceous (C/N ratio > 35). ^{††} “Mineral rich” means a substantial amount of ash content when incinerated; most ash contains silica and salts of alkali/alkali earth metals (Na, K, Ca, Mg being the most common), sometimes also Ca and Fe phosphates. [‡] Values from the California Waste Characterization Study [*Cascadia Consulting Group*, 2009]. [§] Many constituents are non-degradable during composting.

Table 2: Characteristics of feedstocks (raw) and composts at different maturity levels (after week 1, 8, and 63). Adapted from *Himanen and Hänninen* [2011].

| Characteristic | Age | 1:1 v/v sphagnum peat | | |
|----------------------------|---------|-----------------------|------------------|--------------------|
| | | + Kitchen Bio-waste | + Aerobic Sludge | + Anaerobic Sludge |
| Dry matter (%) | Raw | 31.4±0.0 | 15.4±0.0 | 16.0±0.0 |
| Ash (%) | Raw | 23.0±3.3 | 19.2±1.6 | 19.6±0.2 |
| LWCA water (g/kg) | Raw | 8.6±0.7 | 13.8±0.8 | 11.2±0.6 |
| LWCA NaOH (g/kg) | Raw | 12.3±0.7 | 14.3±1.0 | 6.6±4.6 |
| Total C (%) | Raw | 39.0±0.6 | 36.5±0.4 | 34.1±0.6 |
| | Week 1 | 39.0±0.6 | 36.5±0.4 | 34.1±0.6 |
| | Week 8 | 33.1±1.5 | 34.1±0.6 | 31.4±0.2 |
| | Week 63 | 33.4±1.3 | 34.2±0.4 | 28.1±0.9 |
| Total N (%) | Raw | 2.0±0.1 | 2.4±0.02 | 2.1±0.03 |
| | Week 1 | 2.0±0.1 | 2.4±0.02 | 2.1±0.03 |
| | Week 8 | 2.5±0.1 | 2.3±0.03 | 2.4±0.04 |
| | Week 63 | 2.6±0.1 | 1.7±0.10 | 1.7±0.04 |
| C/N ratio | Raw | 20 | 15 | 15 |
| | Week 1 | 20 | 15 | 16 |
| | Week 8 | 13 | 15 | 13 |
| | Week 63 | 13 | 20 | 16 |
| Inorganic N (% Total N) | Week 1 | 4.5 | 10.8 | 9.5 |
| | Week 8 | 17.1 | 25.7 | 29.7 |
| | Week 63 | 16.6 | 23.5 | 6.9 |
| N loss (% N at week 1) | Week 8 | 8.7 | 45.2 | 1.4 |
| | Week 63 | 5.3 | 41.4 | 38.8 |

Note 1: All mean and \pm SD were of 3 replicate subsamples (except the LWCA (low-weight carboxylic acids) which were of 4 replicate sub-samples). **Note 2:** All values (except % dry matter, C/N ratios and inorganic N) are expressed as % of dry weight or per kg of dry weight.

post. *Himanen and Hänninen* [2011] also found increased nitrogen losses in form of volatile ammonia, with the aerobic sludge showing as much as 45% nitrogen loss in the initial 8 to 10 weeks. Over the long run though, the nitrogen mineralization rates varied among the feedstocks as reflected by the C/N ratios, with the biowaste compost showing a decreasing C/N ratio and the sludge-based composts showing an increasing C/N ratio.

Guo et al. [2012] investigated the effect of aeration rates, feedstock C/N ratios, and moisture content on a mixed feedstock of pig manure and corn stalks. Compost stability was found to be most dependent on the aeration rates during the composting process. The C/N

ratio mainly influenced the maturity (degree of decomposition, humification, and decrease of phytotoxicity) of the compost as indicated by a seed germination index.

Such studies are helpful for predicting nutrient release from compost both from a nutrient management perspective when compost is used as soil amendment as well as from an environmental perspective to understand properties of the compost leachate.

5.2 Compost

5.2.1 Categorization and Characterization

Compost is such a variable and complex material that systematic classification and categorization is difficult. Several researchers have used principles of chemometrics and statistical analysis to classify and characterize compost [Li *et al.*, 2001; Zbytniewski and Buszewski, 2005b; Campitelli and Ceppi, 2008; Bustamante *et al.*, 2010].

Campitelli and Ceppi [2008] measured 19 parameters of 28 different compost samples differing in feedstocks and processing methods. The authors found a large variation in the parameters, but using statistical methods like principal component analysis and linear discriminant analysis, the most representative indices to categorize composts were found to be total organic carbon, germination index, pH, total nitrogen, and water-soluble carbon. Zbytniewski and Buszewski [2005b] categorized sewage sludge compost into three distinct stages of maturity based on the duration of composting: ≈ 1 week, 3–4 weeks, and 6–8 weeks.

Advanced analytical separation and quantitation techniques, such as size-exclusion, gas and gel chromatography, mass spectrometry, NMR-, FT-IR- and ICP-AES spectroscopy, and isotopic tracer studies, are being increasingly used to characterize the composting process and its end-products [Wershaw *et al.*, 1996; Zbytniewski and Buszewski, 2005a; Zbytniewski and Buszewski, 2005b; Tang *et al.*, 2006; Noble *et al.*, 2009; Soriano-Disla *et al.*, 2010; Iwai *et al.*, 2013]. Application of such techniques helps identify and quantify the chemical nature of compost products.

5.2.2 Physical and Chemical Properties

Dresbøll and Thorup-Kristensen [2005] investigated the physical properties of produced compost and the process parameters of composting based on plant residue feedstock from three different species of plants (wheat, hemp, and miscanthus). The authors indicated that different plant feedstocks changed the texture of the compost produced noticeably, affecting parameters like water retention, particle size distribution, C/N ratio, and the amount of mineralized nitrogen.

Physical and chemical properties of commercial compost based on their feedstocks and location of origin were investigated by *Zmora-Nahum et al.* [2007]. The authors found that while the compost properties differed widely, there was significant correlation of properties based on the type feedstock (Table 3). The authors also found that the compost properties had more uniformity when the source of the compost was from a country which had tighter regulations of compost feedstocks, e.g., the properties of composts from the Netherlands, where waste streams going into composting are strictly regulated, were more uniform than in France and Greece, where the regulations are less stringent. The chemical properties of compost were also found to correlate well with the feedstock type, e.g., feedstocks containing recalcitrant wastes like oil-cake or grape marc composted slowly compared to those containing easily compostable green waste (fresh plant matter, like lawn and park trimmings, kitchen and garden waste) or woody waste (lumber, bark, sawdust).

5.2.3 Microbiology

Microbes are major drivers of the composting process, and as such, characterization and identification of microorganisms in compost is important to better understand degradation mechanisms. Microbial community structures change during the composting process as temperature and chemical conditions change. *Blanc et al.* [1999] classified the microbial variety in composts using a combination of population counts and rDNA isolate tests. The authors reported that thermophilic bacteria were being replaced with less thermophilic bacteria as

Table 3: Average values of chemical properties of composts grouped by primary source material. Adapted from *Zmora-Nahum et al.* [2007].

| Property | Oilcake | Grape marc | Manure | SMS [†] | Wood | Green |
|--------------------------|-------------------|-------------------|-------------------|-------------------|-------------------|--------------------|
| pH | 6.3 | 6.8 ^a | 8.0 ^a | 7.0 ^a | 7.7 ^a | 8.0 ^a |
| OM [†] (%) | 73.9 | 76. | 46.5 ^a | 45.6 ^a | 24.0 ^b | 36.1 ^{ab} |
| Organic C (%) | 40.9 | 42.2 | 25.5 ^a | 25.6 ^a | 12.8 ^b | 20.3 ^{ab} |
| N (%) | 3.0 | 2.7 ^a | 1.9 ^{ab} | 2.1 ^{ab} | 0.9 ^c | 1.1 ^{bc} |
| C/N | 14.3 | 15. | 13.5 | 13.2 | 14.5 | 18.9 |
| DOC [†] (mg/L) | 2920 | 1470 ^a | 1050 ^a | 115 ^a | 240 ^a | 400 ^a |
| EC [†] (dS/m) | 5.3 | 3.0 ^{ab} | 4.1 ^a | 3.4 ^{ab} | 1.3 ^b | 1.3 ^{ab} |
| N-NO ₃ (mg/L) | 23.9 ^a | 63.6 ^a | 146.1 | 17.7 ^a | 23.6 ^a | 14.5 ^a |
| Sugars (mg/L) | 1004 | 662 ^a | 260 ^a | 629 ^a | 172 ^a | 180 ^a |

[†] OM = Organic Matter, SMS = Spent Mushroom Substrate, DOC = Dissolved Organic Carbon, EC = Electrical Conductivity. ^{a-c} For each property, values with a different letter are significantly different ($p < 0.05$).

the temperature in the compost pile dropped below optimal ranges for thermophilic bacteria [Blanc *et al.*, 1999]. Their results indicate that as temperature declines and the chemical composition of the compost materials becomes more diverse, the compost is populated with a broader range of microorganisms. While the conditions during compositing are generally aerobic, there exist anaerobic sites in micro-environments [Blanc *et al.*, 1999]. Such microsites can harbor strictly anaerobic, thermophilic bacteria [Vancanneyt *et al.*, 1987]. Microbial populations in compost depend upon feedstock and composting methods [Dees and Ghiorse, 2001].

Avery *et al.* [2012] investigated the ability of pathogenic microbes to enter source-separated green wastes and their survival during the composting process. Common pathogens, e.g., *Escherichia coli*, *Salmonella* spp., *Campylobacter* spp., and *Giardia* spp., were found to be destroyed or inactivated during composting over periods of 1 to 16 weeks. However, the authors also found classes of pathogens which were resistant to inactivation by the composting process, e.g., spore-forming bacteria like *Clostridium* spp. and *Bacillus* spp., the bacterium *Legionella longbeachae*, and fungi like *Aspergillus fumigatus*. The authors highlighted the need for more in-depth studies of prevalence of pathogens in compost feedstock as

well as in the target environment where such composts are usually applied (e.g., agricultural, park, and garden soils).

5.2.4 Maturity and Stability

The chemical and physical stability of the compost determines the shelf-life and applicability of compost for various uses. A stable compost is one that shows an advanced degree of organic matter decomposition with resistance to further decomposition [Mondini *et al.*, 2003; Wichuk and McCartney, 2010]. A stable compost shows steady values of a number of indices like respiration rates [Wu *et al.*, 2000], microbial count and biomass, organic matter content, C/N ratio, and storage temperature [Baffi *et al.*, 2007; Wichuk and McCartney, 2010]. A related term that is also used, sometimes interchangeably, is the maturity of compost.

Many authors consider compost maturity from the viewpoint of how beneficial the compost is to plants, as determined by indicators like germination rates, plant growth (biomass formation) assays, and residual content of phytotoxic compounds, like pesticides and low-molecular weight organic acids [Iannotti *et al.*, 1993; Wu *et al.*, 2000]. For example, measurement of microbial respiration and oxygen uptake rates are often used to monitor the composting process and assess compost maturity [Lasaridi and Stentiford, 1998; Wu *et al.*, 2000; Borken *et al.*, 2002; Boulter-Bitzer *et al.*, 2006; Scaglia *et al.*, 2007; Kalamdhad *et al.*, 2008; Tejada *et al.*, 2009; Soriano-Disla *et al.*, 2010; Komilis and Kanellos, 2012].

Maturity and stability of compost can also be assessed by determining changes in chemical structure of the compost over time. Tang *et al.* [2006] used solid-state ^{13}C NMR, respiratory quinone profiles (amount of quinone enzymes), elemental composition, and germination indices to determine changes in compost characteristics during the maturing period (up to 18 months). The results indicate that the initial microbial biomass that had developed during the thermophilic stage was maintained for 2 to 4 months, but then a decrease in carbon content, C/N ratio, microbial biomass, microbial variety, and phytotoxicity was observed.

Common indicators of compost maturity and stability are germination rates (phytotox-

icity) and amounts of soluble organic matter (humic and fulvic acids), which indicate degree of humification. *Bustamante et al.* [2010] used the germination index (percentage of germinating seeds in a compost sample of a given age compared to a control growth medium) and the amount of dissolved organic matter from compost extracts to assess compost maturity.

Sayara et al. [2010] investigated the ability of composts with different stability (as denoted by respiration rates and percent organic matter) in remediating a soil sample intentionally contaminated with mixtures of polyaromatic hydrocarbons (PAHs). The results indicated that stable composts degraded as much as 98% of the PAHs after 30 days, whereas the most unstable (poorly composted) sample achieved only 40% degradation of PAHs. Detailed reviews on assessment of compost maturity using different techniques are discussed in *Woodbury and Breslin* [1992], *Bernal et al.* [2009], and *Kumar* [2011].

5.2.5 Phytotoxicity

Many phytotoxins, which are compounds detrimental to plant growth, come from agricultural use of pesticides, industrial solvents, propellants, and refrigerants (e.g., halogenated alkanes, alkenes, and aromatic (aryl) hydrocarbons), degradation of waste plastics (polymers, pigments, bulking agents, and filler materials), and stormwater runoff.

Composting facilitates microbial degradation of organic molecules with phytotoxic properties, and in addition, organic matter generated through composting can bind phytotoxic metals and thereby reduce their bioavailability. Direct germination rates, or a modified germination index (comparison of germination rates of a test vs a control growth media) have been used as indicators of phytotoxicity in composts [*Pascual et al.*, 1997; *Tiquia et al.*, 1997; *Tiquia and Tam*, 1998; *Tiquia and Tam*, 2000; *Wu et al.*, 2000; *Tang et al.*, 2006; *Campitelli and Ceppi*, 2008; *Himanen and Hänninen*, 2011]. For example, *Himanen and Hänninen* [2011] investigated compost maturity by measuring the phytotoxicity via germination rates. Phytotoxicity levels almost reached zero after eight weeks of composting in three different feedstocks (kitchen biowaste, aerobic and anaerobic waste water sludge).


5.2.6 Organic Matter, C/N Ratio, and Nutrients

Figures 1–3 show major chemical structures of organic compounds and moieties commonly found in compost feedstock and in organic matter extracted from soil and compost. The method of extraction of the major soil (or compost) organic matter fractions—humin, humic acids, and fulvic acids—are described in soil chemistry textbooks (e.g., *Hayes and Swift*, 1978, *McBride*, 1994, *Stevenson*, 1994, *Sposito*, 2008).


Nutrient and organic matter contents of composts have been studied extensively [*Goyal et al.*, 2005; *Zmora-Nahum et al.*, 2005; *Hernández et al.*, 2006]. The ratio of the carbon to nitrogen (percent of dry weight) is a key indicator of the compost’s suitability as a growth medium. For example, 40% C content, 2% N content has a C/N ratio of 20, which is on the upper range of C/N ratio for a good compost [*CalRecycle*, 2006]. Ideal C/N ratios for a compost used as a growth medium is 12–18 [*CalRecycle*, 2006].

The C/N ratio is an important indicator for the fate of N during microbial mineralization [*Golueke and McGauhey*, 1953; *Raabe*, 2001; *CalRecycle*, 2006]. *Iglesias-Jiménez* [2001], for example, studied actual nitrogen availability from mature composts applied to a standard soil sample spiked with ^{15}N using the $^{15}\text{N}/^{14}\text{N}$ isotope dilution method. The authors indicate that compost matured over three months made from mixed city waste feedstock, which is usually considered a poor nitrogen releasing feedstock, shows good nitrogen release to plants. *Doublet et al.* [2010] investigated the variation in the C/N ratio and extent of nitrogen mineralization in different particle size fractions in sludge-based compost. The C/N ratio of the 0–50 μm particle fraction was an indicator of degree of sludge transformation and humification. The larger particle size fractions continued degrading organic matter and mineralizing nitrogen even after 13 weeks, indicating the importance of particle size in the composting process. *Kumar* [2011] provides a review of C/N ratios of compost derived from a variety of feedstocks.


Zmora-Nahum et al. [2005] found that dissolved organic carbon (DOC) is a consistent

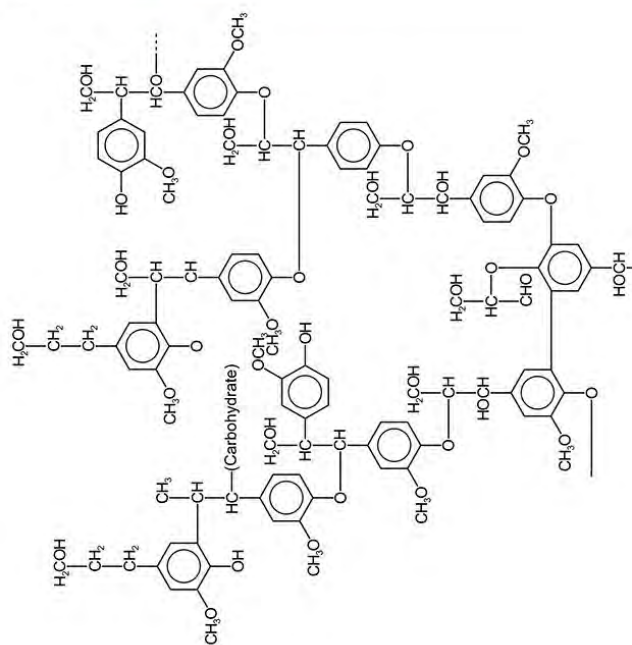


Part of a lignin molecule
(a phenolic residue rich macromolecule)*




Part of a cellulose molecule (a polysaccharide)

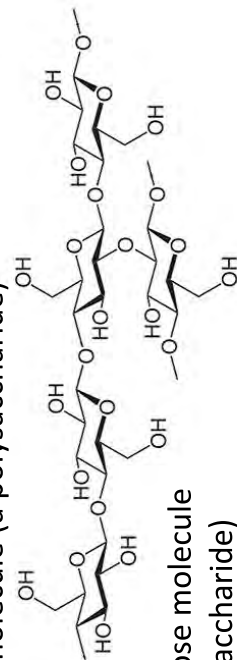


Part of a hemicellulose molecule
(a branched polysaccharide)

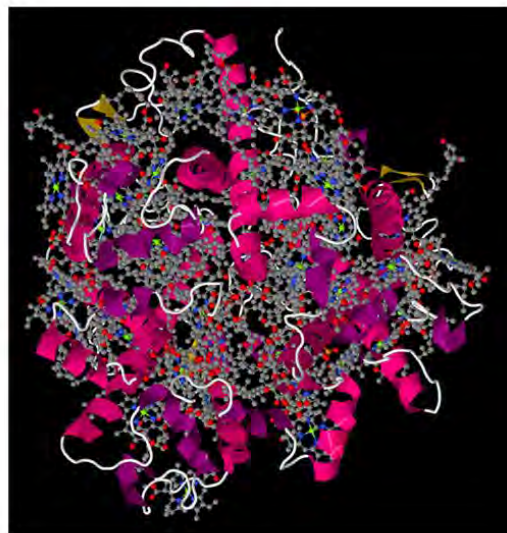


Pea LHC II (a plant protein)[†]



Chlorophyll-a
(plant pigment with a lipid chain)

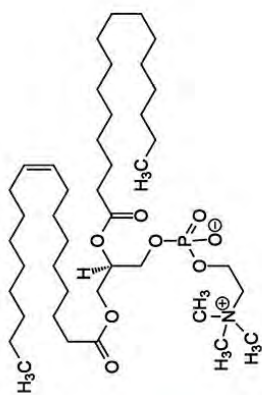

(R)-1-Oleoyl-2-palmitoyl-
-phosphatidylcholine
(a phospholipid molecule)



Fructose
(a furanose sugar)

Glucose

Glucose
(a pyranose sugar)

Figure 1: Chemical structures of organic moieties/molecules found in feedstock. (*Structure adapted from Sakakibara [1983],
†Structure visualized using Jmol PDB viewer using Protein Data Bank file 2BHW)



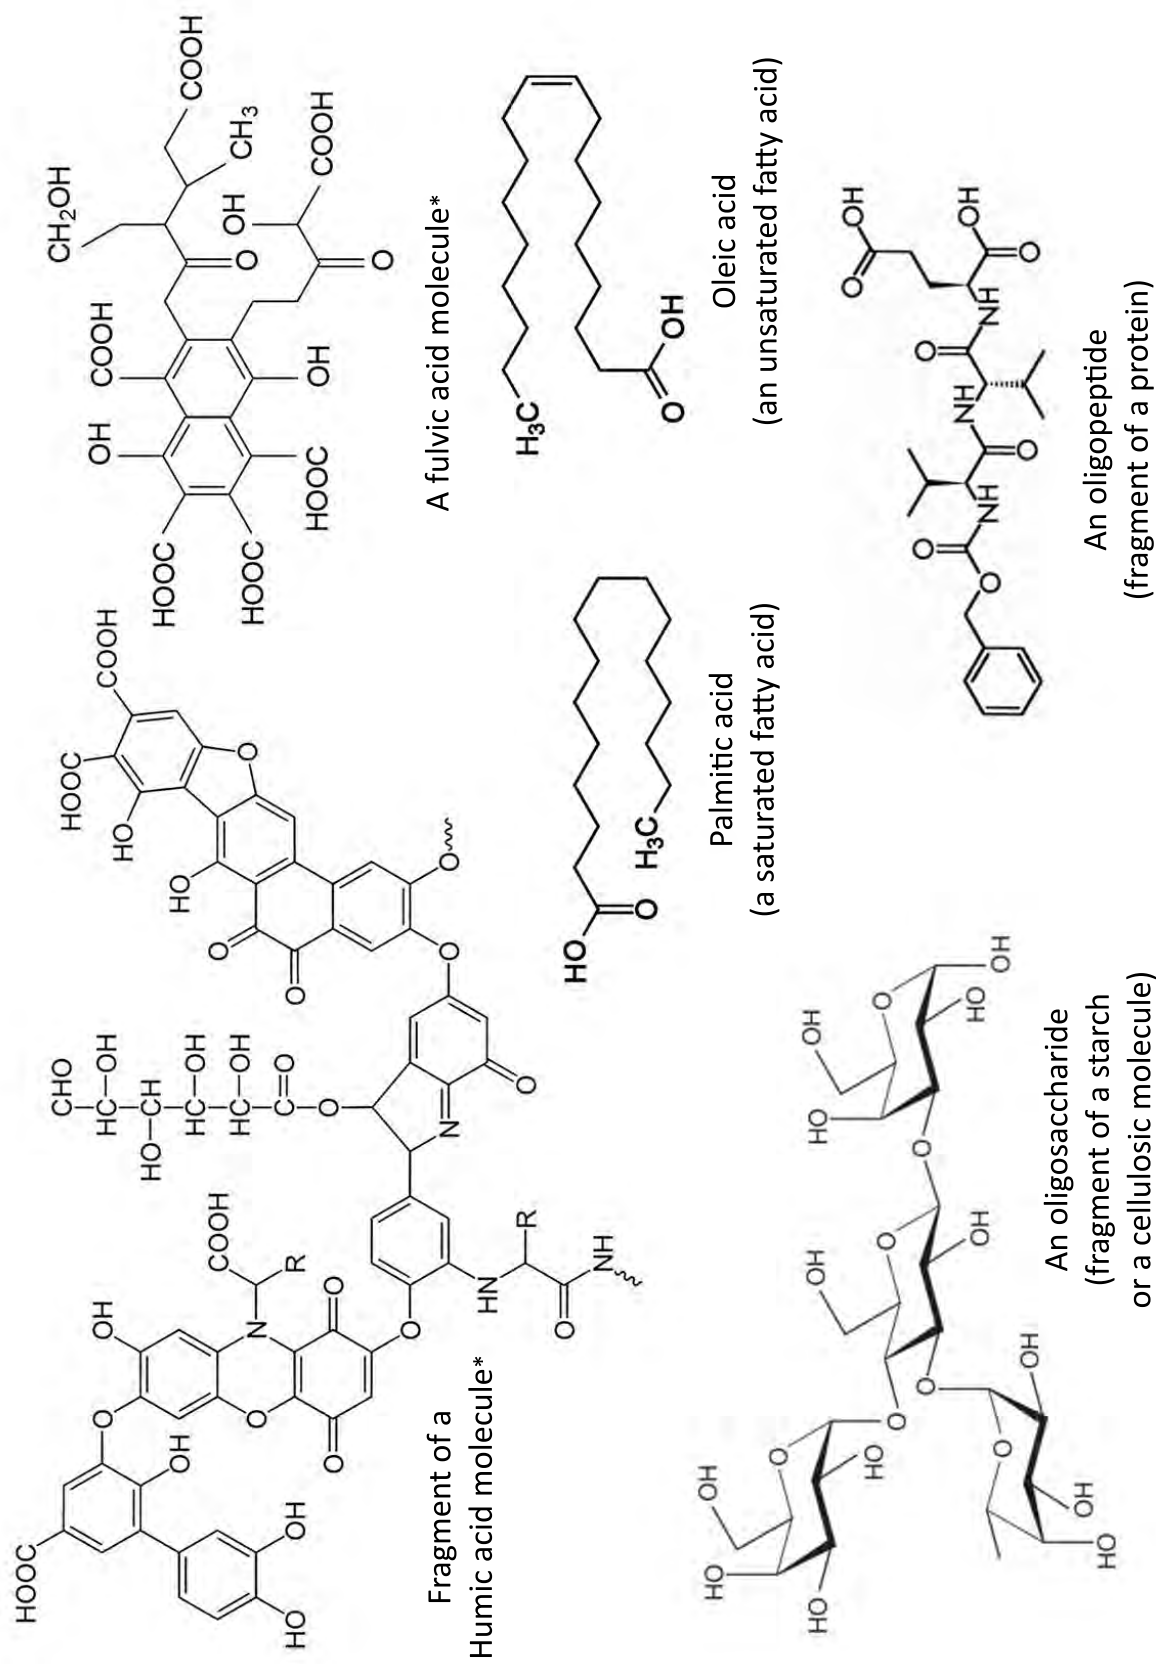


Figure 2: Chemical structures of organic moieties/molecules found in mature compost. *Structures adapted from Stevenson [1994]

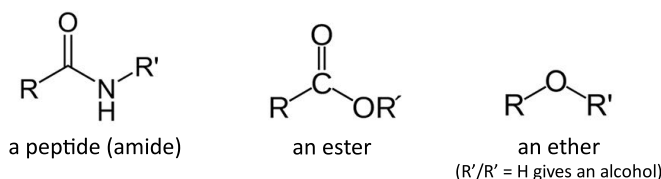

Oxygen-functionals

In an ester - H instead of OR' gives aldehydes, R' instead of OR' gives a ketone -
aldehydes and ketones are together called carbonyl functionals.
H instead of R' gives carboxylic acids.



straight chain and cyclic
alkyl (aliphatic) groups
(commonly denoted by an R)

straight chain and cyclic
alkenyl (olefinic) groups

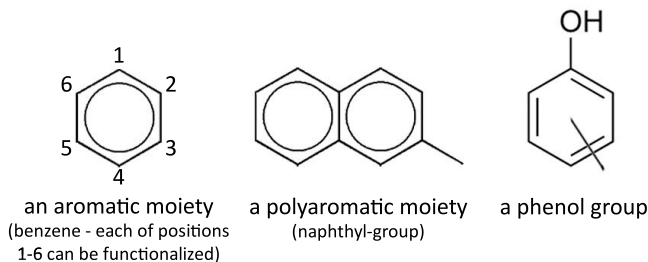


Figure 3: Common functional groups/moieties in organic matter found in mature compost.

indicator of compost maturity across several different feedstocks and processing methods. The authors recommend a value of 4 g DOC/kg-compost as an indicator of a mature compost, irrespective of the compost feedstock or the composting methodology. The measurement of DOC itself is suggested by UV/Visible absorbance at 465 nm.

The humic material content is a good indicator of the quality of the compost produced and its efficacy in nutrient management, especially as a soil amendment to improve water retention and fertility. There exists a large number of studies on characterization of humic materials from composts [Christensen and Nielsen, 1983; Inbar et al., 1990; Ciavatta et al., 1993; Prudent et al., 1995; Davies et al., 2001; Campitelli et al., 2006; Spaccini and Piccolo, 2009]. Spaccini and Piccolo [2009] investigated the molecular characteristics of humic substances extracted from composts at increasing stages of maturity. The results obtained from

NMR spectra and thermochemolysis show increasing uniformity in properties of the humic substances with increasing composting time. The constituents of the stable fraction of humic substances were found to be linear and cyclic lipids, phyto-polysaccharides and aromatic compounds. Progressive maturity of the compost was characterized by the presence of more O-alkyl (ester and ether, Figure 3) carbon. Increasing compost stability was also indicated by preservation of hydrophobic (non-polar) moieties and incorporation of labile, nitrogenous functionalities like peptide (Figures 1 and 3) fragments. The hydrophobic components in humic acids also contributed to better retention of nutrients and contaminants [Spaccini and Piccolo, 2009]. Composts with high humic acid content are useful soil amendments, especially to increase and sequester soil carbon [Fortuna *et al.*, 2003], to remediate contaminated soils [Conte *et al.*, 2005], and to control nutrient runoff [Tsui *et al.*, 2007].

5.2.7 Heavy Metals

Heavy metal concentrations in composts (usually produced from mixed waste and industrial waste streams) have been extensively investigated [Christensen and Tjell, 1984; Fuentes *et al.*, 2006; Cai *et al.*, 2007; Paradelo-Núñez *et al.*, 2007; Gao *et al.*, 2008; Chen *et al.*, 2010; Hartley *et al.*, 2010; Helmreich *et al.*, 2010; Andersen *et al.*, 2011; Himanen and Hänninen, 2011] primarily because of their toxic effects on organisms and potential for long-term accumulation in the food-chain.

Toxicity is related to the physiological availability of the metals and depends on the target organism. Bioavailability of heavy metals can change with the type and maturity of the compost [Moreno *et al.*, 1996; Guerra-Rodríguez *et al.*, 2006; Cai *et al.*, 2007; Ingelmo *et al.*, 2012]. Ingelmo *et al.* [2012] studied bioavailability of heavy metals (Zn, Pb, Cu, Ni, and Cd) in a relatively low stability compost (C/N ratio of 22 and composted for 20 weeks) made from primarily carbonaceous feedstocks (sewage sludge and wood chips, C/N ratio of 30). The authors assessed bioavailability by measuring metal concentrations in different extracts: metals extracted by water, 0.5 M KNO₃, 0.5 M NaOH, and 0.05 M EDTA (ethylene diamine

tetraacetic acid) were considered to have medium-level bioavailability, metals extracted by 4 M HNO₃ were considered to have low-level bioavailability. Results indicate that metal ions (except Pb) become more bioavailable in the compost than in the original feedstock.

If humans or other mammals accidentally ingest compost material, heavy metals may become more bioavailable than in aqueous solutions typical for environmental conditions. This availability to mammals can be assessed with a class of standardized tests known as the Physiologically Based Extraction Tests where metals are extracted with a standard solution (of pepsin, citric, acetic, and malic acids buffered to pH 2) [Miller *et al.*, 1981; Crews *et al.*, 1983; Ruby *et al.*, 1993; Hack and Selenka, 1996]. This solution extracts more metals than just plain water, suggesting the higher bioavailability of toxic metal ions under physiological conditions [Miller *et al.*, 1981; Ruby *et al.*, 1993]. Paradelo-Núñez *et al.* [2007] used such a test to study the physiological availability of Cu, Zn, Cd, Cr, Ni, and Pb from four different composts.

Removal of Cd, Cu, and Zn from synthetic stormwater by using columns of sand amended with various levels of compost was studied to determine the metal retention capacity of bioretention systems [Morgan *et al.*, 2011]. Breakthrough curves for the metal ions were recorded and sorption models were used to predict removal efficiency as well as life span of the bioretention systems. The results showed that for a 70% sand and 30% compost mix, a 90% reduction in metals in the outflow was achieved and the lifespan of the bioretention systems was found to be 95 years. However, it was found that phosphorus release occurred from the bioretention media in considerable amounts, unless initial phosphorus contents in the compost were low.

5.2.8 Chelation and Multi-Site Sorption

The composting process consists of decomposition of biological polymers and complex molecules. The end product of the process is a class of poorly classified, highly variable organic matter called humus. Humus consists of partly decomposed organic materials and newly formed

humic and fulvic acids. Humic and fulvic acids contain a large number of functional groups, and particularly humic acids have both hydrophobic and hydrophilic properties (Figure 2). This ambiphilic characteristics of humic substances makes them ideal adsorbents for both hydrophobic organic molecules, like pesticides and polyaromatic hydrocarbons (PAHs), and hydrophilic polar organic molecules and heavy metals.

5.2.9 Organic Pollutants

Most modern pesticides (insecticides, fungicides, herbicides) are organic compounds, which can be decomposed by biological metabolic processes. However, organic compounds adsorbed onto organic matter, are often less available for microbial degradation. This is the reason why pesticides applied to soils can persist for a long time. For example, *Cogger et al.* [1998b] found that simazine, a common, triazine herbicide used for broad-leaf weed and annual grass control, persisted in soils for up to four years, with a disappearance half-life of four to six months. Results from similar experiments with carbofuran, a carbamate insecticide, showed that carbofuran degrades quicker in soil than simazine, but the enhanced degradation was only associated with freshly applied insecticide not with the residuals left over from previous applications, which appeared to be more recalcitrant and less labile [*Cogger et al.*, 1998a]. Though such studies were conducted in soils, but organic matter from compost applied to the environment is expected to have similar effects.

A few reviews have dealt with pesticide degradation in compost [*Buyuksonmez et al.*, 1999; *Buyuksonmez et al.*, 2000; *Barker and Bryson*, 2002]. *Buyuksonmez et al.* [2000] concluded that pesticides in composting feedstock are not a major cause for concern because the pesticides are decomposed during the composting process. However, some recalcitrant pesticides, notably organochlorine compounds, continue to be of concern. These organochlorines tend to remain adsorbed on complex organic matrices thus becoming unavailable to microbial degradation. Notable examples of such compounds are chlordane, dieldrin, and DDT (or its de-hydrochlorination product, DDE). Even though organochlorine compounds

in soils have been found to degrade during the composting process to about 15% of their initial values, the remaining amount was found to be environmentally non-degradable [Valo and Salkinoja-Salonen, 1986].

Organic pollutants, like organophosphate and carbamate pesticides, are degraded effectively and found in low concentrations in composts. However, the reduction of concentrations and the mechanism of degradation vary with the particular pesticide and the parameters of the composting process. Also, due to inadequate data on degradation levels and pathways it is difficult to make predictions on what the effect of composting may have on a particular pesticide [Buyuksonmez *et al.*, 2000].

5.3 Leachate

5.3.1 What is Compost Leachate?

Compost leachate is the liquid coming out of compost when water from irrigation, precipitation (rain or snow), or runoff seeps through the compost. The chemical and physical nature of the compost leachate is of key importance as the leachate migrates into underlying soils and groundwater, or flows as runoff into surface water bodies. Compost leachate carries both dissolved species and particulate materials suspended in the liquid, such as colloids and larger particles. Suspended organic and inorganic materials in the form of colloids have been implicated in the mobilization of organic contaminants and inorganic, toxic heavy metal ions [McCarthy and Zachara, 1989].

Initial leachate out of active compost piles or fresh compost are often yellowish, pale-brown or dark-brown in color due to the dissolved and particulate organic matter [Callaghan, 2012; CalRecycle, 2012]. Compost leachate is also rich in soluble nutrients [Callaghan, 2012; CalRecycle, 2012]. Compost leachate is similar to compost extracts, the latter are made by intentionally soaking compost (active or mature) in excess water to sample the soluble matter in the compost, whereas the former is the result of drainage of excess water

carrying soluble and particulate matter. Compost tea, on the other hand, is different in that it is produced by active brewing of compost with microbial nutrients and catalysts [CalRecycle, 2012].

5.3.2 Dissolved and Colloidal Organic Matter

The composting process converts some of the original organic matter into humin, humic acids, and fulvic acids. These constituents can be present in compost leachate in both dissolved and particulate (i.e., colloidal) form. The exact chemical structure of dissolved and colloidal organic matter differs depending on feedstock type and composting conditions and age. Humic and fulvic acids are not single molecules, but rather made of assemblies of smaller molecules, typically less than 2000 Da in molecular weight, which are held together by hydrogen bonding and hydrophobic interactions [Piccolo, 2001; Piccolo, 2002; Sposito, 2008]. These assemblies are known as supramolecular associations [Piccolo, 2001; Piccolo, 2002]. Typical chemical structures of components humic and fulvic acids are shown in Figure 2.

Said-Pullicino et al. [2007] monitored the progress of the composting process over 250 days by studying the water extractable organic matter (WEOM) at different times. The study involved monitoring the composting of a mixed feedstock (w/w, 55% source separated municipal solid waste, 30% yard waste and 15% foliage residue from tobacco cultivation). The WEOM was characterized using UV absorbance at 254 nm at dilution levels of < 10 mg-C/L which was then compared with standard spectra of aromatic organic compounds. The WEOM was fractionated into hydrophobic and hydrophilic parts based on XAD-8 resin separation. The fractionated WEOM was characterized by liquid state ^1H and ^{13}C -NMR. Phenolic content in WEOM (usually from lignin degradation) was also measured chemically by oxidizing the WEOM with alkaline CuO followed by a solid-phase extraction.

The ^1H -NMR results in Table 4 indicate increasing oxygen functionalization in the hydrophilic fraction at the expense of aliphatic (straight-chain) moieties, suggesting microbial oxidation and uptake of carbohydrates. The trends for the ^1H -NMR in the hydrophobic

Table 4: Organic matter evolution in water extractable organic matter (WEOM) during composting. Table adapted from *Said-Pullicino et al.* [2007].

| Hydrophilic fraction | | | | Hydrophobic fraction | | | | |
|---|-----------------------|-----------------------|-----------|----------------------|-----------------------|-----------------------|-----------|--|
| ¹ H-NMR SIGNAL INTENSITIES (%) | | | | | | | | |
| Day | olefinic/ aromatic | oxygen- functional | aliphatic | | olefinic/ aromatic | oxygen- functional | aliphatic | |
| 0 | 5 | 17 | 78 | | 11 | 18 | 70 | |
| 13 | 3 | 18 | 79 | | 12 | 17 | 70 | |
| 28 | 3 | 25 | 72 | | 11 | 12 | 77 | |
| 250 | 13 | 32 | 55 | | 13 | 18 | 69 | |

| ¹³ C-NMR SIGNAL INTENSITIES (%) | | | | | | | | |
|--|-----------------------|----------|-------------|-------|-----------------------|----------|-------------|-------|
| Day | carboxyl/ carbonyl | aromatic | O- alkyl | alkyl | carboxyl/ carbonyl | aromatic | O- alkyl | alkyl |
| 0 | 25 | 10 | 28 | 37 | 13 | 23 | 26 | 38 |
| 13 | 27 | 4 | 35 | 33 | 16 | 22 | 23 | 38 |
| 28 | 27 | 3 | 39 | 31 | 17 | 24 | 17 | 42 |
| 250 | 23 | 21 | 29 | 27 | 18 | 7 | 6 | 69 |

See Figure 3 for chemical structure of these moieties.

fractions were not so conclusive; however, the trends in the ¹³C-NMR in the hydrophobic fraction show a relative increase in phenolic compound content at the expense of O-alkyl character, indicating microbial degradation of carbohydrates and an increasing content of lignin-degradation products. There are also trends of increasing alkyl carbons suggesting chain length heterogeneity and an increase of carboxyl carbons suggesting high oxidation in the WEOM [*Said-Pullicino et al.*, 2007].

UV-Vis and ¹³C-NMR spectroscopy was used by *Zbytniewski and Buszewski* [2005a] to investigate the distribution of carbon functionalities in progressively maturing compost from sewage sludge feedstock. The NMR analysis showed an abundance of methoxyl-groups, typical of freshly formed humic acids. A comparison of fresh compost humic acids with standard humic acid shows the increasing attachment of oxygenated functional groups (especially carboxyl groups) to aromatic moieties rather than to aliphatic chains. The rise in phenolic moiety indicates the progressive degradation of lignin after an initial drop, when

the available phenolic moieties are used up by microbial processes.

UV-Vis absorbance was used to determine the degree of humification in the actively composting material by using compost extracts [Zbytniewski and Buszewski, 2005a]. The compost extracts were prepared by mixing 1 g compost and 50 mL 0.5 molar NaOH, shaken for 2 h, then kept overnight, and finally centrifuged at 3000 rpm for 25 min. Absorbance (A) of the supernatant from compost extracts was measured at various stages of the composting at $\lambda = 280$ nm (A_{280} , non-decomposed lignin and quinine moieties), 472 nm (A_{472} , organic matter in the initial actively decomposing stage), and 664 nm (A_{664} , organic material with high content of aromatic and condensed functional groups—denoting stable humified material). Absorbance ratios, indicating the degree of humification, were calculated as follows [Zbytniewski and Buszewski, 2005a]:

$$Q_{2/4} = A_{280}/A_{472} \quad Q_{2/6} = A_{280}/A_{664} \quad Q_{4/6} = A_{472}/A_{664} \quad (1)$$

The $Q_{2/4}$ reflects the progress of the composting process. The $Q_{2/6}$ denotes the degree of conversion of feedstock materials to final humified material, and is thus an indicator of compost maturity. The $Q_{4/6}$, often called the ‘humification index’, is an indicator of the stability of the compost because it denotes the ratio between actively degrading and fully degraded material.

Typical values of the $Q_{4/6}$ ratio for soil humified material are less than 5. However, Zbytniewski and Buszewski [2005a] found that the $Q_{4/6}$ values stabilized at 8.8 after 53 days of composting. The authors inferred that either the $Q_{4/6}$ values of compost humic substances are different from those in soils or that the composting was incomplete.

5.3.3 Interactions of Organic Contaminants with Dissolved and Colloidal Organic Matter

Organic contaminants strongly interact with dissolved and colloidal organic matter. *Chiou et al.* [1986], using a test set of organic pollutants and pesticides (p,p'-DDT, 2,4,5,2',5'-PCB, 2,4,4'-PCB, 1,2,3-trichlorobenzene, and lindane), showed enhanced solubility of the chemicals in solutions containing dissolved organic matter (DOM). The apparent solubility (S_w^*) of the pollutants/pesticides were related to the actual water solubility (S_w) as [*Chiou et al.*, 1986]:

$$S_w^* = S_w(1 + XK_{DOM}) \quad (2)$$

where X is the amount of dissolved or particulate DOM per mL of water and K_{DOM} is the partition coefficient of the pollutant or pesticide between pure water and DOM. Tests were carried out with different amounts of standard samples of DOM like humic acids, fulvic acids, and humin. Comparative measurements were also made with low (phenylacetic acid) and high (poly-acrylic acid) molecular weight organic co-solutes. The results indicate a linear correlation between the DOM concentration in water and the enhancement of pollutant or pesticide dissolution and mobilization. The greatest extent of enhanced dissolution was provided with humic acids, and DDT was the most sensitive to DOM in water. The results also demonstrate that the pollutants or pesticides were having a partition-like interaction with the DOM in water as evidenced by the much reduced extent of such effects with co-solutes like phenylacetic acid or poly-acrylic acid, which do not provide the required non-polar local environments for pronounced partition effects.

There is evidence that DOM can mobilize organic pollutants from contaminated compost and other waste materials [*Aggelides and Londra*, 2000; *Hartlieb et al.*, 2001; *de Guardia et al.*, 2002; *Bolea et al.*, 2006; *Said-Pullicino et al.*, 2007]. *Hartlieb et al.* [2001] used ^{14}C labeled organic contaminants applied to a compost feedstocks and tracked their subsequent fate and transformation during composting. Their results indicate that contaminants pref-

Table 5: Partitioning of Benzo[k]fluoranthene in compost derived dissolved organic matter. Adapted from *Raber and Kögel-Knabner* [1997].

| DOM Solution | Molecular weight fraction | K_{DOM} |
|------------------------|---------------------------|-----------|
| Domestic Waste Compost | < 1 kDa | 20,450 |
| | 1–14 kDa | 19,769 |
| | > 14 kDa | 91,426 |
| Plant Waste Compost | < 1 kDa | 11,209 |
| | 1–14 kDa | 11,629 |
| | > 14 kDa | 56,286 |

erentially partition into DOM of particular molecular weight fractions. For example, pyrene preferentially partitioned into high molecular weight DOM, whereas di-2-ethylhexyl phthalate and simazine preferentially partitioned into lower molecular weight DOM.

The adsorption of organic contaminants, like pesticides, by DOM in compost leachates and use of composts to remediate contaminated soils have also been investigated [*Barriuso et al.*, 2011; *Caricasole et al.*, 2010; *Ertunc et al.*, 2002]. *Raber and Kögel-Knabner* [1997] studied the effect of DOM from composts as potential sorbents and carriers of hydrophobic polyaromatic hydrocarbons (PAHs). The authors found that the penta-cyclic PAH, benzo[k]fluoranthene showed a 4 to 5 times higher partition coefficient (K_{DOM}) in the high molecular weight DOM fraction compared to the lighter DOM fractions (Table 5).

5.3.4 Heavy (Trace) Metal Sequestration and Mobilization

Dissolved organic matter in compost leachate can effectively sorb and mobilize heavy metals. *Christensen and Tjell* [1984] conducted a study on 17 lysimeter columns containing composts of varying age and column lengths, and monitored for 7 heavy metals (Cd, Ni, Co, Zn, Cu, Pb, and Cr) in the leachate over a 30 month period. Simulated rainfall was applied weekly, amounting to 680 mm/yr. The initial leachate was found to exceed drinking water concentration standards for all metals, but the concentrations rapidly fell off within the first 6 to 18 months. After 18 months (450 mm leachate) only Ni was found to exceed concentrations allowed in drinking water standards. In the first year, the amounts of metals leached were as

follows (as percent of the original content): Ni (1.9%), Co (1.3%), Cu (0.7%), Zn (0.4%), Cd (0.21%), Cr (0.1%), and Pb (0.07%). Interestingly, the amounts of heavy metal leached were only moderately correlated with compost origin, compost age, or lysimeter column packing depth.

Kaschl et al. [2002] applied municipal solid waste composts (65 tons/ha) to a calcareous, sandy soil (25 cm and 50 cm long columns) and a loamy soil (25 cm long column). They also applied compost extract to a non-calcareous sandy soil (25 cm long column). The compost-amended soils had significantly higher amounts of organic matter in the leachate than the non-amended soils. The higher amounts of dissolved organic matter in the leachate also contributed to a higher nitrate and metal (Cd, Cr, Cu, Hg, Pb, Ni, and Zn) mobilization. The effect was less pronounced in the loamy than in the sandy soil, probably because the loam had more binding sites, e.g., clay particles, for organic matter and metal sorption. The study also indicated that soil minerals were re-absorbing the metals mobilized with the dissolved organic matter during the passage of the leachate, as 70% of the water extractable organic matter but only about 10% of the water extractable metals in the compost was recovered in the leachate. Only, Ni, Zn, Cu, and Cr were found to be leaching. The maximum release of the metals occurred within the initial 1 to 3 pore volumes of leachate; beyond that, the concentrations of the metals in the leachates dropped drastically, reaching a low (< 10% to 15% of peak) steady-state value. Thus, although considerable leaching did occur, most of the metals released with dissolved organic matter from the compost were accumulated in the topsoil underlying the compost layer [*Kaschl et al.*, 2002]. Similar accumulation of metals leached from compost into underlying soil has been reported by *Achiba et al.* [2009].

Chen et al. [2010] studied the leaching of Cu and Zn from an applied compost [equivalent to a surface application (no incorporation) of 65 tons/ha] into an underlying layer of red, clayey soil (Ultisol) in a 60 cm long laboratory column. Rainfall was simulated by irrigation, equivalent to a total of 200 mm rainfall in 5 events. The results indicated that 4% of the Cu and 58% of the Zn was leached out of the soil column. The soil column was subsequently sam-

pled and tested for metal bioavailability using sequential extractions (as described in *Tessier et al.* [1979]). The extractions were conducted to determine the metal sorption in different soil constituents (e.g., residual formations, organic matter, Fe/Mn oxides, carbonates and exchangeable formations). The bioavailable heavy metals were usually from the sites which are exchangeable or where metals bound to carbonates. The bioavailability parameter, k , was defined as [*Chen et al.*, 2010]:

$$k = \frac{c_{ex} + c_{CO_3^{2-}}}{c_{total}} \quad (3)$$

where c_{ex} , $c_{CO_3^{2-}}$, and c_{total} are, respectively, the number of exchangeable sites, the carbonate-binding sites, and the total number of sorption sites (i.e., residual sites, organic matter, Fe/Mn oxides, carbonates and exchangeable sites). After the leaching experiments, about 75% of the total Cu and Zn added were found in the non-exchangeable, residual sites of the soil. The bioavailability of Cu and Zn ranged between $k = 0.05 - 0.10$ and $k = 0.09 - 0.16$, respectively. The bioavailability of Zn was higher than that of Cu in those treatments that had both Cu and Zn. Thus, the phytotoxicity of Cu is likely to be lower than that of Zn (assuming similar levels of toxicity in plants) when similar levels of contamination with the two heavy metals exist [*Chen et al.*, 2010].

Bolea et al. [2006] and *Bolea et al.* [2010] studied the distribution of a large group of ions between different fractions of organic matter extracted from compost. The authors found that the partition of ions into a specific fraction of the dissolved (or particulate) organic matter extracted from the compost depended upon speciation. *Bolea et al.* [2006] used ultrafiltration to separate different humic substances based on their molecular weights. The results showed that the inorganic species associated with three distinct molecular weight fractions of humic substances (<1 kDa, 1–50 kDa, and 100–300 kDa). Almost all monovalent metal ions, Mg^{2+} , and oxyanions preferentially bound to low molecular weight fulvic acids (Table 6). Most divalent metal ions, Cr^{3+} , and UO_2^{2+} bound to fulvic acids and humic acids.

Table 6: Elemental partitioning in humic substance fractions. Adapted from *Bolea et al.* [2006].

| Group | Elements | Partitioning in humic acid fractions | | |
|-------|--------------------------------|--------------------------------------|---------------------|------------------------|
| | | <1 kDa (fulvic) | 1–50 kDa (humic) | 100–300 kDa (humic) |
| I | +1: Na, K, Rb, Cs | | | |
| | +2: Mg | >90% | – | – |
| | oxyanions: As, B, Mo, W | | | |
| II | +2: Ca, Sr, Co, Cu, Ni, Cd, Zn | | | |
| | +3: Cr | 30–81% | 11–44% | Cd (17%), Zn (12%) |
| | +6: U | | | |
| III | +1: Ag | | | |
| | +2: Ba, Pb, Fe, Ce, Sn, Ti, La | <42% | 16–50% | 13–60% |
| | +3: Pb, Fe, Al, La, Ce, Ti, Bi | | | |
| | +4: Ce, Ti, Zr, Sn, Th | | | |

Cd^{2+} and Zn^{2+} were the only exceptions showing significant binding to the highest molecular weight humic fraction. Other metals with oxidation numbers 3 or higher were binding to all three organic matter fractions (Table 6).

In a related study, *Bolea et al.* [2010] reported comparable results for metal uptake by organic matter in compost leachates fractionated by particle size [macromolecular (<15 nm), colloidal (15 nm–1 μm) and particulate (>1 μm)] rather than by molecular weight. These results suggest that if dissolved and particulate organic matter is leached from compost, colloid-facilitated transport of metals is likely to occur.

5.3.5 Nutrients in Compost Leachates

Many of the chemical species that leach out of compost, either in dissolved or particulate form, are plant nutrients. Dissolved and particulate organic matter in the compost leachate are important sources of C, H, N, O, and P. *Christensen* [1983] studied nutrient leaching from 3 and 12 month old composts made of equal parts of municipal solid wastes and waste-water sludge. The author reported that the outflow contained 100 to 400 mg/L of NH_4^+ during the first 100 to 300 mm of leachate. NO_3^- concentrations were 100 to 700 mg/L in the initial 200

Table 7: Nutrient concentrations in compost leachates. Adapted from *Christensen* [1984].

| Nutrient | Cumulative leachate fraction | | |
|-------------------------------|------------------------------|-----------------------|--------------------|
| | 0–100 mm (mg/L) | 100–200 mm (mg/L) | > 200 mm (mg/L) |
| Na | 600–2100 | 50–600 | 0–400 |
| K | 200–1800 | 100–1200 | 40–700 |
| Ca | 250–1100 | 100–600 | 70–400 |
| Mg | 60–400 | 30–270 | 10–200 |
| Mn | 0.1–1.3 | 0.1–0.6 | 0–0.5 |
| Fe | 0.8–14 | 2–4 | 0.5–3.8 |
| Cl | 500–2500 | 40–800 | 0–500 |
| SO ₄ ^{2−} | 180–1400 | 100–650 | 0–300 |
| | 0–100 mm | >100 mm | |
| PO ₄ ^{3−} | 1.2–17.5 [†] | 2.2–32.7 [†] | |
| BO ₃ ^{3−} | 0.7–5.0 [†] | 0.7–5.0 [†] | |
| F [−] | 0.3–22.7 [†] | 1.6–67.7 [†] | |

[†] Estimations based on values in Tables 1, 4, and 5 in *Christensen* [1984].

mm of leachate, followed by a decrease in concentrations, and then by another surge in NO₃[−] concentrations in the later 300 to 800 mm of leachate. These results indicate that compost leachates can contain considerable loads of nitrogen (in form of NH₄⁺ or NO₃[−]).

Christensen [1984] also investigated the leaching of a variety of other nutrients in compost. Table 7 lists the concentrations of these nutrients in cumulative compost leachate volumes, and Figure 4 illustrates the trends of nutrient concentrations as a function of cumulative leachate volume. These data show compost leachates can contain substantial amounts of nutrients, but that the nutrient concentrations in the leachate fall off quickly with volume of leachate.

The leaching of phosphorus out of compost is generally less pronounced than that of other inorganic ions. *Christensen* [1984] found that leaching of phosphorus was two orders of magnitude less than that of sodium, potassium, and calcium, all of which were present in similar initial percentages (per unit dry matter weight) in the compost. Phosphorus was considerably better retained by more mature composts (> 3 month old) as compare to less mature compost (< 3 months old). Less mature compost tends to leach more DOM, which

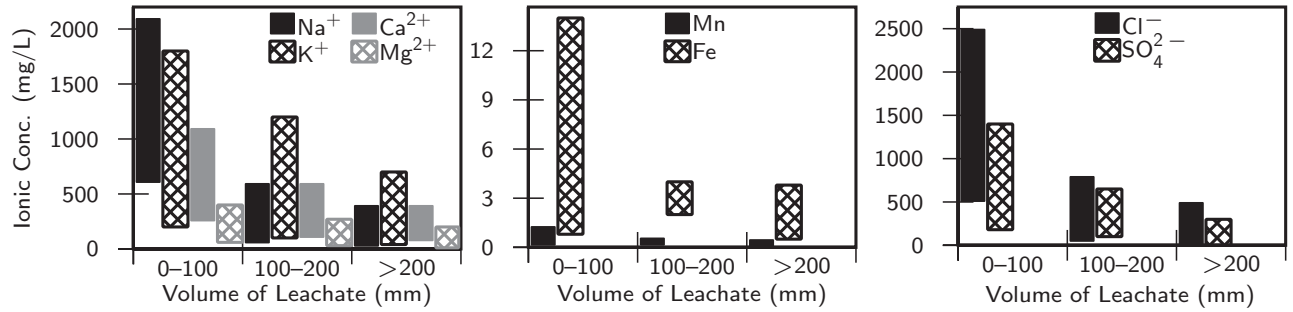


Figure 4: Nutrient concentrations in compost leachates. Drawn with data from *Christensen [1984]*.

can act as carrier of phosphorus, whereas mature compost showed less DOM leaching.

However, if the compost contains substantial amounts of phosphorus, like in animal manure-derived compost, phosphorus leaching can occur and cause pollution of surface and groundwaters [Eghball, 2003]. Studies on phosphorus leaching from compost-amended bioretention systems have shown mixed results. Some studies have shown that compost-amended bioretention systems can remove incoming phosphorus from stormwater [Davis *et al.*, 2006; Hunt *et al.*, 2006; Davis, 2007], some studies, however, showed net export of phosphorus [Hunt *et al.*, 2006]. Phosphorus export with effluent appears to be pronounced when the compost has high phosphorous content, and when the aeration of the test media is low, i.e., water saturation occurs [Hunt *et al.*, 2006].

Christensen and Tjell [1984] (see also Section 5.3.4) discussed the presence of other important plant micronutrients, e.g., Co, Cu, and Zn, in appreciable quantities in compost leachates. In a 9-year long study, *Miller et al. [2013]* monitored leaching of Ca, Mg, Na, K, and S from compost-amended soil cores. The authors found that composted manure showed more leaching of these ions than non-composted, but stock-piled manure. Excess leaching of nutrients causes harmful effects, indirectly through creating an ecological imbalance through promoting excessive growth of selected organisms, and directly because some nutrients, e.g., Cu, Zn, and Ni, become toxic when present at concentrations greater than physiologically necessary.

6 Implications and Conclusions

6.1 Leaching of Organic Matter and Nutrients

Compost is an important recycling product that helps to minimize and even eliminate organic waste by chemically transforming organic waste into a valuable soil amendment. Provided that the compost itself does not contain any toxic chemicals, the application of compost to the environment is generally beneficial; however, the leachates coming out of compost nonetheless can be of environmental concern. The reviewed literature indicates that materials can readily leach out of compost. The leachate is composed mainly of dissolved and particulate organic matter. Along with dissolved and particulate organic matter, nutrients—either as components of organic matter molecules or associated with exchange sites on organic matter—are leaching. The exact chemical makeup of the leachate varies with type of feedstock as well as age and maturity of the compost. The initial leachate contains the highest concentrations of dissolved and particulate matter and nutrients, and with increased amount of water passing through the compost, the amount of leached materials decreases.

There are only few comprehensive studies where leachates from compost have been analyzed as a function of leachate volume and time. Although some generalizations can be drawn from these studies (e.g., considerable amounts of organic matter and nutrients, including nitrogen and phosphorus, can be readily leached in the initial flushes), each compost feedstock and compost maturity will be different, so that specific studies with a given compost material would be required to assess the exact quantity and nature of materials leached from a given compost.

6.2 Facilitated Leaching and Retention of Organic Contaminants and Metals

Besides the dissolved and particulate organic matter, compost leachate may, depending on the feedstock source, contain organic and inorganic contaminants (toxic organic chemicals—such as for instance pesticides, surfactants, halogenated hydrocarbons—and metals). The leached dissolved and particulate organic matter can facilitate the movement of organic contaminants and metals that are otherwise relatively immobile in compost. Along with the initial, enhanced leaching of the dissolved and particulate organic matter, these organic contaminants and metals likely show increased leaching in the initial flushes of compost through the process of colloid-facilitated contaminant transport.

On the other hand, the stable, non-leachable organic matter can retain organic contaminants and metals by the process of sorption. Compost therefore plays a role in sequestering organic contaminants and metals. Compost is used as soil amendment to help remediate contaminated water, e.g., stormwater runoff from paved areas like parking lots and roadways. The large number of sorption sites in organic-matter-rich media, like compost, provides a means to control runoff of organic contaminants and metals, at least initially until the compost is being decomposed and mineralized, or until the sorption sites in the compost are saturated. Organic contaminants retained in compost can, over time, be metabolized by microorganisms or degraded by chemical processes. However, some more recalcitrant organic contaminants can be partitioned into the organic matter in such a way that the contaminants are protected from microbial degradation.

6.3 Bioavailability and Toxicity

The nature and characteristics of the compost leachate, especially after compost is applied, is of prime importance because the leachate from compost is the component that has an off-site effect on the surrounding environment. Compost can contain both organic and inorganic

contaminants, and these are inevitably introduced to the environment when contaminated compost is applied as soil amendment. Through decomposition of organic matter in the compost, contaminants can become increasingly bioavailable and can even leach from the compost. This is particularly relevant in the case of heavy metals, which readily combine with dissolved organic matter and thereby become bioavailable for aquatic organisms. The presence of heavy metals and environmentally persistent toxic organic compounds should therefore be monitored from the feedstock selection, processing and mixing stages itself, so that the levels of these undesirable components are kept under toxicity limits in the final matured compost product.

7 Research Needs

This review indicates the need of undertaking a series of studies on the nature of the compost leachates keeping a close control over the feedstock and the composting process (e.g., temperature, aeration, moisture levels, and microbial activity). Such studies, conducted over a wide variety of feedstock types, especially considering the current nature of municipal and small-scale industrial feedstock types, are necessary to accurately calibrate the process parameters for producing composts of appropriate properties. Composts find a wide variety of uses, so there is an opportunity to customize the composting process and the product compost for the target usage in mind. This will not only ensure the best performance of the applied compost to the usage scenario, but also make the application of composts more widespread and functional.

Based on this literature review, we see the need to clarify the nature and role of compost leachates and to identify means to minimize leaching of materials from applied compost. Specific research questions should address the following:

1. Characterize and quantify compost leachates in terms of a series of constituents (e.g., organic matter, nutrients, heavy metals, organic contaminants) from specific feedstock according to:

- (a) Differences in feedstock mixes
 - (b) Feedstock properties (e.g., C/N ratio, moisture content)
 - (c) Compost maturity and type (process methods, curing period, temperature, and aeration control)
 - (d) Amount of water leaching through compost
2. Characterize compost interactions with contaminated runoff from a variety of sources
 3. Categorize compost leachates from specific feed stock mixes according to
 - (a) Potential for heavy metal and toxic organic compound retention
 - (b) Phytotoxicity
 - (c) Bioavailability of contaminants
 - (d) Bioavailability of leached nutrients

Laboratory batch and column studies can be used to address the research topics listed above. Compost leachates and leachate-metal interactions can be characterized spectroscopically (UV/Vis, FTIR, Mössbauer, NMR) and with standard chemical techniques (C/N ratio, pH, electrical conductivity, metal contents). Different compost materials can be packed into laboratory columns and controlled irrigation can be used to leach the compost. Column outflow can be sampled incrementally with a fraction collector and characterized for chemical and physical properties as a function of outflow volume.

8 Acknowledgements

Funding for this review was provided by the Washington State Department of Transportation through Task Order No. T4120-36. We thank Mark Maurer and David Batts for their comments and suggestions on the review.

9 List of Abbreviations

| Abbreviation | Expanded form |
|--------------|---|
| 2,4-D | 2,4-Dichlorophenoxyacetic acid |
| <i>A</i> | UV/Vis Absorbance |
| BMP | Biochemical Methane Production Potential |
| BOD | Biological Oxygen Demand |
| C/N ratio | Carbon-to-Nitrogen ratio |
| COD | Chemical Oxygen Demand |
| DDE | Dichloro Diphenyl Dichloro-Ethylene |
| DDT | Dichloro Diphenyl Trichloroethane |
| Dicamba | 3,6-Dichloro-2-Methoxybenzoic Acid |
| DGGE | Denaturing Gradient Gel Electrophoresis |
| DNA | Deoxy Ribonucleic Acid |
| DOC | Dissolved Organic Carbon |
| DOM | Dissolved Organic Matter |
| EC | Electrical Conductivity |
| FA | Fulvic Acid |
| FT-IR | Fourier Transform-Infra-Red |
| ICP-AES | Inductively Coupled Plasma Atomic Emission Spectroscopy |
| (k)Da | (kilo) Daltons |
| <i>k</i> | Bioavailability Parameter |
| K_{DOM} | Partition Coefficient between Water and Dissolved Organic Matter |
| LWCA | Low-Weight Carboxylic Acid |
| MW | Molecular Weight |
| Mecoprop | Also known as MCP, Methyl Chloro Phenoxy Propionic Acid |
| NMR | Nuclear Magnetic Resonance |
| PAH | Poly Aromatic Hydrocarbon |
| PCB | Poly-Chlorinated Biphenyls |
| R– | Alkyl Functional Group |
| rDNA | Ribosomal DNA |
| RNA | Ribonucleic Acid |
| rRNA | Ribosomal RNA |
| SMS | Spent Mushroom Substrate |
| UV/Vis | Ultraviolet/Visible |
| WEOM | Water Extractable Organic Matter |
| XAD | Trade name for a series of proprietary ion-exchange resins based on derivatized polystyrene (Dow Chemicals) |

10 Glossary

| | |
|--------------------------------|--|
| C/N ratio | The ratio of carbon-to-nitrogen, on a per weight basis, present in a sample, usually measured in soils, sediments, and composts. |
| functional group | A specific group of atoms or bonds within a molecule which are responsible for characteristic chemical properties and reactions. Functional groups can interact with each other to modify their reactivity. (IUPAC) |
| moiety | A part of a molecule containing whole or partial functional groups as a substructure. (IUPAC) |
| aliphatic group | A hydrocarbon group consisting of carbon and hydrogen in a straight or branched chain configuration, the chains may or may not contain multiple bonds between carbons, but does not contain aromatic (e.g., like benzene) rings. |
| phenol | A class of organic compounds containing one or more—OH functional groups attached directly to a carbon in an aromatic (benzene) ring. The equivalent functional group is called a phenyl group. |
| meso-organism | A living organism which is large enough to be visible to the naked eye, usually larger than a few hundred μm to a few cm in size. The range is, however, somewhat context sensitive. |
| colloid | A particle in the size range 1 nm to 2 μm , which is too large to form a truly dissolved species in a solvent, and too small to settle as a sediment. Dispersions of colloidal particles scatter light (visible, UV, IR) rather than transmitting it. |
| nitrogen mineralization | The process in which organic forms of nitrogen (e.g., proteins in dead plant and animal material) are converted by microbial degradation and uptake to inorganic forms of nitrogen (e.g., ammonium and nitrate). |

11 References

- Achiba, W. B., N. Gabteni, A. Lakhdar, G. D. Laing, M. Verloo, N. Jedidi, and T. Gallali, Effects of 5-year application of municipal solid waste compost on the distribution and mobility of heavy metals in a Tunisian calcareous soil, *Agric. Ecosyst. Environ.*, *130*, 156–163, 2009.
- Aggelides, S. M., and P. A. Londra, Effects of compost produced from town wastes and sewage sludge on the physical properties of a loamy and a clay soil, *Bioresour. Technol.*, *71*, 253–259, 2000.
- Amlinger, F., B. Götz, P. Dreher, J. Geszti, and C. Weissteiner, Nitrogen in biowaste and yard waste compost: dynamics of mobilisation and availability—a review, *Eur. J. of Soil Biol.*, *39*, 107–116, 2003.
- Andersen, J. K., A. Boldrin, T. H. Christensen, and C. Scheutz, Mass balances and life cycle inventory of home composting of organic waste, *Waste Manage.*, *31*, 1934–1942, 2011.
- Avery, L. M., P. Booth, C. Campbell, D. Tompkins, and R. L. Hough, Prevalence and survival of potential pathogens in source-segregated green waste compost, *Sci. Total Environ.*, *431*, 128–138, 2012.
- Baffi, C., M. T. Dell’ Abate, A. Nassisi, S. Silva, A. Benedetti, P. L. Genevini, and F. Adani, Determination of biological stability in compost: A comparison of methodologies, *Org. Waste. Soil. EGU*, *39*, 1284–1293, 2007.
- Barker, A. V., and G. M. Bryson, Bioremediation of heavy metals and organic toxicants by composting, *The Sci. World J.*, *2*, 407–420, 2002.
- Barriuso, E., M.-S. Andrades, P. Benoit, and S. Houot, Pesticide desorption from soils facilitated by dissolved organic matter coming from composts: Experimental data and modelling approach, *Biogeochemistry*, *106*, 117–133, 2011.
- Bendfeldt, E. S., R. W. Peer, and G. A. Flory, In-house composting as a rapid response to avian influenza, *BioCycle*, *47*, 38–46, 2006.
- Benson, C. H., and M. A. Othman, Hydraulic and mechanical characteristics of a compacted municipal solid waste compost, *Waste Manage. Res.*, *11*, 127–142, 1993.
- Benson, E. R., G. W. Malone, R. L. Alphin, K. Johnson, and E. Staicu, Application of in-house mortality composting on viral inactivity of newcastle disease virus, *Poult. Sci.*, *87*, 627–635, 2008.
- Bernal, M. P., J. A. Albuquerque, and R. Moral, Composting of animal manures and chemical criteria for compost maturity assessment: A review, *Bioresour. Technol.*, *100*, 5444–5453, 2009.

- Blanc, M., L. Marilley, T. Beffa, and M. Aragno, Thermophilic bacterial communities in hot composts as revealed by most probable number counts and molecular (16S rDNA) methods, *FEMS Microbiol. Ecol.*, 28, 141–149, 1999.
- Bolea, E., F. Laborda, and J. R. Castillo, Metal associations to microparticles, nanocolloids and macromolecules in compost leachates: Size characterization by asymmetrical flow field-flow fractionation coupled to ICP-MS, *Anal. Chim. Acta*, 661, 206–214, 2010.
- Bolea, E., M. Gorriz, M. Bouby, F. Laborda, J. Castillo, and H. Geckeis, Multielement characterization of metal-humic substances complexation by size exclusion chromatography, asymmetrical flow field-flow fractionation, ultrafiltration and inductively coupled plasma-mass spectrometry detection: a comparative approach, *J. Chromatogr. A*, 1129, 236–246, 2006.
- Borken, W., A. Muhs, and F. Beese, Application of compost in spruce forests: effects on soil respiration, basal respiration and microbial biomass, *Forest Ecol. Manag.*, 159, 49–58, 2002.
- Boulter-Bitzer, J. I., J. T. Trevors, and G. J. Boland, A polyphasic approach for assessing maturity and stability in compost intended for suppression of plant pathogens, *Appl. Soil Ecol.*, 34, 65–81, 2006.
- Boulter, J. I., G. J. Boland, and J. T. Trevors, Assessment of compost for suppression of Fusarium Patch (*Microdochium nivale*) and Typhula Blight (*Typhula ishikariensis*) snow molds of turfgrass, *Biol. Control*, 25, 162–172, 2002.
- Bustamante, M. A., F. Surez-Estrella, C. Torrecillas, C. Paredes, R. Moral, and J. Moreno, Use of chemometrics in the chemical and microbiological characterization of composts from agroindustrial wastes, *Bioresour. Technol.*, 101, 4068–4074, 2010.
- Buyuksonmez, F., R. Rynk, T. F. Hess, and E. Bechinski, Occurrence, degradation and fate of pesticides during composting. Part I: Composting, pesticides, and pesticide degradation, *Compost Sci. Util.*, 7, 66, 1999.
- Buyuksonmez, F., R. Rynk, T. F. Hess, and E. Bechinski, Occurrence, degradation and fate of pesticides during composting. Part II: Occurrence and fate of pesticides in compost and composting systems, *Compost Sci. Util.*, 8, 61, 2000.
- Cai, Q.-Y., C.-H. Mo, Q.-T. Wu, Q.-Y. Zeng, and A. Katsoyiannis, Concentration and speciation of heavy metals in six different sewage sludge-composts, *J. Hazard. Mater.*, 147, 1063–1072, 2007.
- Callaghan, T., 2012. What is compost leachate? <http://www.hotbincomposting.com/boards/t/601/what-is-compost-leachate-do-i-get-leachate-with-the-hotbin.aspx> accessed June 22, 2013.
- CalRecycle 2006. Organic Materials Management—Compost—What Is It? <http://www.calrecycle.ca.gov/organics/compostmulch/CompostIs.htm>, accessed on Jan. 3, 2013.

- CalRecycle 2012. Organic Materials Management: Compost Tea—Compost Tea vs. Other Teas and Extracts. <http://www.calrecycle.ca.gov/organics/compostmulch/composttea/OtherTeas.htm>, accessed on Jan. 3, 2013.
- Campitelli, P. A., M. I. Velasco, and S. B. Ceppi, Chemical and physicochemical characteristics of humic acids extracted from compost, soil and amended soil, *Talanta*, *69*, 1234–1239, 2006.
- Campitelli, P., and S. Ceppi, Chemical, physical and biological compost and vermicompost characterization: A chemometric study, *Chemom. Intell. Lab. Syst.*, *90*, 64–71, 2008.
- Caricasole, P., M. R. Provenzano, P. G. Hatcher, and N. Senesi, Chemical characteristics of dissolved organic matter during composting of different organic wastes assessed by ^{13}C CP/MAS NMR spectroscopy, *Bioresour. Technol.*, *101*, 8232–8236, 2010.
- Cascadia Consulting Group 2009. California 2008 statewide waste characterization study, *Technical Report IWMB-2009-0023*, California Integrated Waste Management Board—California Environmental Protection Agency, Sacramento, CA.
- Chen, G., G. Zeng, C. Du, D. Huang, L. Tang, L. Wang, and G. Shen, Transfer of heavy metals from compost to red soil and groundwater under simulated rainfall conditions, *J. Hazard. Mater.*, *181*, 211–216, 2010.
- Chiou, C. T., R. L. Malcolm, T. I. Brinton, and D. Kile, Water solubility enhancement of some organic pollutants and pesticides by dissolved humic and fulvic acids, *Environ. Sci. Technol.*, *20*, 502–508, 1986.
- Christensen, T. H., Leaching from land disposed municipal composts: 2. Nitrogen, *Waste Manage. Res.*, *1*, 115–125, 1983.
- Christensen, T. H., Leaching from land municipal composts: 3. Inorganic ions, *Waste Manage. Res.*, *2*, 63–74, 1984.
- Christensen, T. H., and C. W. Nielsen, Leaching from land disposed municipal composts: 1. Organic matter, *Waste Manage. Res.*, *1*, 83–94, 1983.
- Christensen, T. H., and J. C. Tjell, Leaching from land disposed municipal compost: 4. Heavy metals, *Waste Manage. Res.*, *2*, 347–357, 1984.
- Ciavatta, C., M. Govi, L. Pasotti, and P. Sequi, Changes in organic matter during stabilization of compost from municipal solid wastes, *Bioresour. Technol.*, *43*, 141–145, 1993.
- Cogger, C. G., J. D. Stark, P. R. Bristow, L. W. Getzin, and M. Montgomery, Transport and persistence of pesticides in alluvial soils: II. Carbofuran, *J. Environ. Qual.*, *27*, 551–556, 1998a.
- Cogger, C. G., P. R. Bristow, J. D. Stark, L. W. Getzin, and M. Montgomery, Transport and persistence of pesticides in alluvial soils: I. Simazine, *J. Environ. Qual.*, *27*, 543–550, 1998b.

- Conte, P., A. Agretto, R. Spaccini, and A. Piccolo, Soil remediation: Humic acids as natural surfactants in the washings of highly contaminated soils, *Environ. Pollut.*, *135*, 515–522, 2005.
- Crews, H. M., J. A. Burrell, and D. McWeeny, Preliminary enzymolysis studies on trace element extractability from food, *J. Sci. Food Agric.*, *34*, 997–1004, 1983.
- Davies, G., E. A. Ghabbour, and C. Steelink, Humic acids: Marvelous products of soil chemistry, *J. Chem. Educ.*, *78*, 1609–1614, 2001.
- Davis, A. P., Field performance of bioretention: Water quality, *Environ. Eng. Sci.*, *24*, 1048–1064, 2007.
- Davis, A. P., M. Shokouhian, H. Sharma, and C. Minami, Water quality improvement through bioretention media: nitrogen and phosphorus removal, *Water Environ. Res.*, *78*, 284–293, 2006.
- de Guardia, A., S. Brunet, D. Rogeau, and G. Matejka, Fractionation and characterisation of dissolved organic matter from composting green wastes, *Bioresour. Technol.*, *83*, 181–187, 2002.
- Dees, P. M., and W. C. Ghiorse, Microbial diversity in hot synthetic compost as revealed by PCR-amplified rRNA sequences from cultivated isolates and extracted DNA, *FEMS Microbiol. Ecol.*, *35*, 207–216, 2001.
- Doublet, J., C. Francou, J. P. Ptraud, M. F. Dignac, M. Poitrenaud, and S. Houot, Distribution of C and N mineralization of a sludge compost within particle-size fractions, *Bioresour. Technol.*, *101*, 1254–1262, 2010.
- Dresbøll, D. B., and K. Thorup-Kristensen, Structural differences in wheat (*Triticum aestivum*), hemp (*Cannabis sativa*) and miscanthus (*Miscanthus ogiformis*) affect the quality and stability of plant based compost, *Sci. Hortic. Amsterdam*, *107*, 81–89, 2005.
- Eghball, B., Leaching of phosphorus fractions following manure or compost application, *Commun. Soil Sci. Plant Anal.*, *34*, 2803–2815, 2003.
- Engineering Solutions and Design, Inc. 2004. State of Ohio waste characterization study, *Technical report*, Ohio Department of Natural Resources, Columbus, OH.
- Erickson, M. C., J. Liao, L. Ma, X. Jiang, and M. P. Doyle, Inactivation of Salmonella spp. in cow manure composts, formulated to different initial C:N ratios, *Bioresour. Technol.*, *100*, 5898–5903, 2009.
- Ertunc, T., N. Hartlieb, A. Berns, W. Klein, and A. Schaeffer, Investigations on the binding mechanism of the herbicide simazine to dissolved organic matter in leachates of compost, *Chemosphere*, *49*, 597–604, 2002.

- Finstein, M. S., and M. L. Morris, Microbiology of municipal solid waste composting, in *Advances in Applied Microbiology*, vol. 19 of *Advances in Applied Microbiology*, edited by D. Perlman, pp. 113–151, Academic Press, New York, NY, 1975.
- Fortuna, A., R. Harwood, K. Kizilkaya, and E. A. Paul, Optimizing nutrient availability and potential carbon sequestration in an agroecosystem, *Soil Biol. Biochem.*, *35*, 1005–1013, 2003.
- Fuentes, A., M. Lloréns, J. Sáez, M. Aguilar, A. Pérez-Marín, J. Ortuño, and V. Meseguer, Ecotoxicity, phytotoxicity and extractability of heavy metals from different stabilised sewage sludges, *Environ. Pollut.*, *143*, 355–360, 2006.
- Gao, P., X. Tang, Y. Tong, and Y. Chen, Application of sewage sludge compost on highway embankments., *Waste Manage.*, *28*, 1630–1636, 2008.
- Golueke, C. G., and P. H. McGauhey, 1953. Reclamation of municipal refuse by composting, *Sanitation Engineering Research Laboratory, Technical Bulletin 9, Series 37*, University of California, Berkeley, CA.
- Goyal, S., S. K. Dhull, and K. K. Kapoor, Chemical and biological changes during composting of different organic wastes and assessment of compost maturity, *Bioresour. Technol.*, *96*, 1584–1591, 2005.
- Guan, J., M. Chan, C. Grenier, B. W. Brooks, J. L. Spencer, C. Kranendonk, J. Copps, and A. Clavijo, Degradation of foot-and-mouth disease virus during composting of infected pig carcasses, *Can. J. Vet. Res.*, *74*, 40–44, 2010.
- Guardabassi, L., A. Dalsgaard, and M. Sobsey, 2003. Occurrence and survival of viruses in composted human faeces, *Technical Report 32*, Danish Environmental Protection Agency, Koebenhavn, Denmark.
- Guerra-Rodríguez, E., J. Alonso, M. J. Melgar, and M. Vázquez, Evaluation of heavy metal contents in co-composts of poultry manure with barley wastes or chestnut burr/leaf litter, *Chemosphere*, *65*, 1801–1805, 2006.
- Guo, R., G. Li, T. Jiang, F. Schuchardt, T. Chen, Y. Zhao, and Y. Shen, Effect of aeration rate, C/N ratio and moisture content on the stability and maturity of compost, *Bioresour. Technol.*, *112*, 171–178, 2012.
- Hack, A., and F. Selenka, Mobilization of PAH and PCB from contaminated soil using a digestive tract model, *Toxicol. Lett.*, *88*, 199–210, 1996.
- Hartley, W., N. M. Dickinson, P. Riby, E. Leese, J. Morton, and N. W. Lepp, Arsenic mobility and speciation in a contaminated urban soil are affected by different methods of green waste compost application, *Environ. Pollut.*, *158*, 3560–3570, 2010.
- Hartlieb, N., B. Marschner, and W. Klein, Transformation of dissolved organic matter (DOM) and ^{14}C -labelled organic contaminants during composting of municipal biowaste, *Sci. Total Environ.*, *278*, 1–10, 2001.

- Hayes, M. H. B., and R. S. Swift, The chemistry of soil organic colloids, in *The Chemistry of Soil Constituents*, edited by D. J. Greenland, and M. H. B. Hayes, pp. 179–230, Wiley-Interscience Publication, Wiley, 1978.
- Helmreich, B., R. Hilliges, A. Schriewer, and H. Horn, Runoff pollutants of a highly trafficked urban road – correlation analysis and seasonal influences, *Chemosphere*, *80*, 991–997, 2010.
- Hernández, T., G. Masciandaro, J. I. Moreno, and C. García, Changes in organic matter composition during composting of two digested sewage sludges, *Waste Manage.*, *26*, 1370–1376, 2006.
- Himanen, M., and K. Hänninen, Composting of bio-waste, aerobic and anaerobic sludges – effect of feedstock on the process and quality of compost, *Bioresour. Technol.*, *102*, 2842–2852, 2011.
- Hunt, W., A. Jarrett, J. Smith, and L. Sharkey, Evaluating bioretention hydrology and nutrient removal at three field sites in north carolina, *J. Irrig. Drain. E. ASCE*, *132*, 600–608, 2006.
- Iannotti, D. A., T. Pang, B. L. Toth, D. L. Elwell, H. M. Keener, and H. A. J. Hoitink, A quantitative respirometric method for monitoring compost stability, *Compost Sci. Util.*, *1*, 52–65, 1993.
- Iglesias-Jiménez, E., Nitrogen availability from a mature urban compost determined by the ^{15}N isotope dilution method, *Soil Biol. Biochem.*, *33*, 409–412, 2001.
- Inbar, Y., Y. Chen, and Y. Hadar, Humic substances formed during the composting of organic matter, *Soil Sci. Soc. Am. J.*, *54*, 1316–1323, 1990.
- Ingelmo, F., M. J. Molina, M. D. Soriano, A. Gallardo, and L. Lapeña, Influence of organic matter transformations on the bioavailability of heavy metals in a sludge based compost, *J. Environ. Manage.*, *95 (Supplement)*, S104–S109, 2012.
- Iwai, H., M. Fukushima, M. Yamamoto, T. Komai, and Y. Kawabe, Characterization of seawater extractable organic matter from bark compost by TMAH-py-GC/MS, *J. Anal. Appl. Pyrolysis*, *99*, 9–15, 2013.
- Kalamdhad, A. S., M. Pasha, and A. A. Kazmi, Stability evaluation of compost by respiration techniques in a rotary drum composter, *Resour. Conserv. Recy.*, *52*, 829–834, 2008.
- Kaschl, A., V. Römhelt, and Y. Chen, The influence of soluble organic matter from municipal solid waste compost on trace metal leaching in calcareous soils, *Sci. Total Environ.*, *291*, 45–57, 2002.
- Kavroulakis, N., C. Ehaliotis, S. Ntougias, G. I. Zervakis, and K. K. Papadopoulou, Local and systemic resistance against fungal pathogens of tomato plants elicited by a compost derived from agricultural residues, *Physiol. Mol. Plant. P.*, *66*, 163–174, 2005.

- Komilis, D., and D. Kanellos, A modified dynamic respiration test to assess compost stability: Effect of sample size and air flowrate, *Bioresour. Technol.*, *117*, 300–309, 2012.
- Kumar, S., Composting of municipal solid waste, *Crit. Rev. Biotechnol.*, *31*, 112–136, 2011.
- Lasaridi, K. E., and E. I. Stentiford, A simple respirometric technique for assessing compost stability, *Water Research*, *32*, 3717–3723, 1998.
- Li, G., F. Zhang, Y. Sun, J. W. C. Wong, and M. Fang, Chemical evaluation of sewage sludge composting as a mature indicator for composting process, *Water. Air. Soil Pollut.*, *132*, 333–345, 2001.
- McBride, M. B., *Environmental Chemistry of Soils*, Oxford University Press, 1994.
- McCarthy, J. F., and J. M. Zachara, Subsurface transport of contaminants, *Environ. Sci. Technol.*, *23*, 496–502, 1989.
- Miller, D. D., B. R. Schriker, R. R. Rasmussen, and D. Van Campen, An in vitro method for estimation of iron availability from meals, *Am. J. Clin. Nutr.*, *34*, 2248–2256, 1981.
- Miller, J. J., B. W. Beasley, and C. F. Drury, Transport of residual soluble salts and total sulfur through intact soil cores amended with fresh or composted beef cattle feedlot manure for nine years, *Compost Sci. Util.*, *21*, 22–33, 2013.
- Mondini, C., M. T. Dell’Abate, L. Leita, and A. Benedetti, An integrated chemical, thermal, and microbiological approach to compost stability evaluation, *J. Environ. Qual.*, *32*, 2379–2386, 2003.
- Moreno, J. L., C. García, T. Hernández, and J. A. Pascual, Transference of heavy metals from a calcareous soil amended with sewage-sludge compost to barley plants, *Bioresour. Technol.*, *55*, 251–258, 1996.
- Morgan, J. G., K. A. Paus, R. M. Hozalski, and J. S. Gulliver, 2011. Sorption and release of dissolved pollutants via bioretention media, *Technical Report 559*, Minnesota Pollution Control Agency / University of Minnesota, St. Pauls, MN.
- Noble, R., A. Dobrovin-Pennington, C. Wright, P. J. Hobbs, and J. Williams, Aerating recycled water on mushroom composting sites affects its chemical analysis and the characteristics of odor emissions, *J. Environ. Qual.*, *38*, 1493–1500, 2009.
- Oregon Department of Environmental Quality 2001. Research concerning human pathogens and environmental issues related to composting of non-green feedstocks, *Technical report*, Oregon Department of Environmental Quality, Portland, OR.
- Paradelo-Núñez, R., R. D. Rey, A. B. M. Menduña, and M. T. B. Silva, Physiologically based extraction of heavy metals in compost: Preliminary results, *J. Trace Elem. Med. Biol.*, *21*, Supplement 1, 83 – 85, 2007.

- Pascual, J., M. Ayuso, C. Garcia, and T. Hernández, Characterization of urban wastes according to fertility and phytotoxicity parameters, *Waste Manage. Res.*, *15*, 103–112, 1997.
- Piccolo, A., The supramolecular structure of humic substances, *Soil Sci.*, *166*, 810–832, 2001.
- Piccolo, A., The supramolecular structure of humic substances: A novel understanding of humus chemistry and implications in soil science, *Adv. Agron.*, *75*, 57–134, 2002.
- Prudent, P., M. Domeizel, C. Massiani, and O. Thomas, Gel chromatography separation and UV spectroscopic characterization of humic-like substances in urban composts, *Sci. Total Environ.*, *172*, 229–235, 1995.
- Raabe, R. D., 2001. *The Rapid Composting Method*, Cooperative Extension University of California, Division of Agriculture and Natural Resources, Davis, CA.
- Raber, B., and I. Kögel-Knabner, Influence of origin and properties of dissolved organic matter on the partition of polycyclic aromatic hydrocarbons (PAHs), *Eur. J. Soil. Sci.*, *48*, 443–455, 1997.
- Raj, D., and R. Antil, Evaluation of maturity and stability parameters of composts prepared from agro-industrial wastes, *Bioresour. Technol.*, *102*, 2868–2873, 2011.
- Ruby, M. V., A. Davis, T. E. Link, R. Schoof, R. L. Chaney, G. B. Freeman, and P. Bergstrom, Development of an in vitro screening test to evaluate the in vivo bioaccessibility of ingested mine-waste lead, *Environ. Sci. Technol.*, *27*, 2870–2877, 1993.
- Rynk, R., M. van de Kamp, G. B. Willson, M. E. Singley, T. L. Richard, J. J. Kolega, F. R. Gouin, L. Laliberty Jr., D. Kay, D. W. Murphy, H. A. J. Hoitink, and W. F. Brinton, The Composting Process, pp. 6–13, Characteristics of Raw Materials, pp. 106–113, in *On-Farm Composting Handbook*, edited by R. Rynk, , NRAES-54, Cornell University Press, Ithaca, NY, 1992.
- Said-Pullicino, D., K. Kaiser, G. Guggenberger, and G. Gigliotti, Changes in the chemical composition of water-extractable organic matter during composting: Distribution between stable and labile organic matter pools, *Chemosphere*, *66*, 2166–2176, 2007.
- Sakakibara, A., Chemical structure of lignin related mainly to degradation products, in *Recent advances in lignin biodegradation research*, edited by T. Higuchi, H. Chang, and T. Kirk, pp. 12–33, UNI Publishers, Tokyo, Japan, 1983.
- Sayara, T., M. Sarrà, and A. Sánchez, Effects of compost stability and contaminant concentration on the bioremediation of PAHs-contaminated soil through composting, *J. Hazard. Mater.*, *179*, 999–1006, 2010.
- Scaglia, B., F. G. Erriquens, G. Gigliotti, M. Taccari, M. Ciani, P. L. Genevini, and F. Adani, Precision determination for the specific oxygen uptake rate (SOUR) method used for biological stability evaluation of compost and biostabilized products, *Bioresour. Technol.*, *98*, 706–713, 2007.

- Senne, D. A., B. Panigrahy, and R. L. Morgan, Effect of composting poultry carcasses on survival of exotic avian viruses: Highly pathogenic avian influenza (HPAI) virus and adenovirus of egg drop syndrome-76, *Avian Dis.*, 38, pp. 733–737, 1994.
- Soriano-Disla, J., I. Gómez, C. Guerrero, J. Navarro-Pedreño, and F. García-Orenes, The potential of NIR spectroscopy to predict stability parameters in sewage sludge and derived compost—Diffuse reflectance spectroscopy in soil science and land resource assessment, *Geoderma*, 158, 93–100, 2010.
- Spaccini, R., and A. Piccolo, Molecular characteristics of humic acids extracted from compost at increasing maturity stages, *Soil Biol. Biochem.*, 41, 1164–1172, 2009.
- Sposito, G., *The Chemistry of Soils*, 2 ed., Oxford University Press, New York, NY, 2008.
- Stevenson, F. J., *Humus Chemistry: Genesis, Composition, Reactions*, 2 ed., John Wiley and Sons, New York, NY, 1994.
- Tablante, N. L., and G. W. Malone, 2006. Controlling avian influenza through in-house composting of depopulated flocks: Sharing delmarvas experience, *Technical report*, University of Maryland College Park and University of Delaware.
- Tang, J., N. Maie, Y. Tada, and A. Katayama, Characterization of the maturing process of cattle manure compost, *Process Biochem.*, 41, 380–389, 2006.
- Tejada, M., A. M. Garcia-Martinez, and J. Parrado, Effects of a vermicompost composted with beet vinasse on soil properties, soil losses and soil restoration., *Catena*, 77, 238–247, 2009.
- Termorshuizen, A. J., E. van Rijn, D. J. van der Gaag, C. Alabouvette, Y. Chen, J. Lagerlöf, A. Malandrakis, E. Paplomatas, B. Rmert, J. Ryckeboer, C. Steinberg, and S. Zmora-Nahum, Suppressiveness of 18 composts against 7 pathosystems: Variability in pathogen response, *Soil Biol. Biochem.*, 38, 2461–2477, 2006.
- Tessier, A., P. G. C. Campbell, and M. Bisson, Sequential extraction procedure for the speciation of particulate trace metals, *Anal. Chem.*, 51, 844–851, 1979.
- Tilston, E. L., D. Pitt, M. P. Fuller, and A. C. Groenhof, Compost increases yield and decreases take-all severity in winter wheat, *Field Crop. Res.*, 94, 176–188, 2005.
- Tiquia, S. M., and N. F. Y. Tam, Elimination of phytotoxicity during co-composting of spent pig-manure sawdust litter and pig sludge, *Bioresour. Technol.*, 65, 43–49, 1998.
- Tiquia, S. M., and N. F. Y. Tam, Co-composting of spent pig litter and sludge with forced-aeration, *Bioresour. Technol.*, 72, 1–7, 2000.
- Tiquia, S. M., N. F. Y. Tam, and I. J. Hodgkiss, Effects of turning frequency on composting of spent pig-manure sawdust litter, *Bioresour. Technol.*, 62, 37–42, 1997.

- Tognetti, C., M. Mazzarino, and F. Laos, Comprehensive quality assessment of municipal organic waste composts produced by different preparation methods, *Waste Manage.*, *31*, 1146–1152, 2011.
- Tsui, L., I. G. Krapac, and W. R. Roy, The feasibility of applying immature yard-waste compost to remove nitrate from agricultural drainage effluents: A preliminary assessment, *J. Hazard. Mater.*, *144*, 585–589, 2007.
- Turner, C., A. Williams, R. White, and R. Tillett, Inferring pathogen inactivation from the surface temperatures of compost heaps, *Bioresour. Technol.*, *96*, 521–529, 2005.
- Valo, R., and M. Salkinoja-Salonen, Bioreclamation of chlorophenol-contaminated soil by composting, *Appl. Microbiol. Biotechnol.*, *25*, 68–75, 1986.
- Vancanneyt, M., P. D. Vos, K. Kersters, and J. D. Ley, Isolation, characterization and identification of strictly anaerobic, thermophilic, ethanol producing bacteria from compost, *Syst. Appl. Microbiol.*, *9*, 293–298, 1987.
- Wershaw, R. L., E. C. Llaguno, and J. A. Leenheer, Mechanism of formation of humus coatings on mineral surfaces. 3. Composition of adsorbed organic acids from compost leachate on alumina by solid-state ^{13}C NMR, *Colloids Surf., A*, *108*, 213–223, 1996.
- Wichuk, K. M., and D. McCartney, Compost stability and maturity evaluation—a literature review, *Can. J. Civil. Eng.*, *37*, 1505–1523, 2010.
- Wichuk, K. M., J. P. Tewari, and D. McCartney, Plant pathogen eradication during composting: A literature review, *Compost Sci. Util.*, *19*, 244–266, 2011.
- Woodbury, P. B., and V. T. Breslin, Assuring compost quality: suggestions for facility managers, regulators, and researchers, *Biomass Bioenerg.*, *3*, 213–225, 1992.
- Wu, L., L. Q. Ma, and G. Martinez, Comparison of methods for evaluating stability and maturity of biosolids compost, *J. Environ. Qual.*, *29*, 424–429, 2000.
- Yogev, A., M. Raviv, Y. Hadar, R. Cohen, S. Wolf, L. Gil, and J. Katan, Induced resistance as a putative component of compost suppressiveness, *Biol. Control*, *54*, 46–51, 2010.
- Zbytniewski, R., and B. Buszewski, Characterization of natural organic matter (NOM) derived from sewage sludge compost. Part 1: Chemical and spectroscopic properties, *Bioresour. Technol.*, *96*, 471–478, 2005a.
- Zbytniewski, R., and B. Buszewski, Characterization of natural organic matter (NOM) derived from sewage sludge compost. Part 2: Multivariate techniques in the study of compost maturation, *Bioresour. Technol.*, *96*, 479–484, 2005b.
- Zmora-Nahum, S., O. Markovitch, J. Tarchitzky, and Y. Chen, Dissolved organic carbon (DOC) as a parameter of compost maturity, *Soil Biol. Biochem.*, *37*, 2109–2116, 2005.

Zmora-Nahum, S., Y. Hadar, and Y. Chen, Physico-chemical properties of commercial composts varying in their source materials and country of origin, *Soil Biol. Biochem.*, 39, 1263–1276, 2007.