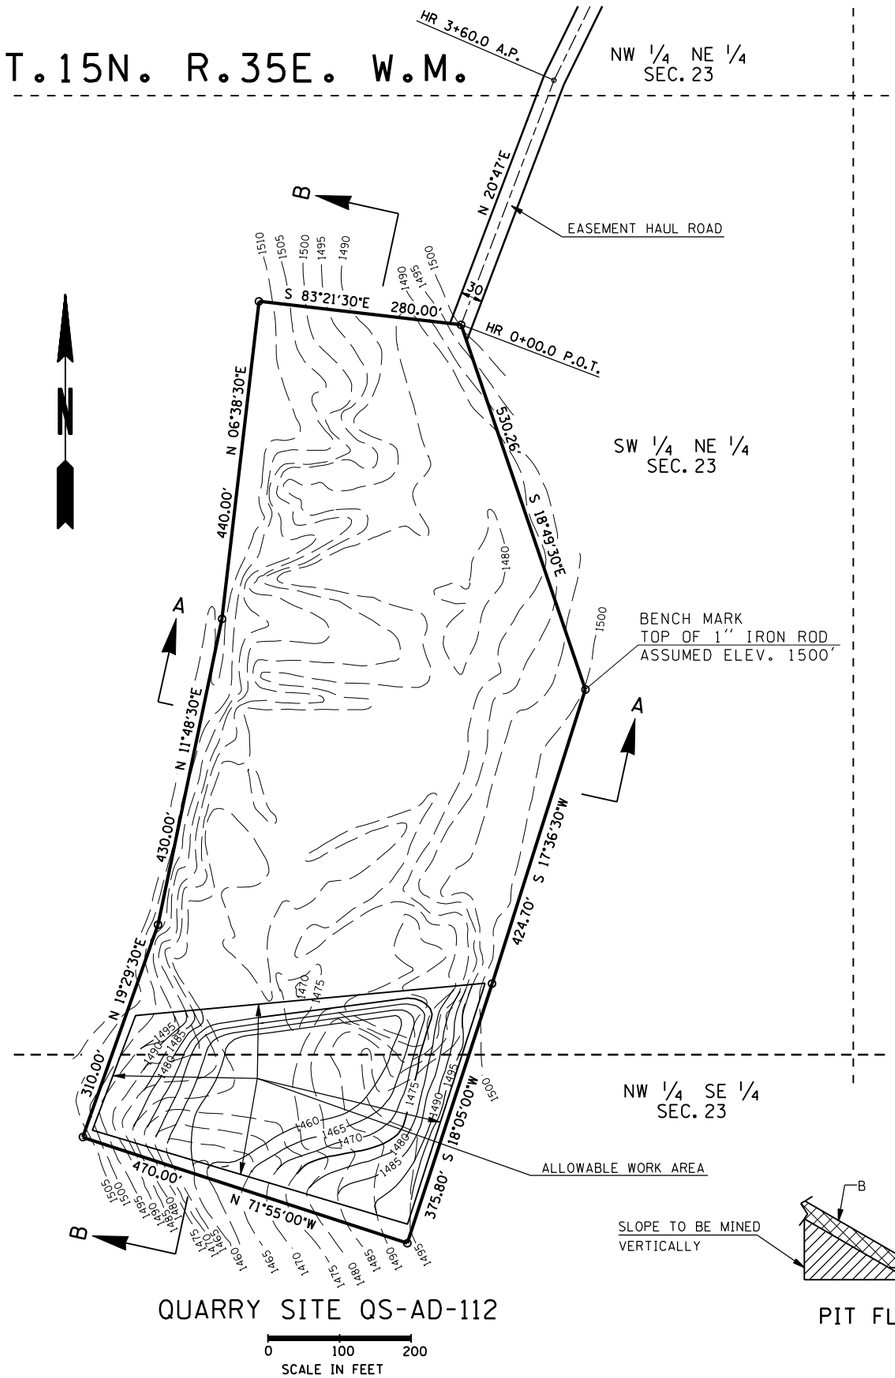

QUARRY SITE QS-AD-112

0 100 200
SCALE IN FEET

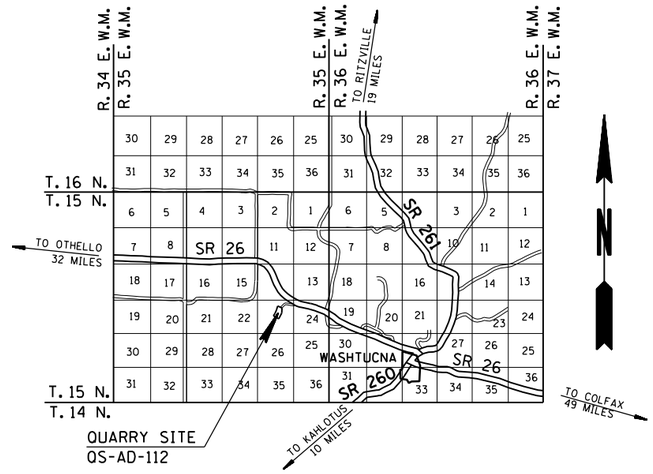

VICINITY MAP

0 2 4
SCALE IN MILES

NOTES:

1. QUARRY QS-AD-112 IS OWNED BY THE WASHINGTON STATE DEPARTMENT OF TRANSPORTATION.
2. ALL SLOPE INTERSECTIONS SHALL BE ROUNDED FOR NATURAL APPEARANCE.
3. NO CONTAMINATES ARE ANTICIPATED.
4. WHEN ALL MINING IS COMPLETED IN THIS QUARRY SITE, ALL DISTURBED AREAS SHALL BE SEEDED, FERTILIZED, AND MULCHED WITH SPECIAL EROSION CONTROL MIX.
5. DRAINAGE SHALL BE TOWARDS THE SOUTH END OF THE SITE.
6. SCALPINGS SHALL BE USED ON THE QUARRY FLOOR AND ON THE SIDES TO OBTAIN THE SIDE SLOPE. IT MAY BE NECESSARY TO HAUL ADDITIONAL BORROW MATERIAL INTO SITE TO CONSTRUCT THE SIDE SLOPES FOR ULTIMATE RECLAMATION.
7. ALL PIT BOUNDARIES SHALL BE FENCED WITH TYPE 2 WIRE FENCING INCLUDING A 20' WIDE GATE AT THE HAUL ROAD AS FIRST ORDER OF WORK.

NOTE TO DESIGNER:

MAKE SURE THAT ALL NOTES ARE PROJECT SPECIFIC.

THE CONTRACT RECLAMATION PLAN IS DEVELOPED FROM THE ULTIMATE RECLAMATION PLAN ON FILE WITH THE REGIONAL MATERIALS LABORATORY.

QUARRY SITE QS-AD-112

THERE IS SUFFICIENT MATERIAL IN THIS QUARRY FOR THIS PROJECT

SOURCE OF MATERIAL FOR PRODUCTION OF:

BALLAST
CRUSHED SURFACING TOP COURSE
CRUSHED SCREENING 1/2 INCH TO 1/4 INCH
CRUSHED SCREENING 1/4 INCH TO 0
PRIME COAT AGGREGATE
MINERAL AGGREGATE FOR HMA

STRIPPING INCLUDING HAUL SITE QS-AD-112

LEGEND

A	NATURAL AREA 10' MINIMUM
B	2:1 SLOPE MAXIMUM
C	ROUNDING FOR NATURAL APPEARANCE
D	VERTICAL SLOPE 30' MAXIMUM
E	BENCH 30' MINIMUM

EXISTING CONTOURS
ULTIMATE CONTOURS
AREA FOR ADDITIONAL BORROW MATERIAL
CONTRACT WORK AREA

CONTOUR INTERVAL 5'



PIT FLOOR DETAIL

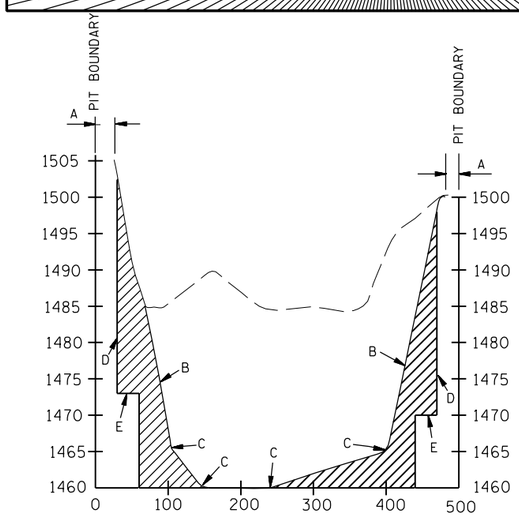

SECTION A-A

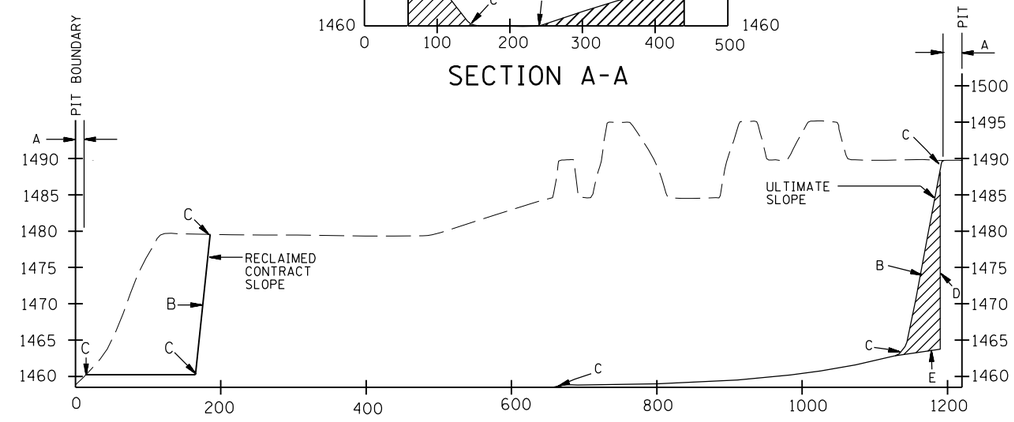

SECTION B-B

FILE NAME	C:\DGN\ExamplePlanSheets\PPM Examples.dgn						
TIME	03:17:56 PM				REGION NO. 10	STATE WASH	FED.AID PROJ.NO.
DATE	06/17/2004						
PLOTTED BY	OPERATC				JOB NUMBER 00Z000		
DESIGNED BY	DESIGNER						
ENTERED BY	CADD OPERATOR				CONTRACT NO.	LOCATION NO. XL-1234	
CHECKED BY	TEAM LEADER						
PROJ. ENGR.	PROJECT ENGINEER						
REGIONAL ADM.	REGIONAL ADM.	REVISION	DATE	BY			

GEORGE WASHINGTON STATE OF WASHINGTON REGISTERED PROFESSIONAL ENGINEER
EXPIRES APR. 30, 1789 DATE
P.E. STAMP BOX

DATE
P.E. STAMP BOX

Washington State Department of Transportation

EXAMPLE 4–8

RECLAMATION PLAN

PLOT7
RC1
SHEET OF SHEETS