

Bridges and Structures

Structures Overview

Preservation is a statewide goal to keep transportation facilities in sound operational condition. The objective is to achieve the best long-term financial investment for a transportation facility and prevent failure of the existing system. In addition, the bridge preservation program aims to “perform the right work on the right bridge at the right time.”

WSDOT is responsible for managing an inventory of nearly 3,500 bridges and structures. These structures carry vehicle and pedestrian traffic over or under other roadways or natural features. There are approximately 18 new bridges that carry vehicle traffic added yearly to this inventory.

WSDOT manages all state-owned bridges using the Washington State Bridge Inventory System (WSBIS). It is WSDOT policy that structural condition of 95% of its bridges rate fair or better, meaning that all primary structural elements are sound. The condition rating is based on the structural sufficiency standards established in the FHWA “Recording and Coding Guide for the Structural Inventory and Appraisal of the Nation’s Bridges.” This rating relates to the evaluation

State Owned Structures Inventory


Structure	No. of Bridges	Square Feet
Vehicular Bridges (over 20 ft. long)	2,978	43,564,680
Structures less than 20 ft long	263	n/a
Border Bridges (maintained by border state)*	6	n/a
Culverts greater than 20 ft in length	90	n/a
Pedestrian Structures	57	249,730
Tunnels and Lids	38	739,381
Ferry Terminal Structures	45	248,443
Railroad Bridges	5	n/a
Buildings (I-5 Convention Center)	1	n/a
Total	3,483	44,802,234

*Maintenance and preservation costs are shared by the states
 Source: WSDOT Bridge and Structures Office - October 2006

of bridge superstructure, deck, substructure, structural adequacy and waterway adequacy.

When a bridge is built, it is given a design life of 75 years. The average age of the state-owned vehicular bridges is now 40 years. WSDOT built a significant number of bridges built during the Interstate Program

Number of Bridges by Year Built

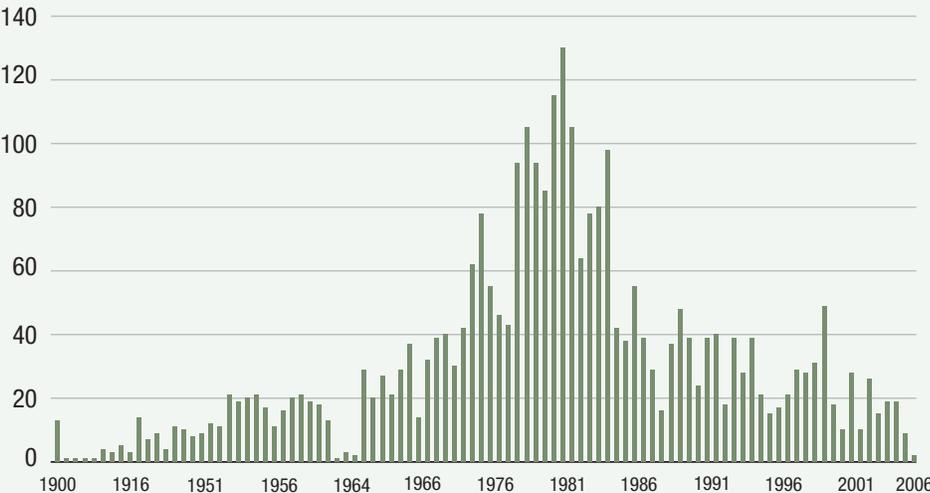

I. System Preservation > Bridges and Structures Management


in the 1950's and 1960's and many of these bridges are now over 50 years old. Most of these bridges are in good to fair condition which is a testimony to sound engineering practices and durable materials; however, age alone is not an indicator of overall bridge condition.

Bridge inspections provide the information needed to determine the condition of a bridge and if any repairs are necessary. The frequency of the inspection and the information gathered during the inspection is defined by the Federal Highway Administration (FHWA) in the 1995 "Recording and Coding Guide for the Structural Inventory and Appraisal of the Nation's Bridges," also known as the NBIS guide.


Most bridges are inspected every two years. Some bridges are inspected every year due to their condition and design type. A few structures require a more frequent inspection cycle, such as the Alaskan Way Viaduct which is inspected every six months. Inspections include all vehicle-carrying bridges, ferry terminals, cables on floating bridges, sign bridges and any structure that has been damaged by a vehicle or vessel. If a repair is deemed necessary then engineers review the repair options and put together a scope of work. If the repair is within the parameters of maintenance activities, then the maintenance program will repair the damage. For each bridge, the preservation need is prioritized and ranked against all bridge needs statewide according to degree of risk and damage. This prioritization process occurs every two years.

WSDOT's Bridge and Structure Preservation Program is addressed in three distinct categories: Bridge

Bridge Preservation Cycle

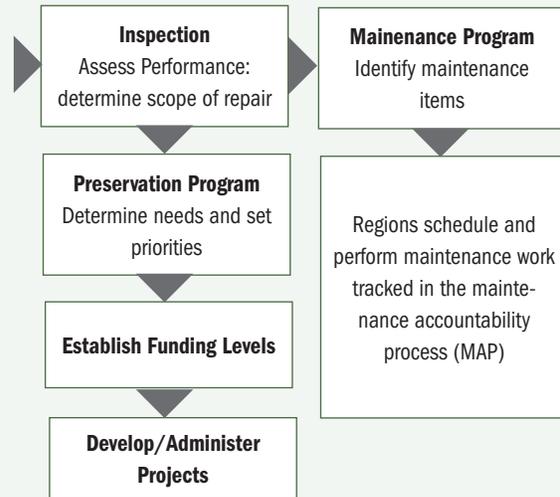

Movable Bridge Status

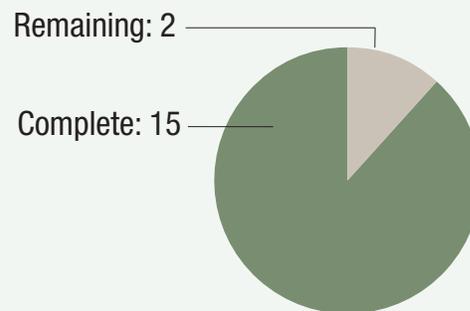


Preservation, Catastrophic Reduction, and Bridge Replacement and Major Rehabilitation. Preservation is further defined into more refined sub-categories: Special Repair, Bridge Deck, Scour, Painting, and

Bridge Repair



SR 153 Methow River Bridge

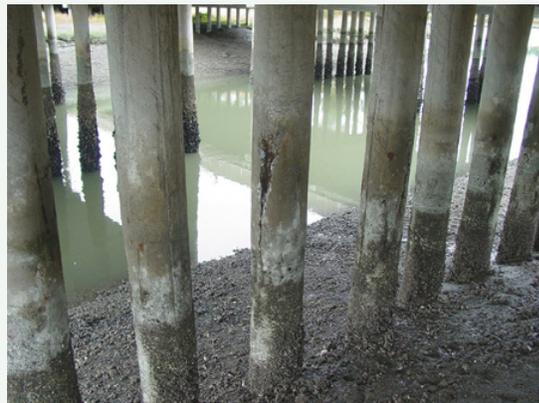

US 101 Mud Bay Bridges

Miscellaneous Structures. All categories consist of implementing cost-effective investments that extend the service life of the structure.

Bridge Preservation

Special Bridge Repair/Major Repair/Movable Bridge Repair

Objective

Our goal is to address major bridge repair needs that are beyond routine maintenance in a timely manner to ensure public safety and avoid costly future rehabilitation. Maintenance repairs will maintain the operating integrity of a bridge between preservation treatments and reconstruction jobs. Through information sharing and decision making, maintenance treatments are coordinated with the bridge preservation program.

Needs

This work differs from rehabilitation in that major repair projects are not intended to address all the deficiencies of a bridge. Major bridge repairs address specific bridge elements such as deteriorated concrete columns, replacing rusty anchor cables on floating bridges, and repairing or replacing expansion joints. This category also includes any work performed on moveable bridges.

Strategies

These types of repairs are prioritized based on engineering analysis and evaluation performed by WS-DOT bridge engineers. They consider a multitude of criteria to assist in their decisions for which bridges are to be repaired. They consider safety to the public, continued maintenance costs, life expectancy of the bridge and replacement costs if the bridge is to be replaced earlier than anticipated.

The state owns and maintains 17 movable span bridges and shares the funding responsibility for three additional bridges with Oregon and Idaho. Most of these structures are over 50 years old and have obsolete mechanical and electrical systems. Over the past 10 years, we have been upgrading these bridges to ensure that the lift spans do not fail and impede either roadway or waterway traffic. Fifteen movable bridges have been overhauled with two remaining.

Moveable bridges receive a comprehensive inspection on a five-year cycle. These inspections are performed by a consultant that specializes in these types of

Movable Bridge



SR 99, 1st Avenue Bridge, Seattle

bridges. The findings and recommendations are then reviewed by bridge engineers dedicated to movable bridges.

A plan is developed for each structure to determine the short term (maintenance) and long term rehabilitation needs. A key element in determining whether a bridge is to receive funding for repairs is the reliability and user needs of the bridge. As part of determining a solution for these unique bridges, a replacement alternative for high-level fixed span bridges may be considered. This cannot be a viable solution at all the locations due to topographic constraints and funding restraints. Since it is not feasible to replace all of these bridges, it becomes imperative to extend the service life of the bridge and to minimize the frequency of roadway closures due to mechanical or electrical malfunctions. The goal is to keep the electrical and mechanical components of these bridges in sound operational condition. From this effort all but two bridges have been overhauled. The two remaining bridges in this category that have not been overhauled are:

- US 101 Hoquiam River at Simpson Ave.
- US 101 Hoquiam River at Riverside

Steel Bridge Painting

Objective

Protective paint coatings on steel bridge elements are essential to prevent corrosion and loss of structural load carrying capacity needed for freight movement. Our goal is to preserve the load carrying capacity of steel bridges by maintaining properly functioning paint systems that provide protection against corrosion.

Steel Bridge Painting



US 101 Calawah River



Columbia River , Bridgeport WA

Needs

A three part paint system is used to overcoat the existing paint on steel. Some other states, like Oregon, prefer to remove all the existing paint before adding a new paint system. This process tends to be 2-3 times more expensive than WSDOT's over coating method.

Strategy

Our policy is to repaint steel bridges when approximately 2% to 5% of the existing steel surface area is exposed. The amount of time it takes a bridge to reach this condition depends on the type of paint, bridge type, and geographic location of the bridge. Generally a paint system will last 15 to 20 years before repainting is required. Since 1991 new steel bridges have been painted with a three part zinc-moisture cured polyurethane paint system that will last longer than previously used paint systems.

WSDOT maintains 282 painted steel bridges on the state highway system. There are also four steel bridges that are owned by Oregon and cross over the Columbia River. These bridges are classified as "Border Bridges" since they cross a state border. The cost to repaint Border Bridges is shared equally between Oregon and Washington.

The department has 19 unpainted weathering steel bridges. Weathering steel bridges were originally designed to resist corrosion and not require painting. Some of these bridges have experienced unacceptable levels of corrosion and will need to be addressed in the next 20 years. A single coat of clear rust penetrating sealer is used to prevent further corrosion.

A sealer has been applied to four of the our weathering steel bridges to date.

WSDOT uses environmentally sound practices to contain debris generated from the bridge painting process. We have an agreement with the Washington Department of Ecology and Department of Fish and Wildlife to use a filter fabric tarp during pressure washing of a bridge. This process is used on a majority of bridges depending on the amount of water flow in the river. Bridges over lakes and low water flow will require full containment and off site disposal of all wash water.

WSDOT also ensures worker safety on Bridge painting jobs by following new regulations and using new procedures to protect bridge workers from excessive lead paint exposure.

Bridge Deck Preservation

Objective

WSDOT's goal is to insure safe, long-lasting roadway riding surfaces on all reinforced concrete bridge decks by timely repair and application of durable protective bridge deck overlays. This will enable free movement of freight by maintaining the load carrying capacity of bridges.

Needs

For years, concrete bridge deck deterioration has been the largest single bridge-related problem in the country. Using salt in past winter deicing practices has caused premature deterioration of many of the state's concrete bridge decks. WSDOT has been working since the early 1980's on a systematic

program aimed at preventing concrete deterioration by using epoxy-coated rebar in new bridges, and by repairing deteriorated and traffic related damaged rebar with durable protective overlays on bridge decks. Repairing and overlaying deteriorated bridge decks is very cost effective compared to more costly total deck replacements.

The timing for replacing a concrete deck is related to the amount and condition of previous deck repairs and the amount and nature of the traffic. Failure in previous repaired areas can eventually cause debonding, cracking, and potholes in the concrete overlay.

Strategy

A modified (latex, micro silica, or fly ash) concrete overlay is the preferred protection system for bridges that meet the requirements for protective overlay. An alternative three-quarter inch thick polyester or one and one-half inch thick Rapid Set latex modified concrete overlay may be used if rapid construction is needed. These alternatives can cure in four hours compared to 42 hours for a modified concrete overlay. We have overlaid 552 bridges with a modified concrete overlay.

Bridge deck testing has been completed on all of our concrete bridge decks. This testing has determined the amount of chlorides, the location and size of any delaminations, and the concrete cover over the reinforcing steel. Deck repair and a protective overlay are required if any of the following deck testing results is found:

- 2% or more of the total deck area is delaminated
- The deck has exposed rebar on the surface
- A concrete overlay with 5% or more of the total overlay area is delaminated or has wheel ruts over a half inch in depth.

Miscellaneous Structures

Objective

This is the smallest category within the bridge preservation category. These projects are usually dependant on larger projects for funding. They receive stand alone funding if they become a hazard to the public.

Needs

Miscellaneous structures include sign support structures; high mast luminaries; standard and special design retaining walls; bridges less than twenty feet long (mainly culverts) and tunnels.

Strategies

Bridges under 20 feet and tunnels will be given precedence over all other miscellaneous structures when determining the biennial priority array.

Sign structures are prioritized by groups based on their physical condition. Section loss in the primary load bearing members is considered for complete replacement. Other considerations given are fatigue cracking, foundation instability and inadequate design capacity.

Catastrophic Reduction

Seismic Retrofits

Objective

A study performed by the Federal Emergency Management Agency in 2001 found that Washington has the second highest risk for economic loss in the nation due to earthquakes. California has the highest risk. Washington has several geological faults that influence the western part of the state. The largest earthquakes in recent history occurred in 1949, 1965 and 2001 and killed 15 people. The most recent Nisqually earthquake killed one, injured 320 and caused over \$2 billion dollars worth of damage.

The objectives of the seismic retrofit program are to:

- Minimize the risks of complete bridge collapse
- Minimize loss of life and disruption of commerce
- Accept moderate damage

Needs

The seismic program prioritizes bridge projects based on essential lifelines that need to remain in service following a seismic event, and where the bridges are located in the seismic risk zones. All bridges within the highest risk zone and those on Interstates in the moderate risk zone will have a higher priority and will be retrofitted first. Those bridges with single columns located in the low-moderate range will also be retrofitted after the higher risk areas have been completed.

Strategy

WSDOT's Bridge and Structures Office has changed the prioritization philosophy for identifying seismic needs. In the past, major bridges along with the superstructure of certain bridges were the first to receive retrofits, followed by bridges with single columns. Multiple column bridges and bridge foundations were the last to receive retrofits. This plan to retrofit bridges for seismic movement has reached a point where a newer strategy was needed. Therefore, more emphasis is now placed on bridge location with respect to seismic zones and design. The highest risk zone and the moderate risk zones were the first to be targeted with the TPA funds in 2005. The highest risk zone is located in central Puget Sound. All bridges that are not part of another funded project will receive funding in this high risk zone along with bridges that are in moderate risk zone on major routes. Those routes are I-405, I-90 and I-5. In addition to the bridges located in these two zones, there are approximately 20 bridges that have single columns that could sustain significant damage during an earthquake. They will remain on the priority list for retrofit until they are completed.

Our goal is to finish those bridges identified for seismic retrofit work in the high risk zone and the moderate zone on major routes first. Then the selection of bridges will begin to radiate outward from the high risk zone. The remaining bridges in the moderate risk zone with multiple columns will come next and will be based on average daily traffic (ADT). The higher the ADT, the higher the bridge will rank in priority. The last targeted zone is the bridges in the low to moderate risk zone. Bridges on I-5 in the low-moderate risk zone may have a higher priority than some smaller routes in a higher risk zone. The intent is to make key routes strong enough to withstand an earthquake so that access is maintained for emergency responders and supplies, and to evacuate people.

In the case of "the big one", an earthquake with a magnitude of 9.0 or greater, WSDOT has accepted that there will be damage. WSDOT designs to the most current standards for seismic strengthening on new bridges and retrofits its older bridges; however, it is unknown how bridges will perform in a very large earthquake.

Scour Protection

Objective

Scour is defined as the removal of material from a streambed by high water flows. Scour can cause a bridge foundation to become unstable if an excessive amount of material under the foundation is removed.

The amount of scour can be estimated by calculating how deep the waterway channel could become based on high water flows and channel conditions. A bridge is classified as "scour critical" when the calculated depth of the potential scour is below the bridge foundation.

Needs

Scour has been the cause of over one-half the bridge failures in Washington since 1923. Of the 70 documented failures, 43 of these are a direct result of foundation scour due to flooding. In 1995, WSDOT began to identify and repair scour damaged foundations.

Strategy

The Scour program has been successful in finding a way to preserve the integrity of bridges during large storm events and is sensitive to the environmental concerns around the bridge. WSDOT evaluates the bridges identified as scour critical on a biennial basis. Bridge engineers in collaboration with hydraulic engineers determine the risk associated with each bridge by calculating the critical depth of scour using FHWA guidelines and the software, "HYRISK." If a bridge is found to be at considerable risk for a catastrophic failure during a large storm event, the bridge is programmed for repair. On occasion a bridge becomes critical between the evaluation periods. If this happens, then the bridge may receive emergency funds to repair or partially repair the scour damage. When the emergency repair is a partial repair, the Department returns the following summer during the fish window to finish the work.

To assist in delivering scour projects on time and on budget, a new approach to scoping scour projects was developed with input from all internal participating support offices. This process was presented to WSDOT executives and was approved in 2005. This process calls for scour specialists to perform more upfront work in order to present a defensible and permissible project to the resource agencies. This also gives clear guidance to the regional offices on

the scope of work and decreases the amount of time it takes to deliver a quality project. Project costs have been difficult to estimate in the past because of increasing environmental regulations and a misunderstanding regarding compensatory mitigation. This process establishes a baseline estimate that correlates to the collaborative efforts of the scour team.

Bridge Replacement/Major Rehabilitation

Objective


The objective of the bridge replacement and major rehabilitation program is to perform necessary work when continued maintenance and preservation strategies are no longer cost effective to provide safe, continuous movement of people and goods. WSDOT has developed three strategies to prioritize bridges that require replacement or major rehabilitation. Those three strategies are structurally deficient bridges, weight restricted bridges, and narrow bridges. When looking at replacement or rehabilitation, bridges should have a sufficiency rating of 50 or less and be classified as structurally deficient or functionally obsolete in order to qualify for federal bridge replacement funds.

Needs

Many bridges are reaching the end of their functional lifespan. Many were not designed for the heavy loads, high traffic volumes or speeds that exist today. Bridges are replaced when continued maintenance and preservation strategies are no longer cost effective to provide safe, continuous movement of people and goods. In order to qualify for Federal Bridge

Bridge Replacement/Major Repair Needs

Region	SR	Bridge No.	Bridge Name
Eastern	21		Keller Ferry
Southwest	97	97/1	Biggs rapids (deck replacement - WA 1/2)
Northwest	2	2/6N	Ebey Island Viaduct Stage 1
Northwest	2	2/7N	
Northwest	2	2/6N	Ebey Island Viaduct Stage 2
Northwest	2	2/7N	
Northwest	2	2/6S-W	Ebey-W Ramp AL Ramp
Northwest	2	2/6W-N	W-Ebey Ramp DL Ramp
Olympic	303	303/4	Manette
Northwest	99	99/538	Spokane Street OC - Timber
Olympic	509	509/5A	City Waterway/Murray Morgan - Removal
South Central	97	97/106	Satus Creek
Olympic	101	101/420	Purdy Creek
Olympic	107	107/5	Slough Bridges
Olympic	107	107/6	Slough Bridges
Olympic	101	101/263	Walker Creek
Northwest	548	548/10	Dakota Creek
Southwest	508	508/23	Alder Creek
Southwest	506	506/106	Lacamas Creek
Northwest	20	20/265	Gulch Bridge
Southwest	508	508/25	Creek Bridge
Southwest	508	508/26	Creek Bridge
Olympic	12	12/12S	Heron Street (Wishkah River)
Northwest	5	5/670W	Stillaguamish River
Southwest	5	5/36E	E Fk Lewis River
Southwest	508	508/12	S Fk Newaukum River
South Central	10	10/143	Bristol Fill

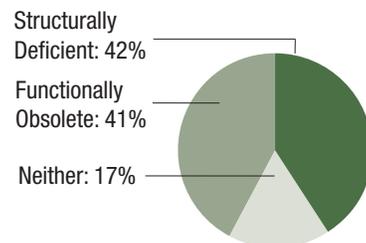

Bridge Structural Condition Ratings

Category	Description	2000	2001	2002	2003	2004	2005	2006
Good	A range from no problems to some minor deterioration of structural elements.	84%	85%	87%	86%	87%	89%	88%
Fair	All primary structural elements are sound but may have deficiencies such as minor section loss, deterioration, cracking, spalling, or scour.	11%	11%	10%	11%	10%	9%	9%
Poor	Advanced deficiencies such as section loss, deterioration, cracking, spalling, scour, or seriously affected primary structural components. Bridges rated in poor condition may be posted with truck weight restrictions.	5%	4%	3%	3%	3%	2%	3%

Source: Gray Notebook, June 30, 2006

I. System Preservation > Bridges and Structures Management

replacement funds, a bridge must meet the following four criteria.

- Bridge must be on the National Bridge Inventory (NBI) list
- Have a sufficiency rating of less than 50 to be eligible for replacement or less than 80 for major rehabilitation
- Must be structurally deficient or functionally obsolete
- Bridge cannot have been worked on in the past 10 years for either rehabilitation or replacement (new bridge) regardless of funding source.

Strategies

The sufficiency rating of a bridge is one of the first criteria that is measured to determine eligibility for major rehabilitation or replacement. If the bridge scores 50 or less, it has the potential to be placed on a replacement list. If the rating is below 80, then it has the potential to have a major rehabilitation to structural elements of the bridge. Cost does play a role in whether a bridge is placed in the major rehabilitation strategy or in the preservation strategy. For example, if a bridge deck is in need of a complete overhaul and the cost exceeds more than a half of the biennial target for bridge deck work, then it may be placed in major rehabilitation where there is more available funding.


Rating Bridges

■ **Sufficiency Rating.** This is a qualitative value that measures the bridges relative capability to serve its intended purpose. The value is generated from a formula that uses inspection data required by the NBIS program. A sufficiency rating will vary from 0 to 100, with a smaller value indicating a lower sufficiency and therefore a higher need of either repair or replacement.

■ **Structurally Deficient.** The bridge is in a deteriorated condition and does not adequately carry its intended traffic loads. Structurally deficient bridges have a deck or substructure code of “4” or less meaning it is in “poor” condition or a waterway adequacy code of “2” or less.

■ **Functionally Obsolete.** The bridge does not have adequate approach alignment, geometry or clearance to meet the intended traffic needs and is below accepted design standards. Functionally obsolete bridges have an inspection code of “3” or less for the alignments, geometry or clearances.

Bridges with a Sufficiency Rating less than 50

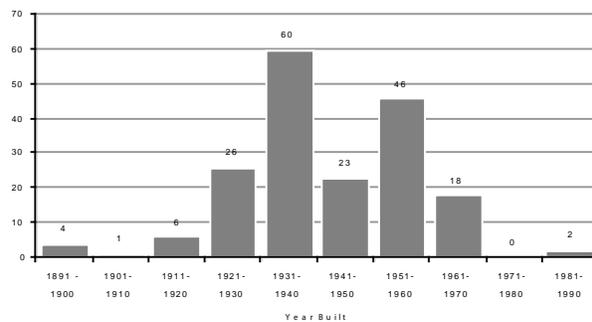

Structurally Deficient Bridges

Bridges that are targeted for replacement or rehabilitation are not chosen on their sufficiency rating alone. There are several factors that are considered when choosing to perform the right work on the right bridge at the right time. Those bridges that are structurally deficient and have a combination of the following: on a key state route, on a significant freight route (T1, T2 routes), and of community significance are placed on a potential replacement list. This list is then prioritized based on bridge condition, accident history, and when the repair should be made to gain the highest potential of the investment. As structurally deficient bridges continue to deteriorate they will eventually become weight restricted or posted with weight limits.

Bridge condition can be assessed by many factors, one of which is the designation of structurally deficient or functionally obsolete. Another tool we use to determine the condition of the bridge is the bridge inspection report. These reports are prepared every two years unless conditions make it necessary for more or less frequent inspections.

The aging of our timber bridges that are structurally deficient is an emerging trend that is of special concern. There are a total of 30 state-owned timber

Structurally Deficient Bridges

Ranking	State	Number of bridges owned by State	Total SD Bridges	Percent SD Bridges
1	Arizona	4,469	32	1%
2	Florida	5,295	56	1%
3	Texas	32,086	554	2%
10	Washington	3,080	106	3%
15	Arkansas	7,084	322	5%
20	Iowa	3,972	212	5%
25	Mississippi	5,537	379	7%
30	New Hampshire	1,285	110	9%
35	Hawaii	704	69	10%
40	Puerto Rico	1,812	208	11%
42	Oregon	2,661	314	12%
45	North Carolina	16,531	2,204	13%
50	Vermont	1,077	193	18%

source: 2005 FHWA National Bridge Inventory

bridges built with all timber components, or a combination of steel, concrete and timber, that are structurally deficient. These timber bridges are deteriorating and will need rehabilitation or replacement in the future. Of the 78 bridges that are designated as structurally deficient, 30 (38%) of them are timber or have timber elements.

There are other elements of a timber bridge that need to be identified in order to prioritize for rehabilitation or replacement. It is not our intent to replace a timber bridge just because it is timber. We analyze additional elements to determine priorities including the approach geometrics to the bridge, width of the bridge, weight restrictions if applicable, and other preservation needs, such as scour, paint or any other strategy. The more items that are deficient with a timber bridge, the higher the ranking on the replacement/rehabilitation list.


Weight Restricted Bridges

There are 155 bridges that have a weight restriction. Weight restricted bridges make it difficult for freight and goods to move about the state. The main strategy for identifying which bridges to replace in this category is route importance and community connectivity. Bridges that are on a major freight route (T1, T2 etc) are moved to the top of the priority list. If there are weight restricted bridges that hinder goods movement into or out of a community and there is no other feasible route to take, then these bridges are also placed on a list for replacement.

Narrow Bridges

Bridges targeted for replacement in the narrow bridge category are those that are 24-feet wide or less, have poor approach geometrics, poor stopping sight

Weight Posted and Restricted Bridges

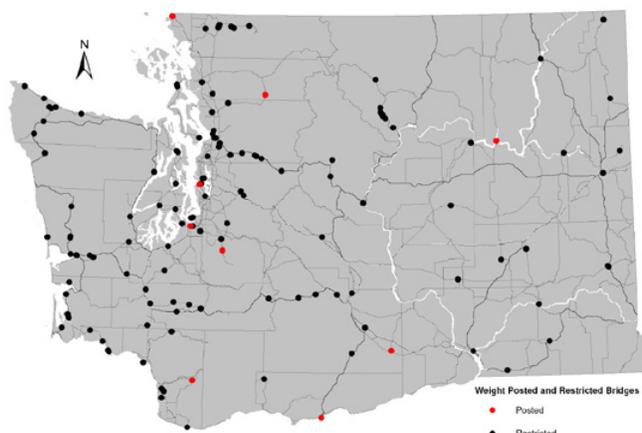

Structurally Deficient Bridges



SR 6, South Fork Chehalis



US 101 - Alder Creek

distance, of a safety concern, and have community importance. Narrow bridges usually fall into the functionally obsolete category. These bridges are no longer performing as they were intended and designed to because of changing traffic patterns. A majority of the functionally obsolete bridges have narrow lanes, narrow or no shoulders, poor sight distance and do not accommodate pedestrian or bicycle traffic. These bridges are usually older and built in the 1930's and 1940's using past design standards. There are 22 narrow bridges that should be replaced in the next 20 years.

The Chehalis River Bridge is a very good example of the types of narrow bridges that would receive funding for replacement. The bridge was built in 1925 and is 20 feet wide. As the picture shows, the bridge is so narrow that some people are reluctant to be on the bridge when a truck is crossing the bridge in the opposite direction. This particular bridge received TPA funding for replacement and will be replaced in 2009.

Narrow Bridges



SR 6, Chehalis River Bridge

a rating of “Poor.” No bridge that is currently rated “poor” is unsafe for public use. Any bridge that is determined to be unsafe for public use is simply closed to all traffic.

WSDOT’s Bridge and Structures Office is in the initial stages of developing individual performance measures for each of the three categories: bridge replacement/major rehabilitation, catastrophic reduction and preservation. Ongoing coordination and collaboration will be necessary to fully develop these measures. We anticipate that the performance measures will be adopted and included in the next Highway System Plan.

Security

WSDOT is involved in discussions with State Emergency Officials to determine what, if any, measures might be needed to insure the functionality of our transportation system during a statewide emergency.

Performance Measures

WSDOT reports the condition of its bridges to both the Federal Highway Administration (FHWA) and the State Office of Financial Management (OFM). The report follows the standards set forth by the Governmental Accounting Standards Board (GASB) and the bridge ratings follow the criteria set forth by the FHWA. WSDOT has established a goal to maintain 95% of its bridges at a structural condition of “Good” or “Fair”. The 2006 assessment of bridges are within these parameters. Bridges rated as “poor” may have structural deficiencies that restrict the weight and type of truck traffic allowed. The 2006 assessment found 2.5% of all bridges (rounded to 3%) received

Coordination and Involvement

Coordination is ongoing with the Bridge Management office to gain knowledge and information about the bridge preservation program for inclusion into various presentations, papers and folio’s.

Bridge Structural Condition Ratings

Category	Description	2000	2001	2002	2003	2004	2005	2006
Good	A range from no problems to some minor deterioration of structural elements.	84%	85%	87%	86%	87%	89%	88%
Fair	All primary structural elements are sound but may have deficiencies such as minor section loss, deterioration, cracking, spalling, or scour.	11%	11%	10%	11%	10%	9%	9%
Poor	Advanced deficiencies such as section loss, deterioration, cracking, spalling, scour, or seriously affected primary structural components. Bridges rated in poor condition may be posted with truck weight restrictions.	5%	4%	3%	3%	3%	2%	3%

source: Gray Notebook, June 30, 2006